

NIPPON THOMPSON CO., LTD. (JAPAN)

Head office : 19-19 Takanawa 2-chome Minato-ku  
Tokyo 108-8586, Japan  
Phone : +81 (0)3-3448-5850  
Fax : +81 (0)3-3447-7637  
E-mail : ntt@ikonet.co.jp  
URL : http://www.ikont.co.jp/eg  
Plant : Gifu, Kamakura

IKO-THOMPSON (SHANGHAI) LTD. (CHINA)

Shanghai Sales Head Office

1608-10 MetroPlaza No.555 LouShanGuan Road  
ChangNing District Shanghai  
People's Republic of China 200051  
Phone : +86 (0)21-3250-5525  
Fax : +86 (0)21-3250-5526  
E-mail : ntc@ikonet.co.jp

Beijing Branch

Room 609 Scitech Tower  
No.22 Jianguomenwai Avenue, Chaoyang District, Beijing  
People's Republic of China 100004  
Phone : +86 (0)10-6515-7681  
Fax : +86 (0)10-6515-7681\*106  
E-mail : ntc@ikonet.co.jp

Guangzhou Branch

Room 834, Garden Tower, Garden Hotel  
368 Huanshi East Road, Yuexiu District, Guangzhou, Guangdong  
People's Republic of China 510064  
Phone : +86 (0)20-8384-0797  
Fax : +86 (0)20-8381-2863  
E-mail : ntc@ikonet.co.jp

Wuhan Branch

Room 2300, Truroll Plaza No.72 Wusheng Road,  
Qiao kou District, Wuhan, Hubei  
People's Republic of China 430033  
Phone : +86 (0)27-8556-1610  
Fax : +86 (0)27-8556-1630  
E-mail : ntc@ikonet.co.jp

Xi'an Office

Room 1613, Building B, Jinqiao International Plaza  
No.50 Keji Road, Gaoxin District, Xi'an, Shanxi  
People's Republic of China 710075  
Phone : +86 (0)29-8882-3225  
Fax : +86 (0)29-8882-3215  
E-mail : ntc@ikonet.co.jp

Shenzhen Office

Room 507, Oriental Plaza,  
1072 Jianshe Road, Luohu District, Shenzhen, Guangdong  
People's Republic of China 518001  
Phone : +86 (0)20-8384-0797  
Fax : +86 (0)20-8381-2863  
E-mail : ntc@ikonet.co.jp

Chengdu Office

Room 01-A, 12F of Tower 1, Central Plaza  
8 Shuncheng Avenue, Jinjiang District ,Chengdu, Sichuan  
People's Republic of China 610016  
Phone : +86 (0)28-6250-5159  
Fax : +86 (0)28-6250-5259  
E-mail : ntc@ikonet.co.jp

Ningbo Office

Room 3406, Zhongnongxin Building, No.181  
Zhongshan East Road, Haishu Ward, Ningbo, Zhejiang  
People's Republic of China 315000  
Phone : +86 (0)574-8718-9535  
Fax : +86 (0)574-8718-9533  
E-mail : ntc@ikonet.co.jp

Qingdao Office

2107 Block A, World Trade Center Building, No.230  
Changjiang Middle Road, Development Zone Qingdao  
People's Republic of China 266555  
Phone : +86 (0)532-8670-2246  
FAX : +86 (0)532-8670-2242  
E-mail : ntc@ikonet.co.jp

Shenyang Office

2-1203 Tower I, City Plaza Shenyang, No.206  
Nanjing North Street Heping District, Shenyang  
People's Republic of China 110001  
Phone : +86 (0)24-2334-2662  
FAX : +86 (0)24-2334-2442  
E-mail : ntc@ikonet.co.jp

Recognizing that conservation of the global environment is the top-priority challenge for the world's population, Nippon Thompson will conduct its activities with consideration of the environment as a corporate social responsibility, reduce its negative impact on the environment, and help foster a rich global environment.

ISO 9001 & 14001 Quality system  
registration certificate



NIPPON THOMPSON CO., LTD. (THAILAND)  
ASEAN REPRESENTATIVE OFFICE (BANGKOK)

1-7 Zuellig House, 5th Floor  
Silom Road, Silom, Bangrak  
Bangkok 10500, Thailand  
Phone : +66 (0)2-637-5115  
FAX : +66 (0)2-637-5116  
E-mail : ntar@ikonet.co.jp

IKO INTERNATIONAL, INC. (U.S.A.)

East Coast Operation (Sales Head Office)

91 Walsh Drive  
Parsippany, NJ 07054  
U.S.A.  
Phone : +1 973-402-0254  
Toll Free : 1-800-922-0337  
Fax : +1 973-402-0441  
E-mail : eco@ikonet.co.jp

Midwest Operation

500 East Thorndale Avenue, Suite K  
Wood Dale, IL 60191  
U.S.A.  
Phone : +1 630-766-6464  
Toll Free : 1-800-323-6694  
Fax : +1 630-766-6869  
E-mail : mw@ikonet.co.jp

West Coast Operation

9830 Norwalk Boulevard, Suite 198  
Santa Fe Springs, CA 90670  
U.S.A.  
Phone : +1 310-609-3988  
Toll Free : 1-800-252-3665  
Fax : +1 310-609-3916  
E-mail : wco@ikonet.co.jp

Silicon Valley Sales Office

3333 Bowers Avenue, Suite 155  
Santa Clara, CA 95054  
U.S.A.  
Phone : +1 408-492-0240  
Toll Free : 1-800-252-3665  
Fax : +1 408-492-0245  
E-mail : wco@ikonet.co.jp

Southeast Operation

2150 Boggs Road, Suite 100  
Duluth, GA 30096  
U.S.A.  
Phone : +1 770-418-1904  
Toll Free : 1-800-874-6445  
Fax : +1 770-418-9403  
E-mail : seo@ikonet.co.jp

Southwest Operation

8105 N. Beltline Road, Suite 130  
Irving, TX 75063  
U.S.A.  
Phone : +1 972-929-1515  
Toll Free : 1-800-295-7886  
Fax : +1 972-915-0060  
E-mail : swo@ikonet.co.jp

See you again at

IKO Website

http://www.ikont.co.jp/eg/

NIPPON THOMPSON EUROPE B.V. (EUROPE)

The Netherlands Sales Head Office

Sheffieldstraat 35-39  
3047 AN Rotterdam  
The Netherlands  
Phone : +31 (0)10-462 68 68  
Fax : +31 (0)10-462 60 99  
E-mail : nte@ikonet.co.jp

Germany Branch

Mündelheimer Weg 56  
40472 Düsseldorf  
Germany  
Phone : +49 (0)211-41 40 61  
Fax : +49 (0)211-42 76 93  
E-mail : ntd@ikonet.co.jp

Regensburg Sales Office

Im Gewerbepark D 30  
93059 Regensburg  
Germany  
Phone : +49 (0)941-20 60 70  
Fax : +49 (0)941-20 60 719  
E-mail : ntdr@iko-nt.de

Neunkirchen Sales Office

Gruben Str.95c  
66540 Neunkirchen  
Germany  
Phone : +49 (0)6821-99 98 60  
Fax : +49 (0)6821-99 98 626  
E-mail : ntdn@iko-nt.de

U.K. Branch

2 Vincent Avenue, Crownhill  
Milton Keynes, Bucks, MK8 0AB  
United Kingdom  
Phone : +44 (0)1908-566144  
Fax : +44 (0)1908-565458  
E-mail : sales@iko.co.uk

Spain Branch

Autovia Madrid-Barcelona, Km. 43,700  
Polig. Ind. AIDA - Nove A-8, Ofic. 2-1ª  
19200 Azuqueca de Henares  
(Guadalajara) Spain  
Phone : +34 949-26 33 90  
Fax : +34 949-26 31 13  
E-mail : nts@ikonet.co.jp

France Branch

Roissypole Le Dôme  
2 rue de La Haye  
BP 15950 Tremblay en France  
95733 Roissy C. D. G. Cedex  
France  
Phone : +33 (0)1-48 16 57 39  
Fax : +33 (0)1-48 16 57 46  
E-mail : contact@iko-france.com

- The specifications and dimensions of products in this catalog are subject to change without prior notice.
- When these products are exported, the exporter should confirm a forwarding country and a use, and, in case of falling under the customer's requirements, take necessary procedures such as export permission application.
- Although all data in this catalog has been carefully complied to make the information as complete as possible, NIPPON THOMPSON CO., LTD. shall not be liable for any damages whatsoever, direct or indirect, based upon any information in this catalog. NIPPON THOMPSON CO., LTD. makes no warranty, either express or implied, including the implied warranty of merchantability or fitness for a particular purpose.
- Reproduction and conversion without permission are prohibited.

# IKO Linear Motion Rolling Guide Series General Catalog

BLUE



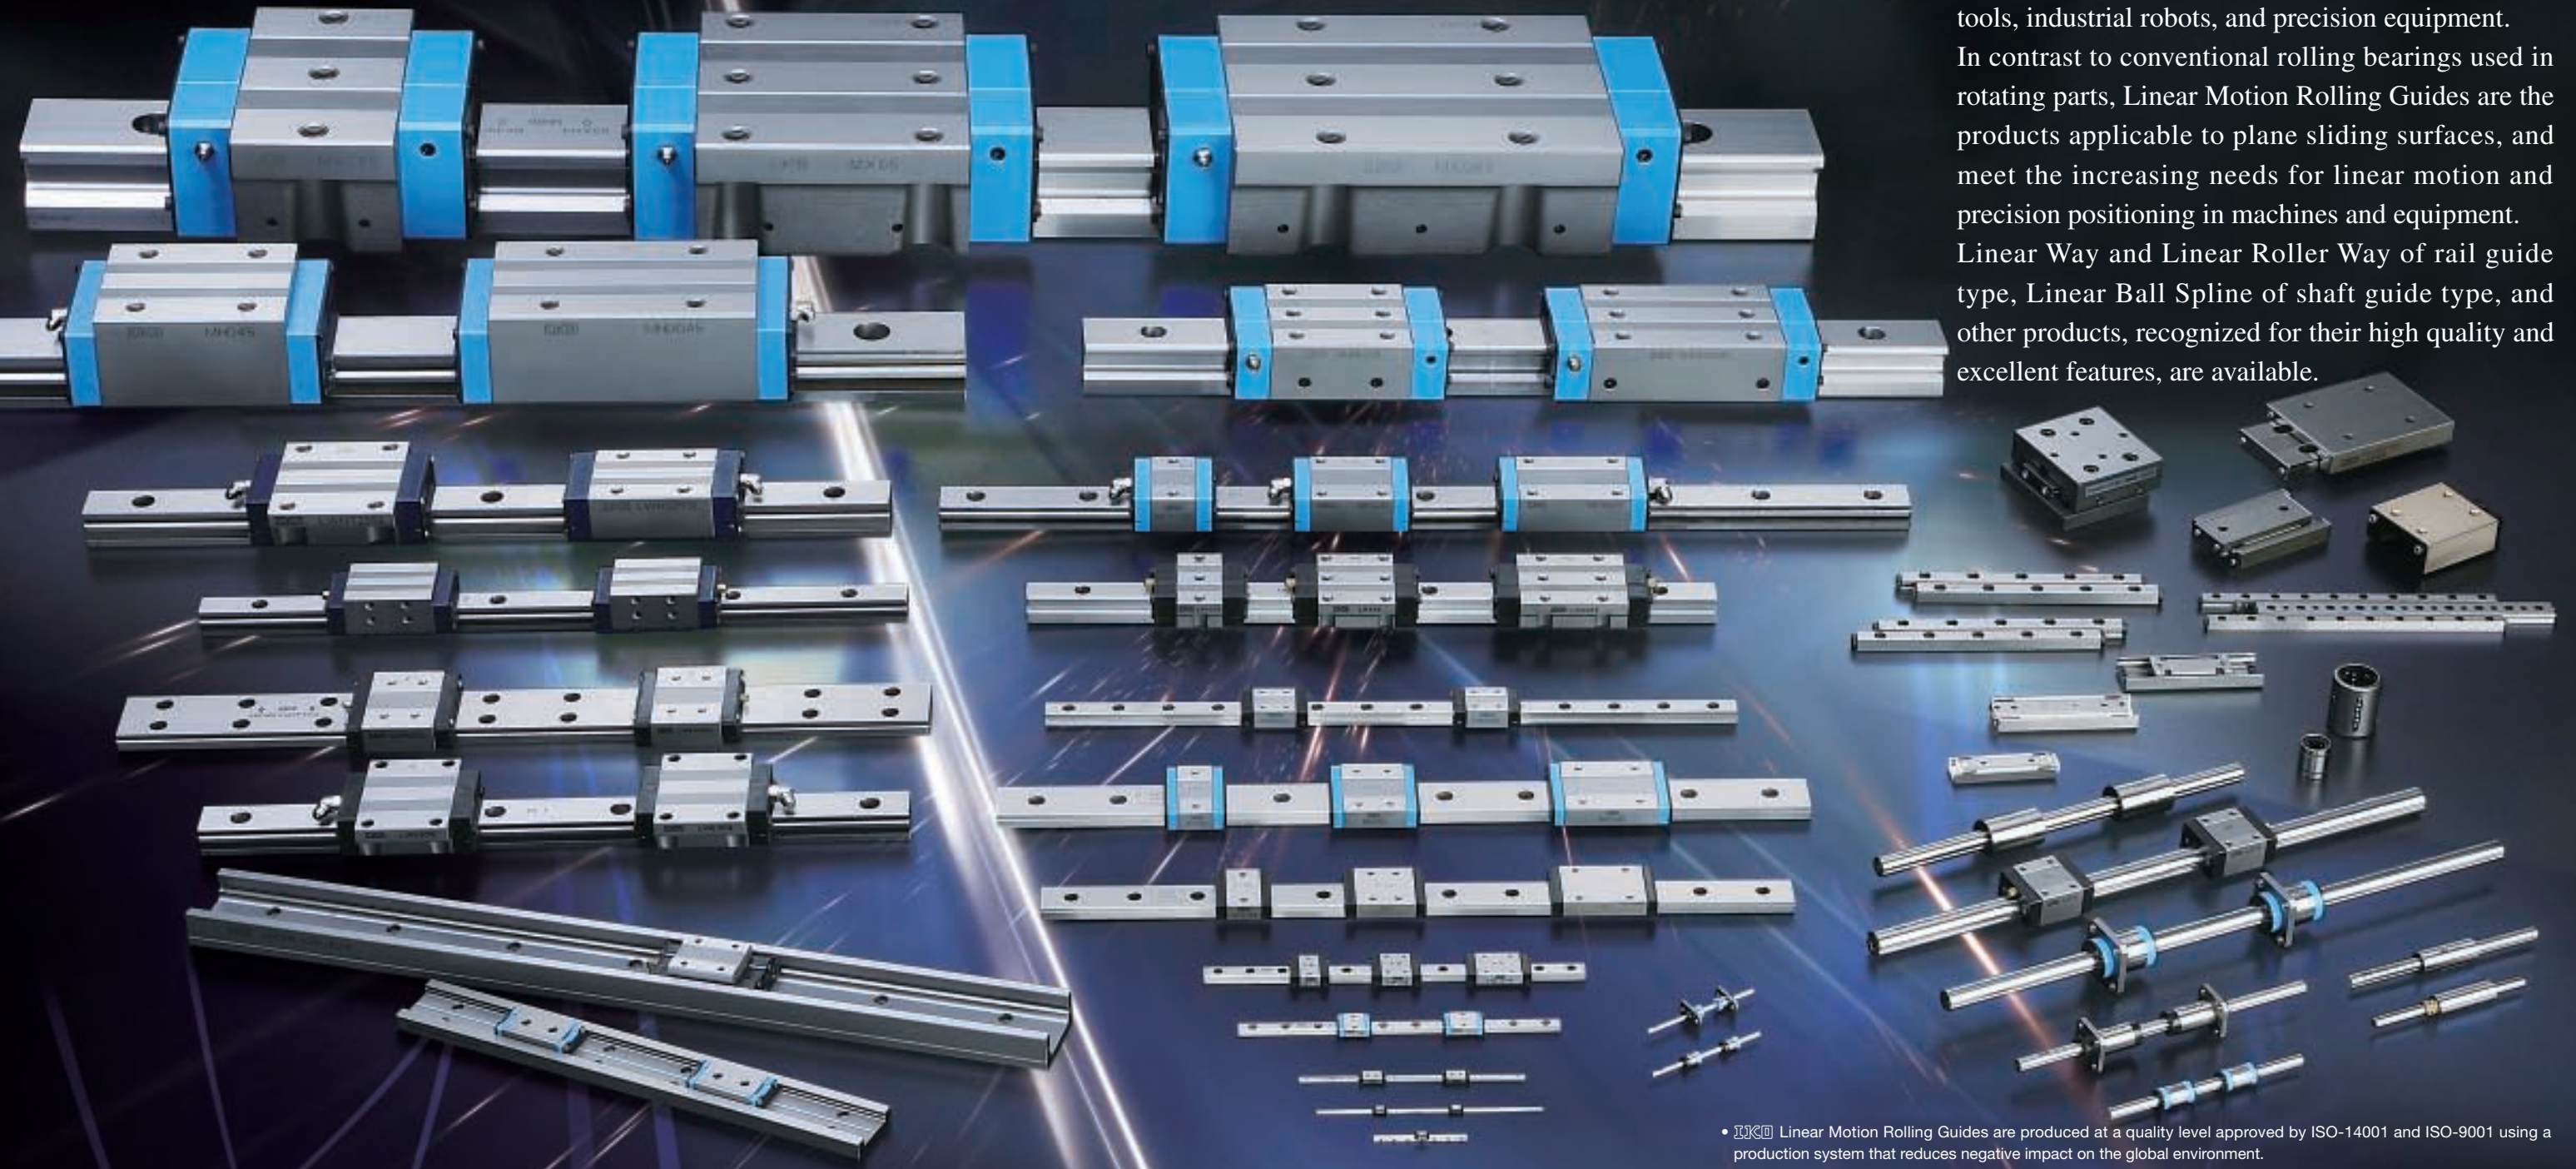


# Eco-friendly and Excellent Quality

IKO Linear Motion Rolling Guides are used with satisfactory results for various applications requiring precision positioning such as semi-conductor manufacturing equipment, large sized machine tools, industrial robots, and precision equipment.

In contrast to conventional rolling bearings used in rotating parts, Linear Motion Rolling Guides are the products applicable to plane sliding surfaces, and meet the increasing needs for linear motion and precision positioning in machines and equipment.

Linear Way and Linear Roller Way of rail guide type, Linear Ball Spline of shaft guide type, and other products, recognized for their high quality and excellent features, are available.



- IKO Linear Motion Rolling Guides are produced at a quality level approved by ISO-14001 and ISO-9001 using a production system that reduces negative impact on the global environment.
- The standard products listed in this catalog comply with the specifications of the six hazardous materials mentioned cited in the European RoHS Directive. For information on all other products, please check with IKO.
- This catalog adopts the SI system (system of international units) in conformance with ISO (International Organization for Standardization) Standard 1000.





Recorded in CAT-1552④E

## Linear Way Linear Roller Way

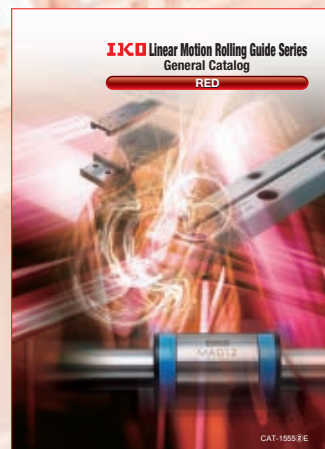
### Rail Guide Type

|                                                                                      |                                                                                                                                                                                      |
|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    | <b>Ball Type Miniature Series</b><br>Super small-size linear motion rolling guide produced by original small sizing technology                                                       |
|    | <b>Ball Type Compact Series</b><br>Versatile linear motion rolling guide pursuing compactness in every aspect just like lower, narrower, and shorter                                 |
|    | <b>Ball Type High Rigidity Series</b><br>High rigidity linear motion rolling guide having a maximum load rating among ball-type units by incorporating a large-diameter ball         |
|    | <b>Ball Type Wide Rail Type Series</b><br>Linear motion rolling guide suitable to single-row use due to having resistance to across-the-width moment load by using a wide track rail |
|    | <b>Ball Type U-Shaped Track Rail Series</b><br>Linear motion rolling guide of high track rail rigidity with U-shaped track rail                                                      |
|    | <b>Roller Type</b><br>Linear motion rolling guide that has achieved the highest level of performance in all characteristics utilizing the roller's superior characteristic           |
|   | <b>Roller Type</b><br>Roller type linear motion rolling guide with cylindrical rollers in four-rows                                                                                  |
|  | <b>Module Type</b><br>Minimum compact linear motion rolling guide with both a track rail and slide member provided                                                                   |

### C-Lube Maintenance Free Series

|                                                                                                                                                                                                                                                                                            |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>C-Lube Linear Way ML</b><br>ML : Standard type<br>MLF : Wide type                                                                                                                                                                                                                       |
| <b>C-Lube Linear Way ME</b><br>ME : Flange type mounting from bottom<br>MET : Flange type mounting from top<br>MES : Block type mounting from top                                                                                                                                          |
| <b>C-Lube Linear Way MH</b><br>MH : Flange type mounting from bottom<br>MHT : Flange type mounting from top<br>MHD : Block type mounting from top<br>MHS : Compact block type mounting from top                                                                                            |
| <b>C-Lube Linear Way MUL</b><br>MUL : Small type                                                                                                                                                                                                                                           |
| <b>C-Lube Linear Roller Way Super MX</b><br>MX : Flange type mounting from top / bottom<br>MXD : Block type mounting from top<br>MXS : Compact block type mounting from top<br>MXN : Low section flange type mounting from top / bottom<br>MXNS : Low section block type mounting from top |

|                                                                                                                                                                                                                          |                                                                                                                                                                      |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Linear Way L</b><br>LWL : Standard type<br>LWLF : Wide type                                                                                                                                                           |                                                                                                                                                                      |
| <b>Linear Way E</b><br>LWE : Flange type mounting from bottom<br>LWET : Flange type mounting from top<br>LWES : Block type mounting from top                                                                             | <b>Low Decibel Linear Way E</b><br>LWE...Q : Flange type mounting from bottom<br>LWET...Q : Flange type mounting from top<br>LWES...Q : Block type mounting from top |
| <b>Linear Way H</b><br>LWH : Flange type mounting from bottom<br>LWHT : Flange type mounting from top<br>LWHD : Block type mounting from top<br>LWHS : Compact block type mounting from top<br>LWHY : Side mounting type |                                                                                                                                                                      |
| <b>Linear Way F</b><br>LWFH : Flange type mounting from top / bottom<br>LWFF : Flange type mounting from top / bottom<br>LWFS : Block type mounting from top                                                             |                                                                                                                                                                      |
| <b>Linear Way U</b><br>LWUL...B : Small type<br>LWU...B : Standard ball-retained type<br>LWU : Standard ball non-retained type                                                                                           |                                                                                                                                                                      |
| <b>Linear Roller Way Super X</b><br>LRX : Flange type mounting from top / bottom<br>LRXD : Block type mounting from top<br>LRXS : Compact block type mounting from top                                                   |                                                                                                                                                                      |
| <b>Linear Roller Way X</b><br>LRWX : Block type mounting from top<br>LRWXH : Flange type mounting from bottom                                                                                                            |                                                                                                                                                                      |
| <b>Linear Way Module</b><br>LWLM : Ball type small type<br>LWM : Ball type standard type<br>LRWM : Roller type                                                                                                           |                                                                                                                                                                      |



Recorded in CAT-1555②E

## Crossed Roller Way

## Linear Slide Unit







## Linear Ball Spline

## Linear Bushing

## Stroke Rotary Bushing

## Roller Way & Flat Roller Cage

### Shaft Guide Type

|                                                                                      |                                                                                                                                                                                  |
|--------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <b>Crossed Roller Way</b><br>Linear motion rolling guide incorporating a roller cage between two ways whose two V-shaped surfaces are used as track groove                       |
|  | <b>Linear Slide Unit</b><br>Light weight, small, and compact linear motion rolling guide that has achieved light and smooth motion                                               |
|  | <b>Linear Ball Spline</b><br>Linear motion rolling guide performing linear motion while performing torque transmission along the spline shaft by external cylinder or slide unit |
|  | <b>Linear Bushing</b><br>A wide variety of linear motion rolling guides facilitating the rolling motion in bush guide portion                                                    |
|  | <b>Stroke Rotary Bushing</b><br>Linear motion rolling guide enabling the rolling motion and rotary and linear motion in axial direction                                          |
|  | <b>Roller Way &amp; Flat Roller Cage</b><br>High accuracy linear motion rolling guide providing high rigidity in load direction                                                  |

### C-Lube Linear Ball Spline MAG

MAG : Standard type  
MAGF : Flange type

|                                                                               |                                                                                                                                                  |                                                                        |
|-------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------|
| <b>Anti-Creep Cage Crossed Roller Way</b><br>CRWG                             | <b>Anti-Creep Cage Crossed Roller Way H</b><br>CRWG...H                                                                                          | <b>Crossed Roller Way</b><br>CRW : Standard type<br>CRWM : Module type |
| <b>Anti-Creep Cage Crossed Roller Way Unit</b><br>CRWUG                       | <b>Crossed Roller Way Unit</b><br>CRWU / CRWU...R / CRWU...RS                                                                                    |                                                                        |
| <b>High Rigidity Precision Linear Slide Unit</b><br>BWU                       | <b>Precision Linear Slide Unit</b><br>BSP : Limited linear motion type<br>BSPG : Built-in rack & pinion type<br>BSR : Endless linear motion type | <b>Linear Slide Unit</b><br>BSU...A                                    |
| <b>Linear Ball Spline G</b><br>LSAG : Standard type<br>LSAGF : Flange type    | <b>Block Type Linear Ball Spline</b><br>LSB                                                                                                      | <b>Stroke Ball Spline</b><br>LS                                        |
| <b>Linear Bushing G</b><br>LMG                                                | <b>Linear Bushing</b><br>LM / LME / LMB                                                                                                          | <b>Miniature Linear Bushing</b><br>LMS                                 |
| <b>Stroke Rotary Bushing</b><br>ST : Ordinary type<br>ST...B : For heavy load | <b>Miniature Stroke Rotary Bushing</b><br>STSI : Assembled set with a shaft<br>STS : Assembled set without a shaft                               | <b>Stroke Rotary Cage</b><br>BG                                        |
| <b>Roller Way</b><br>RW / SR / GSN                                            | <b>Flat Roller Cage</b><br>FT : Single row type<br>FTW...A : Double row angle type                                                               |                                                                        |






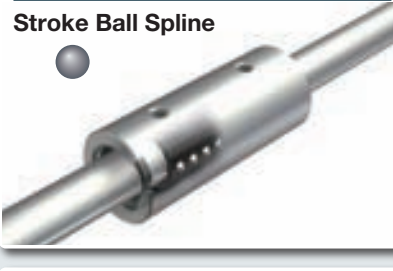












































































# IKO Types and Specifications of

# Linear Motion Rolling Guide Series

## Types of Linear Motion Rolling Guides

## Specifications of Linear Motion Rolling Guides

| Rail Guide Type  | The rail guide type achieves linear motion along a rail. This product can receive a complex load and features high performance, excellent total balance and easy handling.                                                      |                                                                                                                                                                  |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                  | <b>Endless linear motion</b><br><b>Linear Way</b><br>                                                                                          | <b>Limited linear motion</b><br><b>Crossed Roller Way</b><br>                 |
|                  | <b>Linear Roller Way</b><br>                                                                                                                  | <b>Linear Slide Unit</b><br>                                                 |
| Shaft Guide Type | The shaft guide type achieves linear motion along a shaft. This product is easy to handle and suitable for relatively low load conditions. Some shaft guide products can achieve both rotation and reciprocating linear motion. |                                                                                                                                                                  |
|                  | <b>Endless linear motion</b><br><b>Linear Ball Spline</b><br>                                                                                | <b>Limited linear motion</b><br><b>Stroke Ball Spline</b><br>               |
|                  | <b>Linear Bushing</b><br>                                                                                                                    | <b>Limited linear motion + rotation</b><br><b>Stroke Rotary Bushing</b><br> |
| Flat Guide Type  | The flat guide type achieves linear motion on a surface. This product can receive only a unidirectional load but feature high rigidity in the load direction.                                                                   |                                                                                                                                                                  |
|                  | <b>Endless linear motion</b><br><b>Roller Way</b><br>                                                                                        | <b>Limited linear motion</b><br><b>Flat Roller Cage</b><br>                 |

|                  |                       |                                                                                                                        | Type of rolling element                                                                         | Type of motion                                                                                                            | Load direction and load carrying capacity                                                                                      | Rigidity                                                                              | Frictional characteristic                                                             | Ease of mounting                                                                      | General applications                                                                                                                                               | Item-listed catalog |
|------------------|-----------------------|------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| Rail Guide Type  | Endless linear motion | <div>Linear Way</div>               | <br>Ball     | <br>Endless linear motion              | <br>Complex load, medium to heavy load      |    |    |    | <ul style="list-style-type: none"><li>• NC machine tool</li><li>• Precision working machine</li><li>• Robot</li><li>• Transfer machine</li></ul>                   | BLUE                |
|                  |                       | <div>Linear Roller Way</div>        | <br>Roller   | <br>Endless linear motion              | <br>Complex load, heavy to extra-heavy load |    |    |    | <ul style="list-style-type: none"><li>• Heavy duty machine tool</li><li>• Large working machine</li><li>• High-rigidity robot</li></ul>                            | BLUE                |
|                  | Limited linear motion | <div>Crossed Roller Way</div>       | <br>Roller   | <br>Limited linear motion              | <br>Complex load, medium load               |    |    |    | <ul style="list-style-type: none"><li>• Precision working machine</li><li>• Electronic parts assembling machine</li><li>• Precision measuring instrument</li></ul> | RED                 |
|                  |                       | <div>Linear Slide Unit</div>       | <br>Ball    | <br>Limited linear motion             | <br>Complex load, light to medium load     |   |   |   | <ul style="list-style-type: none"><li>• Electronic parts assembling machine</li></ul>                                                                              | RED                 |
| Shaft Guide Type | Endless linear motion | <div>Linear Ball Spline</div>     | <br>Ball   | <br>Endless linear motion            | <br>Complex load, medium to heavy load    |  |  |  | <ul style="list-style-type: none"><li>• Robot</li><li>• Testing and inspection equipment</li><li>• Transfer machine</li></ul>                                      | RED                 |
|                  |                       | <div>Linear Bushing</div>         | <br>Ball   | <br>Endless linear motion            | <br>Radial load, light load               |  |  |  | <ul style="list-style-type: none"><li>• Packaging machine</li><li>• Measuring instrument</li><li>• Medical instrument</li></ul>                                    | RED                 |
|                  | Limited linear motion | <div>Stroke Ball Spline</div>     | <br>Ball   | <br>Limited linear motion            | <br>Complex load, medium to heavy load    |  |  |  | <ul style="list-style-type: none"><li>• Robot</li><li>• Testing and inspection equipment</li></ul>                                                                 | RED                 |
|                  |                       | <div>Stroke Rotary Bushing</div>  | <br>Ball   | <br>Limited linear motion + rotation | <br>Radial load, light load               |  |  |  | <ul style="list-style-type: none"><li>• Printing press</li><li>• Press die set</li><li>• Precision measuring instrument</li></ul>                                  | RED                 |
| Flat Guide Type  | Endless linear motion | <div>Roller Way</div>             | <br>Roller | <br>Endless linear motion            | <br>Unidirectional load, extra-heavy load |  |  |  | <ul style="list-style-type: none"><li>• NC machine tool</li><li>• Precision working machine</li></ul>                                                              | RED                 |
|                  | Limited linear motion | <div>Flat Roller Cage</div>       | <br>Roller | <br>Limited linear motion            | <br>Unidirectional load, extra-heavy load |  |  |  | <ul style="list-style-type: none"><li>• Precision working machine</li><li>• Optical measuring instrument</li></ul>                                                 | RED                 |

Code description ◎Excellent ○Good △Fair





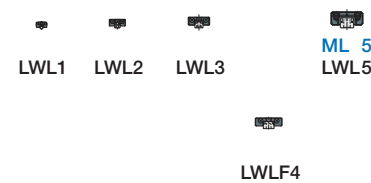
## Ball Type Miniature Series

### C-Lube Linear Way ML

#### Linear Way L

#### Micro Linear Way L

Super small-size linear motion rolling guide produced by original small sizing technology




## Ball Type Compact Series

### C-Lube Linear Way ME

#### Linear Way E

#### Low Decibel Linear Way E

Versatile linear motion rolling guide pursuing compactness in every aspect just like lower, narrower, and shorter



## Ball Type High Rigidity Series

### C-Lube Linear Way MH

#### Linear Way H

High rigidity linear motion rolling guide having a maximum load rating among ball type units by incorporating a large-diameter ball



## Ball Type Wide Type Series

### Linear Way F

Linear motion rolling guide suitable to single-row use due to having resistance to across-the-width moment load by using a wide track rail




## Ball Type U-Shaped Track Rail Series

### C-Lube Linear Way MUL

#### Linear Way U

Linear motion rolling guide of high track rail rigidity with U-shaped track rail




## Roller Type

### C-Lube Linear Roller Way Super MX

#### Linear Roller Way Super X

Linear motion rolling guide that has achieved the highest level of performance in all characteristics utilizing the roller's superior characteristic



## Roller Type

### Linear Roller Way X

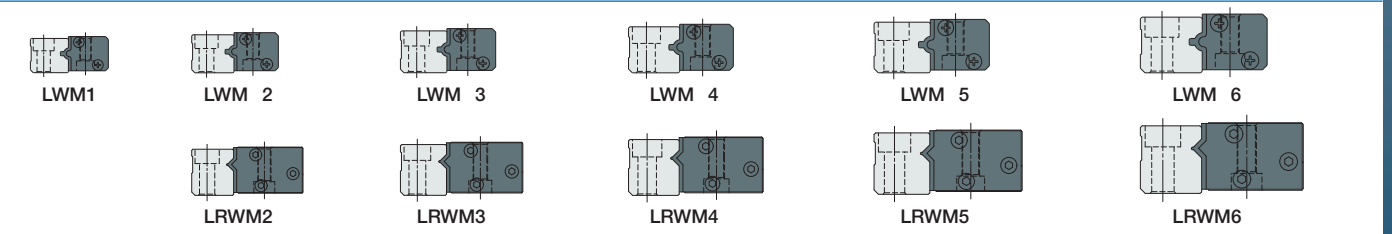
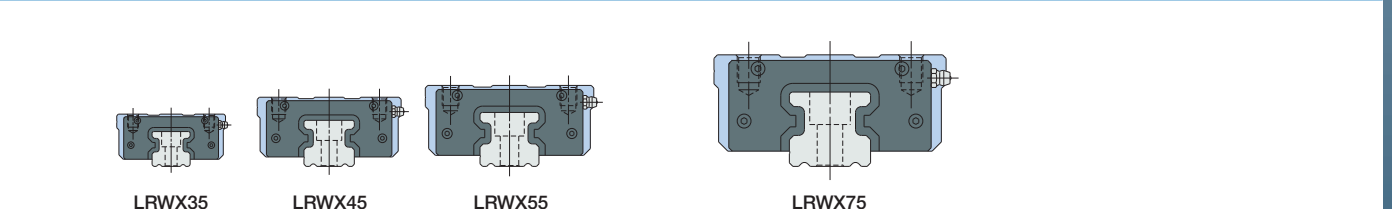
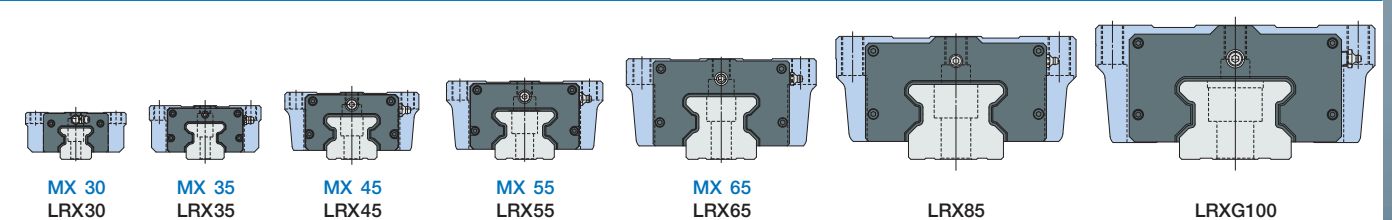
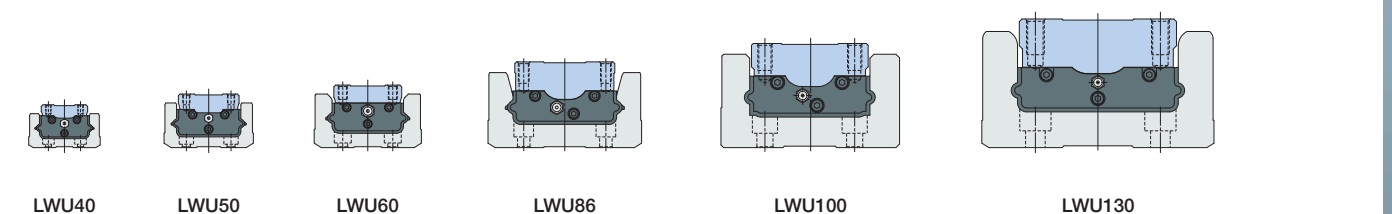
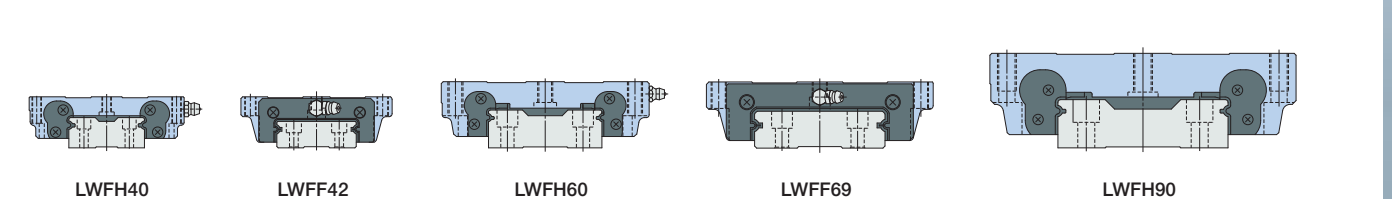
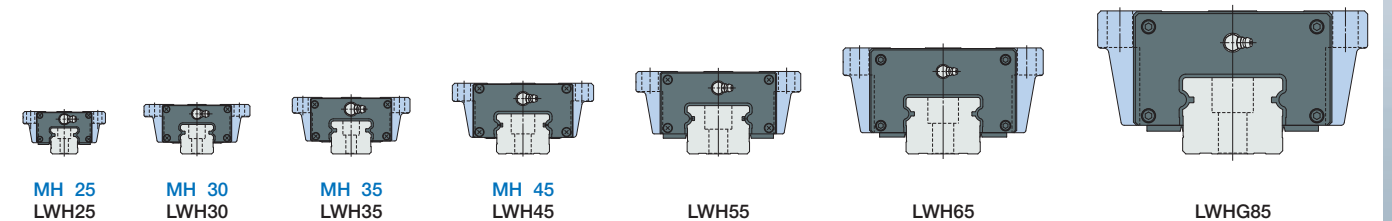
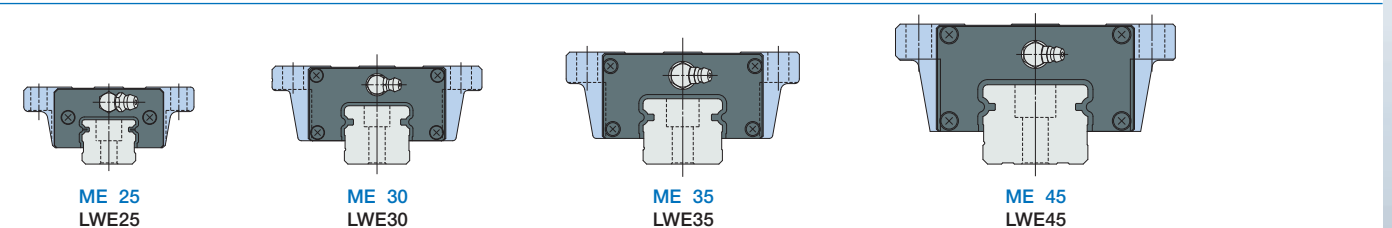
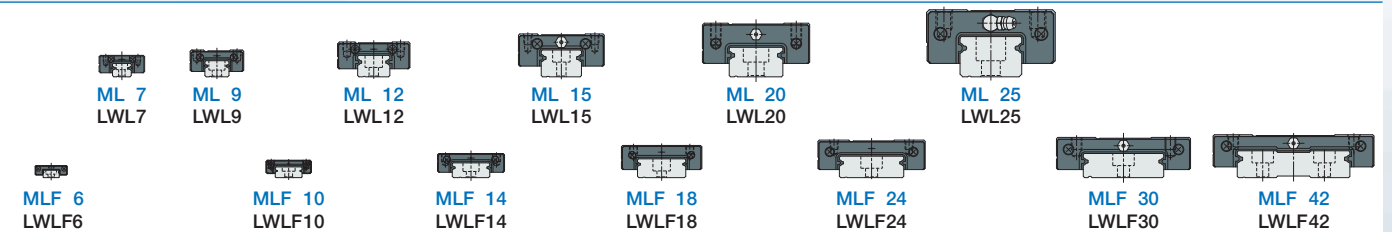
Roller type linear motion rolling guide with cylindrical rollers in four-rows



## Module Type

### Linear Way Module

Minimum compact linear motion rolling guide with both a track rail and slide member provided



ML · LWL

ME · LWE

MH · LWH

LWF

MUL · LWU

MX · LRX

LRWX

LW(L)M · LRWM



# Environment

## **IKO** Gentle to The Earth

Nippon Thompson Co., Ltd. is working to develop global environment-friendly products.

It is committed to developing products that make its customer's machinery and equipment more reliable, thereby contributing to preserving the global environment. This development stance manifests well in the keyword **"Oil Minimum"**.



**Our pursuit of Oil Minimum has led to the creation of IKO's proprietary family of lubricating parts as "C-Lube".**

"C-Lube" minimizes usage of lubrication oil and supplies the optimal amount of lubrication oil for long period of time. So it realizes long term maintenance free and contributes to the global environment preservation.



**The "Interchangeable" is a result of our consideration to the environment and radical pursuit of elimination of material and inventory waste.**

Interchangeable is a collective name of "systems of products selection from users' perspective" which allows free interchange and replacement totally retaining the accuracy and preload of slide units and track rails.

**The integration of maintenance free and advanced interchangeable system with C-Lube is the "Free & Interchangeable".**





# Eco-friendly specification

# Reducing usage of lubrication oil



U.S. PATENTED

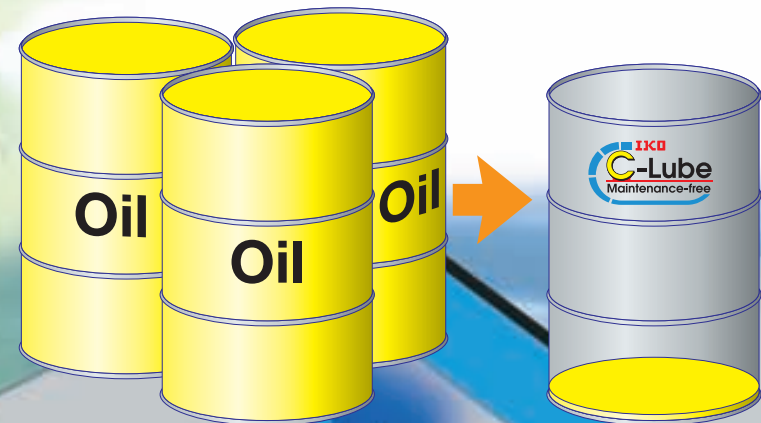
| C-Lube Linear Way ML              |                                                                             | Linear Way L |                                                                                             |
|-----------------------------------|-----------------------------------------------------------------------------|--------------|---------------------------------------------------------------------------------------------|
| No.                               | 7677804<br>7252435<br>6729761<br>6712511<br>5435649                         | No.          | 7258486 5435649<br>6517244<br>6176617<br>6082899<br>5967667                                 |
| C-Lube Linear Way ME              |                                                                             | Linear Way E |                                                                                             |
| No.                               | 7748905 5374126<br>7677804 5356223<br>6729761 5324116<br>6712511<br>5564188 | No.          | 6176617 5564188<br>5967667 5374126<br>5356223<br>5324116<br>7677804                         |
| C-Lube Linear Way MH              |                                                                             | Linear Way H |                                                                                             |
| No.                               | 7832929 6712511<br>7762723 5564188<br>7748905 5374126<br>7677804<br>6729761 | No.          | 7677804 6082899<br>6517244 5967667<br>6461045 5622433<br>6250805 5564188<br>6176617 5374126 |
| C-Lube Linear Way MUL             |                                                                             | Linear Way U |                                                                                             |
| No.                               | 5435649                                                                     | No.          | 6880975 5967667<br>6851857 5435649<br>6517244<br>6461045<br>6309107<br>6176617<br>6082899   |
| Linear Way F                      |                                                                             |              |                                                                                             |
| No.                               | 6176617<br>5967667<br>5564188<br>5374126                                    |              |                                                                                             |
| C-Lube Linear Roller Way Super MX |                                                                             |              |                                                                                             |
| No.                               | 8123408 7927016<br>8113714 7862234<br>8033730 7832930<br>7997800<br>7950852 | No.          | 7780356 5564188<br>7534042 5374126<br>7458721<br>7458720<br>5800064                         |
| Linear Roller Way Super X         |                                                                             |              |                                                                                             |
| No.                               | 7832930 6176617<br>7458721<br>7458720<br>6766897<br>6461045                 | No.          | 7341378 5464288<br>5967667 5374126<br>5800064 5306089<br>5622433<br>5564188                 |

## Eco-friendly

Consumption of precious oil resource is minimized! And elimination of oil feeder and its piping reduces the initial cost!

Contributes to reduction of total cost and environmental loads!!

Oil usage reduction effect




## Maintenance free

Endures running over 20,000 km without oil feeding!

Troublesome lubrication maintenance process is reduced!!

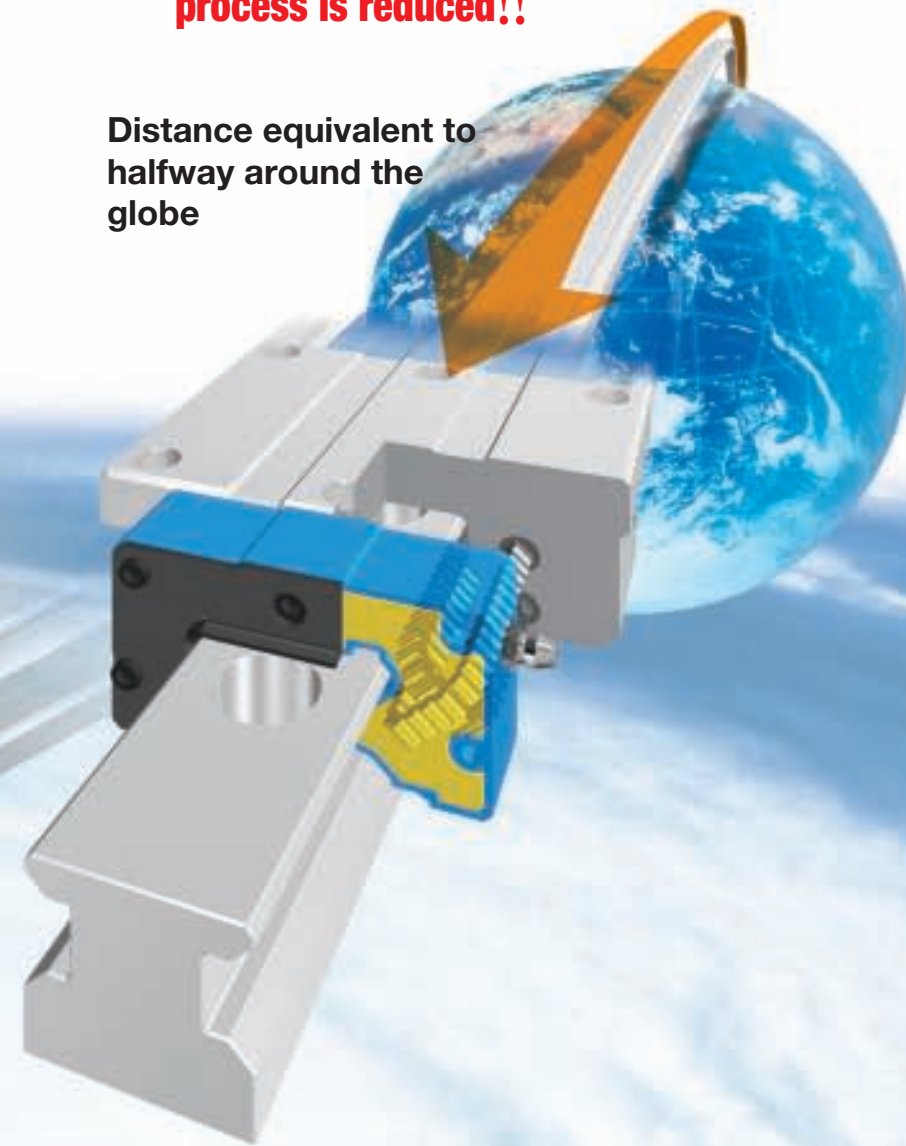Distance equivalent to halfway around the globe




## Compactness

The space consuming oil feeder is eliminated to save the space!


Freedom of machine designing is expanded for user!!

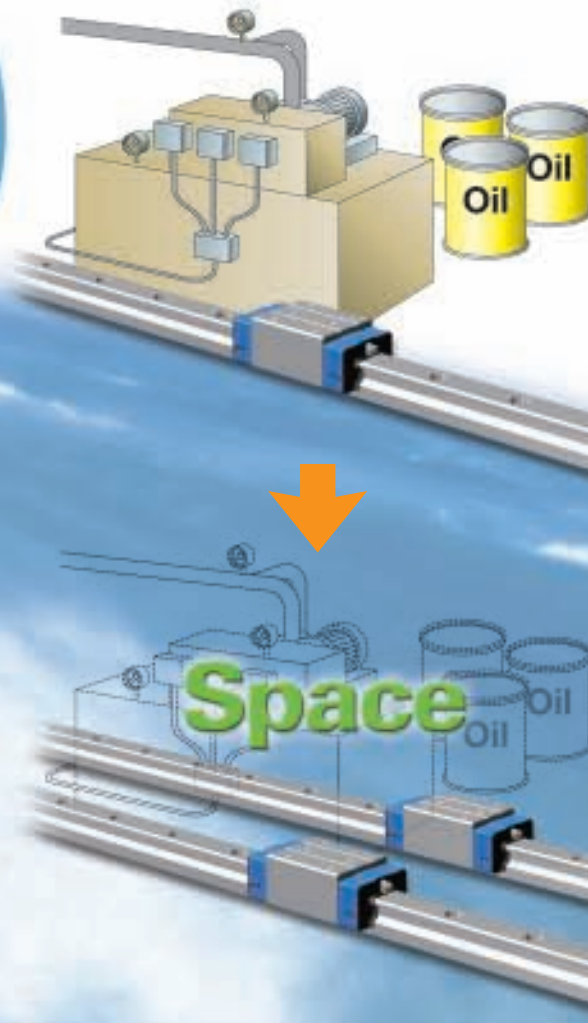Efficient use of space






## Original and world's first structure with [C-Lube]

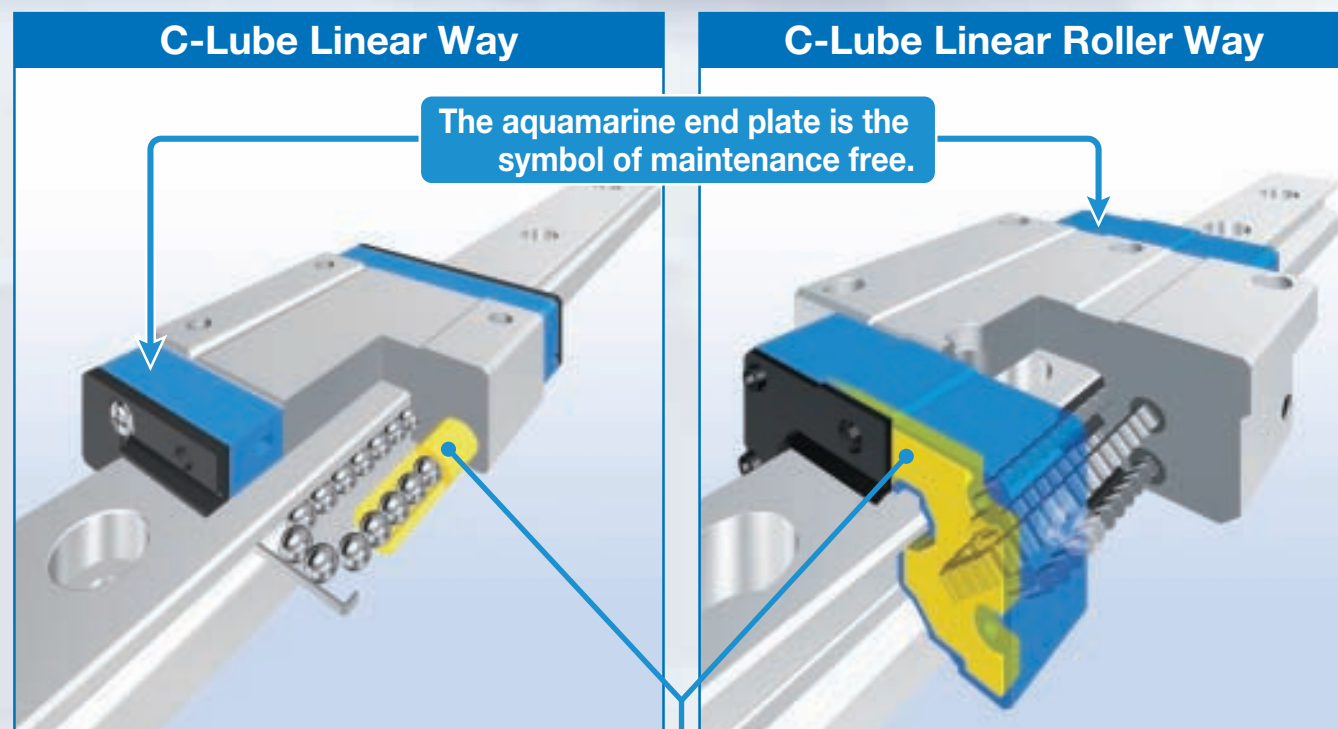

### C-Lube integrated


#### Lubrication oil is carried through circulation of rolling elements

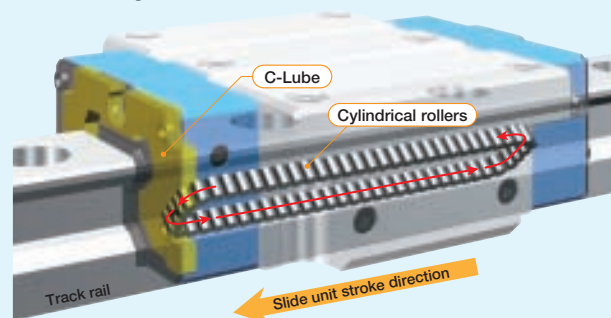The lubrication oil is supplied directly to the rolling elements, not to the track rail.  
When rolling elements make contact with the capillary lubricating element integrated with the circulation path of slide unit rolling elements, the lubrication oil is supplied to surfaces of rolling elements and carried to the loading area through circulation of rolling elements.  
This results in adequate lubrication oil being properly maintained in the loading area and lubrication performance will last for a long time.



#### Lubrication oil is directly supplied to surfaces of the rolling elements

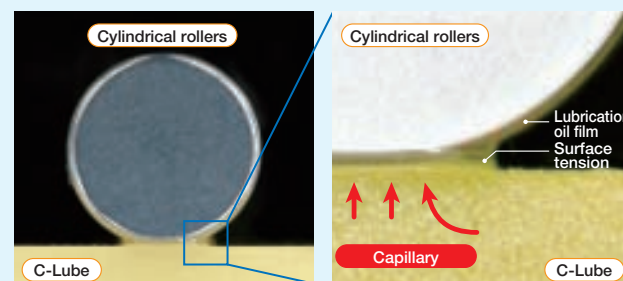The surface of capillary lubricating element is always covered with the lubrication oil.  
Lubrication oil is continuously supplied to the surface of rolling elements by surface tension in the contact of capillary lubricating element surface and rolling elements.  
On the surface of capillary lubricating element with which the rolling elements make contact, new lubrication oil is always supplied from the other sections.



## long term maintenance free is realized with oil impregnated with C-Lube only !!



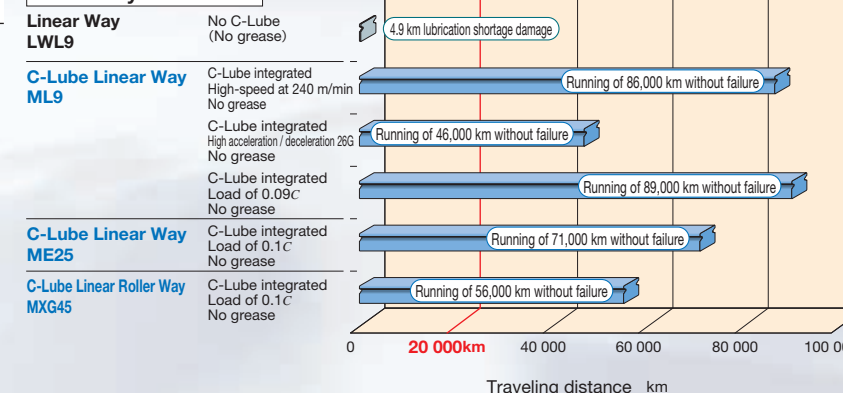
### Maintenance free

This endures running over 20,000 km without oil feeding with lubrication oil in the C-Lube only.  
Furthermore, grease is pre-packed in the slide unit so long term maintenance free can be realized.

**Maintenance free is achieved until the end of device life\*1!**

\*1. Typical device life is assumed. Re-greasing may be necessary depending on use conditions.

#### Durability test result




### Eco-friendly

As lubrication oil in C-Lube is supplied by the amount necessary to maintain lubrication performance of the rolling guide, the consumption of lubrication oil is reduced and lubrication performance is maintained even when it run for a long period.

**Eco-friendly specification reducing usage of lubrication oil!**

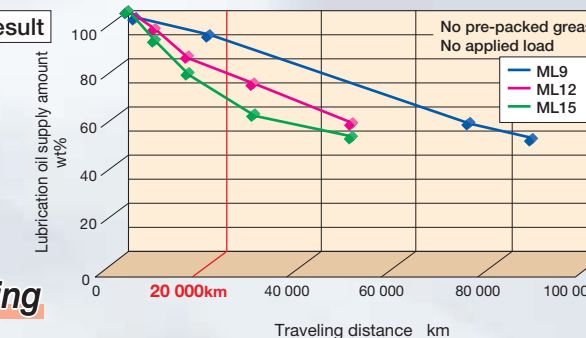
#### Oil supply test result



### Compact

As C-Lube Linear Way and C-Lube Linear Roller Way are integrated with lubrication part C-Lube, their slide units are not long unlike types with external lubrication parts.  
Replacement of conventional parts is easy free from constraints of mounting space and stroke length.

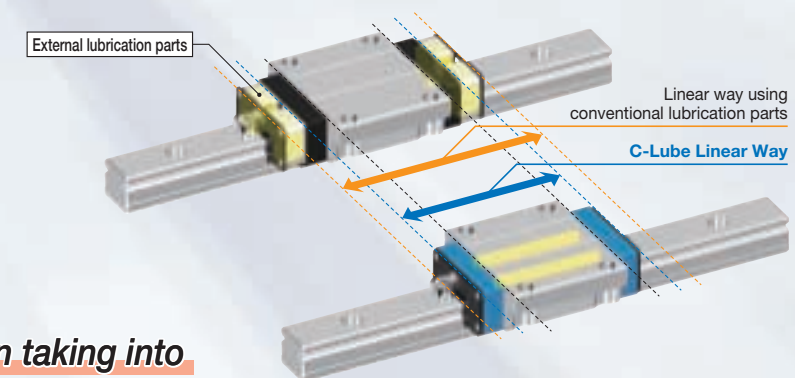
**Compact design taking into account compactness!**



### Smooth

C-Lube Linear Way and C-Lube Linear Roller Way do not generate slide resistance unlike lubrication parts external to the slide unit that make contact with the track rail.  
Driving force follow-up property is superior and energy is saved by improvement of accuracy and reduction of friction loss.
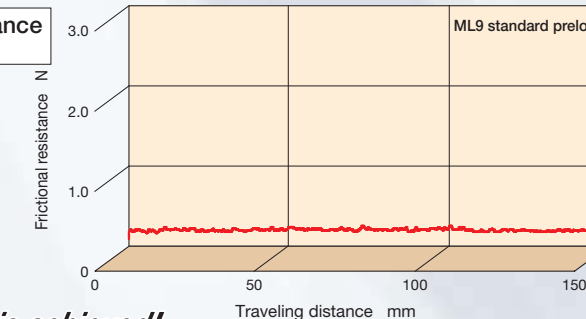
#### Frictional resistance test result



**Light and smooth motion is achieved!**



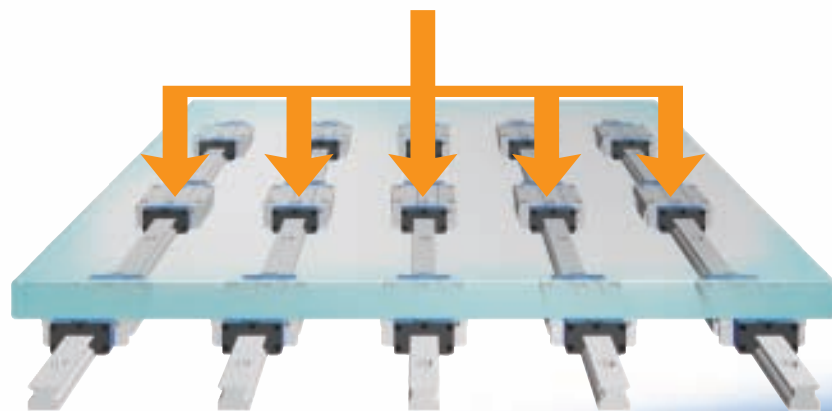
# Ultimate **Interchangeable** pursuit of elimination

# system by radical of any waste

## Accuracy interchangeability

Three accuracy classes are available!  
Height variation can be controlled with multiple assembled sets!


**High accuracy of the device can be maintained in the multiple-use environment!!**



## Unit interchangeability

Many type of slide units are available!  
Every slide unit is interchangeable with the same track rail!

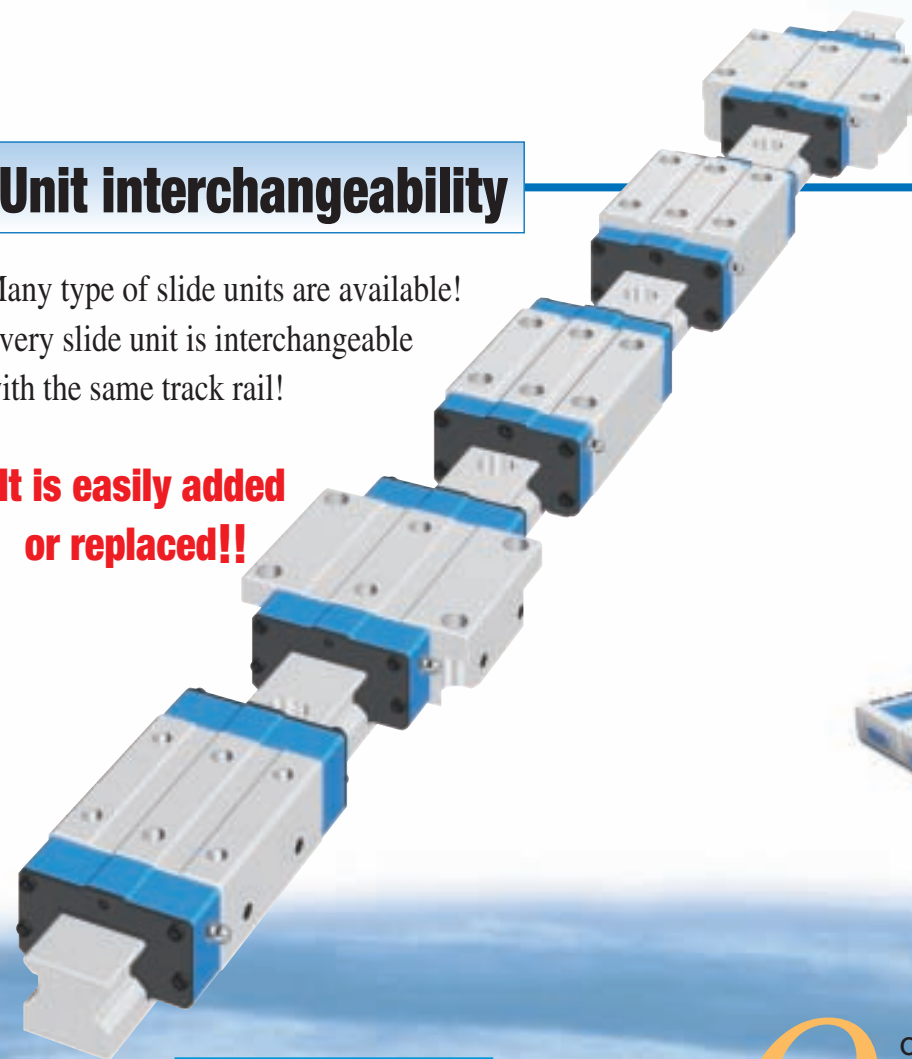
**It is easily added or replaced!!**




## Short delivery products

Separate delivery of slide unit and track rail!


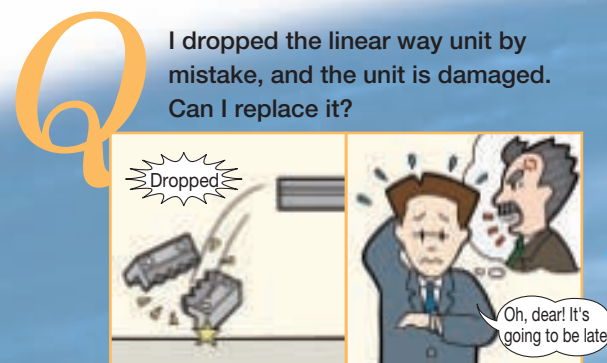
**You may order what you need by any quantity at any time!!**



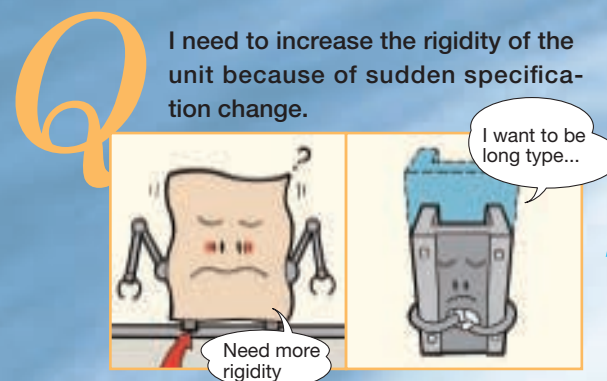
**A Unit interchangeability**  
If you use Linear way of Interchangeable specification, you may need to replace only slide unit.



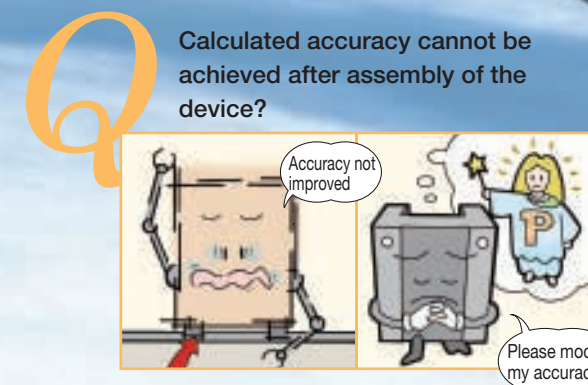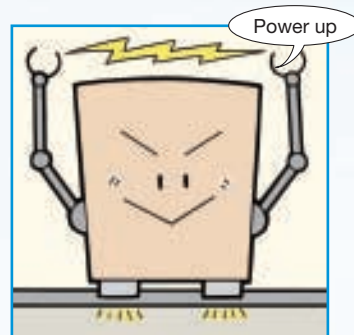**A Unit interchangeability**  
The rigidity can be improved easily by increasing the unit length.



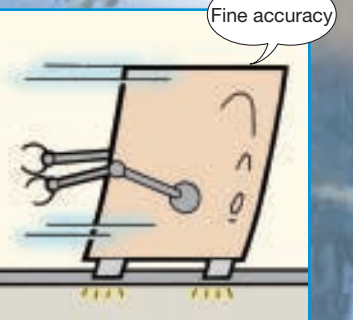**A Accuracy interchangeability, preload interchangeability**  
How do you like to use accuracy higher by one class or higher preload type?  
As accuracy of the interchangeable products is controlled strictly by parts, setting can be modified.



**A Short delivery available**  
Interchangeable parts are available for short delivery, they can be delivered quickly with our perfect inventory system.  
Slide unit and track rail can be ordered individually.





**Free combination is enabled for model, accuracy, preload!!**

**Ultimate interchangeable system**

## Interchangeable specification

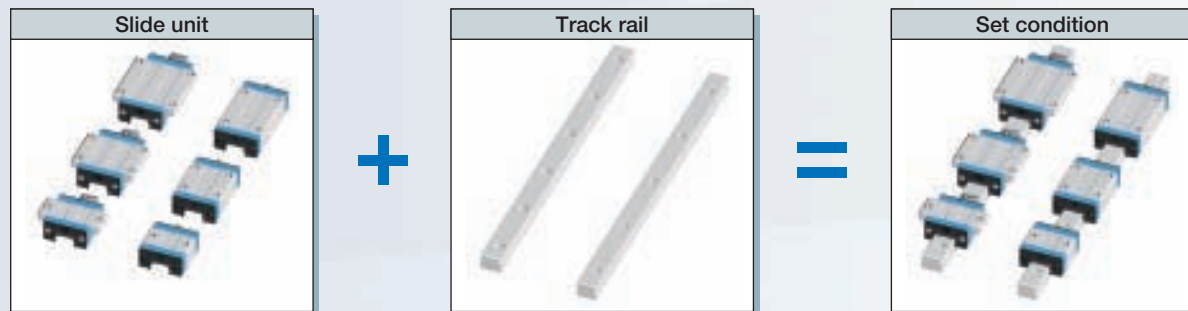
### Requirements of ;

- Wish to improve the rigidity and life of machines
- Wish to improve the accuracy of machines
- Wish to replace the slide unit immediately
- The number of slide units is in short
- Wish to replace the track rail immediately
- The length of track rail is not sufficient
- Wish to store only the slide units in stock for emergency

### Interchangeable specification realizes ;

- Wish to prepare for a sudden design change
- Wish to select freely the combination of high accuracy and preload
- Slide unit and track rail are separately handled
- Free combination of slide unit and track rail can be selected
- Compactness-independent storing of slide units and track rails

Select the products as many as you wish.




## Unit interchangeability


A wide variety of slide unit models with different sectional shape and length are provided, for free replacement on the same track rail.

### Interchangeability of slide unit
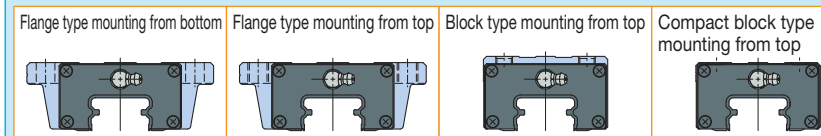
#### Slide unit shape




#### Length of slide unit



### Interchangeability of track rail

| Track rail                        |                                 |                           |
|-----------------------------------|---------------------------------|---------------------------|
| High carbon steel-made track rail | Stainless steel-made track rail | Butt-jointing track rails |
|                                   |                                 |                           |



**Free selection is possible for slide units and track rails!**

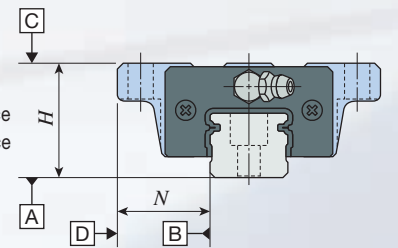
Interchangeable specification has realized the incomparable high interchangeability by severely managing the dimensions of slide unit and track rail with the background of unique high processing technology. This feature allows independent handling of slide unit and track rail, thus allowing you to select free combination and to order any products for any volume at any necessary time.

## Accuracy interchangeability

Three accuracy classes of Ordinary, High and Precision class are provided, to support even high traveling accuracy purposes. In addition, as height variation of multiple assembled sets is managed with high accuracy, you may use parallel track rails at ease.

### Standard setting up to precision


- Tolerances of dimensions  $H$  and  $N$
- Variation of dimensions  $H$  and  $N$  in 1 set
- Parallelism in operation of the C surface to A surface
- Parallelism in operation of the D surface to B surface



**It allows the accuracy improvement of units without design changes!**

Corresponding to parallel arrangement of multiple assembled sets as standard


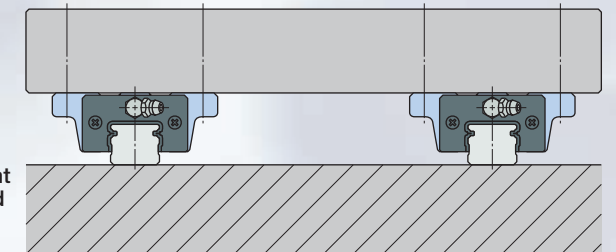
- Variation of dimensions  $H$  of multiple assembled sets is specified



## Preload interchangeability

The high accuracy dimensions management utilizing the simple structure achieved the interchangeability of preloaded slide units. It supports the applications requiring the rigidity of one higher rank.

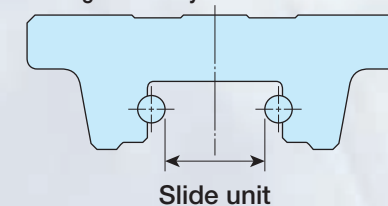High preload setting is possible thanks to high accuracy dimensions control



Light preload

Takeover


Standard preload



**It allows the rigidity improvement of units without design changes!**
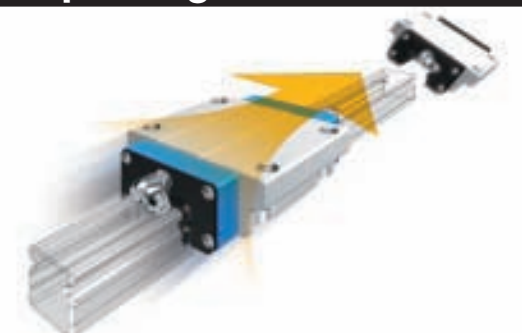
## Maintenance free is achieved only by replacing the slide unit!

By replacing the interchangeable linear way or linear roller way slide unit with C-Lube Linear Way or C-Lube Linear Roller Way slide unit, maintenance free is achieved while using the same track rail.






# **IKE's** excellent features realized by contact in two-row raceways

# a simple structure by **four-points**

## Two-row four-point contact type simple structure

IKE adopts two-row four-point contact type for every Linear Way series. Thanks to our design know how and production technologies having been fostered for long time, high accuracy and smooth motion is realized in the micro series.

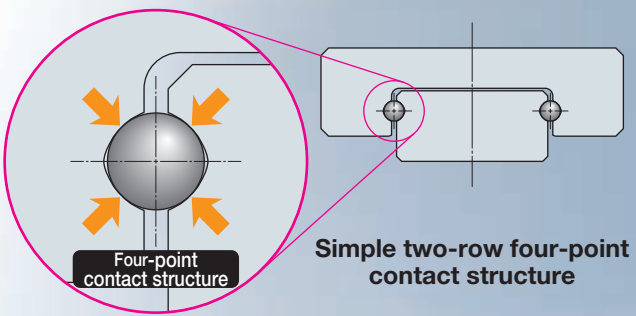In addition, load in every direction can be received evenly and therefore stable high accuracy and rigidity can be achieved even in applications where load has variable direction and size or complex load is applied.



**Essential for micro sizing!**

## Micro Linear Way L realized by simple structure

Micro linear way L for further needs of miniaturization produced by original small sizing technology. Wide variety of track rail width from 1 mm to 6 mm is available and high accuracy of micro positioning mechanism is realized.



## World's smallest size!

- High accuracy even with the smallest size of 1 mm\*!  
\*Track rail width of 1 mm
- Even the smallest size of 1 mm can be securely mounted and fixed\*\*!  
\*\*Tapped rail specification
- Even the smallest size of 1 mm can ensure stable operation!

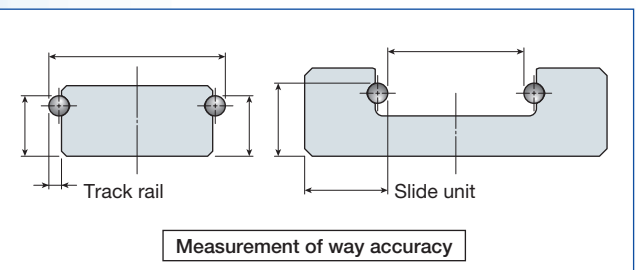
**IKE** Micro Linear Way L  
**LWL1**

**LWL1** can be used for further super miniaturization of machines and devices with free-minded thinking.

## Interchangeable

The simple structure of four-contact in two-row raceway yields small manufacturing errors or accuracy measurement errors, allowing the maintenance of each raceway in the high dimensions accuracy.

**This technology realizes interchangeable specification and high interchangeable system in every series!**



As the ball is stabilized during track groove measurement, measurement of high accuracy and precise pre-load management are possible.

## Variety of models and size variations

A wide variety of models and sizes, such as super miniature size of only 1 mm track rail width, is provided for your selection to meet each requirement.

| Series                | Model      | Size               | Track rail width |            |
|-----------------------|------------|--------------------|------------------|------------|
|                       |            |                    | Min              | Max        |
| C-Lube Linear Way ML  | <b>ML</b>  | 7 models 14 sizes  | 5                | 42 mm      |
|                       | <b>LWL</b> | 20 models 18 sizes | 1                | 42 mm      |
| C-Lube Linear Way ME  | <b>ME</b>  | 18 models 6 sizes  | 15               | 45 mm      |
|                       | <b>LWE</b> | 21 models 6 sizes  | 15               | 45 mm      |
| C-Lube Linear Way MH  | <b>MH</b>  | 19 models 9 sizes  | 8                | 45 mm      |
|                       | <b>LWH</b> | 25 models 12 sizes | 8                | 85 mm      |
| Linear Way F          |            | <b>LWF</b>         | 4 models 7 sizes | 33 ~ 90 mm |
| C-Lube Linear Way MUL | <b>MUL</b> | 1 models 2 sizes   | 25               | 30 mm      |
|                       | <b>LWU</b> | 3 models 8 sizes   | 25               | 130 mm     |





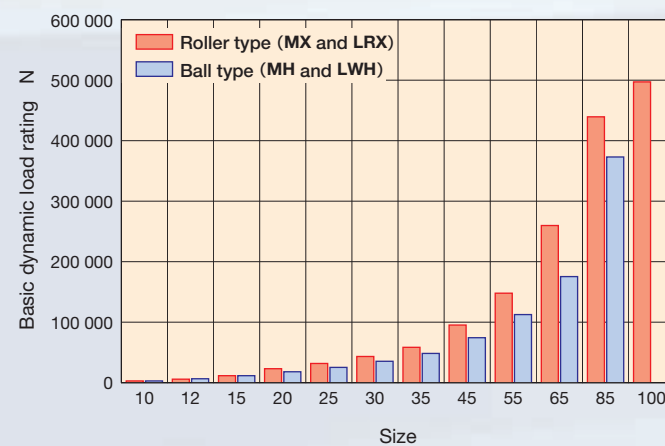
# Ultimate high performance produced by world's

# first roller guide structure of **IKO**


## Super high load capacity

The Linear Roller Way Super X has a large contact area with the way and a number of cylindrical roller with excellent load capacity, which allows to achieve larger load rating.

Comparison of basic dynamic load rating




Comparison of basic static load rating

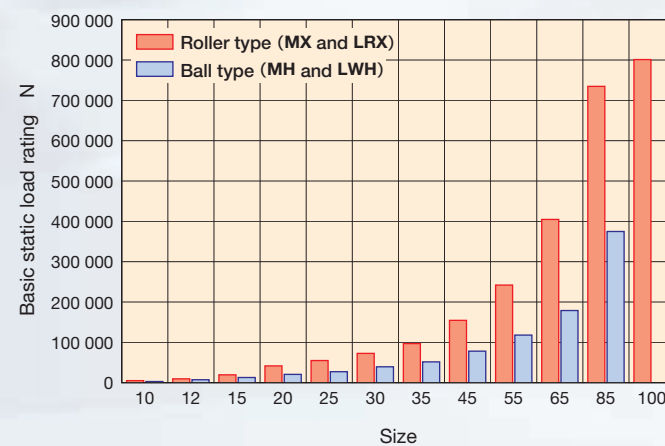

**Size smaller by one size than the ball type can be used!**


## Long life

《Roller Type》MXG45



$C = 124\,000\text{ N}$   
 $C_0 = 223\,000\text{ N}$

《Ball Type》MHG45



$C = 95\,200\text{ N}$   
 $C_0 = 114\,000\text{ N}$

Same size

$C$ : Basic dynamic load rating N  
 $C_0$ : Basic static load rating N  
 $L$ : Life km  
 $P$ : Applied load N

**Roller type has large basic dynamic load rating  $C$  and long life due to the different "index"!**

[Life calculation example]

Roller Type

$$L = 50 \left( \frac{C}{P} \right)^{10/3}$$

Applied load  
In case of 10000 N

$$L \approx 220\,000\text{ km}$$

Ball type

$$L = 50 \left( \frac{C}{P} \right)^3$$


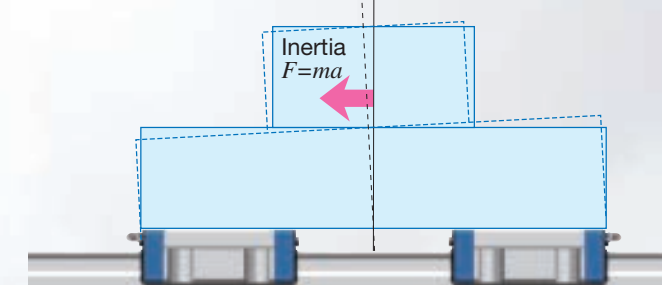
$$L \approx 43\,000\text{ km}$$

**Significant increase!**


## Super high rigidity

The rigidity of linear motion rolling guide significantly affects properties of machines and devices to be incorporated.

The Linear Roller Way Super X achieves high rigidity as a number of small cylindrical rollers with smaller elastic deformation relative to load than that of balls are incorporated in the slide unit.



Comparison of elastic deformation

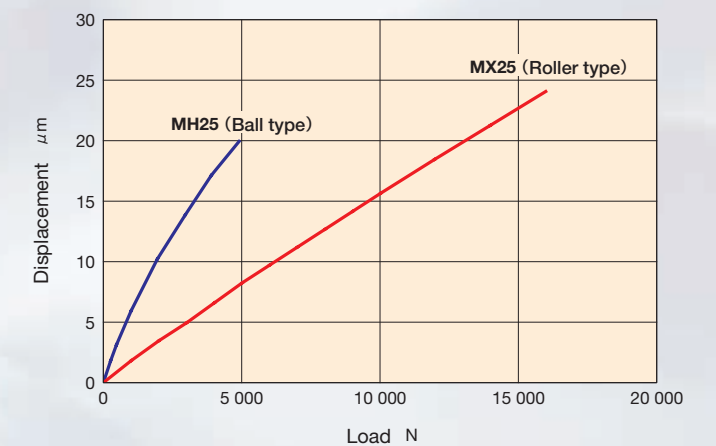


**Well-balanced high rigidity is realized in every direction!**




## Vibration characteristics

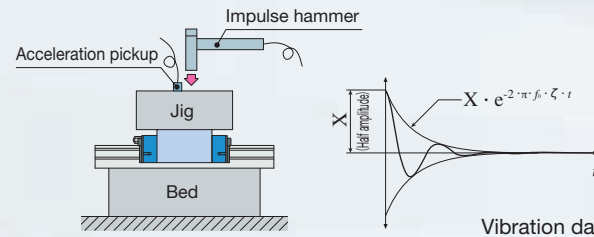The Linear Roller Way Super X has high rigidity relative to ball types of the same size, so deformation amount is low relative to repeated fluctuating load, natural frequency is high and vibration damping time is short.



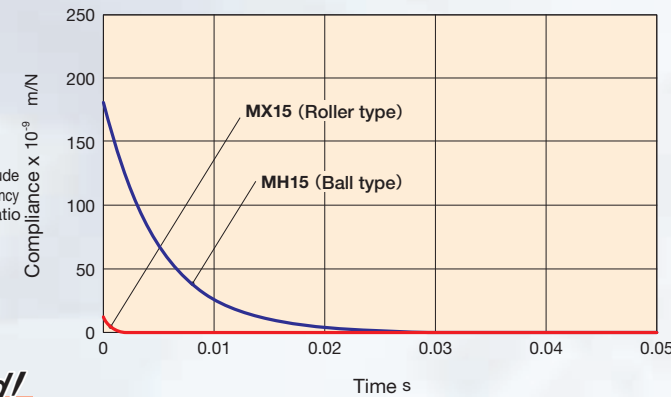Vibration damping curve in downward vibration (Half amplitude)



**Positioning time can be shortened!**

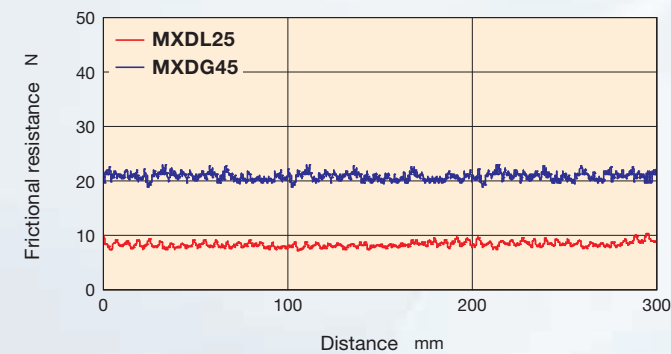

## Allows accurate positioning with excellent frictional characteristic

The Linear Roller Way Super X prevents skew of cylindrical roller and achieves smooth motion by adopting unique retaining method to accurately guide cylindrical roller ends with retaining plate.

The Linear Roller Way Super X has good response characteristics to micro-feeding and allows for accurate positioning, thanks to small frictional resistance against preload and load and excellent frictional characteristics relative to plain guides and ball type linear motion rolling guide.

MXDL25 and MXDG45 T<sub>3</sub> preload frictional resistance

|              |                                            |
|--------------|--------------------------------------------|
| Test portion | Extra long unit MXDL25<br>Long unit MXDG45 |
| Preload      | T <sub>3</sub> preload                     |
| Velocity     | 0.6 m/min                                  |
| Lubrication  | C-Lube integrated, with grease             |



**High follow-up property is ensured even for micro-feeding!**

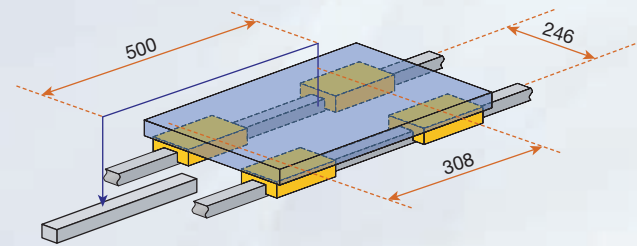
## High running accuracy

Optimal design based on analysis of re-circulation behavior of cylindrical roller circulation realizes smooth and quiet motion. In addition, load is applied to many cylindrical rollers and therefore the micro deflection during running is minimized. Extra long unit is optimal for applications requiring higher running accuracy. (For details, see page I -29)

Deflection amount during running

unit: μm

|                                            |      |
|--------------------------------------------|------|
| MXDG30 T <sub>3</sub> preload              | 0.12 |
| Competitor's super high accuracy long type | 0.12 |




**Stable running accuracy is achieved!**

**MXDG30 is equivalent to competitor's super high accuracy long type**

## Corresponding to compactification

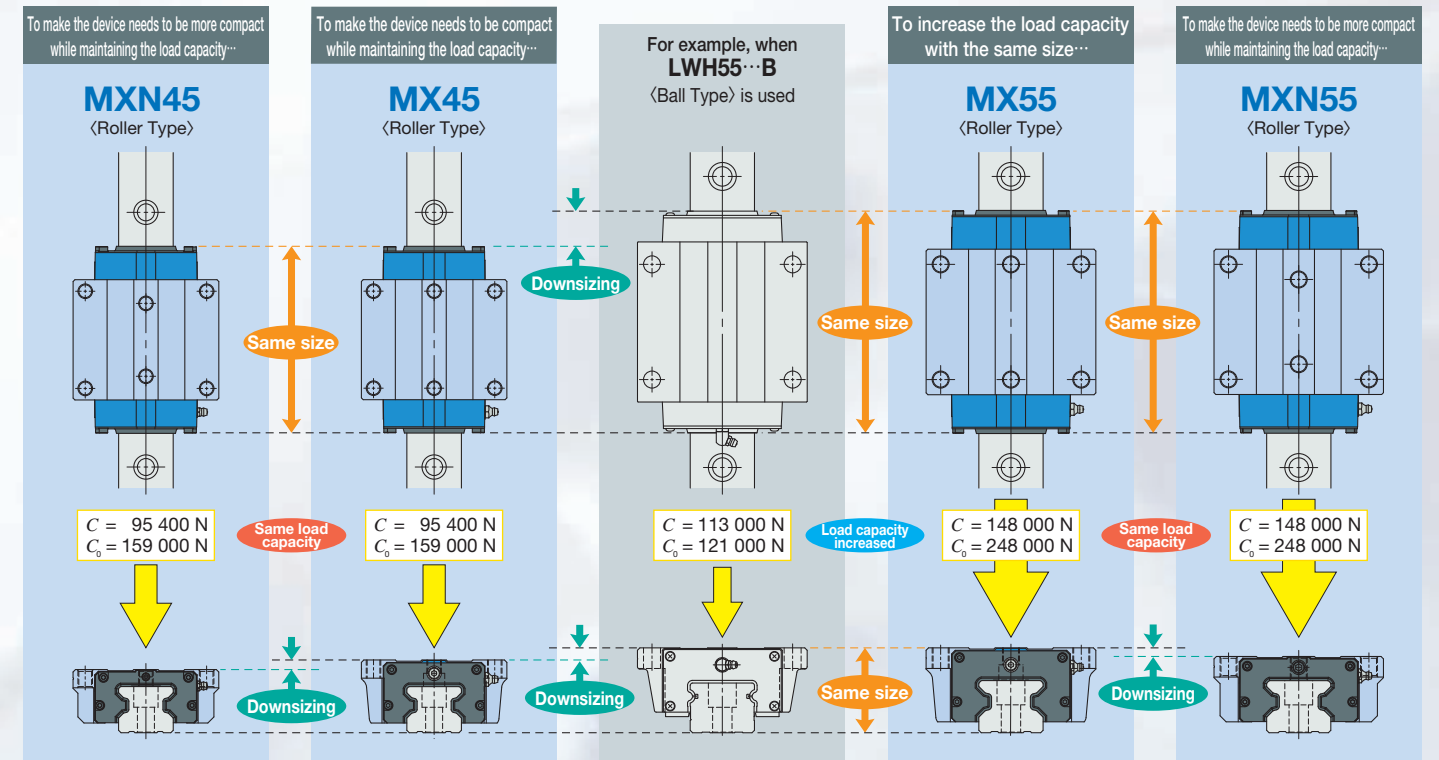Roller type with significantly higher load capacity than the ball type. The Linear Roller Way Super X allows for downsizing from many size variations for compactification of devices.




**Downsizing and increased load capacity!**

**Roller type with large increase of load capacity!**

## Compatible ball type and mounting dimensions

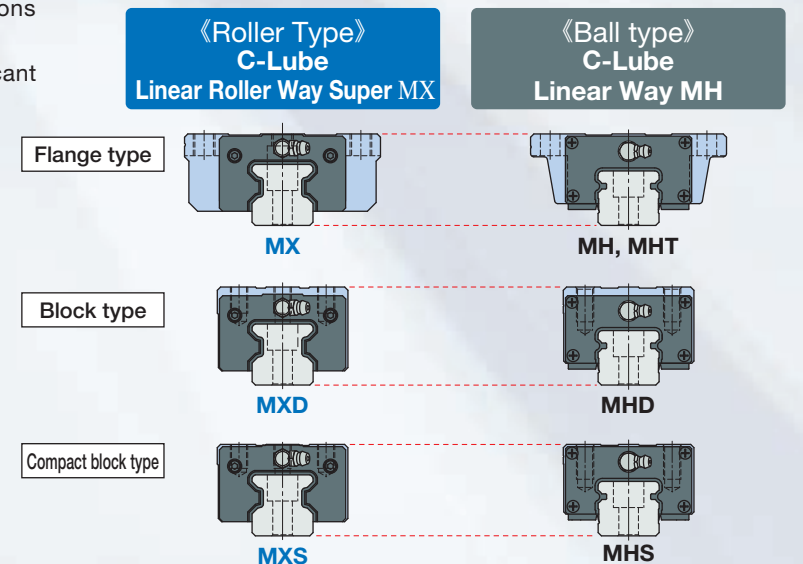The Linear Roller Way Super X has mounting dimensions compatible with the ball type Linear Way H. Replacement with roller type is possible without significant design change to machine or device.



**Downsizing and increased load capacity are possible!**





# A variety of models and size variations



## Ball Type Miniature Series

### C-Lube Linear Way ML Linear Way L

Thanks to the structure with two rows of balls to contact with the way at four points, stable accuracy and rigidity can be achieved even in applications where load has variable direction and size or complex load is applied, despite its very small body.


| Standard type                                                                      |     | Wide type                                                                          |      | Length of slide unit |            | Size          |                                  |
|------------------------------------------------------------------------------------|-----|------------------------------------------------------------------------------------|------|----------------------|------------|---------------|----------------------------------|
| ML                                                                                 | MLF | LWL                                                                                | LWLF | C                    | Short      | Standard type | 1, 2, 3, 5, 7, 9, 12, 15, 20, 25 |
|  |     |  |      | No symbol            | Standard   | Wide type     | 4, 6, 10, 14, 18, 24, 30, 42     |
|                                                                                    |     |                                                                                    |      | G                    | Long       |               |                                  |
|                                                                                    |     |                                                                                    |      | L                    | Extra long |               |                                  |



## Micro Linear Way L

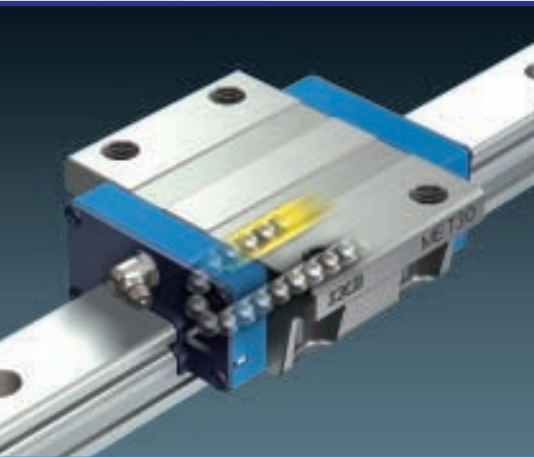As the lineup of track rail width from 1 mm to 6 mm is available, i.e. standard and long, you can select an optimal linear bushing for the specifications of your machine and device. For LWL1, world's smallest size is realized: track rail width of 1 mm, slide unit width of 4 mm and assembly height of 2.5 mm.

|                                                |          | Standard type                   |                               |                                                       | Wide type                    |              |
|------------------------------------------------|----------|---------------------------------|-------------------------------|-------------------------------------------------------|------------------------------|--------------|
|                                                |          | <b>LWL1</b>                     | <b>LWL2</b>                   | <b>LWL3</b>                                           | <b>LWLF4</b>                 | <b>LWLF6</b> |
| Sectional shape<br>(Original size)<br>unit: mm |          |                                 |                               |                                                       |                              |              |
|                                                |          | 4.2<br>1                        | 6<br>2                        | 8<br>3                                                | 10<br>4                      | 12<br>6      |
| Length of slide unit<br>(original size)        | Short    | —                               | —                             |                                                       | —                            |              |
|                                                | Standard |                                 |                               |                                                       |                              |              |
| Track rail model                               |          | Standard rail specification<br> | Tapped rail specification<br> | Tapped rail specification (mounting from lateral)<br> | Solid rail specification<br> |              |




## Ball Type Compact Series

### C-Lube Linear Way ME Linear Way E Low Decibel Linear Way E

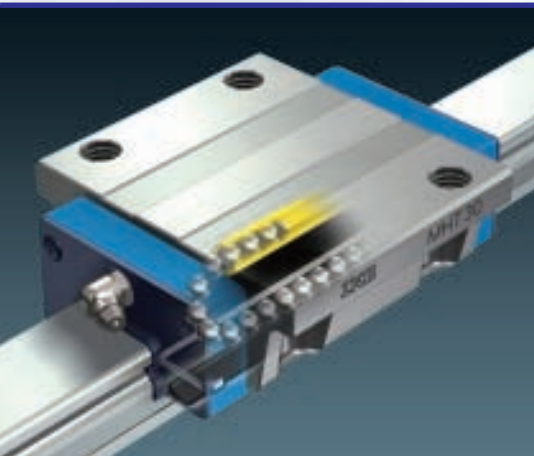Versatile linear motion rolling guide achieved utility pursuing compactness in every aspect just like lower, narrower, and shorter. Low decibel types with resin separator to prevent direct contact between balls are also available.






|                                     |  | Length of slide unit |            | Size                   |
|-------------------------------------|--|----------------------|------------|------------------------|
| Flange type<br>mounting from bottom |  | C                    | Short      | 15, 20, 25, 30, 35, 45 |
|                                     |  | No symbol            | Standard   |                        |
|                                     |  | G                    | Long       |                        |
|                                     |  | L                    | Extra long |                        |
| Flange type<br>mounting from top    |  | MET<br>LWET          |            |                        |
| Block type<br>mounting from top     |  | MES<br>LWES          |            |                        |



## Ball Type High Rigidity Series

### C-Lube Linear Way MH Linear Way H

Linear motion rolling guide having a maximum load rating among ball type units by incorporating a large-diameter ball. Stable accuracy and rigidity can be achieved even in applications where load with variable direction and size and complex load are applied.


|                                                                              |                                                                                       | Length of slide unit |                                                                                                     |
|------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------|-----------------------------------------------------------------------------------------------------|
| Flange type<br>mounting from bottom<br><b>MH</b><br><b>LWH</b>               |  | C                    | Short<br>      |
|                                                                              |                                                                                       | No symbol            | Standard<br>   |
|                                                                              |                                                                                       | G                    | Long<br>       |
|                                                                              |                                                                                       | L                    | Extra long<br> |
| Flange type<br>mounting from top <sup>(1)</sup><br><b>MHT</b><br><b>LWHT</b> |                                                                                       |                      |                                                                                                     |
| Block type<br>mounting from top<br><b>MHD</b><br><b>LWHD</b>                 |                                                                                       |                      |                                                                                                     |
| Compact block type<br>mounting from top<br><b>MHS</b><br><b>LWHS</b>         |                                                                                       |                      |                                                                                                     |

| Size                                          |
|-----------------------------------------------|
| 8, 10, 12, 15, 20, 25, 30, 35, 45, 55, 65, 85 |

Note <sup>(1)</sup> Some models may be mounted from bottom.



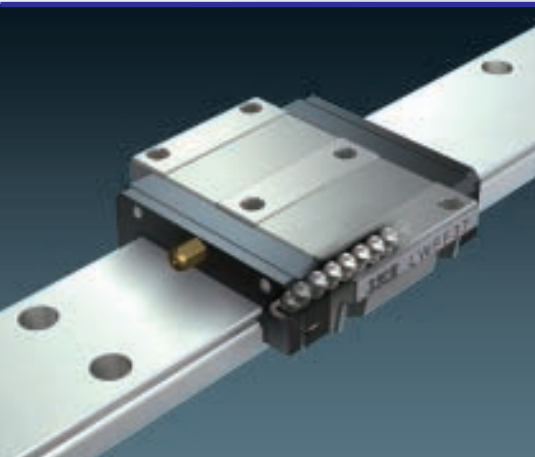A variety of models and size variations




### Ball Type Wide Type Series


## Linear Way F

As wide track rail is used and the distance between the load points is long, this is a linear motion rolling guide suitable to single-row use due to the structure resistant to across-the-width moment load. It is also resistant to complex load.

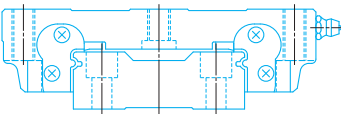
Flange type mounting from top / bottom  
**LWFH**




Flange type mounting from top / bottom  
**LWFF**




Block type mounting from top  
**LWFS**



| Length of slide unit                                                                |          |
|-------------------------------------------------------------------------------------|----------|
| No symbol                                                                           | Standard |
|  |          |

| Size |             |
|------|-------------|
| LWFH | 40,60,90    |
| LWFF | 33,37,42,69 |
| LWFS | 33,37,42    |

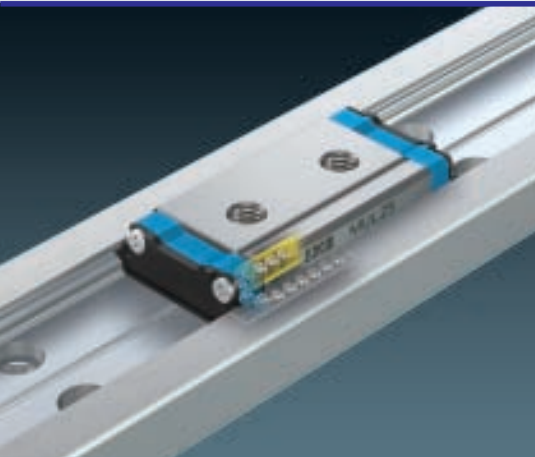


### Ball Type U-Shaped Track Rail Series


## C-Lube Linear Way MUL Linear Way U


Linear motion rolling guide of the structure with way inside the track rail of U-shaped section and slide unit therein. With the U-shaped track rail, rigidity against the track rail moment load and torsion is significantly improved.

Small type  
**MUL**  
LWUL




Standard type  
**LWU**

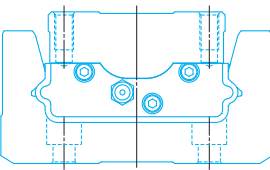

| Length of slide unit                                                                  |          |
|---------------------------------------------------------------------------------------|----------|
| No symbol                                                                             | Standard |
|  |          |

| Size |                          |
|------|--------------------------|
| MUL  | 25, 30                   |
| LWUL | 25, 30                   |
| LWU  | 40, 50, 60, 86, 100, 130 |




### Roller Type


## C-Lube Linear Roller Way Super MX Linear Roller Way Super X

Linear motion rolling guide that has achieved the highest level of performance in all characteristics utilizing the roller's superior characteristic, such as rigidity, load capacity, running accuracy and vibration damping property. With extra long unit with the maximum slide unit length, load capacity and rigidity are improved and running performance with super high accuracy is realized.


Flange type mounting from top / bottom  
**MX<sup>(1)</sup>**  
**LRX<sup>(1)</sup>**




Block type mounting from top  
**MXD**  
**LRXD**




Compact block type mounting from top  
**MXS**  
**LRXS**




Low section flange type mounting from top  
**MXN**



Low section block type mounting from top  
**MXNS**



Note <sup>(1)</sup> Size 20 series allows only for mounting from top and model mounting from bottom is **MXH** and **LRXH**.

| Length of slide unit                                                                  |           |      |            | Size                                            |
|---------------------------------------------------------------------------------------|-----------|------|------------|-------------------------------------------------|
| C                                                                                     | No symbol | G    | L          | 10, 12, 15, 20, 25, 30, 35, 45, 55, 65, 85, 100 |
| Short                                                                                 | Standard  | Long | Extra long |                                                 |
|  |           |      |            |                                                 |

## Four-row roller guide of world's smallest size Track rail width of 10 mm



**Super high rigidity**  
**Super high load capacity**  
**High running performance**  
**Excellent frictional characteristics**

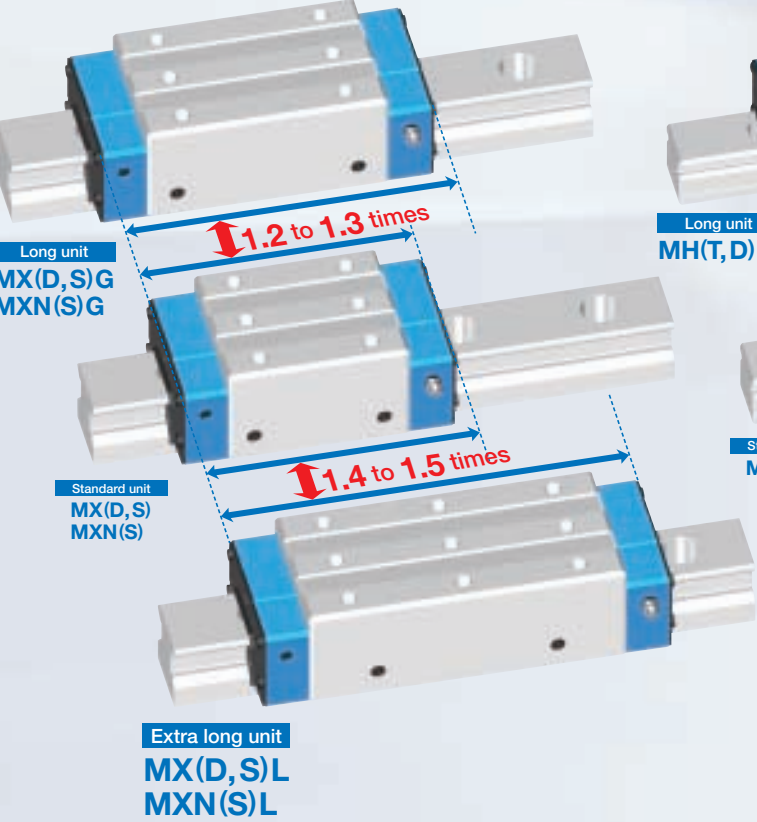
Stainless steel made  
**LRXD10...SL**



# Features of extra long unit


## C-Lube Linear Roller Way Super MX

Length of slide unit is **1.4 to 1.5 times longer** than that of standard unit



## C-Lube Linear Way MH

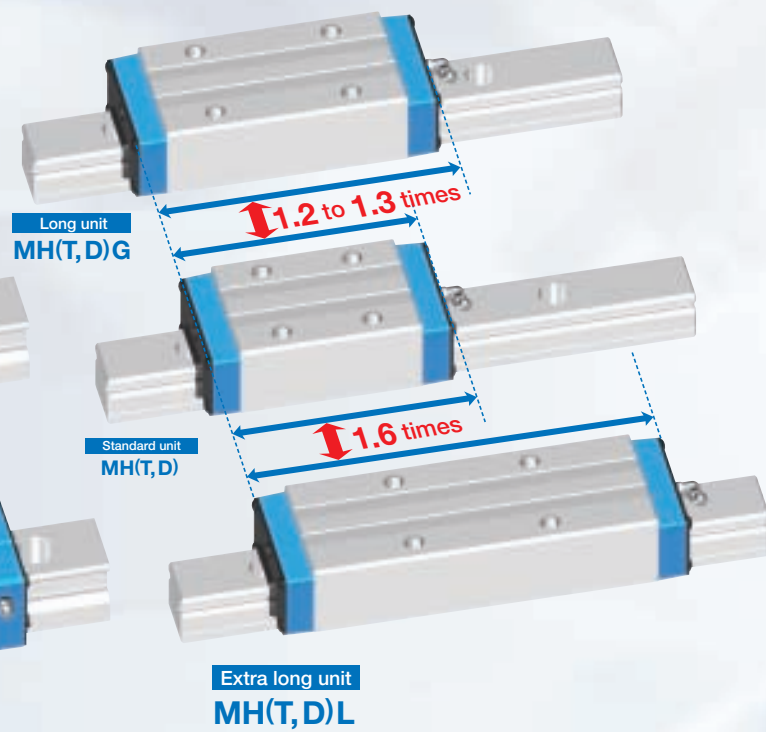Length of slide unit is **1.6 times longer** than that of standard unit




## Super accurate feeding mechanism is realized

As running accuracy is as low as a half of that of long unit, feeding mechanism with super high accuracy can be realized.


### Test conditions
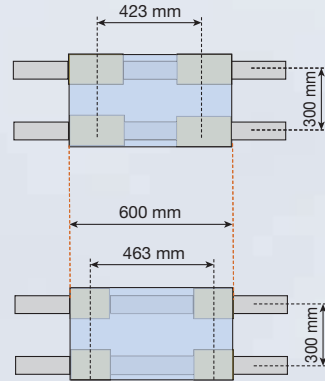
|              |                        |
|--------------|------------------------|
| Test portion | Extra long unit        |
| Preload      | T <sub>3</sub> preload |



### Test conditions
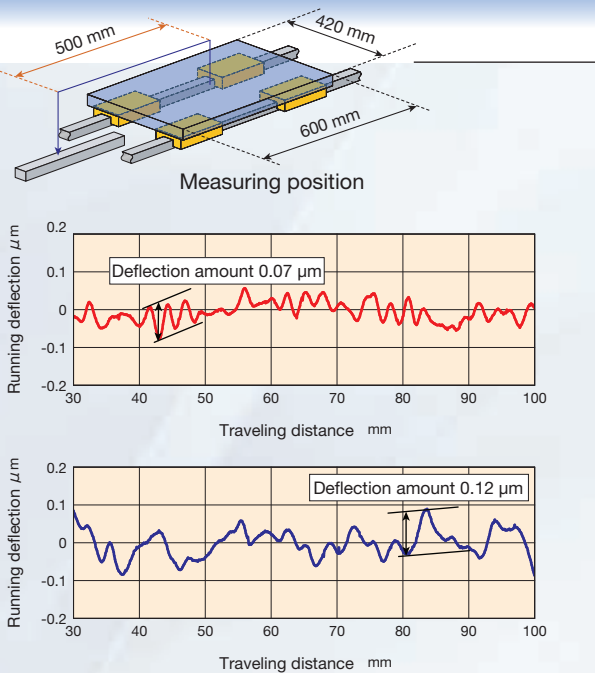
|              |                        |
|--------------|------------------------|
| Test portion | Long unit              |
| Preload      | T <sub>3</sub> preload |



**High accuracy running performance is realized without major change of machine or device design<sup>(1)</sup>!**

Note (1) Position of the slide unit mounting hole is changed.

## Further improvement of running accuracy

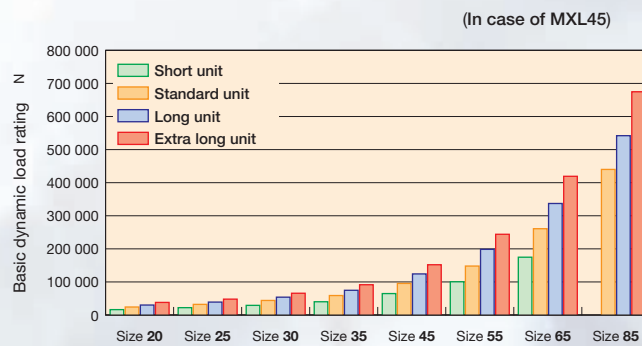
**Load capacity and rigidity are significantly improved!!**

## Load capacity of machine or device is improved

As its basic dynamic load rating and basic static load rating are larger than those of Long type by 122% and 129%, respectively, life and margin safety of machine or device are improved.


### Comparison of basic dynamic load rating

Increased to **158%** relative to standard unit!  
Increased to **122%** relative to long unit!



### Comparison of basic static load rating

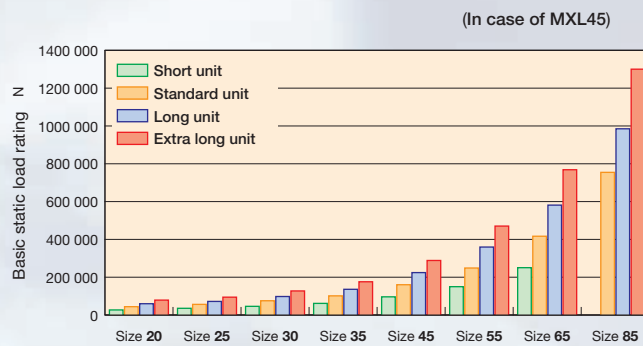Increased to **181%** relative to standard unit!  
Increased to **129%** relative to long unit!





## Contributing to improvement of machine or device rigidity

Elastic deformation relative to load is small in comparison with long unit, device rigidity is improved, accuracy is improved, and resonance can be avoided.


### Comparison of elastic deformation under downward load

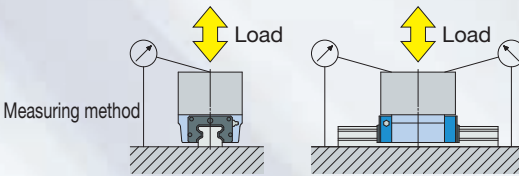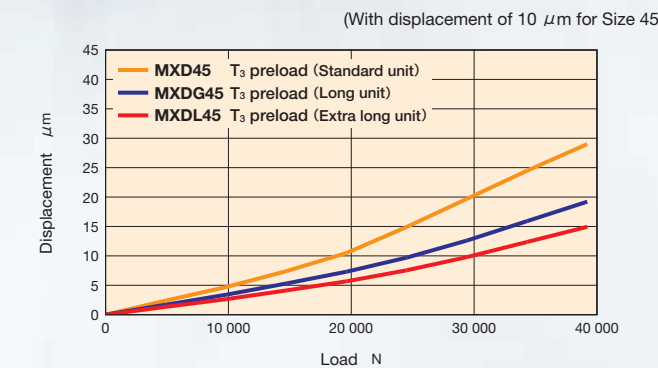Rigidity increased to **155%** relative to standard unit!  
Rigidity increased to **117%** relative to long unit!



### Comparison of elastic deformation under upward load

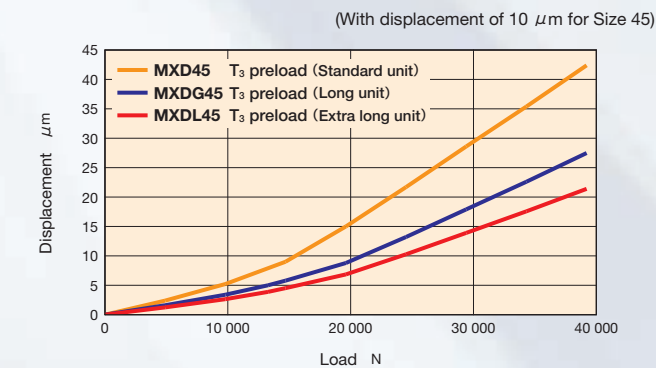Rigidity increased to **152%** relative to standard unit!  
Rigidity increased to **113%** relative to long unit!






# IKO's unique ideas and experiences special environment applications.

IKO Linear Way and Linear Roller Way are available for various special environment by using different materials and grease, surface treatment and dust protection measures, etc. Typical application fields and major countermeasures are described below.


## Clean Environment

When the Linear Way or Linear Roller Way is used in clean environment such as a clean room, it is required that the environment is not polluted by dust-generation by the Linear Way or Linear Roller Way and it must have excellent rust prevention property as rust prevention oil cannot be used.



## Vacuum Environment

When the Linear Way or Linear Roller Way is used in vacuum environment, it is required that the gas discharged from the Linear Way or Linear Roller Way does not pollute the environment or reduce the degree of vacuum, and it must have excellent rust prevention property as rust prevention oil cannot be used.




## Heat Resistance Measures

When the Linear Way is used in an environment where temperature is higher than usual, heat resistance of synthetic resin components and metal parts will be an issue.




## Dust Protection

If dust such as metal or wooden chips get into the way of the Linear Way or Linear Roller Way, reduction of life and accuracy may be caused. Therefore, measures to prevent foreign substances from entering into the way are necessary.



## Spatter Protection

Spatter of welding, etc. is so hot that it adheres to components. Foreign substances adhering to the track rail firmly cannot be fully removed by normal dust protection measures, so measures to avoid adherence and enhanced foreign substances removal measures are necessary.



# are utilized to explore new world for

### Clean

- Hybrid Lubrication Linear Way L
- Stainless Linear Way and Linear Roller Way
- Black chrome surface treatment
- Specified grease (CG2 or CGL grease)
- ◇ Fluorine grease

### Corrosion resistance

- Non-Magnetic Hard Alloy Linear Way L
- Stainless Linear Way and Linear Roller Way
- Black chrome surface treatment

### Vacuum

- Vacuum Environment Linear Roller Way Super X
- Hybrid Lubrication Linear Way L
- No end seal
- Stainless steel end plate
- ◇ Fluorine grease

### Heat resistance

- Stainless steel end plate
- Special environment seal
- Specified grease (CG2 grease)
- ◇ High temperature grease

### Foreign substances (wood chips and metal powder, etc.)

- Linear Way H Ultra seal specification
- Track rail mounting from bottom
- Double end seals
- Scrapers
- C-Wiper
- Caps for rail mounting holes
- Rail cover plate for track rail
- Rail cover sheet
- Female threads for bellows
- Specific bellows

### Spatter

- Scrapers
- Caps for rail mounting holes (aluminum alloy)
- Rail cover sheet
- Fluorine black chrome surface treatment
- Stainless steel end plate

- Linear motion rolling guide series for special environment :  
Collective name of linear motion rolling guide series models corresponding to special environment.
- Special specification for special environment :  
Special specification corresponding to special environment by combination of linear motion rolling guide series.
- ◇ Lubricant :  
Lubricant suitable for each special environment can be selected.

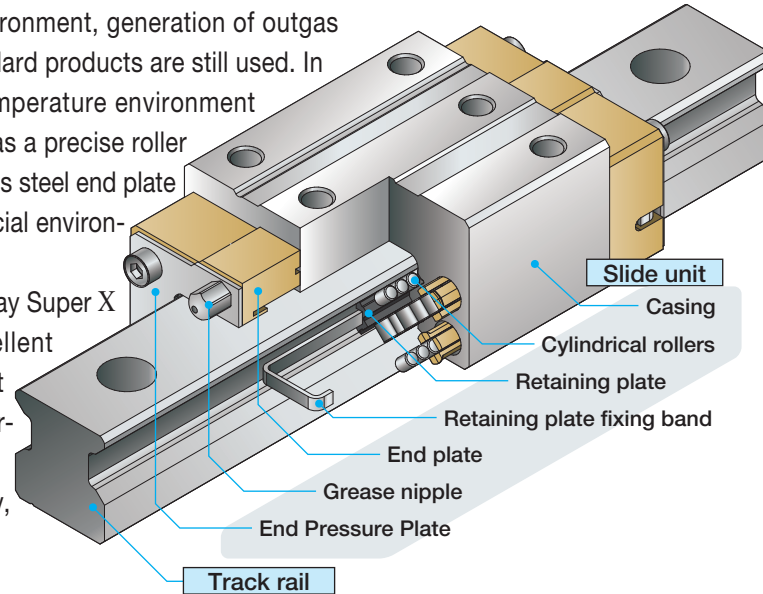


# Vacuum Environment

## Linear Roller Way Super X

When a linear motion rolling guide is used in vacuum environment, generation of outgas from resin parts such as end plates will be an issue if standard products are still used. In addition, the specification must be applicable to high temperature environment during baking. As roller type linear motion rolling guide has a precise roller circulation structure, it has not been compatible with stainless steel end plate widely used in ball type linear motion rolling guides for special environment applications.

The newly developed Vacuum Environment Linear Roller Way Super X is a roller type linear motion rolling guide realizing excellent outgas reduction property by combining corrosion-resistant stainless steel casing and resin parts such as super engineering plastic (PEEK resin) end plate to resolve these issues. Excellent properties of roller type such as high load capacity, high rigidity and smooth sliding characteristic with low frictional resistance can be ensured even under vacuum environment.



### Features

**Newly developed!**  
**Roller type linear motion guide available under vacuum environment!**

**1** Corresponding to low to high vacuum area (degree of vacuum  $10^{-3}$  [Pa])!

**2** Excellent outgas reduction property!

**3** Baking temperature can be up to 200°C!

- Temperature in still condition.
- If baking temperature exceeds 150°C, multiply the basic load rating by the temperature factor.

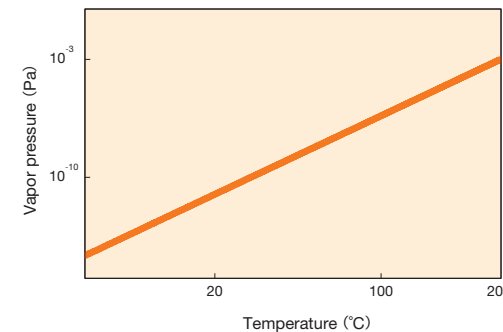
**4** Excellent corrosion resistance!

- Corrosion-resistant stainless steel is used in all steel made parts.

### Selection of lubricant

Though fluorine grease is recommended for lubricant, carefully select grease since vapor pressure and temperature of base oil are correlated as vapor pressure goes up along with increase of the temperature. For details, see chosen grease manufacturer's catalog.

Relationship example between fluorine grease vapor pressure and temperature



#### Representative brands of fluorine grease

| Brand                | Manufacturer            |
|----------------------|-------------------------|
| BARRIERTA SUPER IS/V | NOK KLUVER              |
| DEMNUM™ GREASE L-200 | DAIKIN INDUSTRIES, LTD. |
| FOMBLIN® VAC3        | SOLVAY SOLEXIS          |
| FULLTRIBO VAC        | KYODO YUSHI CO., LTD.   |
| KRYTOX® LVP          | DU PONT                 |

Remarks 1. KRYTOX® is a registered trademark of DU PONT.  
2. FOMBLIN® is a registered trademark of SOLVAY SOLEXIS.

### Specifications

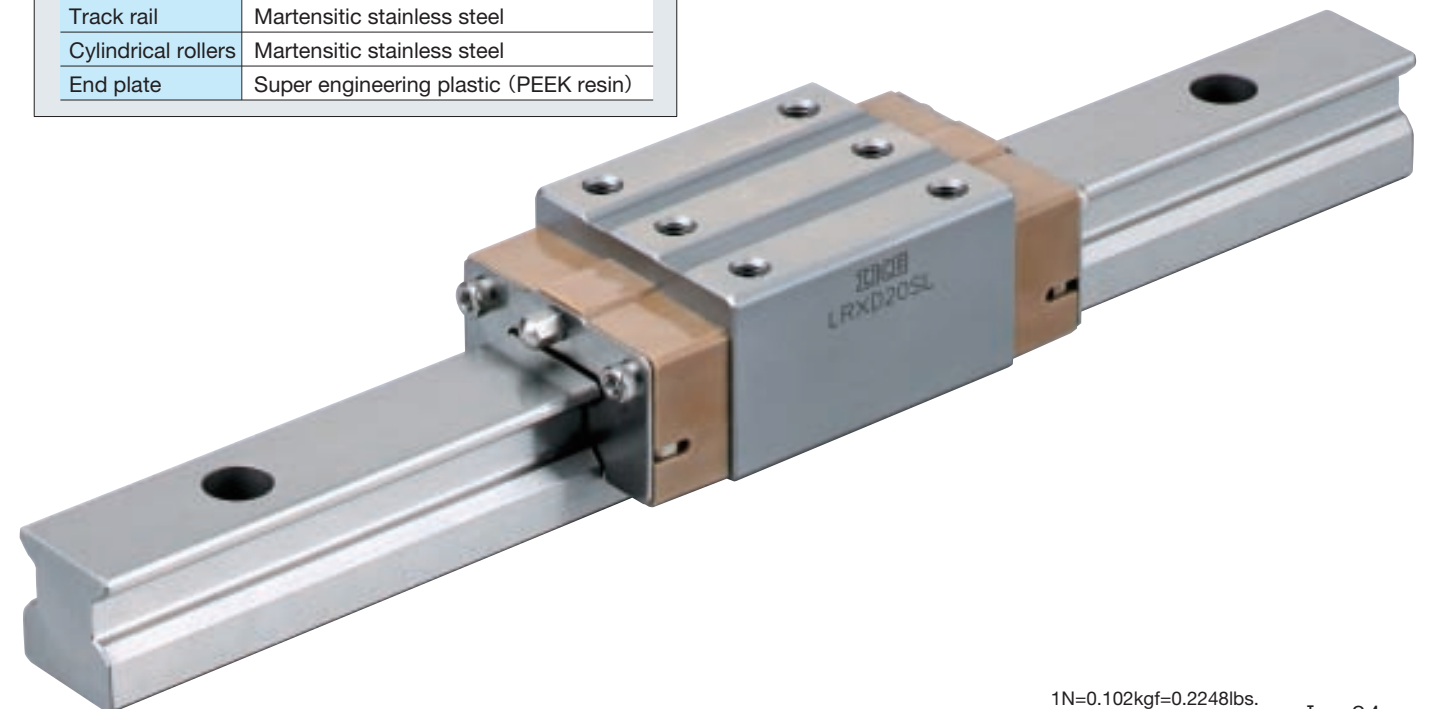
We can offer optimal specification for your use conditions. If needed, please contact IKO.

#### Applicable products

|                  |                           |
|------------------|---------------------------|
| Series           | Linear Roller Way Super X |
| Applicable model | LRXD20...SL               |

#### Main component materials

|                     |                                        |
|---------------------|----------------------------------------|
| Casing              | Martensitic stainless steel            |
| Track rail          | Martensitic stainless steel            |
| Cylindrical rollers | Martensitic stainless steel            |
| End plate           | Super engineering plastic (PEEK resin) |






# Hybrid Lubrication Linear Way L


In clean environment, vacuum or high temperature environment of semiconductor producer and LCD producer, etc, pollution by outgas and particles is extremely not welcome. Therefore, solid lubrication film has been used as lubricant.

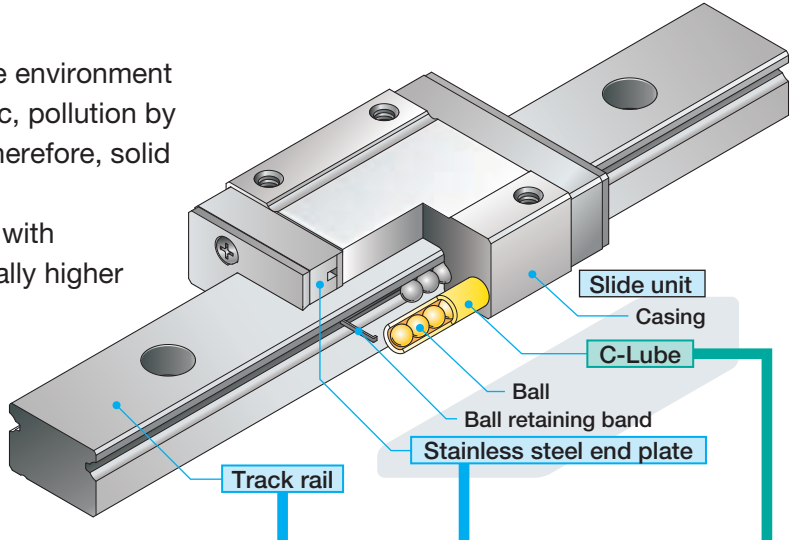IKO developed "Hybrid Lubrication Linear Way" with dust-generation life and load resistance substantially higher than conventional solid lubrication film. Optimal for applications where general grease or oil cannot be used, such as vacuum environment.



## What is hybrid lubrication

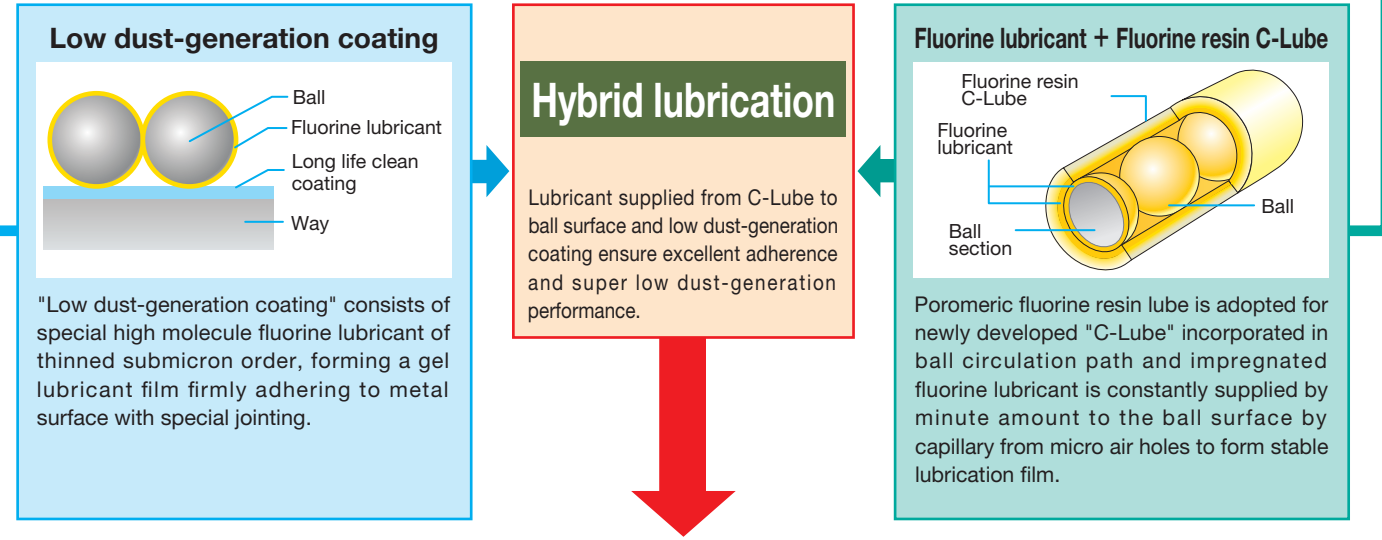IKO Hybrid system of IKO's landmark lubrication system "C-Lube" and newly developed "Low dust-generation coating" achieves low dust generating performance, outgas reduction property, long life and excellent load resistance of Linear Way.



## Features

### Clean (Low dust-generation)

JIS cleanliness class 4 compliant  
(Up to 352 particles of diameter  $0.5 \mu\text{m}/\text{m}^3$ )

### Vacuum

Corresponding to low to high vacuum environment

### High temperature property

$\sim 200^\circ\text{C}$ \* (fluorine lubricant and fluorine resin C-Lube are adopted) compliant

### Load resistance

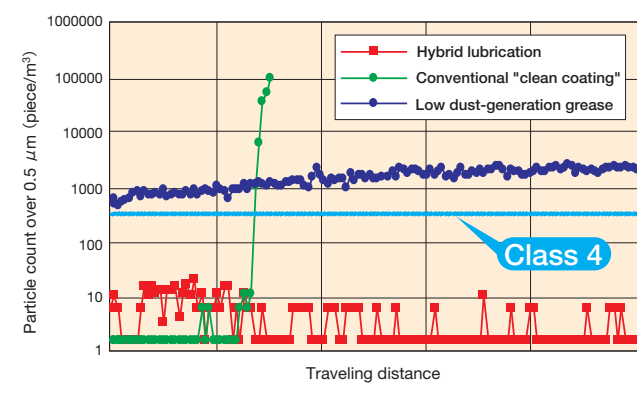
Load resistance more than double of general clean coating

\* For continuous operation, up to  $150^\circ\text{C}$ .

## Performance

### Class 4 low dust generating performance


#### Dust-generation property



Test conditions Model : ML9 equivalent load: 80N stroke: 500 mm


### Life 10 times longer than general clean coating is achieved
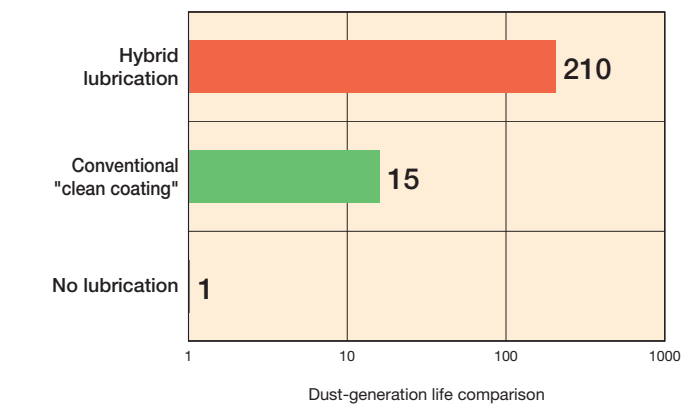
#### Dust-generation life comparison



### Excellent outgas reduction property
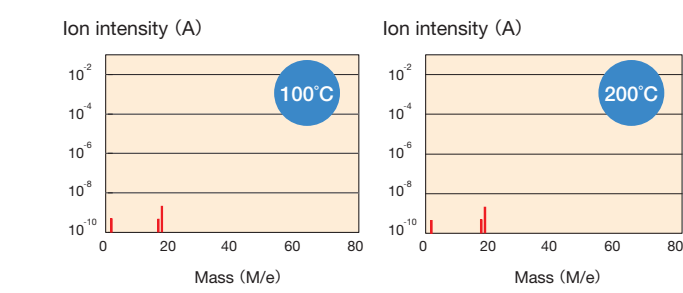
#### Outgas reduction property



#### Outgassing property of Hybrid Lubrication Linear Way

Measuring condition Model : ML9 Degree of vacuum:  $10^{-5}$  Pa Temperature:  $100^\circ\text{C}$ ,  $200^\circ\text{C}$

| ● Applicable products    |                             |
|--------------------------|-----------------------------|
| Series                   | C-Lube Linear Way ML        |
| Main model code          | ML7, 9, 12, 15              |
| ■ Standard specification |                             |
| Casing                   | Martensitic stainless steel |
| Track rail               | Martensitic stainless steel |
| Ball                     | Martensitic stainless steel |
| End plate                | Stainless steel             |
| C-Lube                   | Poromeric fluorinated resin |

This is made-to-order. If needed, please contact IKO. In addition, we also offer non-magnetic stainless steel specification. Please ask us for your request.

● Precaution for Use

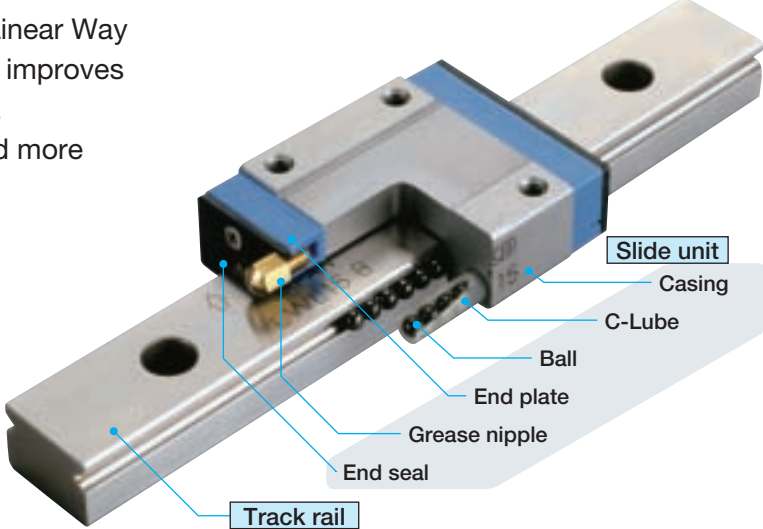
- Although heat resistant fluorinated lubricant and parts are used, operating temperature shall be  $200^\circ\text{C}$  at the maximum or up to  $150^\circ\text{C}$  for continuous operation.
- The unit must be stored in a dry and clean place and unpacked in the same environment right before use. In addition, do not touch the product directly by bare hand.
- Hybrid Lubrication Linear Way is packed in clean condition and therefore cleaning is not necessary. In addition, do not wipe off the coating film on the raceway as it may affect lubrication and dust-generation properties.



# Hybrid C-Lube Linear Way ML

While maintenance free performance of C-Lube Linear Way ML is maintained, the silicon nitride ceramics ball improves high-speed performance and reduces noise level. Ceramics has more resistance to deformation and more rigidity than bearing steel and stainless steel.

ML.../HB



| Standard specification |                                              |
|------------------------|----------------------------------------------|
| Casing                 | Martensitic stainless steel                  |
| Track rail             | Martensitic stainless steel                  |
| Ball                   | Silicon nitride ceramics                     |
| C-Lube                 | Capillary lubricating element (Porous resin) |

## Features

- 1 Superior high-speed performance ... More than three times durability
- 2 Noise reduction ..... Noise reduction by about 4.5 dB
- 3 High rigidity ..... Displacement volume reduced by about 10%
- 4 Superior abrasion resistance ... Preload reduction volume is about one fourth

※ All of the above based on comparison with our C-Lube Linear Way ML



Maintenance free  
Achieved long term maintenance free

Eco-friendly  
Minimized lubrication oil consumption

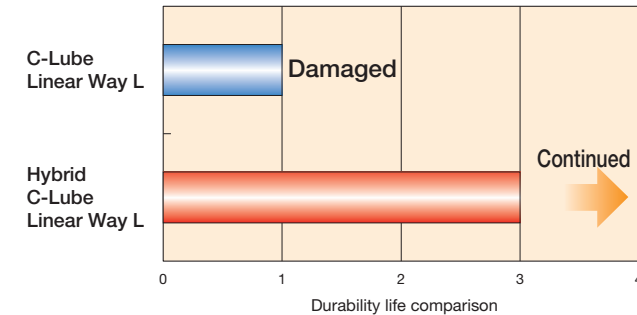
Compact  
Integral lubrication parts

Smooth  
Excellent sliding characteristic

## Performance

### More than three times durability


#### High-speed performance



Test conditions Model : ML12 Velocity: 300 m/min Acceleration: 40 G

### Noise reduction by about 4.5 dB

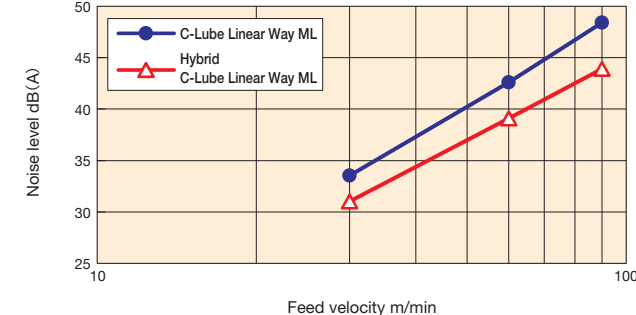
#### Low decibel



Test conditions Model : ML12 Measurement velocity: 30, 60, 90 m/min

### Small deformation of rolling elements and excellent rigidity

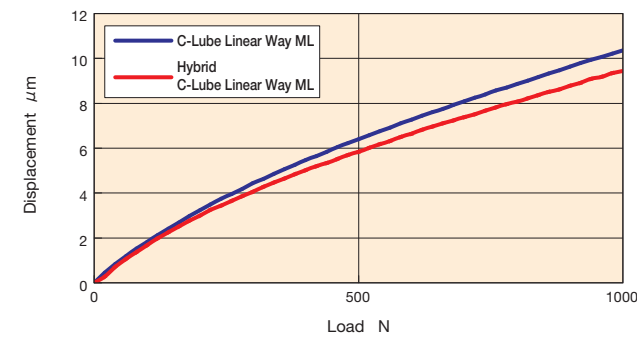
#### High rigidity



Test conditions Model : ML12 Preload: Standard Preload Load direction: Downward

### Low preload reduction volume and accuracy maintained after operation
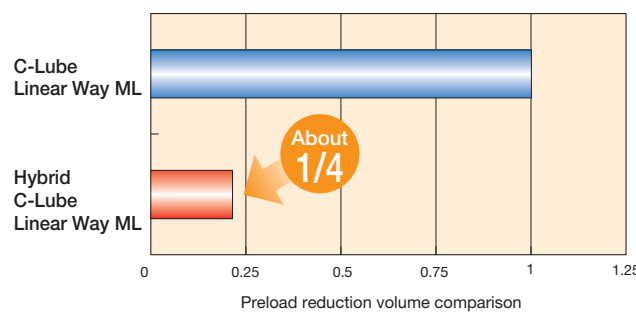
#### Abrasion resistance




Test conditions Model : ML12 Velocity: 300 m/min Acceleration: 40 G Traveling distance: 13,000 km

## Basic performance of C-Lube Linear Way

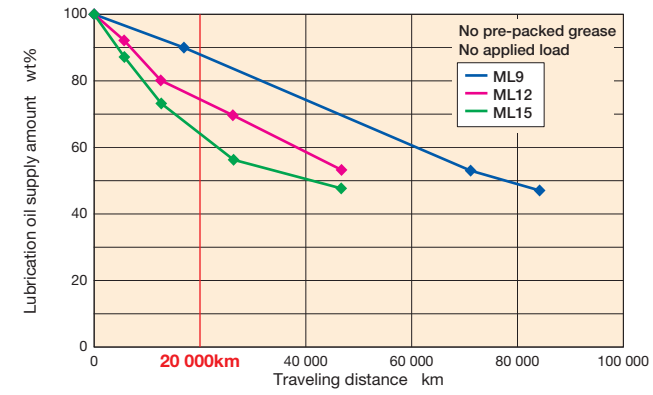
### Achieved long term maintenance free

#### Maintenance free



### Achieved light and smooth sliding
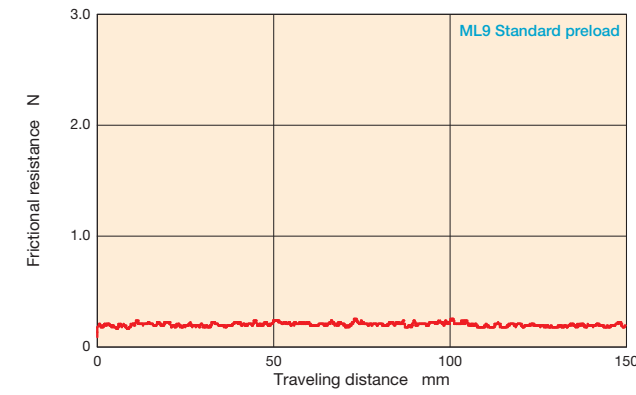
#### Sliding characteristic




1N=0.102kgf=0.2248lbs.  
1mm=0.03937inch




# Non-Magnetic Hard Alloy Linear Way L

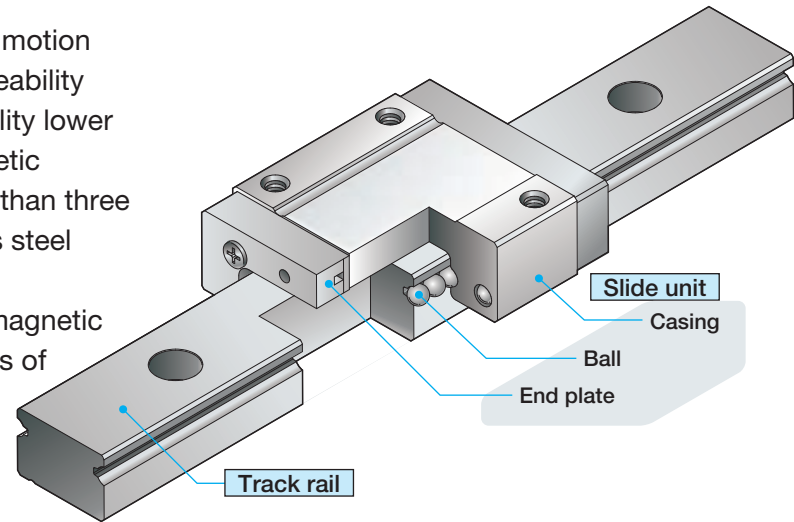Non-magnetic hard alloy Linear Way L is a linear motion rolling guide that realizes relative magnetic permeability lower than 1.001 and relative magnetic permeability lower than one tenth of that of conventional non-magnetic stainless steel products. Further, durability more than three times as higher as that of non-magnetic stainless steel products is realized.

Non-magnetic hard alloy Linear Way L is a non-magnetic linear motion rolling guide optimal to avoid effects of magnetic force in magnetic field environment.



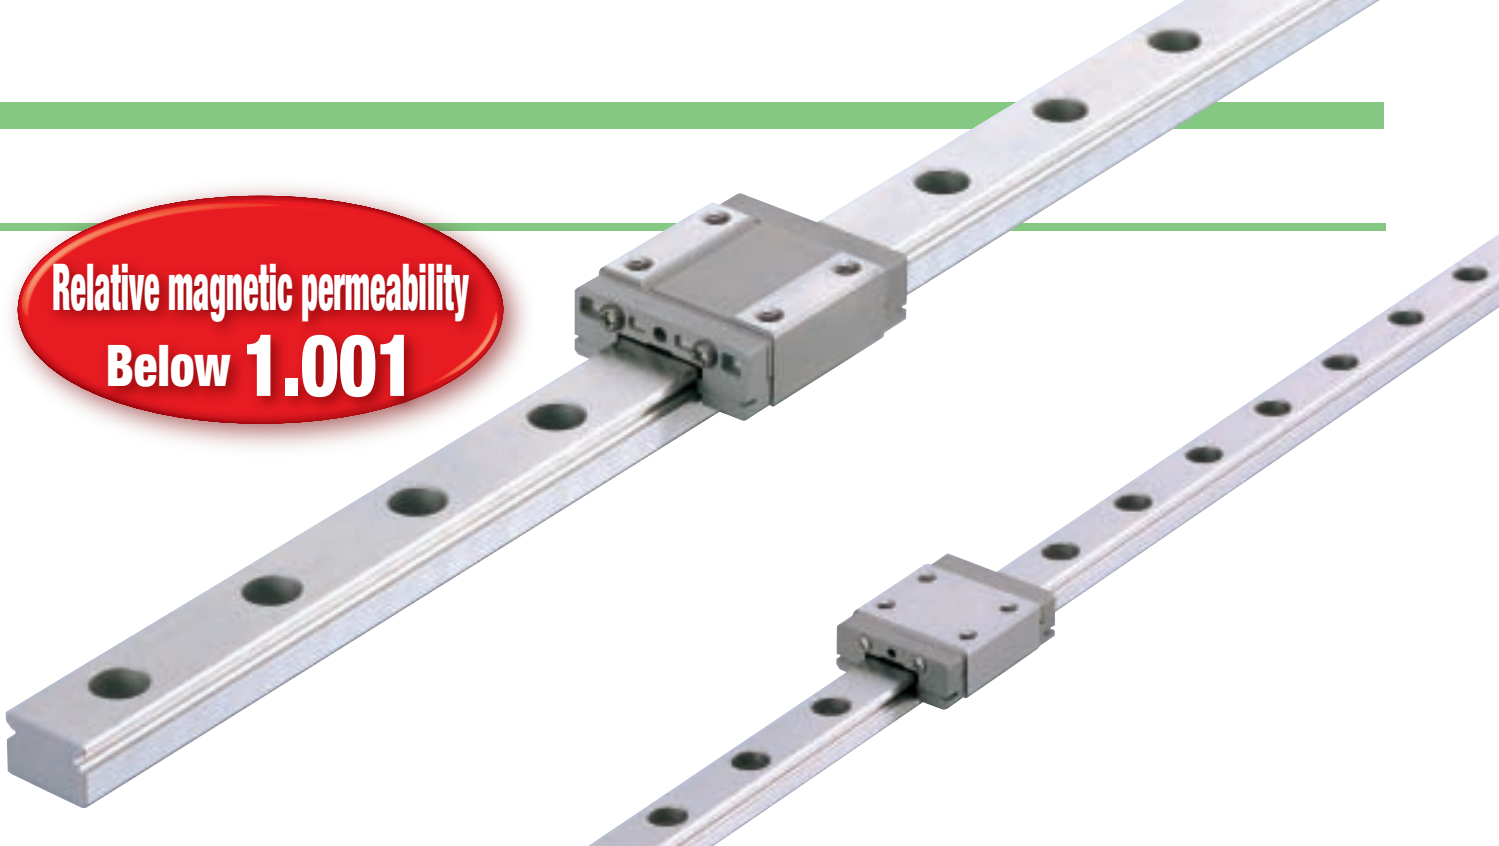Relative magnetic permeability  
Below **1.001**



## Features

### Relative magnetic permeability lower than 1.001

Relative magnetic permeability lower than one tenth of that of non-magnetic stainless steel products

### More than three times durability

More than three times durability with hardness 1.5 times as much as that of non-magnetic stainless steel products

### High corrosion resistance

Optimal for use in clean environment thanks to corrosion-resistant alloy

### Easy handling

Casing and track rail have excellent ductility and coefficient of linear expansion similar to general metals as they are made of metal

## Non-magnetic hard alloy characteristics

| Material name                                        | Non-magnetic hard alloy   | Silicon nitride ceramics       | Non-magnetic stainless steel |
|------------------------------------------------------|---------------------------|--------------------------------|------------------------------|
| Characteristics                                      |                           |                                |                              |
| Relative magnetic <sup>(1)</sup> permeability        | 1.001 or less             | 1<br>(0.999991)                | 1.01 or less<br>(1.005)      |
| Electric conductivity                                | ○                         | ×                              | ○                            |
| Hardness (HV)                                        | 610 ~ 700                 | 1400 ~ 1600                    | 380 ~ 450                    |
| Linear expansion coefficient (×10 <sup>-6</sup> /°C) | 11.5<br>(30 ~ 200°C)      | 3.2<br>(20 ~ 400°C)            | 19.0<br>(20 ~ 400°C)         |
| Specific gravity (g/cm)                              | 7.7                       | 3.2                            | 7.9                          |
| Main component                                       | Ni, Cr                    | Si <sub>3</sub> N <sub>4</sub> | Fe, Mn, Cr                   |
| Cost                                                 | ○                         | △                              | ○                            |
| Remark                                               | Good corrosion resistance | Good corrosion resistance      | —                            |

Note (1) ( ) is only an example of the measurement value.

## Selection of lubricant

By selecting appropriate lubricant such as vacuum grease and low dust-generating grease, this may be corresponding to any operating environment.

### ● Applicable products

|            |                      |
|------------|----------------------|
| Series     | Linear Way L         |
| Main model | LWL5...B ~ LWL15...B |

Remark: No ball retaining band is included.

### ■ Main component materials

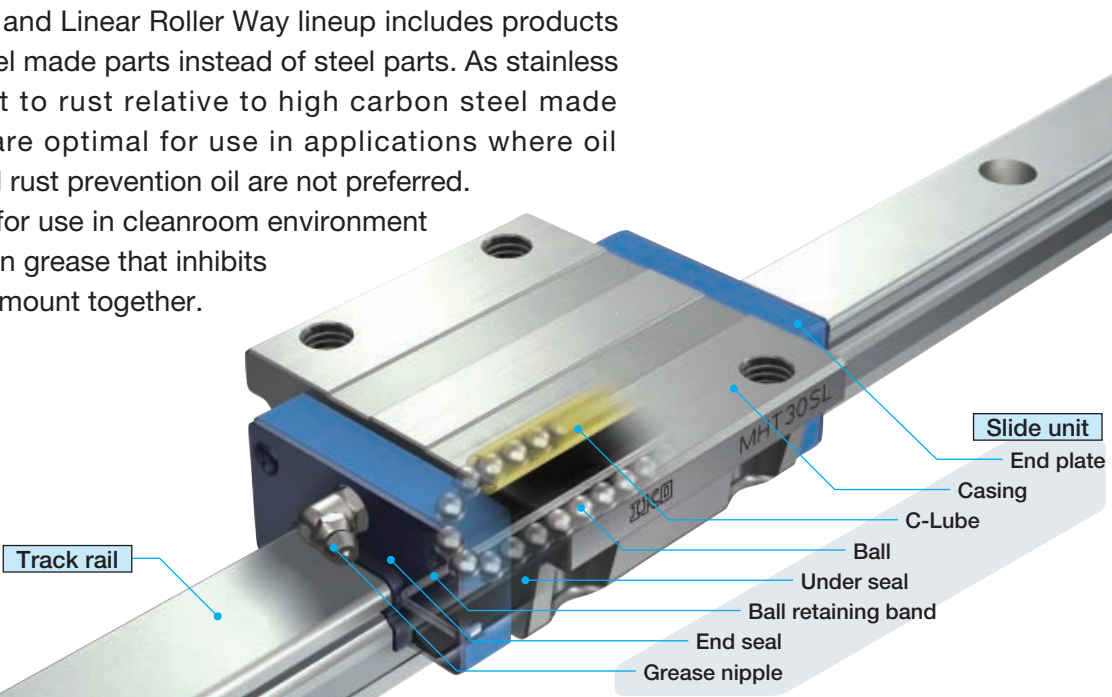
|            |                          |
|------------|--------------------------|
| Casing     | Non-magnetic hard alloy  |
| Track rail | Non-magnetic hard alloy  |
| Ball       | Silicon nitride ceramics |
| End plate  | Non-magnetic alloy steel |



# Stainless Linear Way and Linear Roller Way

## A variety of stainless steel series

IKO Linear Way and Linear Roller Way lineup includes products with stainless steel made parts instead of steel parts. As stainless steel is resistant to rust relative to high carbon steel made products, they are optimal for use in applications where oil content and rust prevention oil are not preferred. It is also suitable for use in cleanroom environment room, so use clean grease that inhibits dust-generation amount together.



### Series name

#### Linear Way

##### Ball Type Miniature Series

**C-Lube Linear Way ML**  
**Linear Way L**  
**Micro Linear Way L**

##### Ball Type Compact Series

**C-Lube Linear Way ME**  
**Linear Way E**

##### Ball Type High Rigidity Series

**C-Lube Linear Way MH**  
**Linear Way H**

##### Ball Type Wide Type Series

**Linear Way F**

##### Ball Type U-Shaped Track Rail Series

**C-Lube Linear Way MUL**  
**Linear Way U**

#### ■ Main component materials

|                     |                                    |
|---------------------|------------------------------------|
| Casing              | Martensitic stainless steel        |
| Track rail          | Martensitic stainless steel        |
| Ball                | Martensitic stainless steel        |
| Ball retaining band | Stainless steel                    |
| End plate           | Engineering plastic                |
| End seal            | Stainless steel + Synthetic rubber |
| Grease nipple       | Brass                              |

#### Linear Roller Way

##### Roller Type

**C-Lube Linear Roller Way Super MX**  
**Linear Roller Way Super X**

## Combination with special specification corresponds to use in special environment!

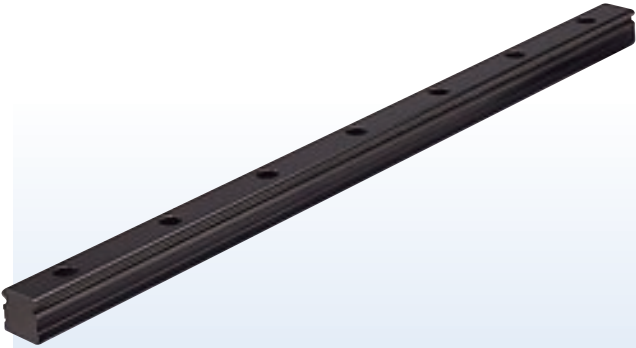
### Rust prevention

#### Black chrome surface treatment /L

Black chrome surface treatment on the track rail and slide unit improves rust prevention capacity.

#### Fluorine black chrome surface treatment /LF

Coating of fluorinated resin is applied over the black chrome surface treatment to prevent foreign substances from sticking and improve the rust prevention capacity.




### Black chrome surface treatment

#### Features

- 1 Thin film
- 2 Uniform film
- 3 Strong adhesion
- 4 Excellent rust prevention capacity
- 5 Low temperature processing to prevent distortion
- 6 No peeling and no effects on life and cleanroom environment
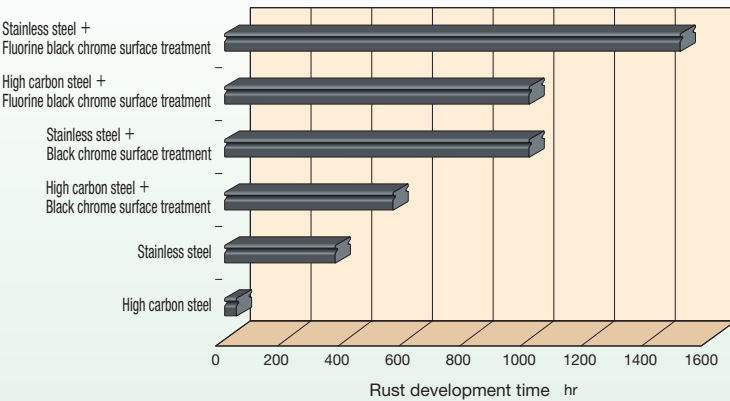
#### Corrosion resistance comparison based on humidity cabinet test



Test conditions Temperature 50°C, Relative humidity 95%RH




# Special specification for special environment

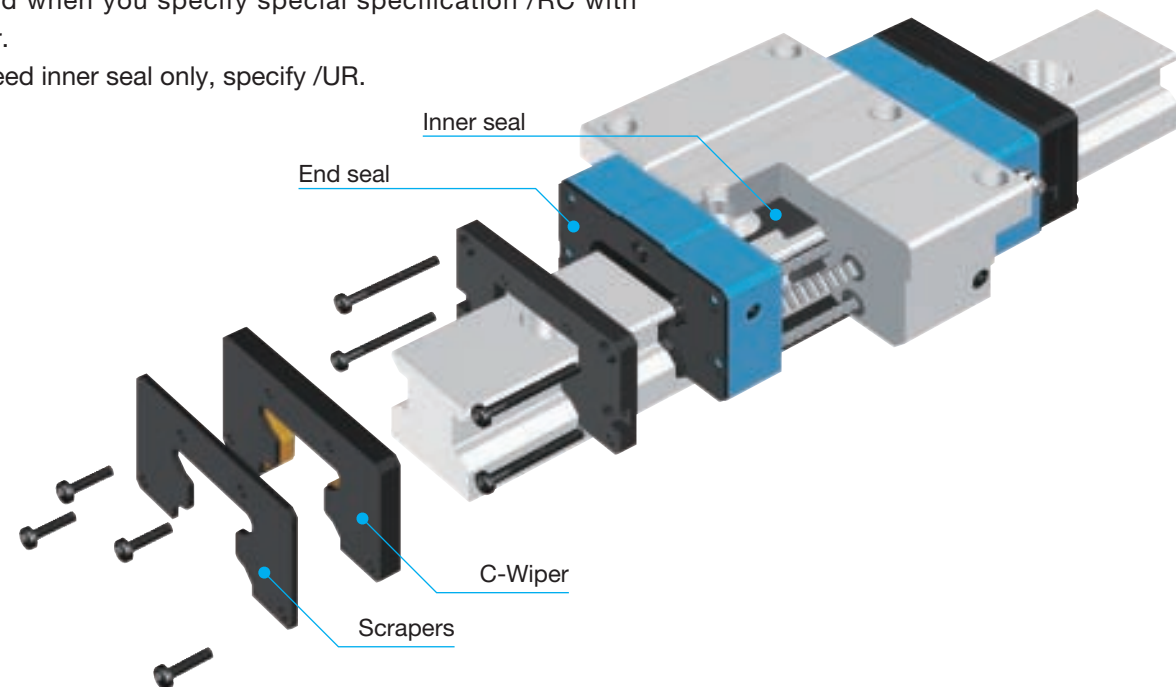IKO Linear Way and Linear Roller Way lineup includes following special specifications to correspond to various special environments.

## Dust protection

### C-Wiper /RC

Mounted to the outside of end seal, it may be used for long time even under environment where metal chips are spattering. End seal, inner seal (/UR) and scraper (/Z) may be equipped as standard when you specify special specification /RC with C-Wiper. If you need inner seal only, specify /UR.



Applicable C-Wiper size

| Model                                     | Length of slide unit | Model code | Size |    |                  |    |    |    |    |    |    |
|-------------------------------------------|----------------------|------------|------|----|------------------|----|----|----|----|----|----|
|                                           |                      |            | 12   | 15 | 20               | 25 | 30 | 35 | 45 | 55 | 65 |
| Flange type mounting from top / bottom    | Short                | MXC        | —    | —  | ○ <sup>(1)</sup> | ○  | ○  | ○  | ○  | ○  | ○  |
|                                           | Standard             | MX         | —    | —  | ○ <sup>(1)</sup> | ○  | ○  | ○  | ○  | ○  | ○  |
|                                           | Long                 | MXG        | —    | —  | ○ <sup>(1)</sup> | ○  | ○  | ○  | ○  | ○  | ○  |
|                                           | Extra long           | MXL        | —    | —  | ○ <sup>(1)</sup> | ○  | ○  | ○  | ○  | ○  | ○  |
| Block type mounting from top              | Short                | MXDC       | —    | —  | ○                | ○  | ○  | ○  | ○  | ○  | ○  |
|                                           | Standard             | MXD        | —    | —  | ○                | ○  | ○  | ○  | ○  | ○  | ○  |
|                                           | Long                 | MXDG       | —    | —  | ○                | ○  | ○  | ○  | ○  | ○  | ○  |
|                                           | Extra long           | MXDL       | —    | —  | ○                | ○  | ○  | ○  | ○  | ○  | ○  |
| Compact block type mounting from top      | Short                | MXSC       | —    | —  | ○                | ○  | ○  | —  | —  | —  | —  |
|                                           | Standard             | MXS        | —    | —  | ○                | ○  | ○  | ○  | ○  | ○  | —  |
|                                           | Long                 | MXSG       | —    | —  | ○                | ○  | ○  | ○  | ○  | ○  | —  |
|                                           | Extra long           | MXSL       | —    | —  | ○                | ○  | ○  | —  | —  | —  | —  |
| Low section flange type mounting from top | Standard             | MXN        | —    | —  | —                | —  | ○  | ○  | ○  | ○  | —  |
|                                           | Long                 | MXNG       | —    | —  | —                | —  | ○  | ○  | ○  | ○  | —  |
|                                           | Extra long           | MXNL       | —    | —  | —                | —  | ○  | ○  | ○  | ○  | —  |
| Low section block type mounting from top  | Standard             | MXNS       | —    | —  | —                | —  | ○  | ○  | ○  | ○  | —  |
|                                           | Long                 | MXNSG      | —    | —  | —                | —  | ○  | ○  | ○  | ○  | —  |
|                                           | Extra long           | MXNSL      | —    | —  | —                | —  | ○  | ○  | ○  | ○  | —  |



Note <sup>(1)</sup> Applicable to models mounting from top (MXHC20, MXH20, MXHG20, MXHL20).

## Dust protection

### Durability test result backing excellent dust protection effect of [C-Wiper]!

#### Durability test in environment with foreign substances

| Test conditions    |                                                                                                                              |
|--------------------|------------------------------------------------------------------------------------------------------------------------------|
| Test portion       | MX35 T <sub>3</sub> preload / caps for rail mounting holes and C-Wiper included                                              |
| Maximum velocity   | 18 m/min                                                                                                                     |
| Stroke length      | 500 mm                                                                                                                       |
| Foreign substances | Fine metal chips<br>Particle diameter lower than 125 μm<br>Hardness HRC40 ~ 50<br>Application dose 1 g/hr (total dose: 1 kg) |





Only few foreign substances may get into the slide unit.

Only few foreign substances get into the way!


#### Durability test in coolant mist environment
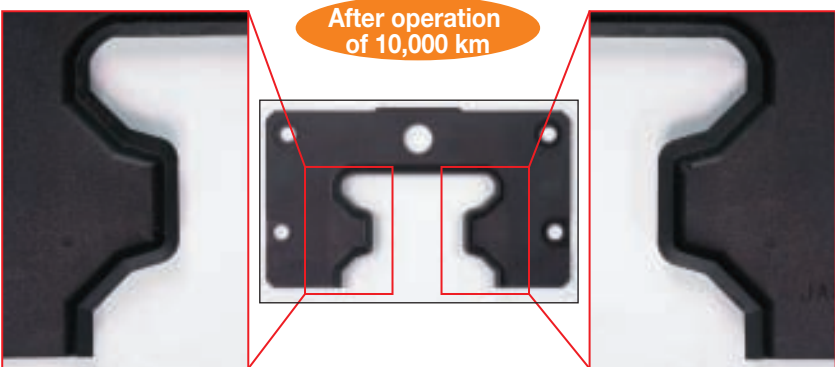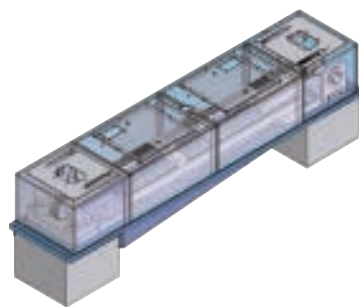
| Test conditions  |                                                                                 |
|------------------|---------------------------------------------------------------------------------|
| Test portion     | MX35 T <sub>3</sub> preload / caps for rail mounting holes and C-Wiper included |
| Maximum velocity | 115.2 m/min                                                                     |
| Stroke length    | 300 mm                                                                          |
| Coolant          | Soluble type<br>Dilute strength 20 times<br>Spray amount 5 cc/hr                |



End seal is not damaged.

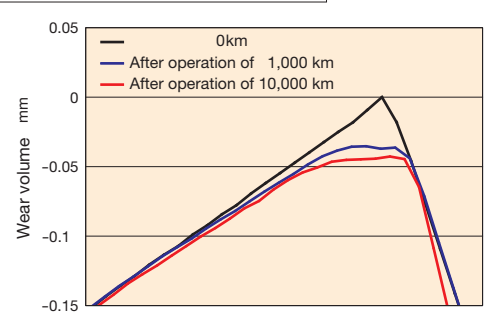Wear condition of end seal lip tip



Wear on the end seal is negligible!



**Special specification for special environment**


**Dust protection**


**Rail cover sheet**

Rail cover sheet that consists of steel plate and adhesive tape and fastened to the dedicated track rail with groove on the track rail prevents foreign substances from entering into the slide unit.



**Caps for rail mounting holes /F**

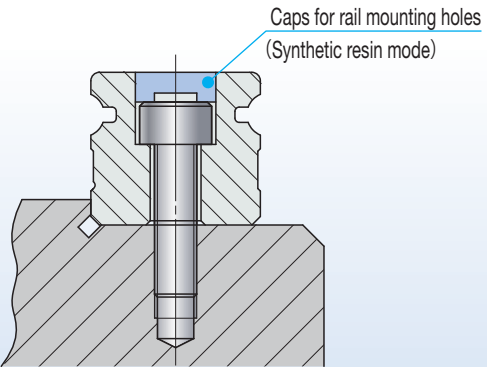
Caps for rail mounting holes close the track rail mounting holes to prevent foreign substances from entering into the slide unit.  
Aluminum caps for rail mounting holes are also available.  
Ask  for your request.



**Dust protection**


**Double end seals /V**

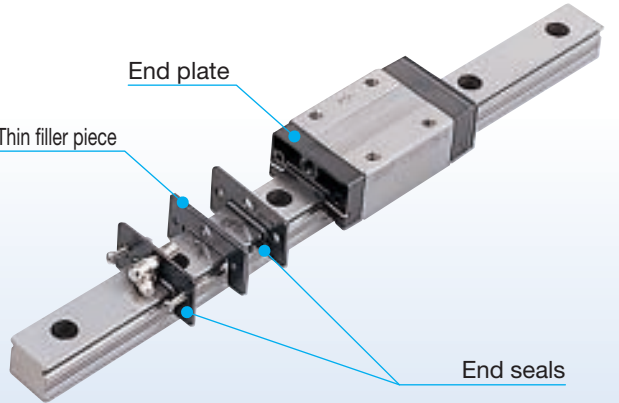Double end seals improve the dust protection property further.



**Scraper /Z**

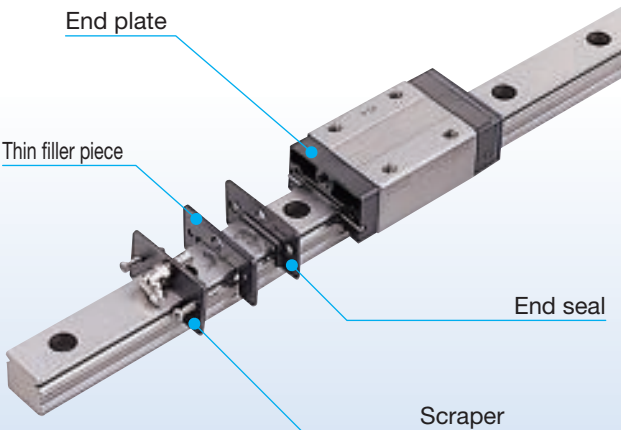Mounted to the outside of end seal, it may remove large foreign substances adhering to the track rail.




**Rail cover plate /PS**

Rail cover plate totally covers the upper surface of the track rail to prevent foreign substances from entering into the track rail.




**Track rail mounting from bottom**

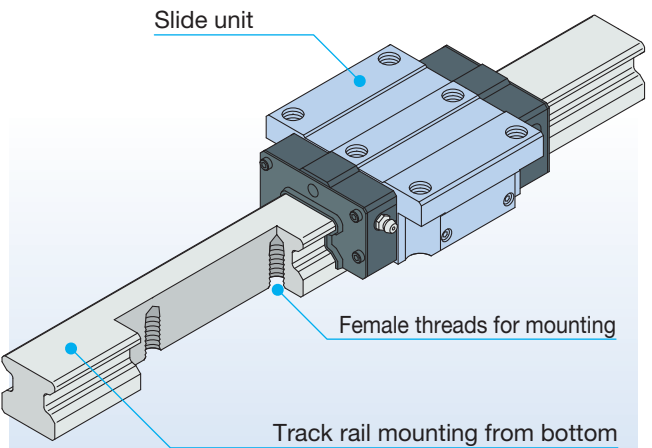This is the specification that track rail is fixed from the mounting surface side. As there are no mounting holes on the track rail upper surface, adherence with the seal is superior and better dust protection effect is achieved.




**Female threads for bellows /J**

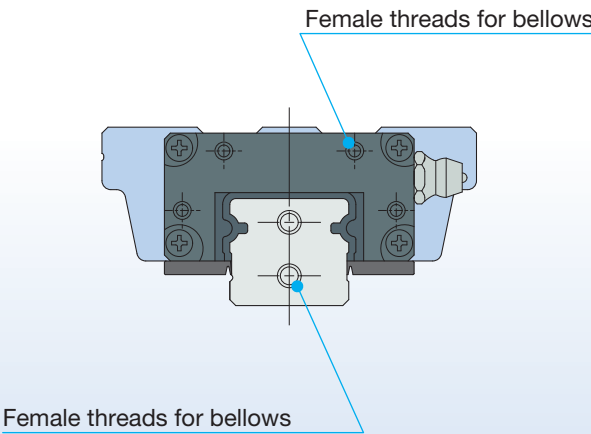Female threads for bellows are prepared on the slide unit and track rail ends.



**Specific bellows**

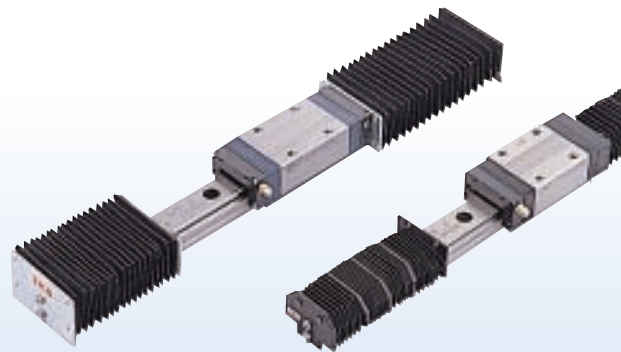Dust protection cover over the exposed part of the track rail.





**Special specification for special environment**

**Lubrication**

**With C-Lube plate /Q**


Lubrication parts to substantially reduce the need for lubrication management, i.e. grease job.




**Low Dust-Generation Grease for Clean Environment CGL /YCL**

For this grease, mixed soap is used as thickener and synthetic oil and low pour point mineral oil are mixed with base oil, so it has excellent low dust generating performance, rolling resistance, lubrication, and rust prevention property.

Bellows cartridge (80 g)  
JG80 /CGL




With miniature greaser (2.5 ml)  
MG2.5 /CGL



**Low Dust-Generation Grease for Clean Environment CG2 /YCG**

For this grease, urea is used as thickener and synthetic oil is used as base oil, so it has excellent low dust generating performance, operating temperature range, lubrication property, rust prevention property and oxidation stability.

Bellows cartridge (80 g)  
JG80 /CG2



With miniature greaser (2.5 ml)  
MG2.5 /CG2




MG10 /CG2 with 10 ml are also available.

**Anti-Fretting Corrosion Grease AF2 /YAF**

Grease with excellent fretting-proof corrosion property.

Bellows cartridge (80 g)  
JG80 /AF2



With miniature greaser (2.5 ml)  
MG2.5 /AF2




**Other special grease**

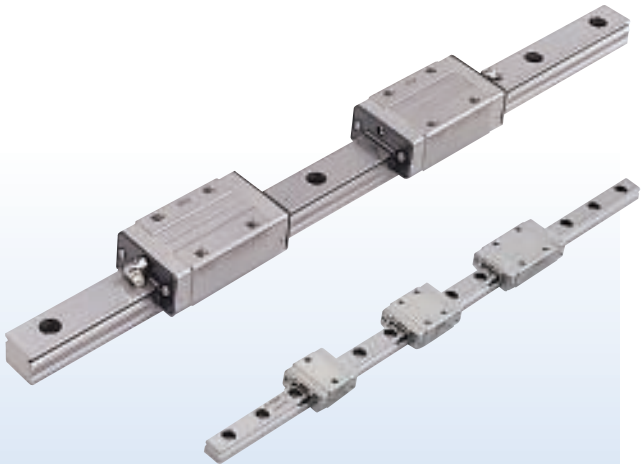If you need any special grease for vacuum or high temperature, ask for IKO your request.

**Others**


**Stainless steel end plate /BS**

End plate is changed to stainless steel.




**Special environment seal /RE**

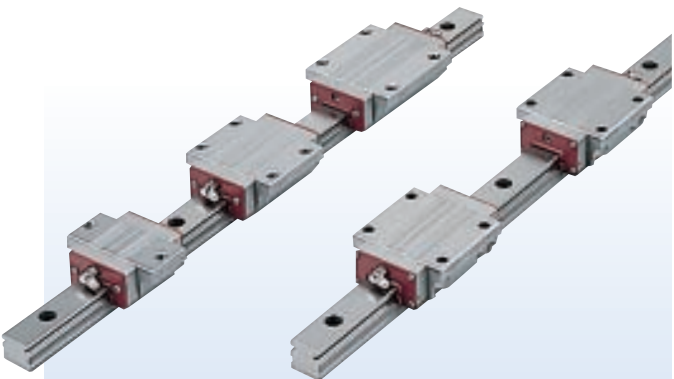The end and under seals are replaced with end seals for special environment that can be used at high temperatures. When it is used in high temperature environment, stainless steel end plate (/BS) and high temperature grease should be combined.




The photo shoes a combination of special environment seal (/RE) and stainless steel end plate (/BS).

**IKO can offer products for special environment!**

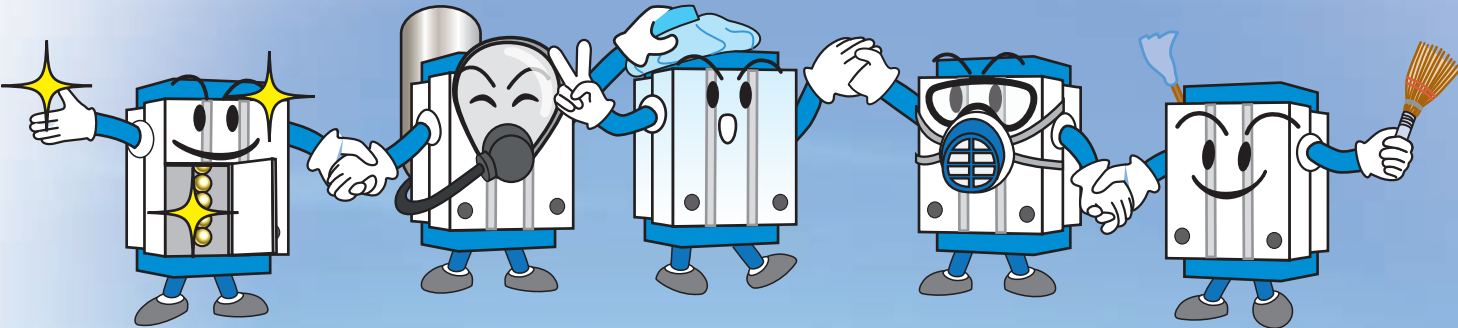

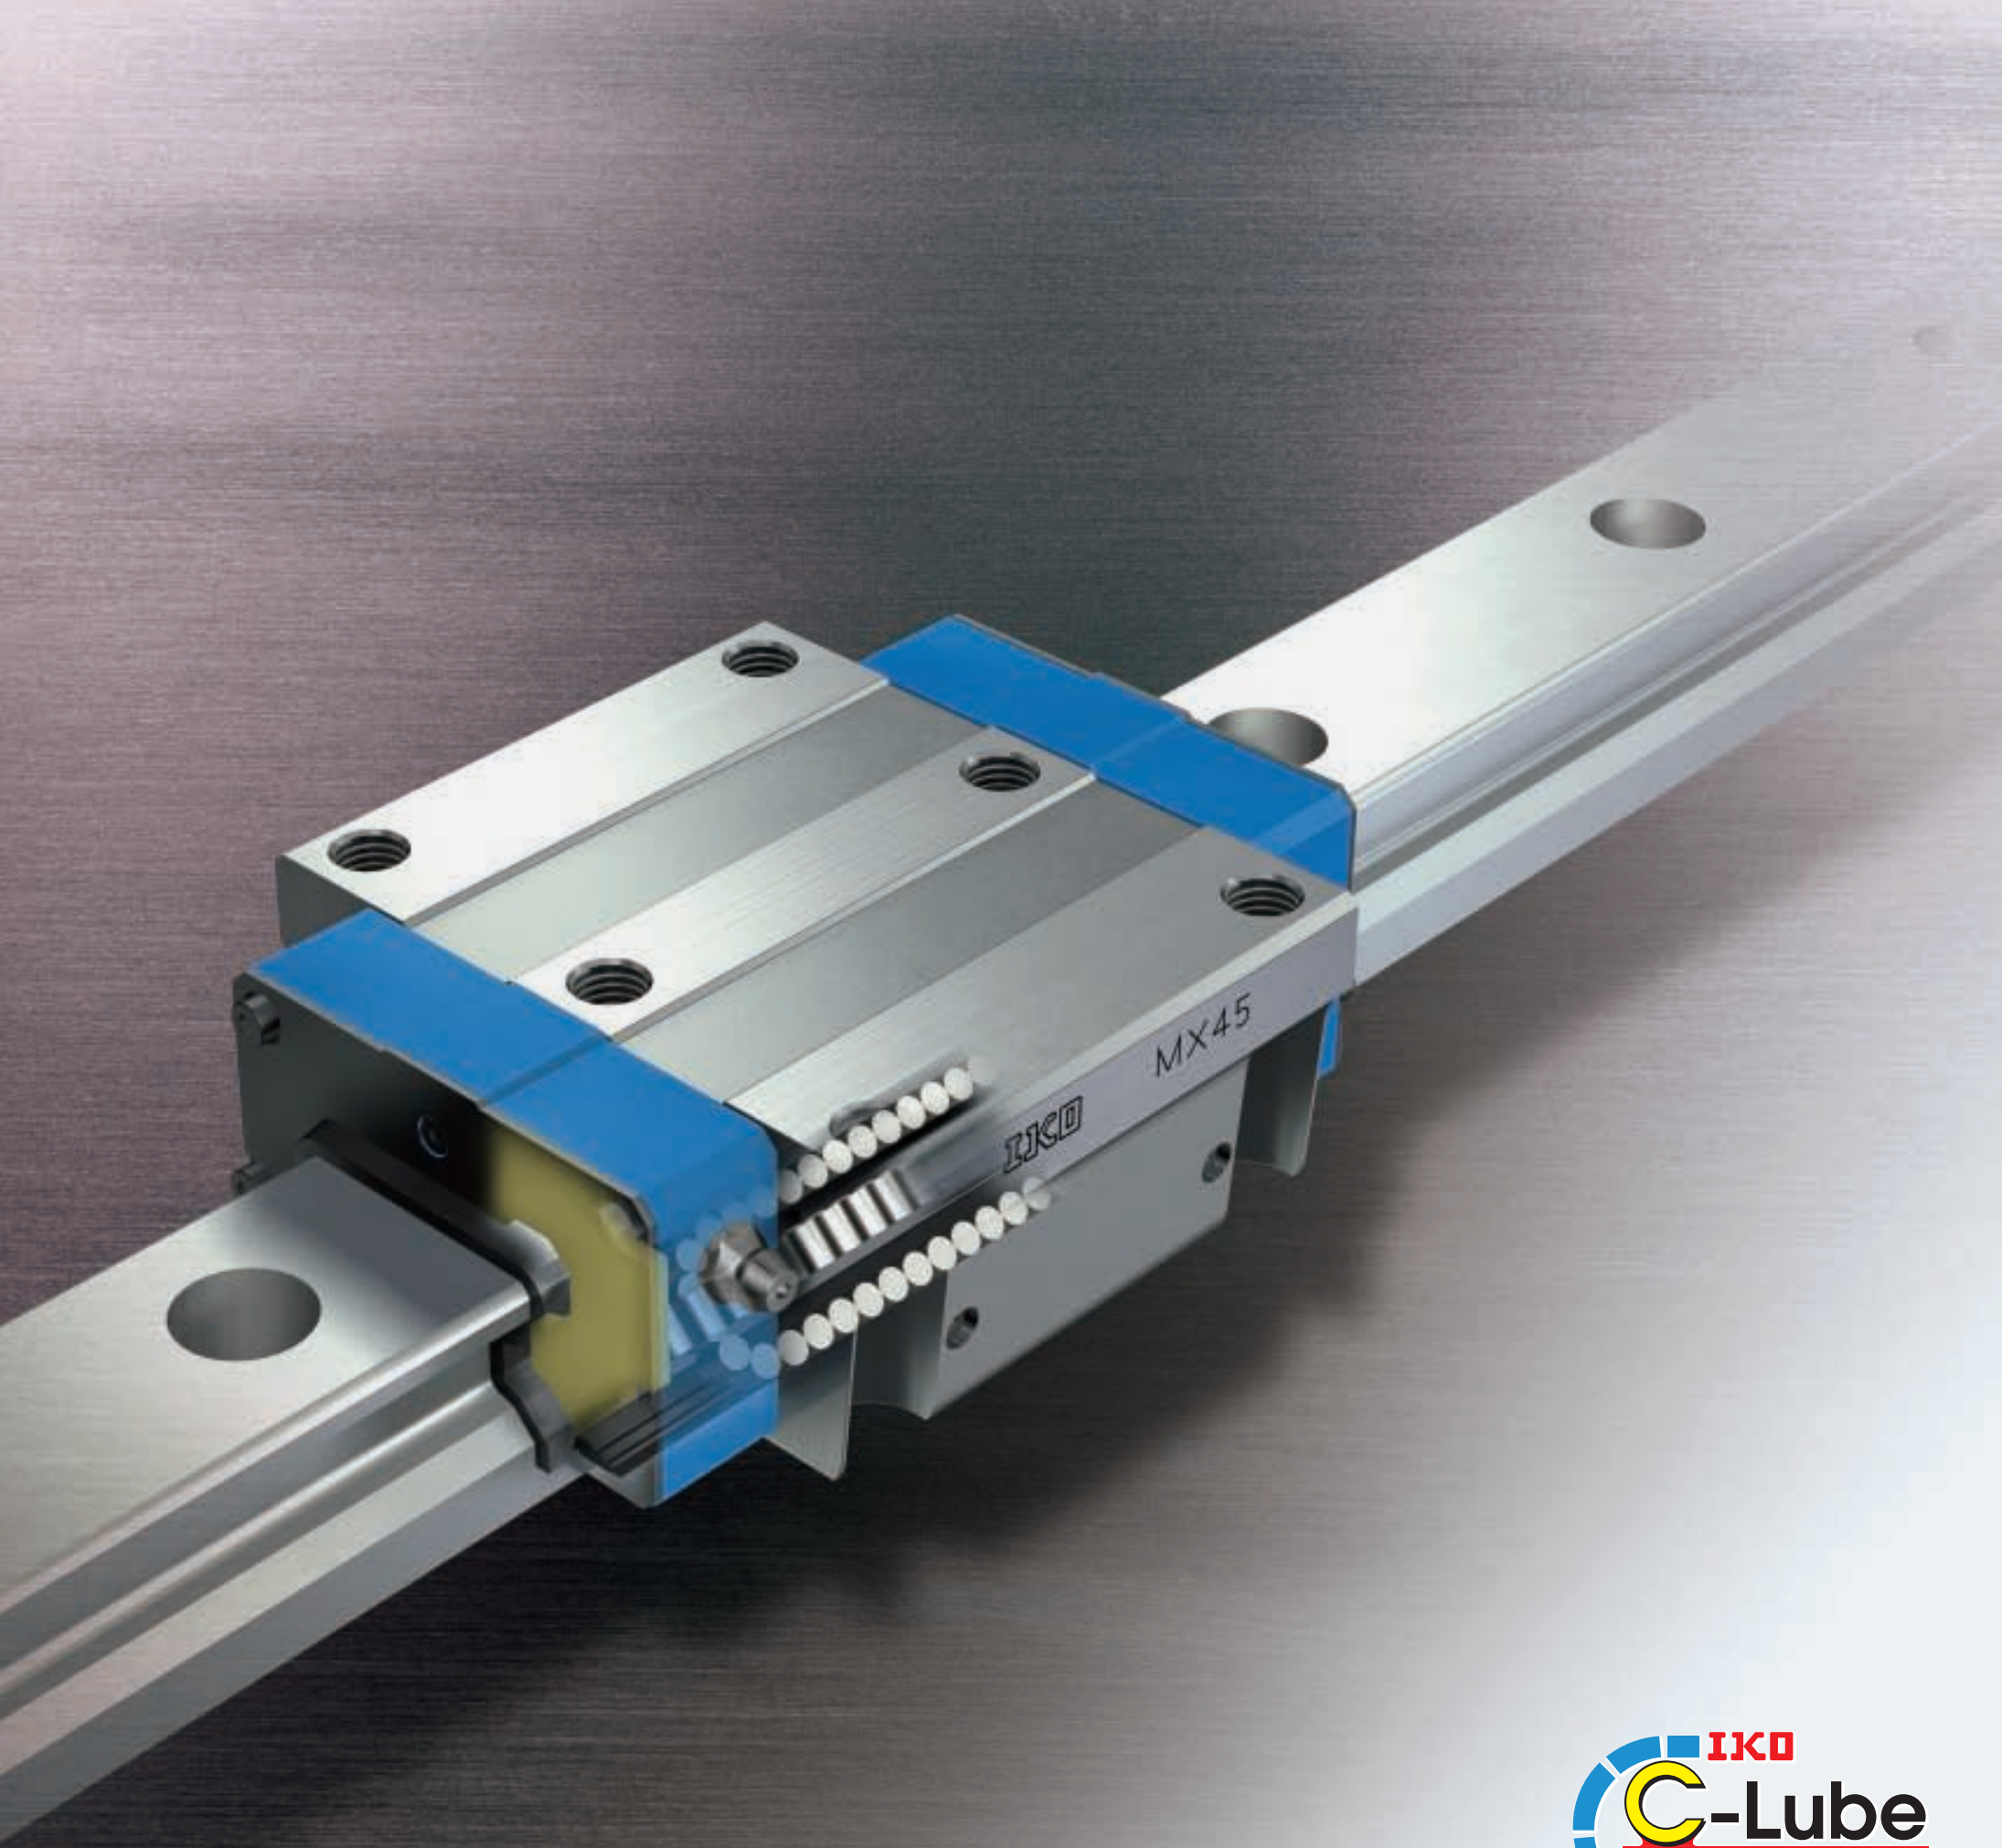If needed, ask **IKO** for your request.





## Explanation and Dimension Table for Respective Product Series

### Rail Guide Type

|                                                                  |        |
|------------------------------------------------------------------|--------|
| ● C-Lube Linear Way ML<br>Linear Way L                           |        |
| Explanation .....                                                | II-5   |
| Dimension Table .....                                            | II-23  |
| ● C-Lube Linear Way ME<br>Linear Way E                           |        |
| Explanation .....                                                | II-41  |
| Dimension Table .....                                            | II-53  |
| ● C-Lube Linear Way MH<br>Linear Way H                           |        |
| Explanation .....                                                | II-67  |
| Dimension Table .....                                            | II-85  |
| ● Linear Way F                                                   |        |
| Explanation .....                                                | II-113 |
| Dimension Table .....                                            | II-127 |
| ● C-Lube Linear Way MUL<br>Linear Way U                          |        |
| Explanation .....                                                | II-135 |
| Dimension Table .....                                            | II-145 |
| ● C-Lube Linear Roller Way Super MX<br>Linear Roller Way Super X |        |
| Explanation .....                                                | II-149 |
| Dimension Table .....                                            | II-169 |
| ● Linear Roller Way X                                            |        |
| Explanation .....                                                | II-197 |
| Dimension Table .....                                            | II-205 |
| ● Linear Way Module                                              |        |
| Explanation .....                                                | II-211 |
| Dimension Table .....                                            | II-219 |

### General Explanation

|                             |       |
|-----------------------------|-------|
| ● General Explanation ..... | III-2 |
|-----------------------------|-------|

### Introduction of Application Examples

|                                              |      |
|----------------------------------------------|------|
| ● Introduction of Application Examples ..... | IV-2 |
|----------------------------------------------|------|



## C-Lube Linear Way ML Linear Way L

ML • LWL



C-Lube Linear Way ML

ML



The aquamarine end plate is the symbol of maintenance free.

Track rail

Slide unit

Casing

C-Lube

Ball

End plate

End seal

Ball retaining band

Oil hole

Linear Way L

LWL

Points

Extremely small size realized by simple structure

For details P.I-19

Super small-size linear motion rolling guide produced by two-row four-point contact simple structure and original small sizing technology. The track rail width of LWL1, the smallest size, is only 1mm.

Wide range of variations for your needs

For details P.I-25

The slide unit shape can be selected from two types, the standard type and the wide type suited for single-row track rail uses, and there are four types with different lengths of slide unit with same section. Furthermore, the track rail has the variation of standard type and tapped rail type with the screw thread implanted, allowing you to select an optimal product for the specifications of your machine and device.

Ball retained type for easy operation

The slide unit of ball retained type incorporates the ball retaining band, which prevents the ball from dropping down when the slide unit is removed from the track rail. This safety structure brings you an easy operation to the machines / equipment.

Stainless steel selections for excellent corrosion resistance

For details P.I-41

Stainless steel highly corrosion-resistant is used as the basic specification, so that the products are suitable for applications where rust prevention oil is not preferred, such as in cleanroom environment. High carbon steel products suited to general purposes are also provided.

Widely supports special environment uses

For details P.I-31

C-Lube Linear Way L for special environment uses are provided as a series. Increasingly varied special environment uses are supported, such as by high-speed / low-noise specifications by combining silicon nitride ceramics and low dust-generation specifications.

Identification Number and Specification

Example of an identification number

The specifications of ML(F) and LWL(F) series are indicated by the identification number. Indicate the identification number, consisting of a model code, dimensions, a part code, a material code, a preload symbol, a classification symbol, an interchangeable code, and a supplemental code for each specification to apply.

| Interchangeable specification     | 1   | 2 | 4  | 5  | 6    | 3 | 7 | 8              | 9 | 10 | 11 |
|-----------------------------------|-----|---|----|----|------|---|---|----------------|---|----|----|
| Single slide unit                 | ML  | C | 12 | C1 |      |   |   | T <sub>1</sub> | P | S1 | /U |
| Single track rail (1)             | LWL |   | 12 |    | R200 | B |   |                | P | S1 |    |
| Assembled set                     | ML  | C | 12 | C1 | R200 |   |   | T <sub>1</sub> | P | S1 | /U |
| Non-interchangeable specification |     |   |    |    |      |   |   |                |   |    |    |
| Assembled set                     | ML  | C | 12 | C1 | R200 | B |   | T <sub>1</sub> | P |    | /U |

1 Model

2 Length of slide unit

3 Structure

4 Size

5 Number of slide units

6 Length of track rail

7 Material type

8 Preload amount

9 Accuracy class

10 Interchangeable

11 Special specification

Model code

Part code

Material code

Preload code

Classification code

Interchangeable code

Supplemental code

Page II - 7

Page II - 7

Page II - 7

Page II - 13

Page II - 14

Page II - 15

Page II - 15

Note (1) Indicate "LWL...B" or "LWL...B" for the model code of the single track rail regardless of the series and the combination of slide unit models.

1N=0.102kgf=0.2248lbs.  
1mm=0.03937inch



|   |       |                                                                                                                                                                                                                  |                                         |
|---|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|
| 1 | Model | C-Lube Linear Way ML<br>(ML(F) series)                                                                                                                                                                           | Standard type : ML<br>Wide type : MLF   |
|   |       | Linear way L <sup>(1)</sup><br>(LWL (F) series)                                                                                                                                                                  | Standard type : LWL<br>Wide type : LWLF |
|   |       | For applicable models and sizes, see Table 2.1 and Table 2.2.<br>Indicate "LWL...B" or "LWLF...B" for the model code of the single track rail regardless of the series and the combination of slide unit models. |                                         |
|   |       | Note <sup>(1)</sup> This model has no built-in C-Lube.                                                                                                                                                           |                                         |

|   |                      |            |             |                                                               |
|---|----------------------|------------|-------------|---------------------------------------------------------------|
| 2 | Length of slide unit | Short      | : C         | For applicable models and sizes, see Table 2.1 and Table 2.2. |
|   |                      | Standard   | : No symbol |                                                               |
|   |                      | Long       | : G         |                                                               |
|   |                      | Extra long | : L         |                                                               |

3

Structure

Table 1.1 Structure of ML and LWL

| Model | Types and sizes of track rails |                       |               | Structure                          |
|-------|--------------------------------|-----------------------|---------------|------------------------------------|
| ML    | Standard rail specification    |                       |               | Ball retained type : No symbol     |
| LWL   | Standard rail specification    |                       |               | Ball retained type : B             |
|       | Tapped rail specification      | Mounting from bottom  | Size: 2, 3    | Ball non-retained type : No symbol |
|       |                                | Mounting from lateral | Size: 5, 7, 9 | Ball retained type : N             |
|       |                                |                       | Size: 1       | Ball non-retained type : Y         |
|       | Solid rail specification       |                       | Size: 1       | Ball non-retained type : No symbol |

Table 1.2 Structure of MLF and LWLF

| Model | Types of track rails        |             | Structure                          |
|-------|-----------------------------|-------------|------------------------------------|
| MLF   | Standard rail specification |             | Ball retained type : No symbol     |
| LWLF  | Standard rail specification | Size: 4, 6  | Ball non-retained type : No symbol |
|       |                             | Size: 10~42 | Ball retained type : B             |
|       | Tapped rail specification   | Size: 6     | Ball non-retained type : N         |
|       |                             | Size: 10~18 | Ball retained type                 |

For applicable models and sizes, see Table 2.1 and Table 2.2.





|   |      |                                                |                                                               |
|---|------|------------------------------------------------|---------------------------------------------------------------|
| 4 | Size | Standard type 1, 2, 3, 5, 7, 9, 12, 15, 20, 25 | For applicable models and sizes, see Table 2.1 and Table 2.2. |
|   |      | Wide type 4, 6, 10, 14, 18, 24, 30, 42         |                                                               |

|   |                       |      |                                                                                                                                       |
|---|-----------------------|------|---------------------------------------------------------------------------------------------------------------------------------------|
| 5 | Number of slide units | : C○ | For an assembled set, indicates the number of slide units assembled on a track rail. For a single slide unit, only "C1" is specified. |
|---|-----------------------|------|---------------------------------------------------------------------------------------------------------------------------------------|

|   |                      |      |                                                                                                                        |
|---|----------------------|------|------------------------------------------------------------------------------------------------------------------------|
| 6 | Length of track rail | : R○ | Indicate the length of track rail in mm.<br>For standard and maximum lengths, see Table 3.1, Table 3.2, and Table 3.3. |
|---|----------------------|------|------------------------------------------------------------------------------------------------------------------------|

|   |               |                        |             |                                                               |
|---|---------------|------------------------|-------------|---------------------------------------------------------------|
| 7 | Material type | Stainless steel made   | : No symbol | For applicable models and sizes, see Table 2.1 and Table 2.2. |
|   |               | High carbon steel made | : CS        |                                                               |

Table 2.1 Models and sizes of standard type ML(F) and LWL(F) series

| Types of track rails                                                                                                                        | Material type          | Length of slide unit | Structure              | Model  | Size    |   |   |   |   |   |    |    |    |    |   |
|---------------------------------------------------------------------------------------------------------------------------------------------|------------------------|----------------------|------------------------|--------|---------|---|---|---|---|---|----|----|----|----|---|
|                                                                                                                                             |                        |                      |                        |        | 1       | 2 | 3 | 5 | 7 | 9 | 12 | 15 | 20 | 25 |   |
| <br>Standard rail specification                          | Stainless steel made   | Short                | Ball retained type     | MLC    | —       | — | — | ○ | ○ | ○ | ○  | ○  | ○  | ○  | ○ |
|                                                                                                                                             |                        |                      |                        | LWLC…B | —       | — | — | ○ | ○ | ○ | ○  | ○  | ○  | ○  | ○ |
|                                                                                                                                             |                        | Standard             |                        | ML     | —       | — | — | ○ | ○ | ○ | ○  | ○  | ○  | ○  | ○ |
|                                                                                                                                             |                        |                      |                        | LWL…B  | —       | — | — | ○ | ○ | ○ | ○  | ○  | ○  | ○  | ○ |
|                                                                                                                                             | Long                   | MLG                  |                        | —      | —       | — | — | ○ | ○ | ○ | ○  | ○  | ○  | ○  |   |
|                                                                                                                                             |                        | LWLG…B               |                        | —      | —       | — | — | ○ | ○ | ○ | ○  | ○  | ○  | ○  |   |
|                                                                                                                                             | Extra long             |                      |                        | MLL    | —       | — | — | — | — | ○ | ○  | ○  | —  | —  | — |
|                                                                                                                                             | High carbon steel made | Standard             |                        |        | LWL…BCS | — | — | — | — | — | ○  | ○  | ○  | ○  | — |
| <br>Tapped rail specification<br>Mounting from bottom    | Stainless steel made   | Short                | Ball non-retained type | LWLC   | —       | — | ○ | — | — | — | —  | —  | —  | —  | — |
|                                                                                                                                             |                        |                      | Ball retained type     | LWLC…N | —       | — | — | ○ | ○ | ○ | —  | —  | —  | —  | — |
|                                                                                                                                             |                        | Standard             | Ball non-retained type | LWL    | —       | ○ | ○ | — | — | — | —  | —  | —  | —  | — |
|                                                                                                                                             |                        |                      | Ball retained type     | LWL…N  | —       | — | — | ○ | ○ | ○ | —  | —  | —  | —  | — |
|                                                                                                                                             | Long                   | Ball retained type   | LWLG…N                 | —      | —       | — | — | ○ | ○ | — | —  | —  | —  | —  |   |
|                                                                                                                                             |                        |                      |                        |        |         |   |   |   |   |   |    |    |    |    |   |
| <br>Tapped rail specification<br>Mounting from lateral | Stainless steel made   | Standard             | Ball non-retained type | LWL…Y  | ○       | — | — | — | — | — | —  | —  | —  | —  | — |
| <br>Solid rail specification                           |                        | Standard             | Ball non-retained type | LWL    | ○       | — | — | — | — | — | —  | —  | —  | —  | — |










Remark: For the models indicated in , the interchangeable specification is available.

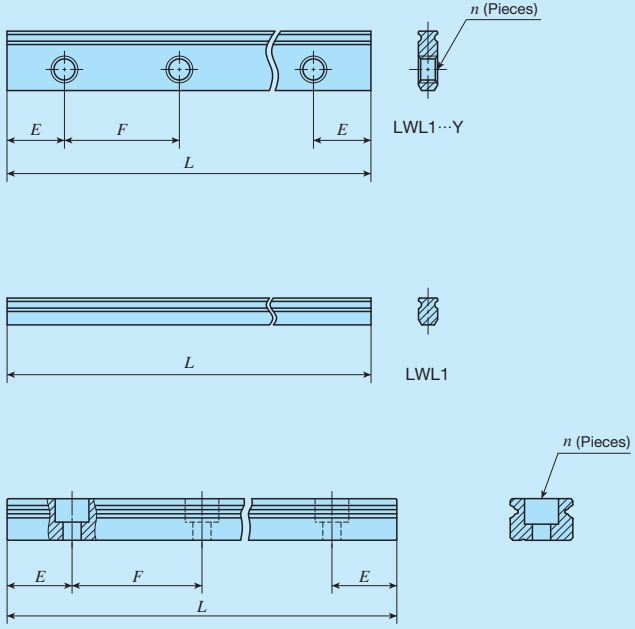


Table 2.2 Models and sizes of wide type ML(F) and LWL(F) series

| Types of track rails                                                                                                                | Material type          | Length of slide unit                                                                       | Structure              | Model    | Size |   |    |    |    |    |    |    |
|-------------------------------------------------------------------------------------------------------------------------------------|------------------------|--------------------------------------------------------------------------------------------|------------------------|----------|------|---|----|----|----|----|----|----|
|                                                                                                                                     |                        |                                                                                            |                        |          | 4    | 6 | 10 | 14 | 18 | 24 | 30 | 42 |
|  Standard rail specification                       | Stainless steel made   |  Short    | Ball retained type     | MLFC     | —    | ○ | ○  | ○  | ○  | ○  | ○  | ○  |
|                                                                                                                                     |                        |                                                                                            | Ball non-retained type | LWLFC…B  | —    | — | ○  | ○  | ○  | ○  | ○  | ○  |
|                                                                                                                                     |                        |  Standard | Ball retained type     | MLF      | —    | ○ | ○  | ○  | ○  | ○  | ○  | ○  |
|                                                                                                                                     |                        |                                                                                            | Ball non-retained type | LWLF…B   | —    | — | ○  | ○  | ○  | ○  | ○  | ○  |
|                                                                                                                                     |                        |  Long     | Ball retained type     | MLFG     | —    | — | —  | ○  | ○  | ○  | ○  | ○  |
|                                                                                                                                     |                        |                                                                                            | Ball non-retained type | LWLFG…B  | —    | — | —  | ○  | ○  | ○  | ○  | ○  |
|  Tapped rail specification<br>Mounting from bottom | High carbon steel made |  Short    | Ball retained type     | LWLF…BCS | —    | — | —  | —  | ○  | ○  | ○  | ○  |
|                                                                                                                                     |                        |                                                                                            | Ball non-retained type | LWLF…N   | —    | ○ | —  | —  | —  | —  | —  | —  |
|                                                                                                                                     |                        |  Standard | Ball retained type     | LWLF…N   | —    | — | ○  | ○  | ○  | —  | —  | —  |
|                                                                                                                                     |                        |                                                                                            | Ball non-retained type | LWLF…N   | —    | ○ | —  | —  | —  | —  | —  | —  |
|                                                                                                                                     |                        |  Long    | Ball retained type     | LWLF…N   | —    | — | —  | ○  | ○  | —  | —  | —  |
|                                                                                                                                     |                        |                                                                                            | Ball non-retained type | LWLF…N   | —    | — | —  | ○  | ○  | —  | —  | —  |

Remark: For the models indicated in  , the interchangeable specification is available.

Table 3.1 Standard and maximum length of stainless steel track rail (Standard type)



|  |                       |                                                                    |                                                                      |                                                                      |                                                                      |                                                                                | unit: mm                                                           |
|-------------------------------------------------------------------------------------|-----------------------|--------------------------------------------------------------------|----------------------------------------------------------------------|----------------------------------------------------------------------|----------------------------------------------------------------------|--------------------------------------------------------------------------------|--------------------------------------------------------------------|
| Item                                                                                | Identification number | LWL1…Y                                                             | LWL1                                                                 | LWL2                                                                 | LWL3                                                                 | ML 5<br>LWL5…B                                                                 | ML 7<br>LWL7…B                                                     |
| Standard length $L$ (n)                                                             |                       | 18 ( 3)<br>30 ( 5)<br>42 ( 7)                                      | 18 ( —)<br>30 ( —)<br>42 ( —)                                        | 32 ( 4)<br>40 ( 5)<br>56 ( 7)<br>80 (10)                             | 30 ( 3)<br>40 ( 4)<br>60 ( 6)<br>80 ( 8)<br>100 (10)                 | 60 ( 4)<br>90 ( 6)<br>105 ( 7)<br>120 ( 8)<br>150 (10)<br>180 (12)<br>240 (16) | 60 ( 4)<br>90 ( 6)<br>120 ( 8)<br>150 (10)<br>180 (12)<br>240 (16) |
| Pitch of mounting holes $F$                                                         |                       | 6                                                                  | —                                                                    | 8                                                                    | 10                                                                   | 15                                                                             | 15                                                                 |
| $E$                                                                                 |                       | 3                                                                  | —                                                                    | 4                                                                    | 5                                                                    | 7.5                                                                            | 7.5                                                                |
| Standard $E$ or higher dimensions <sup>(1)</sup> below                              |                       | 2.5<br>5.5                                                         | —                                                                    | 2.5<br>6.5                                                           | 3<br>8                                                               | 4<br>11.5                                                                      | 4.5<br>12                                                          |
| Maximum length <sup>(2)</sup>                                                       |                       | 102                                                                | 102                                                                  | 104<br>(200)                                                         | 150<br>(300)                                                         | 210<br>(510)                                                                   | 300<br>(990)                                                       |
| Maximum number of butt-jointing track rail <sup>(3)</sup>                           |                       | —                                                                  | —                                                                    | —                                                                    | —                                                                    | 5                                                                              | 7                                                                  |
| Maximum length of butt-jointing track rail <sup>(3)</sup>                           |                       | —                                                                  | —                                                                    | —                                                                    | —                                                                    | 915                                                                            | 1 905                                                              |
| Item                                                                                | Identification number | ML 9<br>LWL9…B                                                     | ML 12<br>LWL12…B                                                     | ML 15<br>LWL15…B                                                     | ML 20<br>LWL20…B                                                     | ML 25<br>LWL25…B                                                               |                                                                    |
| Standard length $L$ (n)                                                             |                       | 60 ( 3)<br>80 ( 4)<br>120 ( 6)<br>160 ( 8)<br>220 (11)<br>280 (14) | 100 ( 4)<br>150 ( 6)<br>200 ( 8)<br>275 (11)<br>350 (14)<br>475 (19) | 160 ( 4)<br>240 ( 6)<br>320 ( 8)<br>440 (11)<br>560 (14)<br>680 (17) | 180 ( 3)<br>240 ( 4)<br>360 ( 6)<br>480 ( 8)<br>660 (11)<br>840 (14) | 240 ( 4)<br>300 ( 5)<br>360 ( 6)<br>480 ( 8)<br>660 (11)<br>900 (15)           |                                                                    |
| Pitch of mounting holes $F$                                                         |                       | 20                                                                 | 25                                                                   | 40                                                                   | 60                                                                   | 60                                                                             |                                                                    |
| $E$                                                                                 |                       | 10                                                                 | 12.5                                                                 | 20                                                                   | 30                                                                   | 30                                                                             |                                                                    |
| Standard $E$ or higher dimensions <sup>(1)</sup> below                              |                       | 4.5<br>14.5                                                        | 5<br>17.5                                                            | 5.5<br>25.5                                                          | 8<br>38                                                              | 9<br>39                                                                        |                                                                    |
| Maximum length <sup>(2)</sup>                                                       |                       | 860<br>(1 200)                                                     | 1 000<br>(1 450)                                                     | 1 000<br>(1 480)                                                     | 960<br>(1 800)                                                       | 960<br>(1 800)                                                                 |                                                                    |
| Maximum number of butt-jointing track rail <sup>(3)</sup>                           |                       | 2                                                                  | 2                                                                    | 2                                                                    | 2                                                                    | 2                                                                              |                                                                    |
| Maximum length of butt-jointing track rail <sup>(3)</sup>                           |                       | 1 660                                                              | 1 925                                                                | 1 880                                                                | 1 740                                                                | 1 740                                                                          |                                                                    |

Notes <sup>(1)</sup> Not applicable to track rail with stopper pins (supplemental code "/S").  
<sup>(2)</sup> Length up to the value in ( ) can be produced. If needed, please contact **IKO**. Not applicable to tapped rail specifications.  
<sup>(3)</sup> Not applicable to interchangeable specifications or tapped rail specifications.  
Remarks 1. A typical identification number is indicated, but is applied to all models of the same size.  
2. Indicate "LWL…B" for the model code of the single track rail regardless of the series and the combination of slide unit models.  
3. If not directed, E dimensions for both ends will be the same within the range of standard E dimensions. To change the dimensions, indicate the specified rail mounting hole positions "/E" of special specification. For more information, see page III-29.

1N=0.102kgf=0.2248lbs.  
1mm=0.03937inch



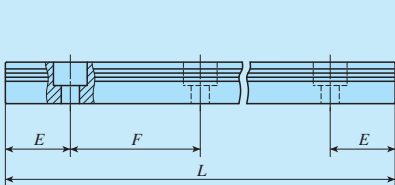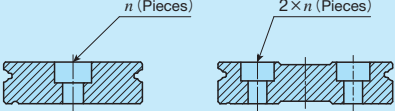Table 3.2 Standard and maximum length of stainless steel track rail (Wide type)

| <div><div></div><div></div><div>LWLF 42...B</div><div>unit: mm</div></div> |                                                                     |                                                                      |                                                                      |                                                                      |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|----------------------------------------------------------------------|----------------------------------------------------------------------|----------------------------------------------------------------------|
| Identification number                                                                                                                                                                                                                         | LWLF4                                                               | MLF 6<br>LWLF6                                                       | MLF 10<br>LWLF10...B                                                 | MLF 14<br>LWLF14...B                                                 |
| Item                                                                                                                                                                                                                                          |                                                                     |                                                                      |                                                                      |                                                                      |
| Standard length $L$ (n)                                                                                                                                                                                                                       | 40 ( 4)<br>60 ( 6)<br>70 ( 7)<br>80 ( 8)<br>100 (10)                | 60 ( 4)<br>90 ( 6)<br>105 ( 7)<br>120 ( 8)<br>150 (10)               | 60 ( 3)<br>80 ( 4)<br>120 ( 6)<br>160 ( 8)<br>220 (11)<br>280 (14)   | 90 ( 3)<br>120 ( 4)<br>150 ( 5)<br>180 ( 6)<br>240 ( 8)<br>300 (10)  |
| Pitch of mounting holes $F$                                                                                                                                                                                                                   | 10                                                                  | 15                                                                   | 20                                                                   | 30                                                                   |
| $E$                                                                                                                                                                                                                                           | 5                                                                   | 7.5                                                                  | 10                                                                   | 15                                                                   |
| Standard $E$ or higher dimensions <sup>(1)</sup> below                                                                                                                                                                                        | 3.5                                                                 | 4.5                                                                  | 4.5                                                                  | 5.5                                                                  |
| Maximum length <sup>(2)</sup>                                                                                                                                                                                                                 | 180<br>(300)                                                        | 240<br>(300)                                                         | 300<br>(500)                                                         | 300<br>(990)                                                         |
| Maximum number of butt-jointing track rail <sup>(3)</sup>                                                                                                                                                                                     | —                                                                   | —                                                                    | 7                                                                    | 8                                                                    |
| Maximum length of butt-jointing track rail <sup>(3)</sup>                                                                                                                                                                                     | —                                                                   | —                                                                    | 1 840                                                                | 1 950                                                                |
| Identification number                                                                                                                                                                                                                         | MLF 18<br>LWLF18...B                                                | MLF 24<br>LWLF24...B                                                 | MLF 30<br>LWLF30...B                                                 | MLF 42<br>LWLF42...B                                                 |
| Item                                                                                                                                                                                                                                          |                                                                     |                                                                      |                                                                      |                                                                      |
| Standard length $L$ (n)                                                                                                                                                                                                                       | 90 ( 3)<br>120 ( 4)<br>150 ( 5)<br>180 ( 6)<br>240 ( 8)<br>300 (10) | 120 ( 3)<br>160 ( 4)<br>240 ( 6)<br>320 ( 8)<br>400 (10)<br>480 (12) | 160 ( 4)<br>240 ( 6)<br>320 ( 8)<br>440 (11)<br>560 (14)<br>680 (17) | 160 ( 4)<br>240 ( 6)<br>320 ( 8)<br>440 (11)<br>560 (14)<br>680 (17) |
| Pitch of mounting holes $F$                                                                                                                                                                                                                   | 30                                                                  | 40                                                                   | 40                                                                   | 40                                                                   |
| $E$                                                                                                                                                                                                                                           | 15                                                                  | 20                                                                   | 20                                                                   | 20                                                                   |
| Standard $E$ or higher dimensions <sup>(1)</sup> below                                                                                                                                                                                        | 5.5                                                                 | 6.5                                                                  | 6.5                                                                  | 6.5                                                                  |
| Maximum length <sup>(2)</sup>                                                                                                                                                                                                                 | 690<br>(1 860)                                                      | 680<br>(1 960)                                                       | 680<br>(2 000)                                                       | 680<br>(2 000)                                                       |
| Maximum number of butt-jointing track rail <sup>(3)</sup>                                                                                                                                                                                     | 3                                                                   | 3                                                                    | 3                                                                    | 3                                                                    |
| Maximum length of butt-jointing track rail <sup>(3)</sup>                                                                                                                                                                                     | 1 920                                                               | 1 840                                                                | 1 840                                                                | 1 840                                                                |

Notes <sup>(1)</sup> Not applicable to track rail with stopper pins (supplemental code "/S").

<sup>(2)</sup> Length up to the value in ( ) can be produced. If needed, please contact **IICO**. Not applicable to tapped rail specifications.





<sup>(3)</sup> Not applicable to interchangeable specifications or tapped rail specifications.

Remarks 1. A typical identification number is indicated, but is applied to all models of the same size.

2. Indicate "LWLF...B" for the model code of the single track rail regardless of the series and the combination of slide unit models.

3. If not directed, E dimensions for both ends will be the same within the range of standard E dimensions. To change the dimensions, indicate the specified rail mounting hole positions "/E" of special specification. For more information, see page III-29.

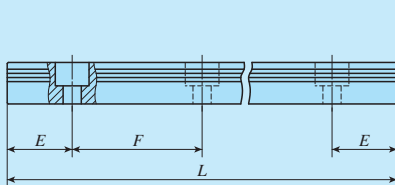Table 3.3 Standard and maximum length of high carbon steel track rail (Standard type, Wide type)

| <div><div></div><div></div><div></div><div></div><div>LWL...BCS      LWLF...BCS      LWLF 42...BCS</div><div>unit: mm</div></div> |                                                                                 |                                                                                  |                                                                                  |                                                                                    |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|----------------------------------------------------------------------------------|----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
| Identification number                                                                                                                                                                                                                                                                                                                                                                                                                                                         | LWL 9...BCS                                                                     | LWL12...BCS                                                                      | LWL15...BCS                                                                      | LWL20...BCS                                                                        |
| Item                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                 |                                                                                  |                                                                                  |                                                                                    |
| Standard length $L$ (n)                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 80 ( 4)<br>160 ( 8)<br>220 (11)<br>280 (14)<br>380 (19)<br>500 (25)<br>600 (30) | 100 ( 4)<br>200 ( 8)<br>275 (11)<br>350 (14)<br>475 (19)<br>600 (24)<br>700 (28) | 160 ( 4)<br>320 ( 8)<br>440 (11)<br>560 (14)<br>680 (17)<br>800 (20)<br>920 (23) | 180 ( 3)<br>240 ( 4)<br>360 ( 6)<br>480 ( 8)<br>660 (11)<br>900 (15)<br>1 020 (17) |
| Pitch of mounting holes $F$                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 20                                                                              | 25                                                                               | 40                                                                               | 60                                                                                 |
| $E$                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 10                                                                              | 12.5                                                                             | 20                                                                               | 30                                                                                 |
| Standard $E$ or higher dimensions <sup>(1)</sup> below                                                                                                                                                                                                                                                                                                                                                                                                                        | 4.5                                                                             | 5                                                                                | 5.5                                                                              | 8                                                                                  |
| Maximum length                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 1 000                                                                           | 1 500                                                                            | 1 520                                                                            | 1 560                                                                              |
| Identification number                                                                                                                                                                                                                                                                                                                                                                                                                                                         | LWLF18...BCS                                                                    | LWLF24...BCS                                                                     | LWLF30...BCS                                                                     | LWLF42...BCS                                                                       |
| Item                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                 |                                                                                  |                                                                                  |                                                                                    |
| Standard length $L$ (n)                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 90 ( 3)<br>180 ( 6)<br>240 ( 8)<br>300 (10)<br>420 (14)<br>510 (17)<br>600 (20) | 120 ( 3)<br>240 ( 6)<br>320 ( 8)<br>400 (10)<br>600 (15)<br>720 (18)<br>800 (20) | 160 ( 4)<br>320 ( 8)<br>440 (11)<br>560 (14)<br>680 (17)<br>800 (20)<br>920 (23) | 160 ( 4)<br>320 ( 8)<br>440 (11)<br>560 (14)<br>680 (17)<br>800 (20)<br>920 (23)   |
| Pitch of mounting holes $F$                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 30                                                                              | 40                                                                               | 40                                                                               | 40                                                                                 |
| $E$                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 15                                                                              | 20                                                                               | 20                                                                               | 20                                                                                 |
| Standard $E$ or higher dimensions <sup>(1)</sup> below                                                                                                                                                                                                                                                                                                                                                                                                                        | 5.5                                                                             | 6.5                                                                              | 6.5                                                                              | 6.5                                                                                |
| Maximum length                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 1 500                                                                           | 1 520                                                                            | 1 600                                                                            | 1 600                                                                              |

Note <sup>(1)</sup> Not applicable to track rail with stopper pins (supplemental code "/S").

Remarks 1. A typical identification number is indicated, but is applied to all models of the same size.

2. If not directed, E dimensions for both ends will be the same within the range of standard E dimensions. To change the dimensions, indicate the specified rail mounting hole positions "/E" of special specification. For more information, see page III-29.

|   |                |               |                  |                                                                                                                                                                                 |
|---|----------------|---------------|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 8 | Preload amount | Clearance     | : T <sub>0</sub> | Specify this item for an assembled set or a single slide unit.<br>For details of the preload amount, see Table 4.<br>For applicable preload types, see Table 5.1 and Table 5.2. |
|   |                | Standard      | : No symbol      |                                                                                                                                                                                 |
|   |                | Light preload | : T <sub>1</sub> |                                                                                                                                                                                 |
|   |                |               |                  |                                                                                                                                                                                 |

Table 4 Preload amount

| Preload type  | Item | Preload symbol | Preload amount N    | Operational conditions                                                            |
|---------------|------|----------------|---------------------|-----------------------------------------------------------------------------------|
| Clearance     |      | T <sub>0</sub> | 0 <sup>(1)</sup>    | • Very light motion                                                               |
| Standard      |      | (No symbol)    | 0 <sup>(2)</sup>    | • Light and precise motion                                                        |
| Light preload |      | T <sub>1</sub> | 0.02 C <sub>0</sub> | • Almost no vibrations<br>• Load is evenly balanced<br>• Light and precise motion |

Notes <sup>(1)</sup> There is zero or subtle clearance.  
<sup>(2)</sup> Indicates zero or minimal amount of preload.  
Remark: C<sub>0</sub> indicates the basic static load rating.

Table 5.1 Application of preload (Standard type)

| Size | Preload type (preload symbol) |                      |                                 |
|------|-------------------------------|----------------------|---------------------------------|
|      | Clearance (T <sub>0</sub> )   | Standard (No symbol) | Light preload (T <sub>1</sub> ) |
| 1    | ○                             | —                    | —                               |
| 2    | ○                             | —                    | —                               |
| 3    | ○                             | —                    | —                               |
| 5    | ○                             | ○                    | —                               |
| 7    | ○ <sup>(1)</sup>              | ○                    | ○ <sup>(1)</sup>                |
| 9    | ○ <sup>(1)</sup>              | ○                    | ○ <sup>(1)</sup>                |
| 12   | ○ <sup>(1)</sup>              | ○                    | ○ <sup>(1)</sup>                |
| 15   | ○ <sup>(1)</sup>              | ○                    | ○ <sup>(1)</sup>                |
| 20   | ○                             | ○                    | ○                               |
| 25   | ○                             | ○                    | ○                               |

Note <sup>(1)</sup> Not applicable when /HB is specified.  
Remark: The mark   indicates that interchangeable specification products are available.


Table 5.2 Application of preload (Wide type)

| Size | Preload type (preload symbol) |                      |                                 |
|------|-------------------------------|----------------------|---------------------------------|
|      | Clearance (T <sub>0</sub> )   | Standard (No symbol) | Light preload (T <sub>1</sub> ) |
| 4    | ○                             | —                    | —                               |
| 6    | ○                             | —                    | —                               |
| 10   | ○                             | ○                    | —                               |
| 14   | ○                             | ○                    | ○                               |
| 18   | ○                             | ○                    | ○                               |
| 24   | ○                             | ○                    | ○                               |
| 30   | ○                             | ○                    | ○                               |
| 42   | ○                             | ○                    | ○                               |

Remark: The mark   indicates that interchangeable specification products are available.

|   |                |           |     |                                                                                                                                                                                                                 |
|---|----------------|-----------|-----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 9 | Accuracy class | High      | : H | For interchangeable specification products, assemble a slide unit and a track rail of the same accuracy class.<br>Size 1 series have "No symbols."<br>For the details of accuracy class, see Table 6.1 and 6.2. |
|   |                | Precision | : P |                                                                                                                                                                                                                 |

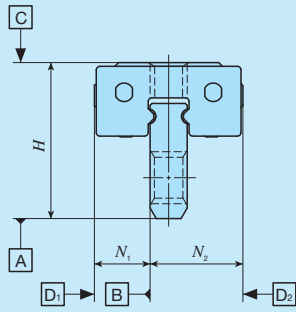
Table 6.1 Tolerance and allowable values (Series of size 1)



unit: mm

| Item                                                  | Tolerance |
|-------------------------------------------------------|-----------|
| Dim. H tolerance                                      | ±0.020    |
| Dim. N <sub>1</sub> and Dim. N <sub>2</sub> tolerance | ±0.025    |

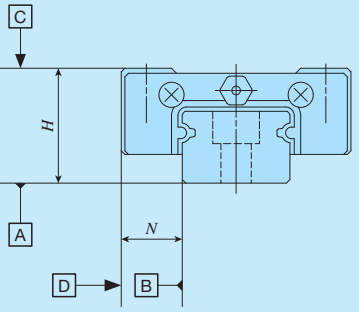
Table 6.2 Tolerance and allowance (Series of size 2 or higher)



unit: mm

| Class (classification symbol)                                     | High (H)   | Precision (P) |
|-------------------------------------------------------------------|------------|---------------|
| Item                                                              |            |               |
| Dim. H tolerance                                                  | ±0.020     | ±0.010        |
| Dim. N tolerance                                                  | ±0.025     | ±0.015        |
| Dim. variation of H <sup>(1)</sup>                                | 0.015      | 0.007         |
| Dim. variation of N <sup>(1)</sup>                                | 0.020      | 0.010         |
| Dim. variation of H for multiple assembled sets <sup>(2)</sup>    | 0.030      | 0.020         |
| Parallelism in operation of the slide unit C surface to A surface | See Fig. 1 |               |
| Parallelism in operation of the slide unit D surface to B surface | See Fig. 1 |               |

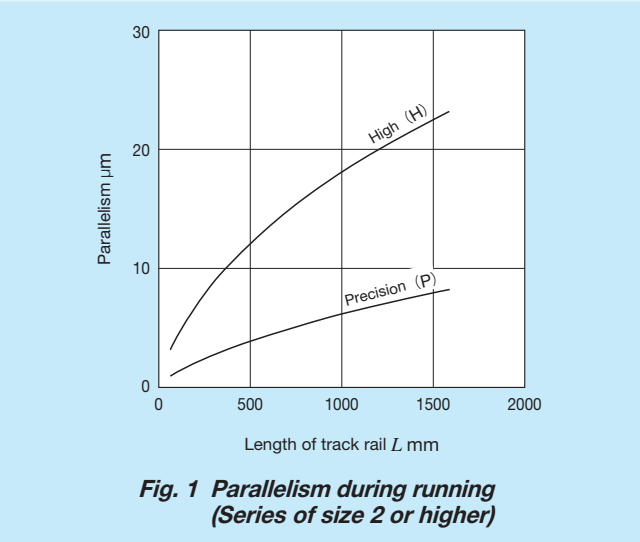Notes <sup>(1)</sup> It means the size variation between slide units mounted on the same track rail.  
<sup>(2)</sup> Applicable to the interchangeable specification.





## 11 Special specification

|                                                                      |                                                                                                                                                                                                               |
|----------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| /A, /BS, /D, /E, /HB, /I, /LR,<br>/MN, /N, /Q, /RE, /S, /U, /W○, /Y○ | For applicable special specifications, see Tables 7.1,<br>7.2, 7.3, and 7.4.<br>For combination of multiple special specifications, see<br>Table 8.<br>For details of special specification, see page III-28. |
|----------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

**Table 7.1 Application of special specifications (Interchangeable specification, single slide unit)**

| Special specification            | Supplemental code | Size |   |   |    |    |    |    |    |    |    |
|----------------------------------|-------------------|------|---|---|----|----|----|----|----|----|----|
|                                  |                   | 1    | 2 | 3 | 5  | 7  | 9  | 12 | 15 | 20 | 25 |
|                                  |                   | —    | 4 | 6 | 10 | 14 | 18 | 24 | 30 | 42 | —  |
| No end seal                      | /N                | —    | — | — | ○  | ○  | ○  | ○  | ○  | ○  | ○  |
| With C-Lube plate <sup>(1)</sup> | /Q                | —    | — | — | ○  | ○  | ○  | ○  | ○  | ○  | ○  |
| Under seal                       | /U                | —    | — | — | ×  | ×  | ○  | ○  | ○  | ○  | ○  |

Note (1) Applicable to LWW(F) series.

**Table 7.2 Application of special specifications (Interchangeable specification, single track rail)**

| Special specification                  | Supplemental code | Size |   |   |    |    |    |    |    |    |    |
|----------------------------------------|-------------------|------|---|---|----|----|----|----|----|----|----|
|                                        |                   | 1    | 2 | 3 | 5  | 7  | 9  | 12 | 15 | 20 | 25 |
|                                        |                   | —    | 4 | 6 | 10 | 14 | 18 | 24 | 30 | 42 | —  |
| Specified rail mounting hole positions | /E                | —    | — | — | ○  | ○  | ○  | ○  | ○  | ○  | ○  |
| Without track rail mounting bolt       | /MN               | —    | — | — | ○  | ○  | ○  | ○  | ○  | ○  | ○  |

**Table 7.3 Application of special specifications (Interchangeable specification, assembled set)**

| Special specification                           | Supplemental code | Size |   |   |    |    |    |    |    |    |    |
|-------------------------------------------------|-------------------|------|---|---|----|----|----|----|----|----|----|
|                                                 |                   | 1    | 2 | 3 | 5  | 7  | 9  | 12 | 15 | 20 | 25 |
|                                                 |                   | —    | 4 | 6 | 10 | 14 | 18 | 24 | 30 | 42 | —  |
| Opposite reference surfaces arrangement         | /D                | —    | — | — | ○  | ○  | ○  | ○  | ○  | ○  | ○  |
| Specified rail mounting hole positions          | /E                | —    | — | — | ○  | ○  | ○  | ○  | ○  | ○  | ○  |
| Without track rail mounting bolt <sup>(1)</sup> | /MN               | —    | — | — | ○  | ○  | ○  | ○  | ○  | ○  | ○  |
| No end seal                                     | /N                | —    | — | — | ○  | ○  | ○  | ○  | ○  | ○  | ○  |
| With C-Lube plate <sup>(2)</sup>                | /Q                | —    | — | — | ○  | ○  | ○  | ○  | ○  | ○  | ○  |
| Under seal                                      | /U                | —    | — | — | ×  | ×  | ○  | ○  | ○  | ○  | ○  |

Notes (1) Not applicable to tapped rail specification.

(2) Applicable to LWL(F) series.

**Table 7.4 Application of special specifications (Non-interchangeable specification)**

| Special specification                                   | Supplemental code | Size |                  |                  |    |                  |                  |                  |                  |    |    |
|---------------------------------------------------------|-------------------|------|------------------|------------------|----|------------------|------------------|------------------|------------------|----|----|
|                                                         |                   | 1    | 2                | 3                | 5  | 7                | 9                | 12               | 15               | 20 | 25 |
|                                                         |                   | —    | 4                | 6                | 10 | 14               | 18               | 24               | 30               | 42 | —  |
| Butt-jointing track rails <sup>(1)</sup> <sup>(2)</sup> | /A                | ×    | ×                | ×                | ○  | ○                | ○                | ○                | ○                | ○  | ○  |
| Stainless steel end plate <sup>(3)</sup>                | /BS               | ×    | ○ <sup>(5)</sup> | ○ <sup>(5)</sup> | ○  | ○                | ○                | ○                | ○                | ○  | ×  |
| Opposite reference surfaces arrangement                 | /D                | ×    | ○                | ○                | ○  | ○                | ○                | ○                | ○                | ○  | ○  |
| Specified rail mounting hole positions                  | /E                | ×    | ○                | ○                | ○  | ○                | ○                | ○                | ○                | ○  | ○  |
| Hybrid C-Lube Linear Way                                | /HB               | ×    | ×                | ×                | ×  | ○ <sup>(6)</sup> | ○ <sup>(6)</sup> | ○ <sup>(6)</sup> | ○ <sup>(6)</sup> | ×  | ×  |
| Inspection sheet                                        | /I                | ×    | ○                | ○                | ○  | ○                | ○                | ○                | ○                | ○  | ○  |
| Black chrome surface treatment (track rail)             | /LR               | ×    | ×                | ×                | ×  | ○                | ○                | ○                | ○                | ○  | ○  |
| Without track rail mounting bolt <sup>(2)</sup>         | /MN               | ×    | ○ <sup>(7)</sup> | ○ <sup>(7)</sup> | ○  | ○                | ○                | ○                | ○                | ○  | ○  |
| No end seal                                             | /N                | ×    | ×                | ×                | ○  | ○                | ○                | ○                | ○                | ○  | ○  |
| With C-Lube plate <sup>(3)</sup>                        | /Q                | ×    | ×                | ×                | ○  | ○                | ○                | ○                | ○                | ○  | ○  |
| Special environment seal <sup>(3)</sup>                 | /RE               | ×    | ×                | ×                | ○  | ○                | ○                | ○                | ○                | ○  | ×  |
| Track rail with stopper pins                            | /S                | ×    | ×                | ×                | ○  | ○                | ○                | ○                | ○                | ○  | ○  |
| Under seal                                              | /U                | ×    | ×                | ×                | ×  | ×                | ○                | ○                | ○                | ○  | ○  |
| A group of multiple assembled sets                      | /W○               | ×    | ○                | ○                | ○  | ○                | ○                | ○                | ○                | ○  | ○  |
| Specified grease <sup>(4)</sup>                         | /Y○               | ×    | ○ <sup>(8)</sup> | ○                | ○  | ○                | ○                | ○                | ○                | ○  | ○  |

Notes (1) Not applicable to high carbon steel made products.

(2) Not applicable to tapped rail specification.

(<sup>3</sup>) Applicable to LWL(F) series. / YCG is applicable

(4) ML(F) series is applicable only to /YCG.

(5) Not applicable to size 4 and 6 series.

(6) Applicable to size 7, 9, 12, and 15 of

(7) Not applicable to size 2 and 3 series.

(8) Applicable only to MNC.

(<sup>8</sup>) Applicable only to /YNG.


**Table 8** *Combination of supplemental codes*

|    |   |    |   |   |    |   |    |    |   |   |    |   |   |   |   |   |
|----|---|----|---|---|----|---|----|----|---|---|----|---|---|---|---|---|
| BS | ○ |    |   |   |    |   |    |    |   |   |    |   |   |   |   |   |
| D  | ○ | ○  |   |   |    |   |    |    |   |   |    |   |   |   |   |   |
| E  | — | ○  | — |   |    |   |    |    |   |   |    |   |   |   |   |   |
| HB | ○ | —  | ○ | ○ |    |   |    |    |   |   |    |   |   |   |   |   |
| I  | ○ | ○  | ○ | ○ | ○  |   |    |    |   |   |    |   |   |   |   |   |
| LR | — | ○  | ○ | ○ | ○  | ○ |    |    |   |   |    |   |   |   |   |   |
| MN | ○ | ○  | ○ | ○ | ○  | ○ | ○  |    |   |   |    |   |   |   |   |   |
| N  | ○ | ○  | ○ | ○ | ○  | ○ | ○  | ○  |   |   |    |   |   |   |   |   |
| Q  | ○ | ○  | ○ | ○ | ○  | — | ○  | ○  | ○ | ○ |    |   |   |   |   |   |
| RE | ○ | ○  | ○ | ○ | ○  | — | ○  | ○  | ○ | — | ○  |   |   |   |   |   |
| S  | ○ | ○  | ○ | ○ | ○  | ○ | ○  | ○  | ○ | ○ | ○  | ○ |   |   |   |   |
| U  | ○ | ○  | ○ | ○ | ○  | ○ | ○  | ○  | ○ | — | ○  | — | ○ |   |   |   |
| W  | ○ | ○  | ○ | ○ | —  | ○ | ○  | ○  | ○ | ○ | ○  | ○ | ○ | ○ |   |   |
| Y  | ○ | ○  | ○ | ○ | —  | ○ | ○  | ○  | ○ | ○ | —  | ○ | ○ | ○ | ○ | ○ |
|    | A | BS | D | E | HB | I | LR | MN | N | Q | RE | S | U | W | Y |   |

Remarks 1. The combination of " – " shown in the table is not available.

2. When using multiple types for combination, please indicate by arranging the symbols in alphabetical order.

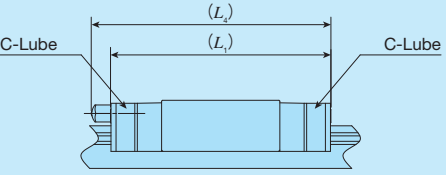Table 9 Dimensions of slide unit with C-Lube plate  
(Supplemental code /Q)

|  |       |       |                       |       |       |
|-----------------------------------------------------------------------------------|-------|-------|-----------------------|-------|-------|
| unit: mm                                                                          |       |       |                       |       |       |
| Identification number                                                             | $L_1$ | $L_4$ | Identification number | $L_1$ | $L_4$ |
| LWLC 5...B                                                                        | 22    | —     | LWLFC 10...B          | 26.5  | —     |
| LWL 5...B                                                                         | 25    | —     | LWLFC 10...B          | 30.5  | —     |
| LWLC 7...B                                                                        | 27    | —     | LWLFC 14...B          | 30.5  | —     |
| LWL 7...B                                                                         | 31.5  | —     | LWLFC 14...B          | 39.5  | —     |
| LWLG 7...B                                                                        | 39    | —     | LWLFG 14...B          | 50    | —     |
| LWLC 9...B                                                                        | 30    | —     | LWLFC 18...B          | 34.5  | —     |
| LWL 9...B                                                                         | 39    | —     | LWLFC 18...B          | 46.5  | —     |
| LWLG 9...B                                                                        | 49    | —     | LWLFC 18...B          | 58.5  | —     |
| LWLC 12...B                                                                       | 33    | —     | LWLFC 24...B          | 38.5  | —     |
| LWL 12...B                                                                        | 42    | —     | LWLFC 24...B          | 52    | —     |
| LWLG 12...B                                                                       | 52    | —     | LWLFC 24...B          | 67    | —     |
| LWLC 15...B                                                                       | 42    | 47    | LWLFC 30...B          | 45.5  | 50    |
| LWL 15...B                                                                        | 52    | 57    | LWLFC 30...B          | 59.5  | 64    |
| LWLG 15...B                                                                       | 67    | 72    | LWLFC 30...B          | 78.5  | 83    |
| LWLC 20...B                                                                       | 48    | 53    | LWLFC 42...B          | 51.5  | 56    |
| LWL 20...B                                                                        | 60    | 65    | LWLFC 42...B          | 65    | 70    |
| LWLG 20...B                                                                       | 78    | 83    | LWLFC 42...B          | 84.5  | 89    |
| LWLC 25...B                                                                       | 63.5  | 74    |                       |       |       |
| LWL 25...B                                                                        | 87.5  | 98    |                       |       |       |
| LWLG 25...B                                                                       | 107.5 | 117   |                       |       |       |

Remarks 1. The dimensions of the slide unit with C-Lube at both ends are indicated.  
2. A typical identification number is indicated, but is applied to all LWL(F) series models of the same size.

Table 10 Load rating / static moment rating (Supplemental code /HB)  
of Hybrid C-Lube Linear Way

| Identification number | C<br>N | $C_0$<br>N | $T_0$<br>N·m | $T_x^{(1)}$<br>N·m | $T_y^{(1)}$<br>N·m |
|-----------------------|--------|------------|--------------|--------------------|--------------------|
| MLC 7.../HB           | 937    | 965        | 3.5          | 1.6<br>12.6        | 1.3<br>10.6        |
| ML 7.../HB            | 1 330  | 1 610      | 5.9          | 4.0<br>23.9        | 3.3<br>20.1        |
| MLG 7.../HB           | 1 690  | 2 250      | 8.2          | 7.5<br>43.1        | 6.3<br>36.2        |
| MLC 9.../HB           | 1 180  | 1 260      | 5.9          | 2.4<br>18.2        | 2.1<br>15.3        |
| ML 9.../HB            | 1 810  | 2 340      | 10.9         | 7.7<br>43.4        | 6.5<br>36.4        |
| MLG 9.../HB           | 2 370  | 3 420      | 15.9         | 15.9<br>83.6       | 13.4<br>70.1       |
| MLL 9.../HB           | 2 870  | 4 500      | 20.9         | 27.1<br>134        | 22.7<br>112        |
| MLC 12.../HB          | 2 210  | 2 030      | 12.6         | 4.5<br>35.5        | 3.8<br>29.8        |
| ML 12.../HB           | 3 330  | 3 650      | 22.6         | 13.1<br>79.2       | 11.0<br>66.4       |
| MLG 12.../HB          | 4 310  | 5 270      | 32.7         | 26.0<br>143        | 21.9<br>120        |
| MLL 12.../HB          | 5 820  | 8 110      | 50.3         | 59.3<br>288        | 49.8<br>242        |
| MLC 15.../HB          | 3 490  | 3 310      | 25.5         | 9.9<br>71.8        | 8.3<br>60.3        |
| ML 15.../HB           | 4 980  | 5 520      | 42.5         | 25.3<br>146        | 21.2<br>122        |
| MLG 15.../HB          | 6 620  | 8 280      | 63.7         | 54.3<br>288        | 45.5<br>241        |
| MLL 15.../HB          | 8 370  | 11 600     | 89.2         | 104<br>497         | 86.9<br>417        |

Note (1) The upper values of  $T_x$  and  $T_y$  are for one slide unit and the lower values are for two slide units in close contact.

Table 11 Dimensions of track rail with stopper pins  
(Supplemental code /S)

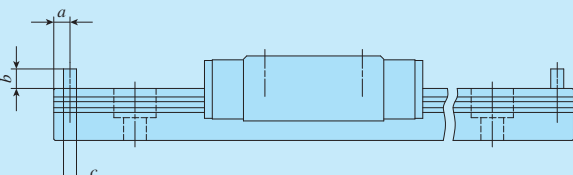
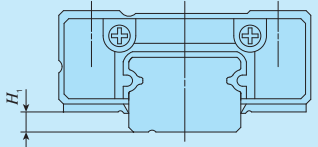
|  |     |     |     |     |
|------------------------------------------------------------------------------------|-----|-----|-----|-----|
| unit: mm                                                                           |     |     |     |     |
| Size                                                                               | $a$ | $b$ | $c$ |     |
| 5                                                                                  | —   | 2   | 2   | 1.6 |
| 7                                                                                  | —   | 2.5 | 2   | 2   |
| 9                                                                                  | —   | 3   | 2   | 1.6 |
| — 10                                                                               | —   | 2   | 2   | 1.6 |
| 12                                                                                 | —   | 3   | 2   | 2   |
| — 14                                                                               | —   | 3   | 2   | 2   |
| 15                                                                                 | —   | 4   | 2   | 2   |
| — 18                                                                               | —   | 3   | 2   | 2   |
| 20                                                                                 | —   | 5   | 2   | 2   |
| — 24                                                                               | —   | 3   | 2   | 2   |
| 25                                                                                 | —   | 5   | 2   | 2   |
| — 30                                                                               | —   | 4   | 2   | 2   |
| — 42                                                                               | —   | 5   | 2   | 2   |

Table 12  $H_1$  dimensions with under seal (Supplemental code /U)

|  |       |                  |
|--------------------------------------------------------------------------------------|-------|------------------|
| unit: mm                                                                             |       |                  |
| Size                                                                                 | $H_1$ |                  |
| 9                                                                                    | —     | 1                |
| 12                                                                                   | —     | 2                |
| 15                                                                                   | —     | 3                |
| — 18                                                                                 | —     | 2                |
| 20                                                                                   | —     | 4                |
| — 24                                                                                 | —     | 2                |
| 25                                                                                   | —     | 5 <sup>(1)</sup> |
| — 30                                                                                 | —     | 2                |
| — 42                                                                                 | —     | 3                |

Note (1) The dimensions are the same as those before mounting of under seal.

## Lubrication

Lithium-soap base grease (MULTEMP PS No.2 [KYODO YUSHI CO., LTD.]) is pre-packed in ML(F) and LWL(F) series. Additionally, ML(F) series has C-Lube placed in the recirculation part of balls, so that lubricant replenishment interval can be extended and maintenance man-hours such as grease job can be reduced significantly. ML(F) series and LWL(F) series have grease nipple or oil hole as indicated in Table 14. Since the Size 1, 2, 3, 4 and 6 series do not have an oil hole, apply grease directly to the raceway part of the track rail for re-greasing. Supply nozzles fit to each shapes of grease nipple and dedicated supplying equipment (miniature greasers) fit to oil holes are also available. When these parts are desired, refer to Table 14 and Table 15.1 in Ⅲ-22 and Table 16 of page Ⅲ-23 to order.

Table 13 Oil hole specifications

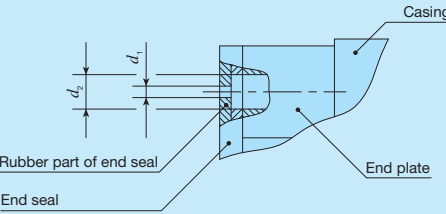
|  |       |       |     |
|-------------------------------------------------------------------------------------|-------|-------|-----|
| unit: mm                                                                            |       |       |     |
| Size                                                                                | $d_1$ | $d_2$ |     |
| 5                                                                                   | 10    | 0.5   | 1.1 |
| 7                                                                                   | 14    | 0.5   | 1.2 |
| 9                                                                                   | 18    | 0.5   | 1.5 |
| 12                                                                                  | 24    | 0.5   | 2   |

Table 14 Parts for lubrication

| Size        | Grease nipple type <sup>(1)</sup> | Applicable supply nozzle type | Bolt size of female threads for piping |
|-------------|-----------------------------------|-------------------------------|----------------------------------------|
| 5, 7, 9, 12 | 10, 14, 18, 24                    | Oil hole                      | Miniature greaser                      |
| 15, 20      | 30, 42                            | A-M3                          | A-5120V A-5240V<br>B-5120V B-5240V     |
| 25          | —                                 | B-M4                          | A-8120V B-8120V                        |

Note (1) For specifications of grease nipple, see Table 15.1 on page Ⅲ-22.

## Dust Protection

The slide unit of ML(F) series and LWL(F) series is dust protected by end seals included as standard. However, if large amount of contaminant or dust are floating, or if large particles of foreign substances such as chips or sand may adhere to the track rail, it is recommended to attach a protective cover to the linear motion mechanism. No end seal is provided for size 1, 2, 3, 4 or 6 series. For applications in the environment not clean enough, cover the entire unit with a protective case, etc. to prevent harmful foreign substances such as dust and particles from outside to enter.



# Precaution for Use

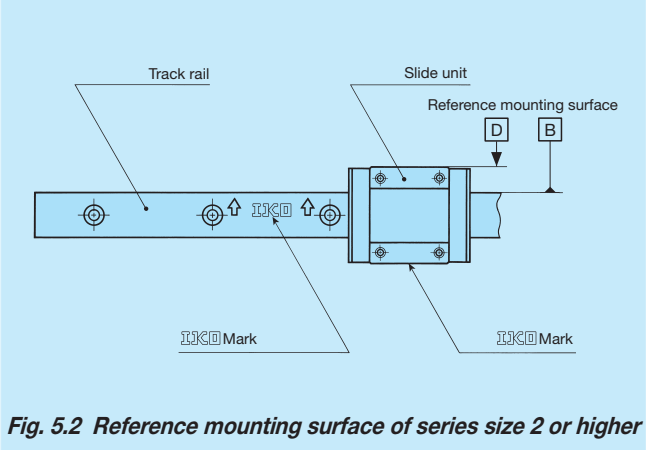
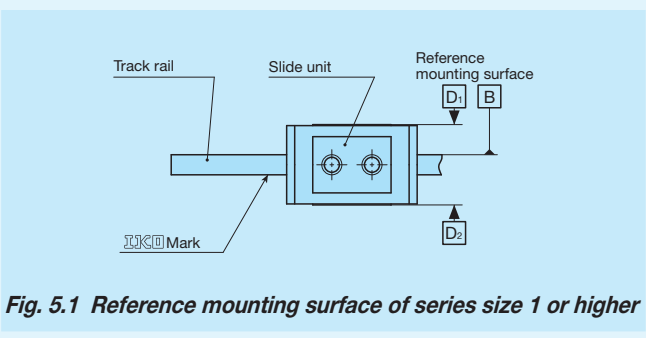
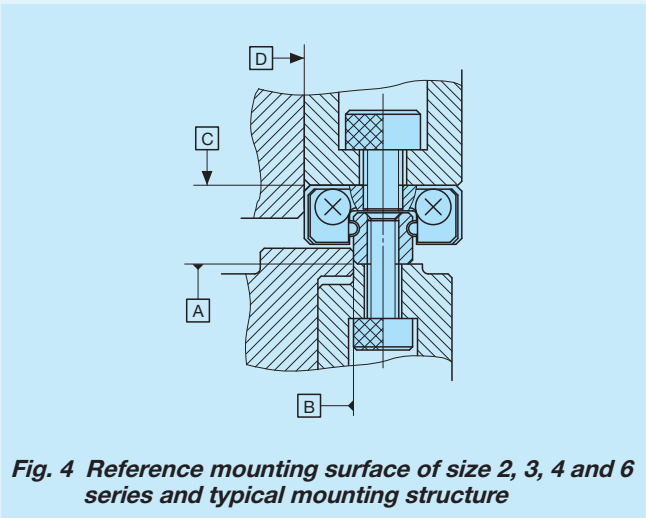
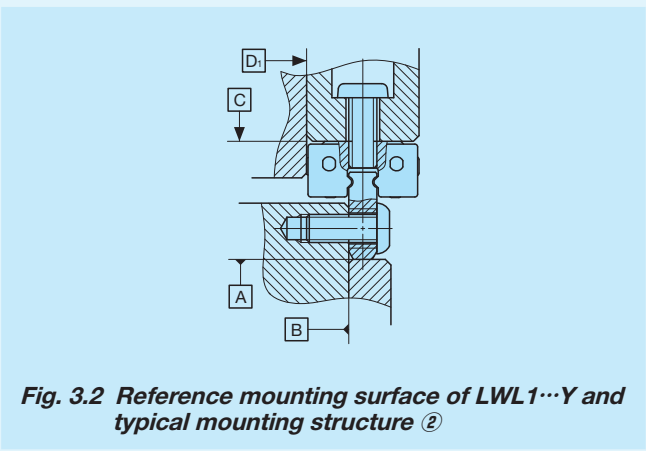
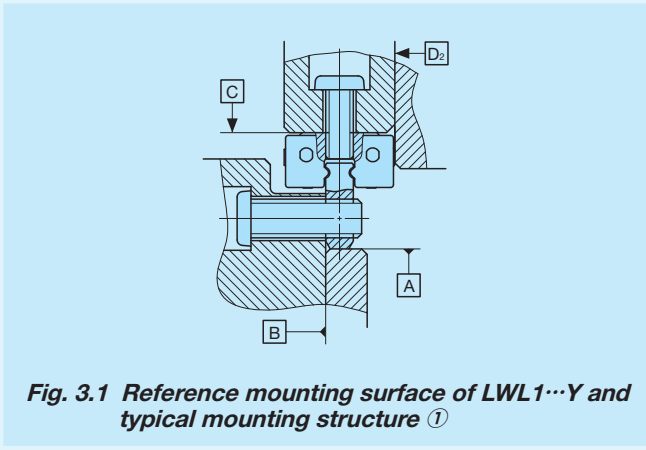
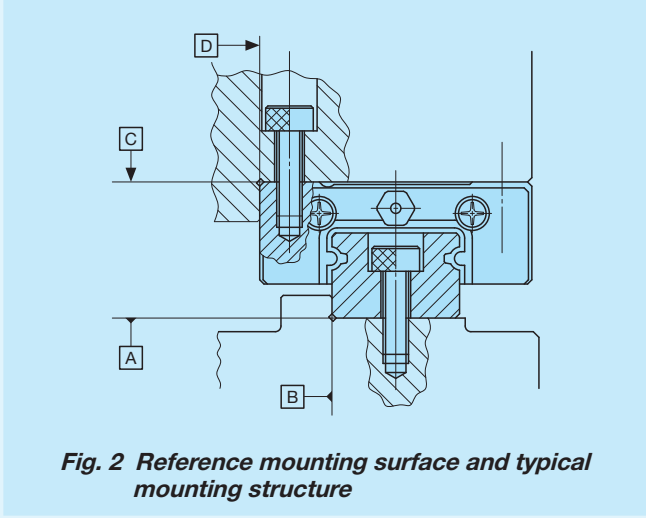
## ① Mounting surface, reference mounting surface and general mounting structure

When mounting the ML(F) series and LWL(F) series, properly align the reference mounting surfaces B and D (D1 or D2) of the track rail and slide unit with the reference mounting surface of the table and bed before fixing them. (See Fig. 2) Reference mounting surfaces B and D (D1 or D2) and mounting surfaces A and C are precisely ground. By machining the mounting surface of the mating member, such as machine or device, to high accuracy and mounting them properly, stable linear motion with high accuracy is obtained.

Reference mounting surface of the slide unit of size 2 or higher is the opposite side of the **IKO** mark. The track rail reference mounting surface is identified by locating the **IKO** mark on the top surface of the track rail. It is the side surface above the mark (in the direction of the arrow). (See Fig. 5.2)

Reference mounting surface of the slide unit of size 1 is located at both right and left sides (D1 and D2). (See Fig. 5.1)

The track rail of LWL1...Y has the mounting structure of lateral direction. Two types of mounting structure as shown in Fig. 3.1 and Fig. 3.2 are available.



## ② Mounting screws for slide unit

To mount a slide unit, tightly fasten the bolt against female thread of slide unit.

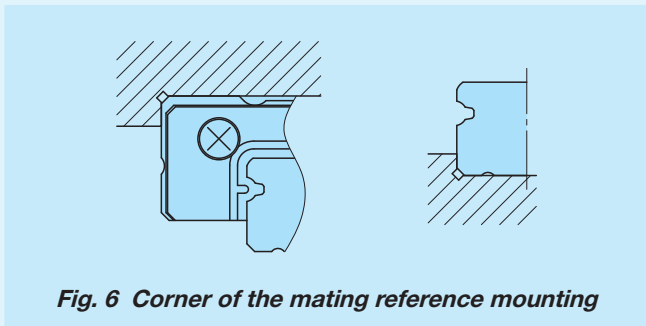
The female thread is created through holes of the slide unit for size 1 series, and also through holes for the slide unit and track rail for size 2, 3, 4 and 6 series. When the fixing thread depth of the mounting screw goes too deep, it can interfere with the track rail and impact the running accuracy or product life so that the fixing thread depth should be within the screwing depth specified in the dimension table. Also prepare the small screws dedicated to precision devices (head diameter 1.8 mm or smaller) for the mounting bolt of slide unit of size 1.

## ③ Mounting screws for track rail

In the size 2 and 3 series and tapped rail specifications, track rail mounting bolts are not appended. Prepare mounting bolts whose fixing thread depth is less than  $H_4$  in dimension table.

## ④ Shoulder height and corner radius of the reference mounting surface

For the opposite corner of the mating reference mounting, it is recommended to have relieved fillet as indicated in Fig. 6 Recommended value for the shoulder height on the mating side is indicated in Table 16.



## ⑤ Tightening torque for mounting bolts

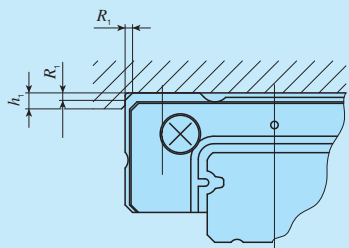
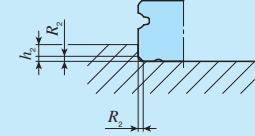
Typical tightening torques for mounting ML(F) series and LWL(F) series to the steel mating member material are indicated in Table 15. When vibration and shock of the machine or device are large, fluctuating load is large, or moment load is applied, fix it by using the torque 1.2 to 1.5 times larger than the value indicated in the table as necessary. If the mating member material is cast iron or aluminum, reduce the tightening torque depending on the strength characteristic of the mating member material.

Table 15 Tightening torque for fixing screw

| Bolt size | Tightening torque N · m    |                              |
|-----------|----------------------------|------------------------------|
|           | Stainless steel-made screw | High carbon steel-made screw |
| M1 ×0.25  | 0.04                       | —                            |
| M1.4×0.3  | 0.10                       | —                            |
| M1.6×0.35 | 0.15                       | —                            |
| M2 ×0.4   | 0.31                       | —                            |
| M2.5×0.45 | 0.62                       | —                            |
| M3 ×0.5   | 1.1                        | 1.2                          |
| M4 ×0.7   | 2.5                        | 2.8                          |
| M5 ×0.8   | 5.0                        | 5.6                          |
| M6 ×1     | 8.5                        | —                            |

Remarks 1. The calculation is based on the tightening torque, strength division 8.8 and property division A2-70.  
2. It is recommended that the tightening torque of slide unit mounting holes for series size 1 is to be 70 to 80 % of the values in the table.

Table 16 Shoulder height and corner radius of the reference mounting surface


| <div><div></div><div></div></div> <div>Mounting part of slide unit      Mounting part of track rail</div> <div>unit: mm</div> |             |                             |                                  |                                         |                                  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-----------------------------|----------------------------------|-----------------------------------------|----------------------------------|
| Identification number                                                                                                                                                                                                                                                                            |             | Mounting part of slide unit |                                  | Mounting part of track rail             |                                  |
|                                                                                                                                                                                                                                                                                                  |             | Shoulder height<br>$h_1$    | Corner radius<br>$R_1$ (Maximum) | Shoulder height <sup>(1)</sup><br>$h_2$ | Corner radius<br>$R_2$ (Maximum) |
| —                                                                                                                                                                                                                                                                                                | LWL 1…Y     | 1.3                         | —                                | 2                                       | —                                |
| —                                                                                                                                                                                                                                                                                                | LWL 1       |                             |                                  | —                                       |                                  |
| —                                                                                                                                                                                                                                                                                                | LWL 2       | 1                           | 0.1                              | 0.5                                     | 0.05                             |
| —                                                                                                                                                                                                                                                                                                | LWL 3       | 1.2                         | 0.15                             | 0.8                                     | 0.1                              |
| ML 5                                                                                                                                                                                                                                                                                             | LWL 5…B     | 2                           | 0.3                              | 0.8                                     | 0.2                              |
| ML 7                                                                                                                                                                                                                                                                                             | LWL 7…B     | 2.5                         | 0.2                              | 1.2                                     | 0.2                              |
| ML 9                                                                                                                                                                                                                                                                                             | LWL 9…B     | 3                           | 0.2                              | 1.5                                     | 0.2                              |
| —                                                                                                                                                                                                                                                                                                | LWL 9…BCS   |                             | 0.4                              |                                         |                                  |
| ML 12                                                                                                                                                                                                                                                                                            | LWL 12…B    | 4                           | 0.2                              | 2.5                                     | 0.2                              |
| —                                                                                                                                                                                                                                                                                                | LWL 12…BCS  |                             | 0.4                              |                                         |                                  |
| ML 15                                                                                                                                                                                                                                                                                            | LWL 15…B    | 4.5                         | 0.2                              | 3                                       | 0.2                              |
| —                                                                                                                                                                                                                                                                                                | LWL 15…BCS  |                             | 0.4                              |                                         |                                  |
| ML 20                                                                                                                                                                                                                                                                                            | LWL 20…B    | 5                           | 0.2                              | 4                                       | 0.2                              |
| —                                                                                                                                                                                                                                                                                                | LWL 20…BCS  |                             | 0.4                              |                                         |                                  |
| ML 25                                                                                                                                                                                                                                                                                            | LWL 25…B    | 6.5                         | 0.7                              | 4                                       | 0.7                              |
| —                                                                                                                                                                                                                                                                                                | LWLF 4      | 1.5                         | 0.1                              | 0.8                                     | 0.1                              |
| MLF 6                                                                                                                                                                                                                                                                                            | LWLF 6      | 2                           | 0.1                              | 0.8                                     | 0.1                              |
| MLF 10                                                                                                                                                                                                                                                                                           | LWLF 10…B   | 2                           | 0.3                              | 1.2                                     | 0.2                              |
| MLF 14                                                                                                                                                                                                                                                                                           | LWLF 14…B   | 2.5                         | 0.2                              | 1.2                                     | 0.2                              |
| MLF 18                                                                                                                                                                                                                                                                                           | LWLF 18…B   | 3                           | 0.2                              | 2.5                                     | 0.2                              |
| —                                                                                                                                                                                                                                                                                                | LWLF 18…BCS |                             | 0.4                              |                                         |                                  |
| MLF 24                                                                                                                                                                                                                                                                                           | LWLF 24…B   | 4                           | 0.2                              | 2.5                                     | 0.2                              |
| —                                                                                                                                                                                                                                                                                                | LWLF 24…BCS |                             | 0.4                              |                                         |                                  |
| MLF 30                                                                                                                                                                                                                                                                                           | LWLF 30…B   | 4.5                         | 0.2                              | 2.5                                     | 0.2                              |
| —                                                                                                                                                                                                                                                                                                | LWLF 30…BCS |                             | 0.4                              |                                         |                                  |
| MLF 42                                                                                                                                                                                                                                                                                           | LWLF 42…B   | 5                           | 0.2                              | 3                                       | 0.2                              |
| —                                                                                                                                                                                                                                                                                                | LWLF 42…BCS |                             | 0.4                              |                                         |                                  |

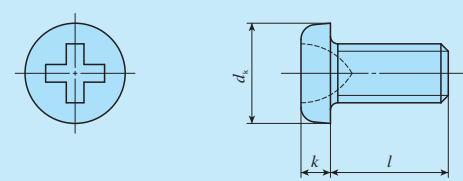Note <sup>(1)</sup> For models with under seals (supplemental code "U"), it is recommended to use the values 1mm smaller than the values in the table.  
However for the models of size 9 with under seal, 0.8 mm is recommended.  
Remark: A typical identification number is indicated, but is applied to all models of the same size.

Mounting Bolt

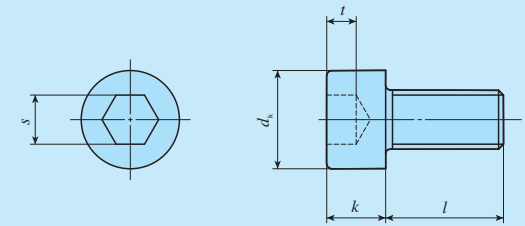
For LWL(F) series, track rail mounting bolt of slide unit and tapped rail specification shown in Table 17 and Table 18are available. If these parts are necessary, please contact **IKO**.

Table 17 Cross-recessed head screw for precision equipment

| <div></div> <div>unit: mm</div> |                       |       |      |           |
|--------------------------------------------------------------------------------------------------------------------|-----------------------|-------|------|-----------|
| Bolt size<br>( $d$ )                                                                                               | Pitch of screw<br>$P$ | $d_k$ | $k$  | $l$       |
| M1                                                                                                                 | 0.25                  | 1.8   | 0.45 | 3, 4, 5   |
| M1.4 <sup>(1)</sup>                                                                                                | 0.3                   | 2.5   | 0.8  | 2.5, 3, 4 |
| M1.6 <sup>(1)</sup>                                                                                                | 0.35                  | 2.8   | 0.85 | 4, 5, 6   |
| M2 <sup>(1)</sup>                                                                                                  | 0.4                   | 3.5   | 1    | 3, 4, 5   |


Note <sup>(1)</sup> Based on cross-recessed head screw for precision equipment (Number 0) in Japan Camera Industry Standard JCIS 10-70.  
Remark: The dimensions are different from the appended track rail mounting bolts.


Table 18 Hexagon socket head bolt

| <div></div> <div>unit: mm</div> |                       |       |     |     |     |           |
|----------------------------------------------------------------------------------------------------------------------|-----------------------|-------|-----|-----|-----|-----------|
| Bolt size<br>( $d$ )                                                                                                 | Pitch of screw<br>$P$ | $d_k$ | $k$ | $s$ | $t$ | $l$       |
| M1.4                                                                                                                 | 0.3                   | 2.6   | 1.4 | 1.3 | 0.6 | 2.5, 3, 4 |
| M1.6 <sup>(1)</sup>                                                                                                  | 0.35                  | 3     | 1.6 | 1.5 | 0.7 | 4, 5, 6   |
| M2 <sup>(1)</sup>                                                                                                    | 0.4                   | 3.8   | 2   | 1.5 | 1   | 3, 4, 5   |


Note <sup>(1)</sup> Based on hexagon socket head bolts equivalent to JIS B 1176.



| Standard type |                                                                                   |    |    |    |    |
|---------------|-----------------------------------------------------------------------------------|----|----|----|----|
| Shape         | LWL                                                                               |    |    |    |    |
|               |  |    |    |    |    |
| Size          | 1                                                                                 | 2  | 3  | 5  | 7  |
|               | 9                                                                                 | 12 | 15 | 20 | 25 |

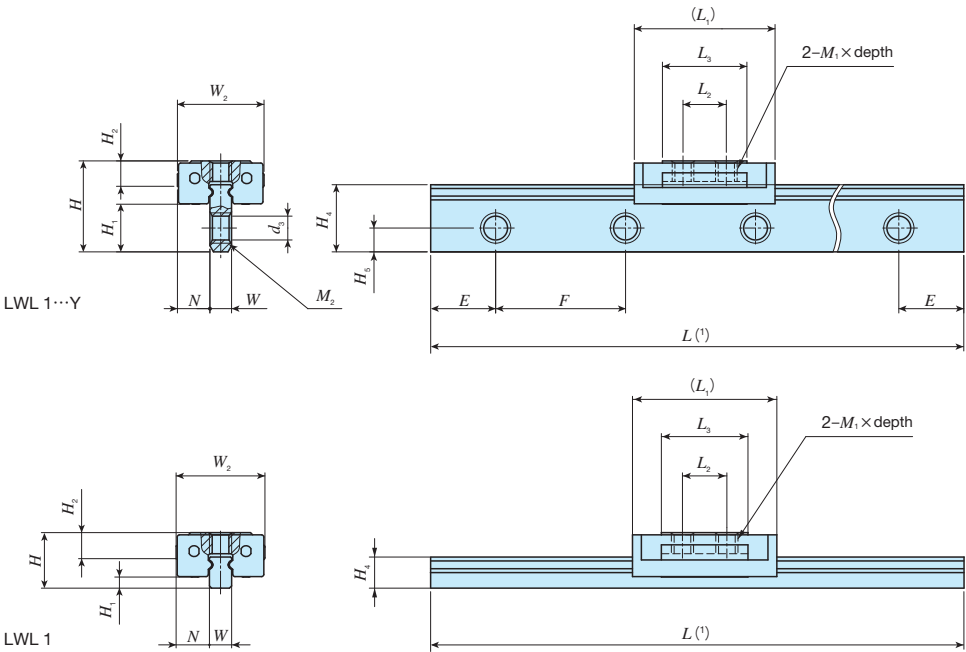


LWL 2  
LWLC 3  
LWL 3

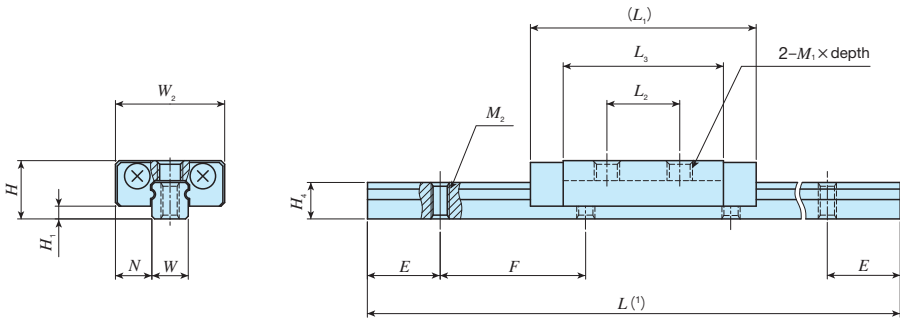

| Identification number |                           | Interchangeable | Mass (Ref.)<br>g |                            | Dimensions of<br>assembly<br>mm |                |     | Dimensions of slide unit<br>mm |                |                |                |                       |                |  | Dimensions of track rail<br>mm |                |                |                 |                |   |    | Appended mounting<br>bolt for track rail <sup>(2)</sup><br>mm | Basic dynamic<br>load rating <sup>(5)</sup> | Basic static<br>load rating <sup>(5)</sup> | Static moment rating <sup>(5)</sup> |                       |                       |
|-----------------------|---------------------------|-----------------|------------------|----------------------------|---------------------------------|----------------|-----|--------------------------------|----------------|----------------|----------------|-----------------------|----------------|--|--------------------------------|----------------|----------------|-----------------|----------------|---|----|---------------------------------------------------------------|---------------------------------------------|--------------------------------------------|-------------------------------------|-----------------------|-----------------------|
| ML series             | LWL series<br>(No C-Lube) |                 | Slide<br>unit    | Track rail<br>(per 100 mm) | H                               | H <sub>1</sub> | N   | W <sub>2</sub>                 | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | M <sub>1</sub> ×depth | H <sub>2</sub> |  | W                              | H <sub>4</sub> | H <sub>5</sub> | M <sub>2</sub>  | d <sub>3</sub> | E | F  | Bolt size× ℓ                                                  | C<br>N                                      | C <sub>0</sub><br>N                        | T <sub>0</sub><br>N・m               | T <sub>x</sub><br>N・m | T <sub>y</sub><br>N・m |
| —                     | LWL 1…Y                   | —               | 0.16             | 2.1                        | 4.2                             | 2.2            | 1.5 | 4                              | 6.5            | 2              | 3.9            | M1 ×0.9               | 1.2            |  | 1                              | 3.1            | 1.1            | M1.4<br>Through | 1.1            | 3 | 6  | M1× ℓ or M1.4× ℓ <sup>(3)</sup>                               | 66.8                                        | 113                                        | 0.06                                | 0.07<br>0.47          | 0.09<br>0.56          |
| —                     | LWL 1                     | —               |                  | 1.0                        | 2.5                             | 0.5            |     |                                |                |                |                |                       |                |  |                                | 1.4            | —              | —               | —              | — | —  | —                                                             |                                             |                                            |                                     |                       |                       |
| —                     | LWL 2                     | —               | 0.9              | 2.8                        | 3.2                             | 0.7            | 2   | 6                              | 12.5           | 4              | 8.8            | M1.4×1.1              | —              |  | 2                              | 2              | —              | M1<br>Through   | —              | 4 | 8  | M1 × ℓ <sup>(4)</sup>                                         | 211                                         | 381                                        | 0.42                                | 0.54<br>2.9           | 0.64<br>3.5           |
| —                     | LWLC 3                    | —               | 1.0              | 5.3                        | 4                               | 1              | 2.5 | 8                              | 11.5           | 3.5            | 6.7            | M1.6×1.3              | —              |  | 3                              | 2.6            | —              | M1.6<br>Through | —              | 5 | 10 | M1.6× ℓ <sup>(4)</sup>                                        | 251                                         | 361                                        | 0.58                                | 0.39<br>2.7           | 0.47<br>3.2           |
| —                     | LWL 3                     | —               | 1.6              |                            |                                 |                |     |                                | 15.5           | 5.5            | 10.7           | M2 ×1.3               |                |  |                                |                |                |                 |                |   |    |                                                               | 353                                         | 587                                        | 0.94                                | 0.98<br>5.6           | 1.2<br>6.7            |



- Notes (1) Track rail lengths  $L$  are shown in Table 3.1 on page II-10.  
(2) Track rail mounting bolts are not appended.  
(3) Prepare screws according to mounting structure.  
(4) Choose screws whose dimension allow fixing thread depth into track rail  $\ell$  to be less than  $H_4$ .  
(5) The direction of basic dynamic load rating ( $C$ ), basic static load rating ( $C_0$ ), and static moment rating ( $T_0$ ,  $T_x$ ,  $T_y$ ) are shown in the sketches below.  
The upper values of  $T_x$  and  $T_y$  are for one slide unit and the lower values are for two slide units in close contact.
- Remarks 1. Metal parts are made of stainless steel.  
2. Do not disassemble a slide unit from the track rail because steel balls are not retained. No end seal is attached.  
3. The specification of small size mounting bolts (M2 and less) are show on page II-22. If needed, please contact IKO.



Example of identification number of assembled set


| Model code                               |   | Dimensions                 | Part code |                                         | Model code | Preload symbol                                   | Classification symbol | Special specification |
|------------------------------------------|---|----------------------------|-----------|-----------------------------------------|------------|--------------------------------------------------|-----------------------|-----------------------|
| LWL                                      | 2 | C2                         | R80       |                                         |            | T0                                               | P                     | /D                    |
| 1                                        | 2 | 3                          | 4         | 5                                       | 1          | 6                                                | 7                     | 8                     |
| ① Model<br>LWL<br>LWL...Y                |   | ③ Size<br>1, 2, 3          |           | ⑥ Preload amount<br>To<br>Clearance     |            | ⑧ Special specification<br>BS, D, E, I, MN, W, Y |                       |                       |
| ② Length of slide unit<br>C<br>No symbol |   | ④ Number of slide unit (2) |           | ⑦ Accuracy class<br>No symbol<br>H<br>P |            |                                                  |                       |                       |
| Standard type                            |   | Standard                   |           | Length of track rail (80 mm)            |            |                                                  |                       |                       |

| Standard type |          |    |    |    |    |
|---------------|----------|----|----|----|----|
| Shape         | ML • LWL |    |    |    |    |
|               |          |    |    |    |    |
| Size          | 1        | 2  | 3  | 5  | 7  |
|               | 9        | 12 | 15 | 20 | 25 |

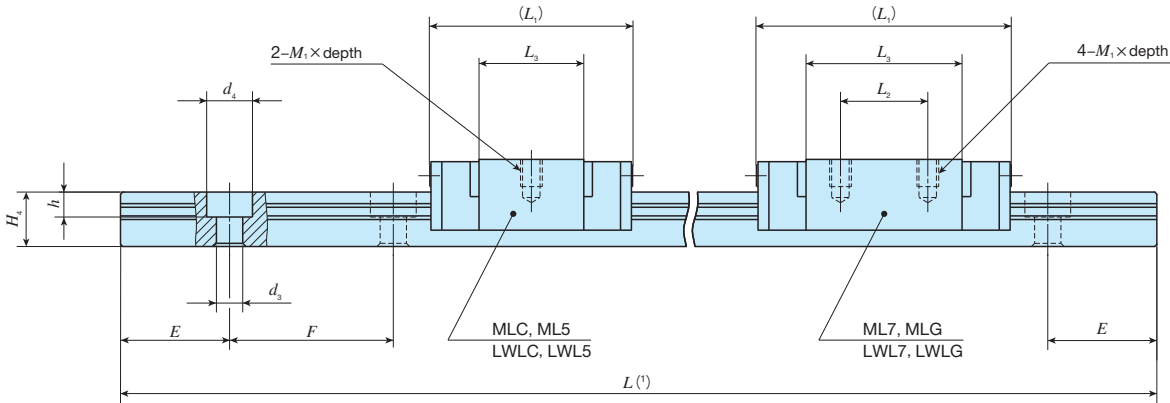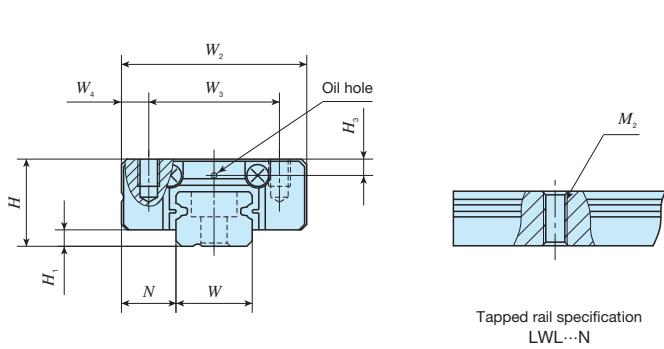

| Identification number |                           | Interchangeable | Mass (Ref.)<br>g |                            | Dimensions of assembly<br>mm |                |     | Dimensions of slide unit<br>mm |                |                |                |                |                |                        | Dimensions of track rail<br>mm |   |                |                |                |                |     |     | Appended mounting bolt<br>for track rail (2)<br>mm |                                                          | Basic dynamic<br>load rating (4)<br>N | Basic static<br>load rating (4)<br>N | Static moment rating (4)<br>N · m |                |                |
|-----------------------|---------------------------|-----------------|------------------|----------------------------|------------------------------|----------------|-----|--------------------------------|----------------|----------------|----------------|----------------|----------------|------------------------|--------------------------------|---|----------------|----------------|----------------|----------------|-----|-----|----------------------------------------------------|----------------------------------------------------------|---------------------------------------|--------------------------------------|-----------------------------------|----------------|----------------|
| ML series             | LWL series<br>(No C-Lube) |                 | Slide<br>unit    | Track rail<br>(per 100 mm) | H                            | H <sub>1</sub> | N   | W <sub>2</sub>                 | W <sub>3</sub> | W <sub>4</sub> | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | M <sub>1</sub> × depth | H <sub>3</sub>                 | W | H <sub>4</sub> | M <sub>2</sub> | d <sub>3</sub> | d <sub>4</sub> | h   | E   | F                                                  | Bolt size × ℓ                                            | C                                     | C <sub>0</sub>                       | T <sub>0</sub>                    | T <sub>x</sub> | T <sub>y</sub> |
| MLC 5                 | LWLC 5...B                | ○               | 3.4              | 12                         | 6                            | 1              | 3.5 | 12                             | 8              | 2              | 16             |                | 9.6            | M2 × 1.5               | 1.2                            | 5 | 3.7            |                | 2.4            | 3.6            | 0.8 | 7.5 | 15                                                 | Cross-recessed head screw for precision equipment M2 × 6 | 562                                   | 841                                  | 2.2                               | 1.4<br>8.5     | 1.2<br>7.2     |
| —                     | LWLC 5...N*               | —               | —                | 13                         |                              |                |     |                                |                |                |                |                |                |                        |                                |   |                |                |                |                |     |     |                                                    | M2.5 × ℓ (3)<br>(Not appended)                           |                                       |                                      |                                   |                |                |
| ML 5                  | LWL 5...B                 | ○               | 4.3              | 12                         |                              |                |     |                                |                |                |                |                |                |                        |                                |   |                |                |                |                |     |     |                                                    | Cross-recessed head screw for precision equipment M2 × 6 | 676                                   | 1 090                                | 2.9                               | 2.3<br>12.8    | 1.9<br>10.8    |
| —                     | LWL 5...N*                | —               | —                | 13                         |                              |                |     |                                |                |                |                |                |                |                        |                                |   |                |                |                |                |     |     |                                                    | M2.5 × ℓ (3)<br>(Not appended)                           |                                       |                                      |                                   |                |                |
| MLC 7                 | LWLC 7...B                | ○               | 6.7              | 22                         | 8                            | 1.5            | 5   | 17                             | 12             | 2.5            | 19             | —              | 9.6            | M2 × 2.5               | 1.5                            | 7 | 5              |                | 2.4            | 4.2            | 2.3 | 7.5 | 15                                                 | Hexagon socket head bolt M2 × 6                          | 937                                   | 1 140                                | 4.1                               | 1.8<br>14.9    | 1.5<br>12.5    |
| —                     | LWLC 7...N*               | —               | —                | 24                         |                              |                |     |                                |                |                |                |                |                |                        |                                |   |                |                |                |                |     |     |                                                    | M3 × ℓ (3)<br>(Not appended)                             |                                       |                                      |                                   |                |                |
| ML 7                  | LWL 7...B                 | ○               | 9.1              | 22                         |                              |                |     |                                |                |                |                |                |                |                        |                                |   |                |                |                |                |     |     |                                                    | Hexagon socket head bolt M2 × 6                          | 1 330                                 | 1 890                                | 6.9                               | 4.7<br>28.2    | 3.9<br>23.6    |
| —                     | LWL 7...N*                | —               | —                | 24                         |                              |                |     |                                |                |                |                |                |                |                        |                                |   |                |                |                |                |     |     |                                                    | M3 × ℓ (3)<br>(Not appended)                             |                                       |                                      |                                   |                |                |
| MLG 7                 | LWLG 7...B                | ○               | 13               | 22                         | 8                            | 1.5            | 5   | 17                             | 12             | 2.5            | 31             | 12             | 21.6           | M2 × 2.5               | 1.5                            | 7 | 5              |                | 2.4            | 4.2            | 2.3 | 7.5 | 15                                                 | Hexagon socket head bolt M2 × 6                          | 1 690                                 | 2 650                                | 9.7                               | 8.8<br>50.7    | 7.4<br>42.5    |
| —                     | LWLG 7...N*               | —               | —                | 24                         |                              |                |     |                                |                |                |                |                |                |                        |                                |   |                |                |                |                |     |     |                                                    | M3 × ℓ (3)<br>(Not appended)                             |                                       |                                      |                                   |                |                |

- Notes (1) Track rail lengths  $L$  are shown in Table 3.1 on page II-10.  
(2) The appended track rail mounting bolts are hexagon socket head bolts equivalent to JIS B 1176 or cross recessed head screws for precision equipment.  
(3) Choose screws whose dimension allow fixing thread depth into track rail  $\ell$  to be less than  $H_4$ .  
(4) The direction of basic dynamic load rating ( $C$ ), basic static load rating ( $C_0$ ), and static moment rating ( $T_0$ ,  $T_x$ ,  $T_y$ ) are shown in the sketches below.  
The upper values of  $T_x$  and  $T_y$  are for one slide unit and the lower values are for two slide units in close contact.  
If hybrid C-Lube Linear Way specification (supplemental code "/HB") is selected in MLC7, ML7, and MLG7, see Table 10 on page II-17.  
Remarks 1. The specification of oil hole is shown in Table 13 on page II-18.  
2. The identification numbers with \* are our semi-standard items.







Example of identification number of assembled set

| Model code             |  | Dimensions    |  | Part code                       |  | Model code     |  | Preload symbol   |  | Classification symbol |  | Interchangeable code              |  | Special specification |  |
|------------------------|--|---------------|--|---------------------------------|--|----------------|--|------------------|--|-----------------------|--|-----------------------------------|--|-----------------------|--|
| <u>ML</u>              |  | <u>C</u>      |  | <u>7</u>                        |  | <u>C2</u>      |  | <u>R120</u>      |  | <u>T<sub>1</sub></u>  |  | <u>P</u>                          |  | <u>S1</u>             |  |
| ①                      |  | ②             |  | ④                               |  | ⑤              |  | ⑥                |  | ⑦                     |  | ⑧                                 |  | ⑨                     |  |
| ⑩                      |  |               |  |                                 |  |                |  |                  |  |                       |  |                                   |  |                       |  |
| ① Model                |  |               |  | ④ Size                          |  |                |  | ⑦ Preload amount |  |                       |  | ⑨ Interchangeable                 |  |                       |  |
| ML                     |  | Standard type |  | 5, 7                            |  |                |  | T <sub>0</sub>   |  | Clearance             |  | S1                                |  | S1 specification      |  |
| LWL...B                |  |               |  |                                 |  | No symbol      |  | Standard         |  | S2                    |  | S2 specification                  |  |                       |  |
| LWL...N                |  |               |  |                                 |  | T <sub>1</sub> |  | Light preload    |  | No symbol             |  | Non-interchangeable specification |  |                       |  |
| ② Length of slide unit |  |               |  | ⑤ Number of slide unit (2)      |  |                |  | ⑧ Accuracy class |  |                       |  | ⑩ Special specification           |  |                       |  |
| C                      |  | Short         |  | ⑥ Length of track rail (120 mm) |  |                |  | H                |  | High                  |  | A, BS, D, E, HB, I, LR            |  |                       |  |
| No symbol              |  | Standard      |  |                                 |  |                |  | P                |  | Precision             |  | MN, N, Q, RE, S, W, Y             |  |                       |  |
| G                      |  | Long          |  |                                 |  |                |  |                  |  |                       |  |                                   |  |                       |  |



IKO C-Lube Linear Way ML


| Standard type |                                                                                   |    |    |    |    |
|---------------|-----------------------------------------------------------------------------------|----|----|----|----|
| Shape         | ML • LWL                                                                          |    |    |    |    |
|               |  |    |    |    |    |
| Size          | 1                                                                                 | 2  | 3  | 5  | 7  |
|               | 9                                                                                 | 12 | 15 | 20 | 25 |

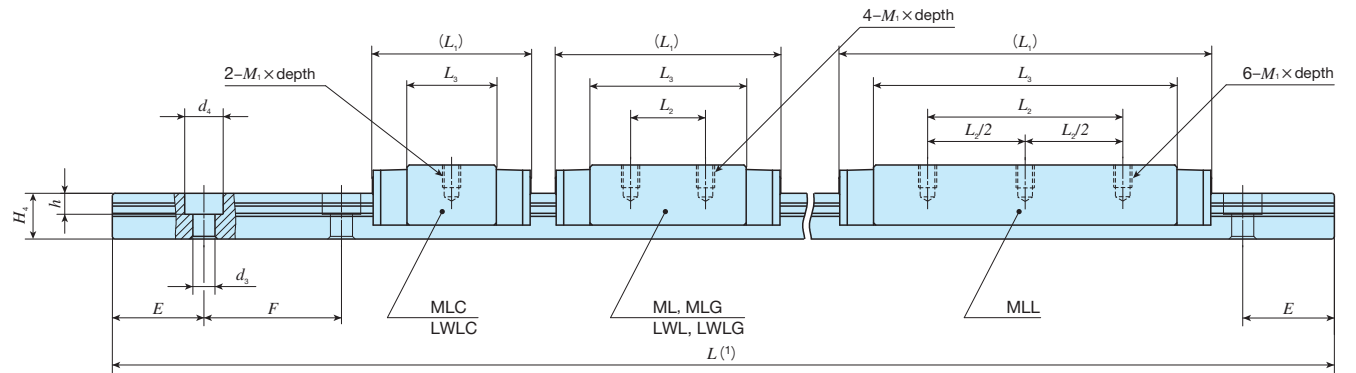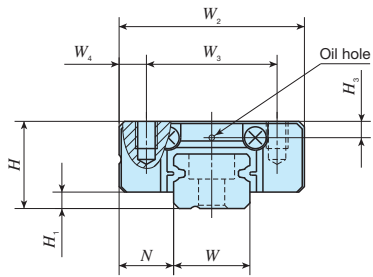

| Identification number |                           | Interchangeable | Mass (Ref.)<br>g |                            | Dimensions of<br>assembly<br>mm |                |     | Dimensions of slide unit<br>mm |                |                |                |                |                |                       |                | Dimensions of track rail<br>mm |                |                |                |                |      |    |    | Appended<br>mounting bolt for<br>track rail <sup>(2)</sup><br>mm | Basic dynamic<br>load rating <sup>(4)</sup> | Basic static<br>load rating <sup>(4)</sup> | Static moment rating <sup>(4)</sup> |                       |                       |       |       |      |                                        |              |        |             |             |                                        |   |     |     |     |      |    |      |             |             |      |              |              |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|-----------------------|---------------------------|-----------------|------------------|----------------------------|---------------------------------|----------------|-----|--------------------------------|----------------|----------------|----------------|----------------|----------------|-----------------------|----------------|--------------------------------|----------------|----------------|----------------|----------------|------|----|----|------------------------------------------------------------------|---------------------------------------------|--------------------------------------------|-------------------------------------|-----------------------|-----------------------|-------|-------|------|----------------------------------------|--------------|--------|-------------|-------------|----------------------------------------|---|-----|-----|-----|------|----|------|-------------|-------------|------|--------------|--------------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| ML series             | LWL series<br>(No C-Lube) |                 | Slide<br>unit    | Track rail<br>(per 100 mm) | H                               | H <sub>1</sub> | N   | W <sub>2</sub>                 | W <sub>3</sub> | W <sub>4</sub> | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | M <sub>1</sub> ×depth | H <sub>3</sub> | W                              | H <sub>4</sub> | M <sub>2</sub> | d <sub>3</sub> | d <sub>4</sub> | h    | E  | F  | Bolt size× ℓ                                                     | C<br>N                                      | C <sub>0</sub><br>N                        | T <sub>0</sub><br>N・m               | T <sub>x</sub><br>N・m | T <sub>y</sub><br>N・m |       |       |      |                                        |              |        |             |             |                                        |   |     |     |     |      |    |      |             |             |      |              |              |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| MLC 9                 | LWLC 9-B                  | ○               | 11               | 35                         | 10                              | 2              | 5.5 | 20                             | 15             | 2.5            | 21.5           | —              | 11.9           | M3×3                  | 2.2            | 9                              | 6              | —              | 3.5            | 6              | 3.5  | 10 | 20 | M3×8                                                             | 1 180                                       | 1 480                                      | 6.9                                 | 2.9<br>21.4           | 2.4<br>18.0           |       |       |      |                                        |              |        |             |             |                                        |   |     |     |     |      |    |      |             |             |      |              |              |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| —                     | LWLC 9-N*                 | —               |                  | 37                         |                                 |                |     |                                |                |                |                |                |                |                       |                |                                |                | M4<br>Through  | —              | —              | —    |    |    | M4× ℓ <sup>(3)</sup><br>(Not appended)                           |                                             |                                            |                                     |                       |                       |       |       |      |                                        |              |        |             |             |                                        |   |     |     |     |      |    |      |             |             |      |              |              |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| ML 9                  | LWL 9-B                   | ○               | 19               | 35                         |                                 |                |     |                                |                |                |                |                |                |                       |                |                                |                | 30             | 10             | 20.8           | M3×8 |    |    | 1 810                                                            | 2 760                                       | 12.8                                       | 9.1<br>51.1                         | 7.6<br>42.9           |                       |       |       |      |                                        |              |        |             |             |                                        |   |     |     |     |      |    |      |             |             |      |              |              |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| —                     | LWL 9-BCS                 | ○               |                  | 37                         |                                 |                |     |                                |                |                |                |                |                |                       |                |                                |                |                |                |                |      |    |    |                                                                  |                                             |                                            |                                     |                       | M4<br>Through         | —     | —     | —    | M4× ℓ <sup>(3)</sup><br>(Not appended) |              |        |             |             |                                        |   |     |     |     |      |    |      |             |             |      |              |              |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| —                     | LWL 9-N*                  | —               |                  | 37                         |                                 |                |     |                                |                |                |                |                |                |                       |                |                                |                |                |                |                |      |    |    |                                                                  |                                             |                                            |                                     |                       | M4<br>Through         | —     | —     | —    | M4× ℓ <sup>(3)</sup><br>(Not appended) |              |        |             |             |                                        |   |     |     |     |      |    |      |             |             |      |              |              |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| MLG 9                 | LWLG 9-B                  | ○               |                  | 35                         |                                 |                |     |                                |                |                |                |                |                |                       |                |                                |                |                |                |                |      |    |    |                                                                  |                                             |                                            |                                     |                       | M3×8                  | 2 370 | 4 030 | 18.7 | 18.7<br>98.3                           | 15.7<br>82.5 |        |             |             |                                        |   |     |     |     |      |    |      |             |             |      |              |              |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| —                     | LWLG 9-N*                 | —               | 28               | 37                         |                                 |                |     |                                |                |                |                |                |                |                       |                |                                |                |                |                |                |      |    |    |                                                                  |                                             |                                            |                                     |                       | M4<br>Through         |       |       |      |                                        |              | —      | —           | —           | M4× ℓ <sup>(3)</sup><br>(Not appended) |   |     |     |     |      |    |      |             |             |      |              |              |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| MLL 9                 | —                         | ○               | 34               | 35                         |                                 |                |     |                                |                |                |                |                |                |                       |                |                                |                |                |                |                |      |    |    |                                                                  |                                             |                                            |                                     |                       | 50                    | 26    | 40.4  | M3×8 | 2 870                                  | 5 300        | 24.6   | 31.9<br>157 | 26.7<br>132 |                                        |   |     |     |     |      |    |      |             |             |      |              |              |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| MLC 12                | LWLC 12-B                 | ○               | 22               | 65                         |                                 |                |     |                                |                |                | 13             | 3              | 7.5            |                       |                |                                |                |                |                |                |      |    |    |                                                                  |                                             |                                            |                                     |                       | 27                    | 20    | 3.5   | 25   | —                                      | 13           | M3×3.5 | 2.7         | 12          | 8                                      | — | 3.5 | 6.5 | 4.5 | 12.5 | 25 | M3×8 | 2 210       | 2 380       | 14.8 | 5.3<br>41.7  | 4.5<br>35.0  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| ML 12                 | LWL 12-B                  | ○               | 34               |                            |                                 |                |     |                                |                |                |                |                |                |                       |                |                                |                |                |                |                |      |    |    |                                                                  |                                             |                                            |                                     |                       |                       |       |       |      |                                        |              |        |             |             |                                        |   |     |     |     |      |    |      | 3 330       | 4 290       | 26.6 | 15.4<br>93.1 | 12.9<br>78.2 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| —                     | LWL 12-BCS                | ○               | 35               |                            |                                 |                |     |                                |                |                |                |                |                |                       |                |                                |                | 4 310          | 6 200          | 38.4           |      |    |    |                                                                  |                                             |                                            |                                     |                       |                       |       |       |      |                                        |              |        |             |             |                                        |   |     |     |     |      |    |      | 30.6<br>168 | 25.7<br>141 |      |              |              |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| MLG 12                | LWLG 12-B                 | ○               | 48               |                            |                                 |                |     |                                |                |                |                |                |                |                       |                |                                |                | 5 820          | 9 540          | 59.1           |      |    |    |                                                                  |                                             |                                            |                                     |                       |                       |       |       |      |                                        |              |        |             |             |                                        |   |     |     |     |      |    |      | 69.8<br>339 | 58.6<br>285 |      |              |              |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| —                     | LWLG 12-N*                | —               | 51               |                            |                                 |                |     |                                |                |                |                |                |                |                       |                |                                |                |                |                |                |      |    |    |                                                                  |                                             |                                            |                                     |                       |                       |       |       |      |                                        |              |        |             |             |                                        |   |     |     |     |      |    |      |             |             |      |              |              |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| MLL 12                | —                         | ○               | 70               |                            |                                 |                |     |                                |                |                |                |                |                |                       |                |                                |                |                |                |                |      |    |    |                                                                  |                                             |                                            |                                     |                       |                       |       |       |      |                                        |              |        |             |             |                                        |   |     |     |     |      |    |      |             |             |      |              |              |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |

Notes (1) Track rail lengths  $L$  are shown in Table 3.1 on page II -10 and Table 3.3 on page II -12.  
(2) The appended track rail mounting bolts are hexagon socket head bolts equivalent to JIS B 1176. For stainless steel model, stainless steel made bolts are appended.  
(3) Choose screws whose dimension allow fixing thread depth into track rail  $\ell$  to be less than  $H_4$ .  
(4) The direction of basic dynamic load rating ( $C$ ), basic static load rating ( $C_0$ ), and static moment rating ( $T_0$ ,  $T_x$ ,  $T_y$ ) are shown in the sketches below.  
The upper values of  $T_x$  and  $T_y$  are for one slide unit and the lower values are for two slide units in close contact.  
If hybrid C-Lube Linear Way specification (supplemental code "/HB") is selected in ML series, see Table 10 on page II -17.

Remarks 1. The specification of oil hole is shown in Table 13 on page II -18.  
2. The identification numbers with \* are our semi-standard items.



Example of identification number of assembled set

|            |            |           |            |               |                |                       |                      |                       |    |    |
|------------|------------|-----------|------------|---------------|----------------|-----------------------|----------------------|-----------------------|----|----|
| Model code | Dimensions | Part code | Model code | Material code | Preload symbol | Classification symbol | Interchangeable code | Special specification |    |    |
| ML         | G          | 9         | C2         | R160          |                |                       | T1                   | P                     | S1 | /D |
| 1          | 2          | 3         | 4          | 5             | 6              | 7                     | 8                    | 9                     | 10 |    |

① Model

|         |               |
|---------|---------------|
| ML      | Standard type |
| LWL···B |               |
| LWL···N |               |

② Length of slide unit

|           |                          |
|-----------|--------------------------|
| C         | Short                    |
| No symbol | Standard                 |
| G         | Long                     |
| L         | Extra high rigidity long |

③ Size

|       |
|-------|
| 9, 12 |
|-------|

④ Number of slide unit (2)

|  |
|--|
|  |
|--|

⑤ Length of track rail (160 mm)

|  |
|--|
|  |
|--|

⑥ Material type

|           |                        |
|-----------|------------------------|
| No symbol | Stainless steel made   |
| CS        | High carbon steel made |

⑦ Preload amount

|           |               |
|-----------|---------------|
| T0        | Clearance     |
| No symbol | Standard      |
| T1        | Light preload |

⑧ Accuracy class

|   |           |
|---|-----------|
| H | High      |
| P | Precision |

⑨ Interchangeable


|           |                                   |
|-----------|-----------------------------------|
| S1        | S1 specification                  |
| S2        | S2 specification                  |
| No symbol | Non-interchangeable specification |

⑩ Special specification



|                            |  |
|----------------------------|--|
| A, BS, D, E, HB, I, LR, MN |  |
| N, Q, RE, S, U, W, Y       |  |

## Standard type

ML • LWL



|      |   |    |    |    |    |
|------|---|----|----|----|----|
| Size | 1 | 2  | 3  | 5  | 7  |
|      | 9 | 12 | 15 | 20 | 25 |

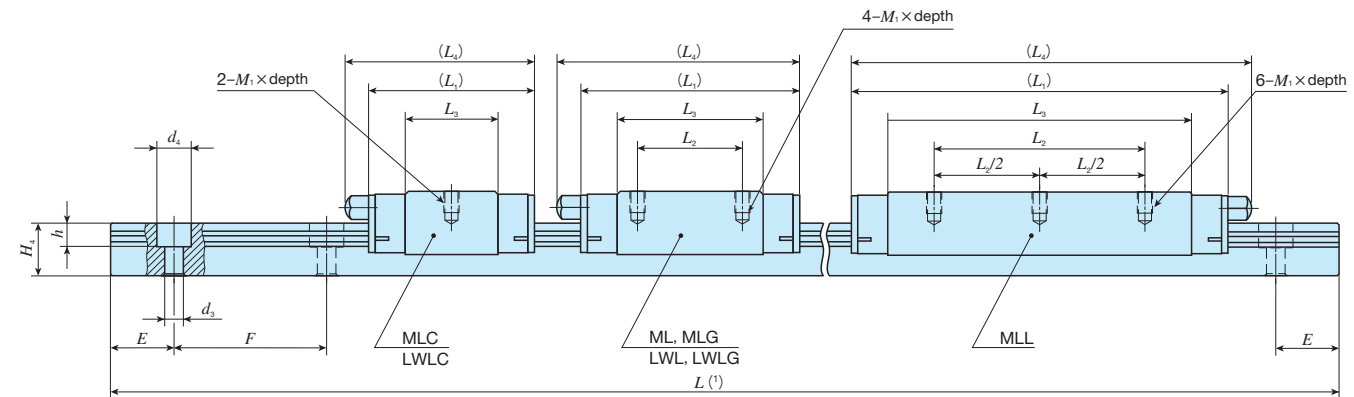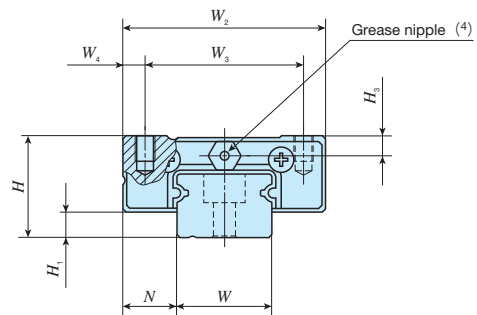

| Identification number |                           | Interchangeable | Mass (Ref.)<br>g |                            | Dimensions of<br>assembly<br>mm |                |      | Dimensions of slide unit<br>mm |                |                |                |                |                |                |                       |  |                | Dimensions of track rail<br>mm |                |                |                |     |    |    | Appended mounting bolt<br>for track rail <sup>(2)</sup><br>mm | Basic dynamic<br>load rating <sup>(3)</sup> | Basic static<br>load rating <sup>(3)</sup> | Static moment rating <sup>(3)</sup> |                       |                       |    |
|-----------------------|---------------------------|-----------------|------------------|----------------------------|---------------------------------|----------------|------|--------------------------------|----------------|----------------|----------------|----------------|----------------|----------------|-----------------------|--|----------------|--------------------------------|----------------|----------------|----------------|-----|----|----|---------------------------------------------------------------|---------------------------------------------|--------------------------------------------|-------------------------------------|-----------------------|-----------------------|----|
| ML series             | LWL series<br>(No C-Lube) |                 | Slide<br>unit    | Track rail<br>(per 100 mm) | H                               | H <sub>1</sub> | N    | W <sub>2</sub>                 | W <sub>3</sub> | W <sub>4</sub> | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | L <sub>4</sub> | M <sub>1</sub> ×depth |  | H <sub>3</sub> | W                              | H <sub>4</sub> | d <sub>3</sub> | d <sub>4</sub> | h   | E  | F  | Bolt size×ℓ                                                   | C<br>N                                      | C <sub>0</sub><br>N                        | T <sub>0</sub><br>N·m               | T <sub>x</sub><br>N·m | T <sub>y</sub><br>N·m |    |
| MLC 15                |                           | ○               | 43               | 107                        | 16                              | 4              | 8.5  | 32                             | 25             | 3.5            |                |                | 17.8           | 37             | M3×4                  |  | 3.1            | 15                             | 10             | 3.5            | 6.5            | 4.5 | 20 | 40 | M3×10                                                         | 3 490                                       | 3 890                                      | 30.0                                | 11.7<br>84.5          | 9.8<br>70.9           |    |
|                       | LWLC 15…B                 | ○               | 42               |                            |                                 |                |      |                                |                |                | 32             | —              | 17.7           |                |                       |  |                |                                |                |                |                |     |    |    |                                                               |                                             |                                            |                                     |                       |                       |    |
| ML 15                 |                           | ○               | 63               |                            |                                 |                |      |                                |                |                |                |                | 27.9           |                |                       |  |                |                                |                |                |                |     |    |    |                                                               |                                             |                                            |                                     |                       |                       |    |
|                       | LWL 15…B                  | ○               | 64               |                            |                                 |                |      |                                |                |                | 42             | 20             | 27.8           |                |                       |  |                |                                |                |                |                |     |    |    |                                                               |                                             |                                            |                                     |                       |                       | 47 |
| —                     | LWL 15…BCS                | ○               |                  |                            |                                 |                |      |                                |                |                |                |                |                |                |                       |  |                |                                |                |                |                |     |    |    |                                                               |                                             |                                            |                                     |                       |                       |    |
| MLG 15                |                           | ○               | 93               |                            |                                 |                |      |                                |                |                | 57             | 25             | 42.8           |                |                       |  |                |                                |                |                |                |     |    |    |                                                               |                                             |                                            |                                     |                       |                       | 62 |
|                       | LWLG 15…B                 | ○               | 95               |                            |                                 |                |      |                                |                |                |                |                | 42.7           |                |                       |  |                |                                |                |                |                |     |    |    |                                                               |                                             |                                            |                                     |                       |                       |    |
| MLL 15                | —                         | ○               | 122              |                            |                                 |                |      |                                |                |                | 72             | 40             | 57.7           |                |                       |  |                |                                |                |                |                |     |    |    |                                                               |                                             |                                            |                                     |                       |                       | 76 |
| MLC 20                | LWLC 20…B                 | ○               | 89               | 156                        | 20                              | 5              | 10   | 40                             | 30             | 5              | 38             | —              | 22.3           | 43             | M4×6                  |  | 4.2            | 20                             | 11             | 6              | 9.5            | 5.5 | 30 | 60 | M5×14                                                         | 4 580                                       | 5 300                                      | 54.0                                | 19.4<br>134           | 16.3<br>112           |    |
| ML 20                 |                           | ○               | 130              |                            |                                 |                |      |                                |                |                |                |                |                |                |                       |  |                |                                |                |                |                |     |    |    |                                                               |                                             |                                            |                                     |                       |                       |    |
|                       | LWL 20…B                  | ○               |                  |                            |                                 |                |      |                                |                |                | 50             | 25             | 34.6           | 55             |                       |  |                |                                |                |                |                |     |    |    |                                                               |                                             |                                            |                                     |                       |                       |    |
| —                     | LWL 20…BCS                | ○               | 133              |                            |                                 |                |      |                                |                |                |                |                |                |                |                       |  |                |                                |                |                |                |     |    |    |                                                               |                                             |                                            |                                     |                       |                       |    |
| MLG 20                |                           | ○               | 189              |                            |                                 |                |      |                                |                |                | 68             | 30             | 52.3           | 73             |                       |  |                |                                |                |                |                |     |    |    |                                                               |                                             |                                            |                                     |                       |                       |    |
|                       | LWLG 20…B                 | ○               | 196              |                            |                                 |                |      |                                |                |                |                |                |                |                |                       |  |                |                                |                |                |                |     |    |    |                                                               |                                             |                                            |                                     |                       |                       |    |
| MLC 25                |                           | ○               | 189              | 243                        | 25                              | 5              | 12.5 | 48                             | 35             | 6.5            | 54.5           | —              | 31.9           | 64             | M6×7                  |  | 5              | 23                             | 15             | 7              | 11.0           | 9.0 | 30 | 60 | M6×16                                                         | 9 120                                       | 10 600                                     | 128                                 | 57.4<br>376           | 48.1<br>316           |    |
|                       | LWLC 25…B                 | ○               | 190              |                            |                                 |                |      |                                |                |                |                |                |                |                |                       |  |                |                                |                |                |                |     |    |    |                                                               |                                             |                                            |                                     |                       |                       |    |
| ML 25                 |                           | ○               | 305              |                            |                                 |                |      |                                |                |                | 78             | 35             | 55.7           | 88             |                       |  |                |                                |                |                |                |     |    |    |                                                               |                                             |                                            |                                     |                       |                       |    |
|                       | LWL 25…B                  | ○               | 310              |                            |                                 |                |      |                                |                |                |                |                |                |                |                       |  |                |                                |                |                |                |     |    |    |                                                               |                                             |                                            |                                     |                       |                       |    |
| MLG 25                |                           | ○               | 405              |                            |                                 |                |      |                                |                |                | 98             | 40             | 75.5           | 108            |                       |  |                |                                |                |                |                |     |    |    |                                                               |                                             |                                            |                                     |                       |                       |    |
|                       | LWLG 25…B                 | ○               | 413              |                            |                                 |                |      |                                |                |                |                |                |                |                |                       |  |                |                                |                |                |                |     |    |    |                                                               |                                             |                                            |                                     |                       |                       |    |

Notes (1) Track rail lengths  $L$  are shown in Table 3.1 on page II-10 and Table 3.3 on page II-12.

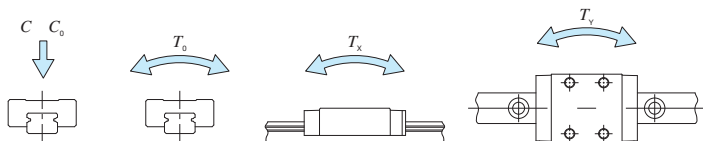
(2) The appended track rail mounting bolts are hexagon socket head bolts equivalent to JIS B 1176. For stainless steel model, stainless steel made bolts are appended.

(3) The direction of basic dynamic load rating ( $C$ ), basic static load rating ( $C_0$ ), and static moment rating ( $T_0$ ,  $T_X$ ,  $T_Y$ ) are shown in the sketches below.

The upper values of  $T_x$  and  $T_y$  are for one slide unit and the lower values are for two slide units in close contact.

If hybrid C-Lube Linear Way specification (supplemental code "/HB") is selected in MLC15, ML15, MLG15, and MLL15, see Table 10 on page II-17.

(4) The shapes of grease nipple vary by size. The specifications are shown in Table 14 on page II—18.



### Example of identification number of assembled set

| Model code |          | Dimensions | Part code |             | Model code | Material code | Preload symbol       | Classification symbol | Interchangeable code | Special specification |
|------------|----------|------------|-----------|-------------|------------|---------------|----------------------|-----------------------|----------------------|-----------------------|
| <u>ML</u>  | <u>G</u> | <u>15</u>  | <u>C2</u> | <u>R320</u> | <u>  </u>  | <u>  </u>     | <u>T<sub>1</sub></u> | <u>P</u>              | <u>S1</u>            | <u>/D</u>             |
| 1          | 2        | 3          | 4         | 5           | 1          | 6             | 7                    | 8                     | 9                    | 10                    |

|         |               |
|---------|---------------|
| ① Model |               |
| ML      | Standard type |
| LWL...B |               |

| ② Length of slide unit |                          |
|------------------------|--------------------------|
| C                      | Short                    |
| No symbol              | Standard                 |
| G                      | Long                     |
| L                      | Extra high rigidity long |

③ Size  
15, 20, 25

|                                 |                        |
|---------------------------------|------------------------|
| ⑤ Length of track rail (320 mm) |                        |
| ⑥ Material type                 |                        |
| No symbol                       | Stainless steel made   |
| CS                              | High carbon steel made |

| ⑦ Preload amount |               |
|------------------|---------------|
| T <sub>0</sub>   | Clearance     |
| No symbol        | Standard      |
| T <sub>1</sub>   | Light preload |

| ⑧ Accuracy class |           |
|------------------|-----------|
| H                | High      |
| P                | Precision |


| ⑨ Interchangeable |                                   |
|-------------------|-----------------------------------|
| S1                | S1 specification                  |
| S2                | S2 specification                  |
| No symbol         | Non-interchangeable specification |

⑩ Special specification  
A, BS, D, E, HB, I, LR, MN  
N, Q, RE, S, U, W, Y



MLF • LWLF



## Shape





Size

|    |    |    |    |
|----|----|----|----|
| 4  | 6  | 10 | 14 |
| 18 | 24 | 30 | 42 |



LWLF 4  
MLFC 6, LWLFC 6  
MLF 6, LWLF 6



Tapped rail specification  
LWLF6...N

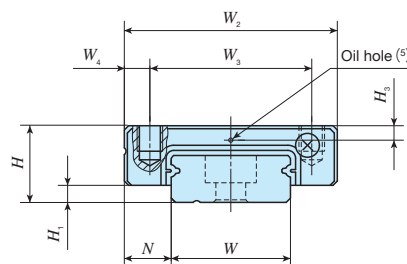

Tapped rail specification  
LWLF...N

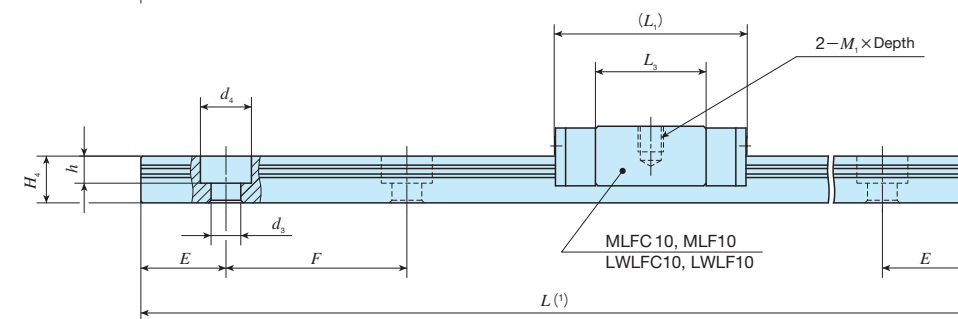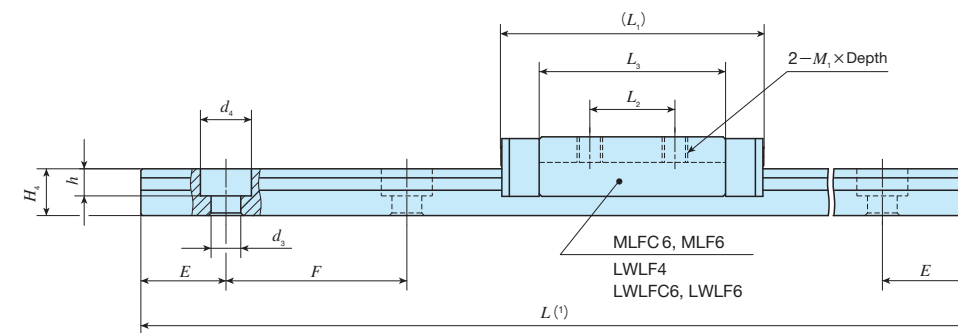

| Identification number |                            | Interchangeable | Mass (Ref.)<br>g |                            | Dimensions of<br>assembly<br>mm |                |      | Dimensions of slide unit<br>mm |                                                                |                |                |                |                |                                                                |                | Dimensions of track rail<br>mm |                |                |                                                              |                |      |     |    | Appended mounting bolt<br>for track rail<br>mm                 | Basic dynamic<br>load rating <sup>(4)</sup> | Basic static<br>load rating <sup>(4)</sup> | Static moment rating <sup>(4)</sup> |                       |                       |                                                              |     |    |   |               |     |     |     |    |    |                                                                |     |       |     |             |             |
|-----------------------|----------------------------|-----------------|------------------|----------------------------|---------------------------------|----------------|------|--------------------------------|----------------------------------------------------------------|----------------|----------------|----------------|----------------|----------------------------------------------------------------|----------------|--------------------------------|----------------|----------------|--------------------------------------------------------------|----------------|------|-----|----|----------------------------------------------------------------|---------------------------------------------|--------------------------------------------|-------------------------------------|-----------------------|-----------------------|--------------------------------------------------------------|-----|----|---|---------------|-----|-----|-----|----|----|----------------------------------------------------------------|-----|-------|-----|-------------|-------------|
| MLF series            | LWLF series<br>(No C-Lube) |                 | Slide<br>unit    | Track rail<br>(per 100 mm) | H                               | H <sub>1</sub> | N    | W <sub>2</sub>                 | W <sub>3</sub>                                                 | W <sub>4</sub> | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | M <sub>1</sub> ×depth                                          | H <sub>3</sub> | W                              | H <sub>4</sub> | M <sub>2</sub> | d <sub>3</sub>                                               | d <sub>4</sub> | h    | E   | F  | Bolt size×ℓ                                                    | C<br>N                                      | C <sub>0</sub><br>N                        | T <sub>0</sub><br>N·m               | T <sub>x</sub><br>N·m | T <sub>y</sub><br>N·m |                                                              |     |    |   |               |     |     |     |    |    |                                                                |     |       |     |             |             |
| —                     | LWLF 4 <sup>(2)</sup>      | —               | 2.1              | 6.8                        | 4                               | 1              | 3    | 10                             | —                                                              | 5              | 17             | 6.5            | 11.9           | M2 × 1.3                                                       | —              | 4                              | 2.6            | —              | 1.8                                                          | 2.8            | 0.75 | 5   | 10 | Cross recessed head screw<br>for precision equipment<br>M1.6×5 | 390                                         | 677                                        | 1.4                                 | 1.3<br>7.1            | 1.5<br>8.4            |                                                              |     |    |   |               |     |     |     |    |    |                                                                |     |       |     |             |             |
| MLFC 6 <sup>(2)</sup> | LWLF 6 <sup>(2)</sup>      | —               | 2.1              | 13                         | 4.5                             | 1              | 3    | 12                             | —                                                              | 6              | 15             | 4.5            | 9.8            | M2 × 1.6                                                       | —              | 6                              | 2.8            | —              | 2.4                                                          | 4              | 1.5  | 7.5 | 15 | Cross recessed head screw<br>for precision equipment<br>M2×4   | 334                                         | 542                                        | 1.7                                 | 0.84<br>5.1           | 1.0<br>6.1            |                                                              |     |    |   |               |     |     |     |    |    |                                                                |     |       |     |             |             |
| —                     | LWLF 6…N <sup>(2)</sup> *  | —               | 2.4              |                            |                                 |                |      |                                |                                                                |                |                |                |                |                                                                |                |                                |                | 12             | M3<br>Through                                                | —              | —    |     |    | —                                                              |                                             |                                            |                                     |                       |                       | Cross recessed head screw<br>for precision equipment<br>M2×4 |     |    |   |               |     |     |     |    |    |                                                                |     |       |     |             |             |
| MLF 6 <sup>(2)</sup>  | LWLF 6 <sup>(2)</sup>      | —               | 3.1              | 13                         |                                 |                |      |                                |                                                                |                | —              | 2.4            | 4              |                                                                |                |                                |                | 1.5            | Cross recessed head screw<br>for precision equipment<br>M2×4 |                |      |     |    |                                                                |                                             |                                            |                                     |                       |                       |                                                              |     |    |   |               |     |     |     |    |    |                                                                |     |       |     |             |             |
| —                     | LWLF 6…N <sup>(2)</sup> *  | —               | 3.4              | 12                         |                                 |                |      |                                |                                                                |                | M3<br>Through  | —              | —              |                                                                |                |                                |                | —              | Cross recessed head screw<br>for precision equipment<br>M2×4 |                |      |     |    |                                                                |                                             |                                            |                                     |                       |                       |                                                              |     |    |   |               |     |     |     |    |    |                                                                |     |       |     |             |             |
| MLFC 10               | LWLF 10…B                  | ○               | 6.1              | 28                         |                                 |                |      |                                |                                                                |                | 6.5            | 1.5            | 3.5            |                                                                |                |                                |                | 17             | 13                                                           | 2              | 20.5 |     |    | —                                                              |                                             |                                            |                                     |                       |                       | M2.5×1.5                                                     | 1.3 | 10 | 4 | —             | 2.9 | 4.8 | 1.6 | 10 | 20 | Cross recessed head screw<br>for precision equipment<br>M2.5×7 | 712 | 1 180 | 6.1 | 2.6<br>14.9 | 2.2<br>12.5 |
| —                     | LWLF 10…N*                 | —               | 5.9              | 29                         |                                 |                |      |                                |                                                                |                |                |                |                |                                                                |                |                                |                |                |                                                              |                |      |     |    |                                                                |                                             |                                            |                                     |                       |                       |                                                              |     |    |   | M3<br>Through | —   | —   | —   |    |    | Cross recessed head screw<br>for precision equipment<br>M2.5×7 |     |       |     |             |             |
| MLF 10                | LWLF 10…B                  | ○               | 7.6              | 28                         | 24.5                            | —              | 17.6 | —                              | 4.8                                                            | 1.6            |                |                |                | Cross recessed head screw<br>for precision equipment<br>M2.5×7 |                |                                |                |                |                                                              |                |      |     |    |                                                                |                                             |                                            |                                     |                       |                       |                                                              |     |    |   |               |     |     |     |    |    |                                                                |     |       |     |             |             |
| —                     | LWLF 10…N*                 | —               | 7.5              | 29                         | M3<br>Through                   | —              | —    | —                              | Cross recessed head screw<br>for precision equipment<br>M2.5×7 |                |                |                |                |                                                                |                |                                |                |                |                                                              |                |      |     |    |                                                                |                                             |                                            |                                     |                       |                       |                                                              |     |    |   |               |     |     |     |    |    |                                                                |     |       |     |             |             |

Notes (1) Track rail lengths  $L$  are shown in Table 3.2 on page II-11.

(2) Size 4 and 6 are non-retained-ball type. No end seal is attached.

(3) Choose screws whose dimension allow fixing thread depth into track rail  $\ell$  to be less than  $H_4$ .


(4) The direction of basic dynamic load rating ( $C$ ), basic static load rating ( $C_0$ ), and static moment rating ( $T_0$ ,  $T_x$ ,  $T_y$ ) are shown in the sketches below.

The upper values of  $T_v$  and  $T_v$  are for one slide unit and the lower values are for two slide units in close contact.

(5) No oil hole is prepared for size 4 and 6.

The specification of oil hole for size 10 is shown in Table 13 on page II-18.

Remark: The identification numbers with \* are our semi-standard items.



### Example of identification number of assembled set

| Model code |          | Dimensions | Part code |             | Model code | Preload symbol       | Classification symbol | Interchangeable code | Special specification |
|------------|----------|------------|-----------|-------------|------------|----------------------|-----------------------|----------------------|-----------------------|
| <u>MLF</u> | <u>C</u> | <u>10</u>  | <u>C2</u> | <u>R120</u> | <u>  </u>  | <u>T<sub>0</sub></u> | <u>P</u>              | <u>S1</u>            | <u>/D</u>             |
| 1          | 2        | 3          | 4         | 5           | 1          | 6                    | 7                     | 8                    | 9                     |

|            |           |
|------------|-----------|
| ① Model    |           |
| MLF        |           |
| LWLF(...B) | Wide type |
| LWLF...N   |           |

|        |          |
|--------|----------|
| ③ Size | 4, 6, 10 |
|--------|----------|

| ⑥ Preload amount |           |
|------------------|-----------|
| T <sub>0</sub>   | Clearance |
| No symbol        | Standard  |

| ⑧ Interchangeable |                                   |
|-------------------|-----------------------------------|
| S1                | S1 specification                  |
| S2                | S2 specification                  |
| No symbol         | Non-interchangeable specification |

| ② Length of slide unit |          |
|------------------------|----------|
| C                      | Short    |
| No symbol              | Standard |


⑤ Length of track rail (120 mm)

| ⑦ Accuracy class |           |
|------------------|-----------|
| H                | High      |
| P                | Precision |

⑨ Special specification  
A, BS, D, E, I, MN, N, Q  
BE, S, W, Y



MLF • LWLF

## Shape




Size

|    |    |    |    |
|----|----|----|----|
| 4  | 6  | 10 | 14 |
| 18 | 24 | 30 | 42 |

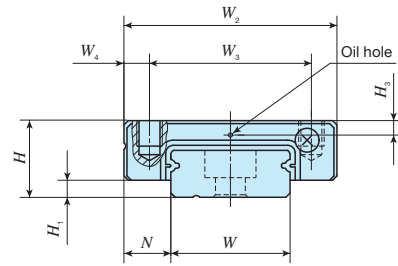

Tapped rail specification  
LWLF...N

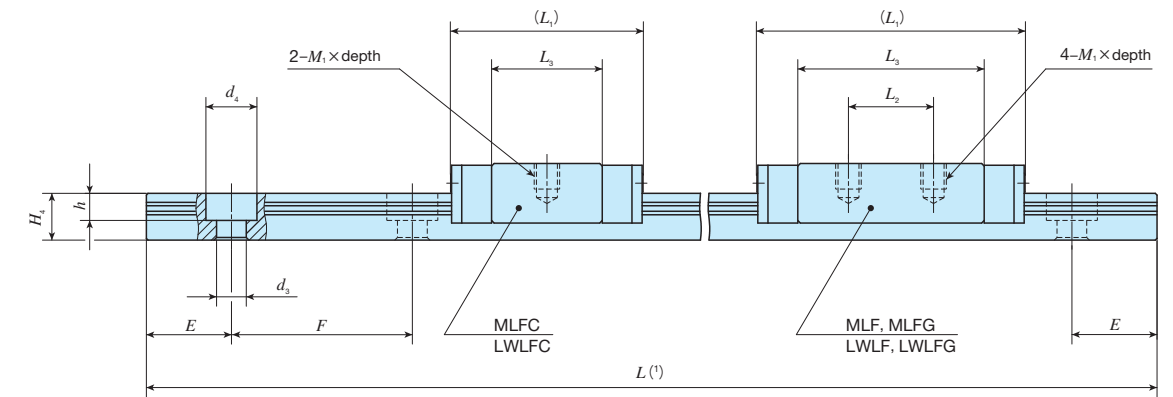

| Identification number |                            | Interchangeable | Mass (Ref.)<br>g |                            | Dimensions of<br>assembly<br>mm |                |     | Dimensions of slide unit<br>mm |                |                |                |                |                |                       | Dimensions of track rail<br>mm |    |                |                |                                       |                |     |    | Appended mounting bolt<br>for track rail <sup>(2)</sup><br>mm | Basic dynamic<br>load rating <sup>(4)</sup> | Basic static<br>load rating <sup>(4)</sup> | Static moment rating <sup>(4)</sup> |                       |                       |                       |      |               |       |      |              |             |      |       |       |      |             |              |
|-----------------------|----------------------------|-----------------|------------------|----------------------------|---------------------------------|----------------|-----|--------------------------------|----------------|----------------|----------------|----------------|----------------|-----------------------|--------------------------------|----|----------------|----------------|---------------------------------------|----------------|-----|----|---------------------------------------------------------------|---------------------------------------------|--------------------------------------------|-------------------------------------|-----------------------|-----------------------|-----------------------|------|---------------|-------|------|--------------|-------------|------|-------|-------|------|-------------|--------------|
| MLF series            | LWLF series<br>(No C-Lube) |                 | Slide<br>unit    | Track rail<br>(per 100 mm) | H                               | H <sub>1</sub> | N   | W <sub>2</sub>                 | W <sub>3</sub> | W <sub>4</sub> | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | M <sub>1</sub> ×depth | H <sub>3</sub>                 | W  | H <sub>4</sub> | M <sub>2</sub> | d <sub>3</sub>                        | d <sub>4</sub> | h   | E  | F                                                             | Bolt size×ℓ                                 | C<br>N                                     | C <sub>0</sub><br>N                 | T <sub>0</sub><br>N・m | T <sub>x</sub><br>N・m | T <sub>y</sub><br>N・m |      |               |       |      |              |             |      |       |       |      |             |              |
| MLFC 14               | LWLFC 14…B                 | ○               | 13               | 54                         | 9                               | 2              | 5.5 | 25                             | 19             | 3              | 22.5           | —              | 13             | M3×3                  | 1.7                            | 14 | 5.5            | —              | 3.5                                   | 6              | 3.2 | 15 | 30                                                            | M3×8                                        | 1 240                                      | 1 700                               | 12.2                  | 3.8<br>24.6           | 3.2<br>20.7           |      |               |       |      |              |             |      |       |       |      |             |              |
| —                     | LWLFC 14…N*                | —               |                  | 56                         |                                 |                |     |                                |                |                | M4<br>Through  | —              | —              |                       |                                |    |                | —              | M4×ℓ <sup>(3)</sup><br>(Not appended) |                |     |    |                                                               |                                             |                                            |                                     |                       |                       |                       |      |               |       |      |              |             |      |       |       |      |             |              |
| MLF 14                | LWLF 14…B                  | ○               | 20               | 54                         |                                 |                |     |                                |                |                | 31.5           | 10             | 22             |                       |                                |    |                | M3×3           | 1.7                                   | 14             | 5.5 |    |                                                               | —                                           | 3.5                                        | 6                                   | 3.2                   | 15                    | 30                    | M3×8 | 1 770         | 2 840 | 20.3 | 10.1<br>54.7 | 8.4<br>45.9 |      |       |       |      |             |              |
| —                     | LWLF 14…N*                 | —               |                  | 56                         |                                 |                |     |                                |                |                | M4<br>Through  | —              | —              |                       |                                |    |                |                |                                       |                |     |    |                                                               | —                                           | M4×ℓ <sup>(3)</sup><br>(Not appended)      |                                     |                       |                       |                       |      |               |       |      |              |             |      |       |       |      |             |              |
| MLFG 14               | LWLFG 14…B                 | ○               | 29               | 54                         |                                 |                |     |                                |                |                | 42             | 19             | 32.5           |                       |                                |    |                |                |                                       |                |     |    |                                                               | M3×3                                        | 1.7                                        | 14                                  | 5.5                   |                       |                       | —    | 3.5           | 6     | 3.2  | 15           | 30          | M3×8 | 2 320 | 4 160 | 29.8 | 21.0<br>104 | 17.6<br>87.6 |
| —                     | LWLFG 14…N*                | —               |                  | 31                         |                                 |                |     |                                |                |                |                |                |                |                       |                                |    |                |                |                                       |                |     |    |                                                               |                                             |                                            |                                     |                       |                       |                       | 56   | M4<br>Through | —     | —    |              |             | —    |       |       |      |             |              |

Notes (1) Track rail lengths  $L$  are shown in Table 3.2 on page II-11.

(2) The appended track rail mounting bolts are hexagon socket head bolts equivalent to JIS B 1176.


(3) Choose screws whose dimension allow fixing thread depth into track rail  $\ell$  to be less than  $H_4$ .

(4) The direction of basic dynamic load rating ( $C$ ), basic static load rating ( $C_0$ ), and static moment rating ( $T_o$ ,  $T_x$ ,  $T_y$ ) are shown in the sketches below.

The upper values of  $T_x$  and  $T_y$  are for one slide unit and the lower values are for two slide units in close contact.

Remarks 1. The specification of oil hole is shown in Table 13 on page II-18.

2. The identification numbers with \* are our semi-standard items.



### Example of identification number of assembled set

| Model code |          | Dimensions | Part code |             | Model code | Preload symbol       | Classification symbol | Interchangeable code | Special specification |
|------------|----------|------------|-----------|-------------|------------|----------------------|-----------------------|----------------------|-----------------------|
| <u>MLF</u> | <u>G</u> | <u>14</u>  | <u>C2</u> | <u>R240</u> | <u>  </u>  | <u>T<sub>1</sub></u> | <u>P</u>              | <u>S1</u>            | <u>/D</u>             |
| 1          | 2        | 3          | 4         | 5           | 1          | 6                    | 7                     | 8                    | 9                     |

| ① Model  |           |
|----------|-----------|
| MLF      | Wide type |
| LWLF...B |           |
| LWLF...N |           |

|        |    |
|--------|----|
| ③ Size | 14 |
|--------|----|

④ Number of slide unit (2)

| ⑥ Preload amount |               |
|------------------|---------------|
| T <sub>0</sub>   | Clearance     |
| No symbol        | Standard      |
| T <sub>1</sub>   | Light preload |

| ⑦ Accuracy class |           |
|------------------|-----------|
| H                | High      |
| P                | Precision |


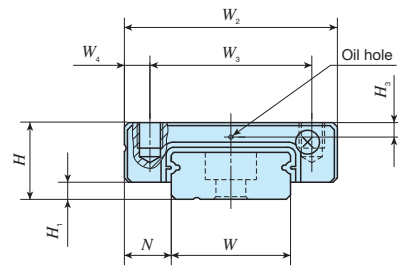

| ⑧ Interchangeable |                                   |
|-------------------|-----------------------------------|
| S1                | S1 specification                  |
| S2                | S2 specification                  |
| No symbol         | Non-interchangeable specification |

⑨ Special specification  
A, BS, D, E, I, LR, MN  
N, Q, BE, S, W, Y




## Size

|    |    |    |    |
|----|----|----|----|
| 4  | 6  | 10 | 14 |
| 18 | 24 | 30 | 42 |




Tapped rail specification  
LWLF...N

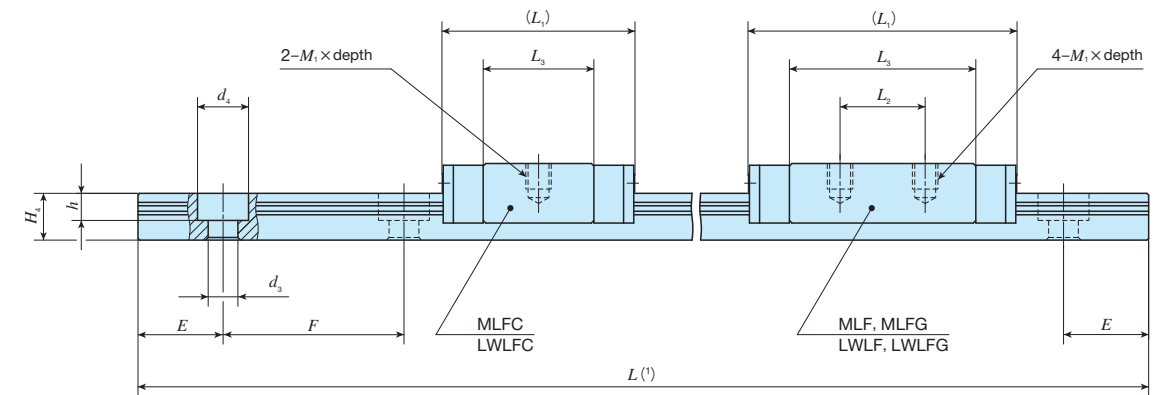

| Identification number |                            | Interchangeable | Mass (Ref.)<br>g |                            | Dimensions of assembly<br>mm |                |   | Dimensions of slide unit<br>mm |                |                |                |                |                |                       | Dimensions of track rail<br>mm |    |                |                |                                       |                |       |    | Appended mounting bolt<br>for track rail <sup>(2)</sup><br>mm | Basic dynamic<br>load rating <sup>(4)</sup> | Basic static<br>load rating <sup>(4)</sup> | Static moment rating <sup>(4)</sup> |                       |                                       |                       |       |      |             |             |       |        |       |      |             |             |
|-----------------------|----------------------------|-----------------|------------------|----------------------------|------------------------------|----------------|---|--------------------------------|----------------|----------------|----------------|----------------|----------------|-----------------------|--------------------------------|----|----------------|----------------|---------------------------------------|----------------|-------|----|---------------------------------------------------------------|---------------------------------------------|--------------------------------------------|-------------------------------------|-----------------------|---------------------------------------|-----------------------|-------|------|-------------|-------------|-------|--------|-------|------|-------------|-------------|
| MLF series            | LWLF series<br>(No C-Lube) |                 | Slide<br>unit    | Track rail<br>(per 100 mm) | H                            | H <sub>1</sub> | N | W <sub>2</sub>                 | W <sub>3</sub> | W <sub>4</sub> | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | M <sub>1</sub> ×depth | H <sub>3</sub>                 | W  | H <sub>4</sub> | M <sub>2</sub> | d <sub>3</sub>                        | d <sub>4</sub> | h     | E  | F                                                             | Bolt size×ℓ                                 | C<br>N                                     | C <sub>0</sub><br>N                 | T <sub>0</sub><br>N・m | T <sub>x</sub><br>N・m                 | T <sub>y</sub><br>N・m |       |      |             |             |       |        |       |      |             |             |
| MLFC 18               | LWLF 18…B                  | ○               | 26               | 90                         | 12                           | 3              | 6 | 30                             | 21             | 4.5            | 26.5           | —              | 16.6           | M3×3                  | 2.5                            | 18 | 7              | —              | 3.5                                   | 6.5            | 4.5   | 15 | 30                                                            | M3×8                                        | 1 510                                      | 2 120                               | 19.4                  | 5.5<br>35.9                           | 4.7<br>30.1           |       |      |             |             |       |        |       |      |             |             |
| —                     | LWLF 18…N*                 | —               |                  | 92                         |                              |                |   |                                |                |                | M4<br>Through  | —              | —              |                       |                                |    |                | —              | M4×ℓ <sup>(3)</sup><br>(Not appended) |                |       |    |                                                               |                                             |                                            |                                     |                       |                                       |                       |       |      |             |             |       |        |       |      |             |             |
| MLF 18                | LWLF 18…B                  | ○               | 44               | 90                         |                              |                |   |                                |                |                | —              | 3.5            | 6.5            |                       |                                |    |                | 4.5            | M3×8                                  | 2 280          | 3 810 |    |                                                               | 34.9                                        | 16.9<br>88.8                               | 14.2<br>74.5                        |                       |                                       |                       |       |      |             |             |       |        |       |      |             |             |
| —                     | LWLF 18…BCS                | ○               |                  | 92                         |                              |                |   |                                |                |                | M4<br>Through  | —              | —              |                       |                                |    |                | —              | M4×ℓ <sup>(3)</sup><br>(Not appended) |                |       |    |                                                               |                                             |                                            |                                     |                       |                                       |                       |       |      |             |             |       |        |       |      |             |             |
| MLFG 18               | LWLF 18…B                  | ○               | 59               | 90                         |                              |                |   |                                | 23             | 3.5            | 50.5           | 24             | 40.4           |                       |                                |    |                | M3×3           | 2.5                                   | 18             | 7     |    |                                                               | —                                           | 3.5                                        | 6.5                                 | 4.5                   | M3×8                                  | 2 870                 | 5 300 | 48.5 | 31.9<br>159 | 26.7<br>134 |       |        |       |      |             |             |
| —                     | LWLF 18…N*                 | —               | 61               | 92                         |                              |                |   |                                |                |                |                |                |                |                       |                                |    |                |                |                                       |                |       |    |                                                               | M4<br>Through                               | —                                          | —                                   | —                     | M4×ℓ <sup>(3)</sup><br>(Not appended) |                       |       |      |             |             |       |        |       |      |             |             |
| MLFC 24               | LWLF 24…B                  | ○               | 46               | 139                        |                              |                |   |                                | 14             | 3              | 8              | 40             | 28             |                       |                                |    |                | 6              | 30.5                                  | —              | 17.7  |    |                                                               | M3×3.5                                      | 3.2                                        | 24                                  | 8                     | —                                     | 4.5                   | 8     | 4.5  | 20          | 40          | M4×10 | 2 800  | 3 340 | 40.7 | 9.7<br>67.6 | 8.2<br>56.8 |
| —                     | LWLF 24…B                  | ○               | 45               |                            |                              |                |   |                                |                |                |                |                |                |                       |                                |    |                |                | 44                                    | 15             | 31    |    |                                                               |                                             |                                            |                                     |                       |                                       |                       |       |      |             |             |       | M3×3.5 | 3.2   |      |             |             |
| MLF 24                | LWLF 24…B                  | ○               | 74               |                            |                              |                |   |                                |                |                |                |                |                |                       |                                |    |                |                |                                       |                |       |    |                                                               |                                             |                                            |                                     |                       |                                       |                       |       |      |             |             |       |        |       |      |             |             |
| —                     | LWLF 24…BCS                | ○               | 76               |                            |                              |                |   |                                |                |                |                |                |                |                       |                                |    |                |                |                                       |                |       |    |                                                               |                                             |                                            |                                     |                       |                                       |                       |       |      |             |             |       |        |       |      |             |             |
| MLFG 24               | LWLF 24…B                  | ○               | 108              |                            |                              |                |   |                                |                |                |                |                |                |                       |                                |    |                |                |                                       |                |       |    |                                                               |                                             |                                            |                                     |                       |                                       |                       |       |      |             |             |       |        |       |      |             |             |
| —                     | LWLF 24…N*                 | —               | 111              |                            |                              |                |   |                                |                |                |                |                |                |                       |                                |    |                |                |                                       |                |       |    |                                                               |                                             |                                            |                                     |                       |                                       |                       |       |      |             |             |       |        |       |      |             |             |

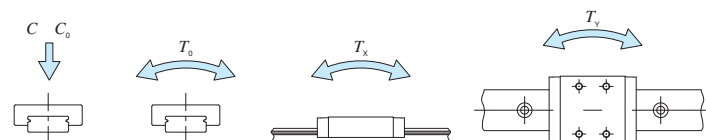2. The identification numbers with \* are our semi-standard items.




| Model code |          | Dimensions | Part code |             | Model code | Material code | Preload symbol       | Classification symbol | Interchangeable code | Special specification |
|------------|----------|------------|-----------|-------------|------------|---------------|----------------------|-----------------------|----------------------|-----------------------|
| <u>MLF</u> | <u>G</u> | <u>18</u>  | <u>C2</u> | <u>R300</u> | <u> </u>   | <u> </u>      | <u>T<sub>1</sub></u> | <u>P</u>              | <u>S1</u>            | <u>/D</u>             |
| 1          | 2        | 3          | 4         | 5           | 1          | 6             | 7                    | 8                     | 9                    | 10                    |

|                        |          |                 |                                 |  |                  |               |                         |                                  |
|------------------------|----------|-----------------|---------------------------------|--|------------------|---------------|-------------------------|----------------------------------|
| ① Model                |          | Wide type       | ③ Size                          |  | ⑦ Preload amount |               | ⑨ Interchangeable       |                                  |
| MLF                    |          |                 | 18, 24                          |  | To               | Clearance     | S1                      | S1 specification                 |
| LWLF...B               |          |                 | ④ Number of slide unit (2)      |  | No symbol        | Standard      | S2                      | S2 specification                 |
| LWLF...N               |          |                 |                                 |  | T1               | Light preload | No symbol               | No-interchangeable specification |
| ② Length of slide unit |          |                 | ⑤ Length of track rail (300 mm) |  | ⑧ Accuracy class |               | ⑩ Special specification |                                  |
| C                      | Short    | ⑥ Material type |                                 |  |                  |               |                         |                                  |
| No symbol              | Standard |                 |                                 |  |                  |               |                         |                                  |
| G                      | Long     |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  | H                |               | A, BS, D, E, I, LR, MN  |                                  |
|                        |          |                 |                                 |  | P                |               | N, Q, RE, S, U, W, Y    |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |
|                        |          |                 |                                 |  |                  |               |                         |                                  |


## MLF • LWLF

Technical drawing of a cross-section of a beam. The beam has a central hole and two side holes. The dimensions are given as follows: 100 (total width), 50 (width of each side flange), 10 (thickness of the beam), 10 (radius of the side holes), 10 (radius of the central hole), and 10 (height of the side flanges). The scale is 1:1.
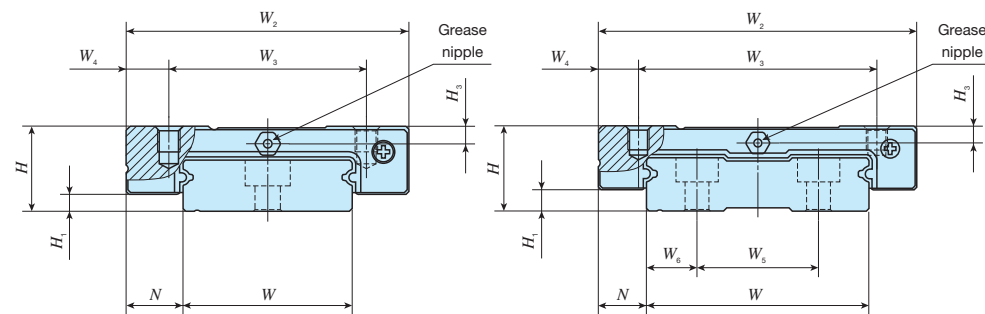
|    |    |    |    |
|----|----|----|----|
| 4  | 6  | 10 | 14 |
| 18 | 24 | 30 | 42 |




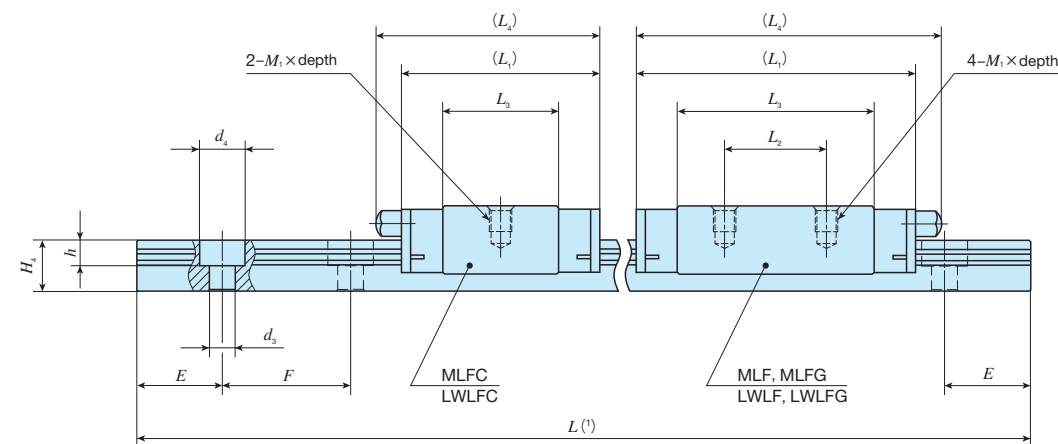MLFC 42, LWLFC 42  
MLF 42, LWLF 42  
MLFG 42, LWLFG 42



| Identification number |                            | Interchangeable | Mass (Ref.)<br>g |                            | Dimensions of assembly<br>mm |                       |          | Dimensions of slide unit<br>mm |                       |                       |                       |                       |                       |                       |                              |     |                       | Dimensions of track rail<br>mm |                       |                       |                       |                       |                       |          |             |             |                     | Appended<br>mounting bolt for<br>track rail <sup>(2)</sup><br>mm |                            | Basic dynamic<br>load rating <sup>(3)</sup> | Basic static<br>load rating <sup>(3)</sup> | Static moment rating <sup>(3)</sup> |     |     |     |     |    |     |       |       |        |       |            |            |             |             |        |      |     |        |     |     |     |     |    |     |       |       |        |       |            |            |            |             |        |    |     |    |     |     |     |     |    |     |       |        |       |       |       |     |             |             |
|-----------------------|----------------------------|-----------------|------------------|----------------------------|------------------------------|-----------------------|----------|--------------------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|------------------------------|-----|-----------------------|--------------------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|----------|-------------|-------------|---------------------|------------------------------------------------------------------|----------------------------|---------------------------------------------|--------------------------------------------|-------------------------------------|-----|-----|-----|-----|----|-----|-------|-------|--------|-------|------------|------------|-------------|-------------|--------|------|-----|--------|-----|-----|-----|-----|----|-----|-------|-------|--------|-------|------------|------------|------------|-------------|--------|----|-----|----|-----|-----|-----|-----|----|-----|-------|--------|-------|-------|-------|-----|-------------|-------------|
| MLF series            | LWLF series<br>(No C-Lube) |                 | Slide<br>unit    | Track rail<br>(per 100 mm) | <i>H</i>                     | <i>H</i> <sub>1</sub> | <i>N</i> | <i>W</i> <sub>2</sub>          | <i>W</i> <sub>3</sub> | <i>W</i> <sub>4</sub> | <i>L</i> <sub>1</sub> | <i>L</i> <sub>2</sub> | <i>L</i> <sub>3</sub> | <i>L</i> <sub>4</sub> | <i>M</i> <sub>1</sub> ×depth |     | <i>H</i> <sub>3</sub> | <i>W</i>                       | <i>H</i> <sub>4</sub> | <i>W</i> <sub>5</sub> | <i>W</i> <sub>6</sub> | <i>d</i> <sub>3</sub> | <i>d</i> <sub>4</sub> | <i>h</i> | <i>E</i>    | <i>F</i>    | Bolt size× <i>ℓ</i> | <i>C</i><br>N                                                    | <i>C</i> <sub>0</sub><br>N | <i>T</i> <sub>0</sub><br>N·m                | <i>T</i> <sub>x</sub><br>N·m               | <i>T</i> <sub>y</sub><br>N·m        |     |     |     |     |    |     |       |       |        |       |            |            |             |             |        |      |     |        |     |     |     |     |    |     |       |       |        |       |            |            |            |             |        |    |     |    |     |     |     |     |    |     |       |        |       |       |       |     |             |             |
| MLFC 30               | LWLFC 30…B                 | ○               | 70               | 198                        | 15                           | 3                     | 10       | 50                             | 35                    | 7.5                   | 35.5                  | —                     | 20.5                  | 40                    | M4×4.5                       |     | 3.1                   | 30                             | 9                     | —                     | —                     | 4.5                   | 8                     | 4.5      | 20          | 40          | M4×12               | 3 890                                                            | 4 540                      | 69.1                                        | 15.4<br>107                                | 13.0<br>89.9                        |     |     |     |     |    |     |       |       |        |       |            |            |             |             |        |      |     |        |     |     |     |     |    |     |       |       |        |       |            |            |            |             |        |    |     |    |     |     |     |     |    |     |       |        |       |       |       |     |             |             |
| MLF 30                | LWLFC 30…B                 | ○               | 111              |                            |                              |                       |          |                                |                       |                       | 112                   | 68.5                  | 35                    | 53.8                  |                              |     |                       |                                |                       |                       |                       |                       |                       |          |             |             |                     | 73                                                               | M4×4.5                     |                                             | 3.2                                        | 42                                  | 10  | 23  | 9.5 | 4.5 | 8  | 4.5 | 20    | 40    | M4×12  | 5 970 | 8 440      | 128        | 48.7<br>256 | 40.8<br>215 |        |      |     |        |     |     |     |     |    |     |       |       |        |       |            |            |            |             |        |    |     |    |     |     |     |     |    |     |       |        |       |       |       |     |             |             |
| —                     | LWLFC 30…BCS               | ○               | 167              |                            |                              |                       |          |                                |                       |                       |                       |                       |                       |                       |                              |     |                       |                                |                       |                       |                       |                       |                       |          |             |             |                     |                                                                  |                            |                                             |                                            |                                     |     |     |     |     |    |     |       |       |        | 140   | 74.5       | 35         | 58.7        | 79          | M4×4.5 |      | 3.2 | 42     | 10  | 23  | 9.5 | 4.5 | 8  | 4.5 | 20    | 40    | M4×12  | 7 810 | 12 300     | 187        | 100<br>508 | 84.3<br>426 |        |    |     |    |     |     |     |     |    |     |       |        |       |       |       |     |             |             |
| MLFG 30               | LWLFC 30…B                 | ○               | 170              |                            |                              |                       |          |                                |                       |                       |                       |                       |                       |                       |                              |     |                       |                                |                       |                       |                       |                       |                       |          |             |             |                     |                                                                  |                            |                                             |                                            |                                     |     |     |     |     |    |     |       |       |        |       |            |            |             |             |        |      |     |        |     |     |     |     |    |     |       |       |        | 140   | 74.5       | 35         | 58.7       | 79          | M4×4.5 |    | 3.2 | 42 | 10  | 23  | 9.5 | 4.5 | 8  | 4.5 | 20    | 40     | M4×12 | 5 440 | 6 810 | 144 | 30.8<br>180 | 25.8<br>151 |
| MLFC 42               | LWLFC 42…B                 | ○               | 95               |                            |                              |                       |          |                                |                       |                       |                       |                       |                       |                       |                              |     |                       |                                |                       |                       |                       |                       |                       |          |             |             |                     |                                                                  |                            |                                             |                                            |                                     |     |     |     |     |    |     |       |       |        |       |            |            |             |             |        |      |     |        |     |     |     |     |    |     |       |       |        |       |            |            |            |             |        |    |     |    |     |     |     |     |    |     |       |        |       | 140   | 74.5  | 35  | 58.7        | 79          |
| MLF 42                | LWLFC 42…B                 | ○               | 138              | 140                        | 74.5                         | 35                    | 58.7     | 79                             | M4×4.5                |                       | 3.2                   | 42                    | 10                    | 23                    | 9.5                          | 4.5 | 8                     | 4.5                            | 20                    | 40                    | M4×12                 | 7 050                 | 9 840                 | 209      | 61.3<br>333 | 51.4<br>280 |                     |                                                                  |                            |                                             |                                            |                                     |     |     |     |     |    |     |       |       |        |       |            |            |             |             |        |      |     |        |     |     |     |     |    |     |       |       |        |       |            |            |            |             |        |    |     |    |     |     |     |     |    |     |       |        |       |       |       |     |             |             |
| —                     | LWLFC 42…BCS               | ○               | 140              |                            |                              |                       |          |                                |                       |                       |                       |                       |                       |                       |                              |     |                       |                                |                       |                       |                       | 140                   | 74.5                  | 35       | 58.7        | 79          | M4×4.5              |                                                                  | 3.2                        | 42                                          | 10                                         | 23                                  | 9.5 | 4.5 | 8   | 4.5 | 20 | 40  | M4×12 | 9 520 | 15 100 | 321   | 140<br>674 | 117<br>565 |             |             |        |      |     |        |     |     |     |     |    |     |       |       |        |       |            |            |            |             |        |    |     |    |     |     |     |     |    |     |       |        |       |       |       |     |             |             |
| MLFG 42               | LWLFC 42…B                 | ○               | 200              |                            |                              |                       |          |                                |                       |                       |                       |                       |                       |                       |                              |     |                       |                                |                       |                       |                       |                       |                       |          |             |             |                     |                                                                  |                            |                                             |                                            |                                     |     |     |     |     |    |     |       | 140   | 74.5   | 35    | 58.7       | 79         | M4×4.5      |             | 3.2    | 42   | 10  | 23     | 9.5 | 4.5 | 8   | 4.5 | 20 | 40  | M4×12 | 9 200 | 14 400 | 305   | 126<br>644 | 106<br>541 |            |             |        |    |     |    |     |     |     |     |    |     |       |        |       |       |       |     |             |             |
|                       | LWLFC 42…B                 | ○               | 204              |                            |                              |                       |          |                                |                       |                       |                       |                       |                       |                       |                              |     |                       |                                |                       |                       |                       |                       |                       |          |             |             |                     |                                                                  |                            |                                             |                                            |                                     |     |     |     |     |    |     |       |       |        |       |            |            |             |             |        |      |     |        |     |     |     |     |    |     |       | 140   | 74.5   | 35    | 58.7       | 79         | M4×4.5     |             | 3.2    | 42 | 10  | 23 | 9.5 | 4.5 | 8   | 4.5 | 20 | 40  | M4×12 |        |       |       |       |     |             |             |
|                       |                            |                 |                  | 140                        | 74.5                         | 35                    | 58.7     | 79                             |                       |                       |                       |                       |                       |                       |                              |     |                       |                                |                       |                       |                       |                       |                       |          |             |             |                     |                                                                  |                            |                                             |                                            |                                     |     |     |     |     |    |     |       |       |        |       |            |            |             |             |        |      |     |        |     |     |     |     |    |     |       |       |        |       |            |            |            |             |        |    |     |    |     |     |     |     |    |     |       | M4×4.5 |       | 3.2   | 42    | 10  | 23          | 9.5         |
|                       |                            |                 |                  |                            |                              |                       |          |                                | 140                   | 74.5                  | 35                    | 58.7                  | 79                    | M4×4.5                |                              | 3.2 | 42                    | 10                             | 23                    | 9.5                   | 4.5                   | 8                     | 4.5                   | 20       | 40          | M4×12       |                     |                                                                  |                            |                                             |                                            |                                     |     |     |     |     |    |     |       |       |        |       |            |            |             |             |        |      |     |        |     |     |     |     |    |     |       |       |        |       |            |            |            |             |        |    |     |    |     |     |     |     |    |     |       |        |       |       |       |     |             |             |
|                       |                            |                 |                  |                            |                              |                       |          |                                |                       |                       |                       |                       |                       |                       |                              |     |                       |                                |                       |                       |                       |                       |                       |          |             |             | 140                 | 74.5                                                             | 35                         | 58.7                                        | 79                                         | M4×4.5                              |     | 3.2 | 42  | 10  | 23 | 9.5 | 4.5   | 8     | 4.5    | 20    | 40         | M4×12      |             |             |        |      |     |        |     |     |     |     |    |     |       |       |        |       |            |            |            |             |        |    |     |    |     |     |     |     |    |     |       |        |       |       |       |     |             |             |
|                       |                            |                 |                  |                            |                              |                       |          |                                |                       |                       |                       |                       |                       |                       |                              |     |                       |                                |                       |                       |                       |                       |                       |          |             |             |                     |                                                                  |                            |                                             |                                            |                                     |     |     |     |     |    |     |       |       |        |       |            |            | 140         | 74.5        | 35     | 58.7 | 79  | M4×4.5 |     | 3.2 | 42  | 10  | 23 | 9.5 | 4.5   | 8     | 4.5    | 20    |            |            |            |             |        |    |     |    |     |     |     |     |    |     |       |        |       |       |       |     |             |             |

Remark: The specifications of grease nipple are shown in Table 14 on page II 18.



| Model code |          | Dimensions | Part code |             | Model code | Material code | Preload symbol       | Classification symbol | Interchangeable code | Special specification |
|------------|----------|------------|-----------|-------------|------------|---------------|----------------------|-----------------------|----------------------|-----------------------|
| <u>MLF</u> | <u>G</u> | <u>42</u>  | <u>C2</u> | <u>R320</u> | <u>—</u>   | <u>—</u>      | <u>T<sub>1</sub></u> | <u>P</u>              | <u>S1</u>            | <u>/D</u>             |
| 1          | 2        | 3          | 4         | 5           | 1          | 6             | 7                    | 8                     | 9                    | 10                    |

|                        |           |                                 |                        |                  |           |                                                |                  |
|------------------------|-----------|---------------------------------|------------------------|------------------|-----------|------------------------------------------------|------------------|
| ① Model                |           | ③ Size                          |                        | ⑦ Preload amount |           | ⑨ Interchangeable                              |                  |
| MLF                    | Wide type | 30, 42                          |                        | To               | Clearance | S1                                             | S1 specification |
| LWLF...B               |           |                                 | No symbol              | Standard         | S2        | S2 specification                               |                  |
|                        |           |                                 | T <sub>1</sub>         | Light preload    | No symbol | Non-interchangeable specification              |                  |
| ② Length of slide unit |           | ④ Number of slide unit (2)      |                        | ⑧ Accuracy class |           | ⑩ Special specification                        |                  |
| C                      | Short     | ⑤ Length of track rail (320 mm) |                        | H                | High      | A, BS, D, E, I, LR, MN<br>N, Q, RE, S, U, W, Y |                  |
| No symbol              | Standard  |                                 |                        | P                | Precision |                                                |                  |
| G                      | Long      |                                 |                        |                  |           |                                                |                  |
|                        |           |                                 |                        |                  |           |                                                |                  |
|                        |           | ⑥ Material type                 |                        |                  |           |                                                |                  |
|                        |           | No symbol                       | Stainless steel made   |                  |           |                                                |                  |
|                        |           | CS                              | High carbon steel made |                  |           |                                                |                  |



## C-Lube Linear Way ME Linear Way E

ME • LWE



C-Lube Linear Way ME

ME



The aquamarine end plate is the symbol of maintenance free.

Track rail

Slide unit

Casing

C-Lube

Ball

End plate

Ball retaining band

End seal

Grease nipple

Linear Way E

LWE

Points

1 Compact and versatile series with utility

Pursuit making lower, slimmer, and shorter to compact in all respects. Versatile linear motion rolling guide achieved utility.

2 Wide range of variations for your needs

For details P.I-26

As two shapes of slide unit, flange type and block type (with small width) and 3 types with different slide unit length with same section are available, you can select an optimal product for the specifications of your machine and device.

3 Stainless steel selections superior in corrosion resistance are listed on lineup. For details P.I-41

Products made of stainless steel are highly resistant to corrosion, so that they are suitable for applications where rust prevention oil is not preferred, such as in cleanroom environment.

4 Achieved smooth and quiet motion Low Decibel Linear Way E

Due to resin separator built-in balls, Low Decibel Linear Way E achieved smooth and quiet motion by eliminating of direct contact of balls each other. This feature reduces noise level in factory and contributes to a human-friendly environment.

Identification Number and Specification

Example of an identification number

The specifications of ME and LWE (···Q) series are indicated by the identification number. Indicate the identification number, consisting of a model code, dimensions, a part code, a material code, a preload symbol, a classification symbol, an interchangeable code, and a supplemental code for each specification to apply.

| Interchangeable specification     | 1   | 2 | 3  | 4  | 5     | 1 | 6 | 7              | 8 | 9  | 10  |
|-----------------------------------|-----|---|----|----|-------|---|---|----------------|---|----|-----|
| Single slide unit                 | ME  | C | 20 | C1 |       |   |   | T <sub>1</sub> | P | S1 | /U  |
| Single track rail (1)             | LWE |   | 20 |    | R1000 |   |   |                | P | S1 | /F  |
| Assembled set                     | ME  | C | 20 | C1 | R1000 |   |   | T <sub>1</sub> | P | S1 | /FU |
| Non-interchangeable specification |     |   |    |    |       |   |   |                |   |    |     |
| Assembled set                     | ME  | C | 20 | C1 | R1000 |   |   | T <sub>1</sub> | P |    | /FU |

1 Model

Model code Page II - 43

2 Length of slide unit

Part code Page II - 43

3 Size

Dimensions Page II - 43

4 Number of slide units

Part code Page II - 43

5 Length of track rail

Part code Page II - 43

6 Material type

Material code Page II - 43

7 Preload amount

Preload code Page II - 46

8 Accuracy class

Classification code Page II - 46

9 Interchangeable

Interchangeable code Page II - 47

10 Special specification

Supplemental code Page II - 47

Note (1) Indicate "LWE" for the model code of single track rail regardless of the series and the slide unit model to be combined.









Identification Number and Specification —Model · Length of Slide Unit · Size ·

|   |                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                       |
|---|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| 1 | Model                 | <div>C-Lube Linear Way ME (ME series)<div>Flange type mounting from bottom : ME<br/>Flange type mounting from top : MET<br/>Block type mounting from top : MES</div></div> <div>Linear Way E <sup>(1)</sup> (LWE series)<div>Flange type mounting from bottom : LWE<br/>Flange type mounting from top : LWET<br/>Block type mounting from top : LWES</div></div> <div>Low Decibel Linear Way E <sup>(1)</sup> (LWE...Q series)<div>Flange type mounting from bottom : LWE...Q<br/>Flange type mounting from top : LWET...Q<br/>Block type mounting from top : LWES...Q</div></div> <div>For applicable models and sizes, see Table 1.<br/>Indicate "LWE" for the model code of single track rail regardless of the series and the slide unit model to be combined.</div> <div>Note <sup>(1)</sup> This model has no built-in C-Lube.</div> |                                                                                                                                       |
| 2 | Length of slide unit  | <div>Short : C</div> <div>Standard : No symbol</div> <div>Long : G</div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | For applicable models and sizes, see Table 1.                                                                                         |
| 3 | Size                  | 15,20,25,30,35,45                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | For applicable models and sizes, see Table 1.                                                                                         |
| 4 | Number of slide units | : C○                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | For an assembled set, indicates the number of slide units assembled on a track rail. For a single slide unit, only "C1" is specified. |
| 5 | Length of track rail  | : R○                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Indicate the length of track rail in mm.<br>For standard and maximum lengths, see Tables 2.1 and 2.2.                                 |
| 6 | Material type         | <div>High carbon steel made : No symbol</div> <div>Stainless steel made : SL</div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | For applicable models and sizes, see Table 1.                                                                                         |

Number of Slide Unit · Length of Track Rail · Material—

Table 1 Models and sizes of ME and LWE (...Q) series

| Material               | Shape                                                                                 | Slide unit Length | Model      | Size |    |    |    |    |    |
|------------------------|---------------------------------------------------------------------------------------|-------------------|------------|------|----|----|----|----|----|
|                        |                                                                                       |                   |            | 15   | 20 | 25 | 30 | 35 | 45 |
| High carbon steel made |    | Short             | MEC        | ○    | ○  | ○  | ○  | ○  | —  |
|                        |                                                                                       |                   | LWEC       | ○    | ○  | ○  | ○  | ○  | —  |
|                        |                                                                                       | Standard          | ME         | ○    | ○  | ○  | ○  | ○  | ○  |
|                        |                                                                                       |                   | LWE        | ○    | ○  | ○  | ○  | ○  | ○  |
|                        |                                                                                       |                   | LWE...Q    | ○    | ○  | ○  | ○  | ○  | —  |
|                        |                                                                                       | Long              | MEG        | ○    | ○  | ○  | ○  | —  | —  |
|                        |                                                                                       |                   | LWEG       | ○    | ○  | ○  | ○  | —  | —  |
|                        |    | Short             | METC       | ○    | ○  | ○  | ○  | ○  | —  |
|                        |                                                                                       |                   | LWETC      | ○    | ○  | ○  | ○  | ○  | —  |
|                        |                                                                                       | Standard          | MET        | ○    | ○  | ○  | ○  | ○  | ○  |
|                        |                                                                                       |                   | LWET       | ○    | ○  | ○  | ○  | ○  | ○  |
|                        |                                                                                       |                   | LWET...Q   | ○    | ○  | ○  | ○  | ○  | —  |
|                        |                                                                                       | Long              | METG       | ○    | ○  | ○  | ○  | —  | —  |
|                        |                                                                                       |                   | LWETG      | ○    | ○  | ○  | ○  | —  | —  |
|                        |  | Short             | MESC       | ○    | ○  | ○  | ○  | ○  | —  |
|                        |                                                                                       |                   | LWESC      | ○    | ○  | ○  | ○  | ○  | —  |
|                        |                                                                                       | Standard          | MES        | ○    | ○  | ○  | ○  | ○  | ○  |
|                        |                                                                                       |                   | LWES       | ○    | ○  | ○  | ○  | ○  | ○  |
|                        |                                                                                       |                   | LWES...Q   | ○    | ○  | ○  | ○  | ○  | —  |
|                        |                                                                                       | Long              | MESG       | ○    | ○  | ○  | ○  | —  | —  |
|                        |                                                                                       |                   | LWESG      | ○    | ○  | ○  | ○  | —  | —  |
| Stainless steel made   |  | Short             | MEC...SL   | ○    | ○  | ○  | ○  | —  | —  |
|                        |                                                                                       |                   | LWEC...SL  | ○    | ○  | ○  | ○  | —  | —  |
|                        |                                                                                       | Standard          | ME...SL    | ○    | ○  | ○  | ○  | —  | —  |
|                        |                                                                                       |                   | LWE...SL   | ○    | ○  | ○  | ○  | —  | —  |
|                        |                                                                                       | Long              | MEG...SL   | ○    | ○  | ○  | ○  | —  | —  |
|                        |                                                                                       |                   | LWEG...SL  | ○    | ○  | ○  | ○  | —  | —  |
|                        |  | Short             | METC...SL  | ○    | ○  | ○  | ○  | —  | —  |
|                        |                                                                                       |                   | LWETC...SL | ○    | ○  | ○  | ○  | —  | —  |
|                        |                                                                                       | Standard          | MET...SL   | ○    | ○  | ○  | ○  | —  | —  |
|                        |                                                                                       |                   | LWET...SL  | ○    | ○  | ○  | ○  | —  | —  |
|                        |                                                                                       | Long              | METG...SL  | ○    | ○  | ○  | ○  | —  | —  |
|                        |                                                                                       |                   | LWETG...SL | ○    | ○  | ○  | ○  | —  | —  |
|                        |  | Short             | MESC...SL  | ○    | ○  | ○  | ○  | —  | —  |
|                        |                                                                                       |                   | LWESC...SL | ○    | ○  | ○  | ○  | —  | —  |
|                        |                                                                                       | Standard          | MES...SL   | ○    | ○  | ○  | ○  | —  | —  |
|                        |                                                                                       |                   | LWES...SL  | ○    | ○  | ○  | ○  | —  | —  |
|                        |                                                                                       | Long              | MESG...SL  | ○    | ○  | ○  | ○  | —  | —  |
|                        |                                                                                       |                   | LWESG...SL | ○    | ○  | ○  | ○  | —  | —  |


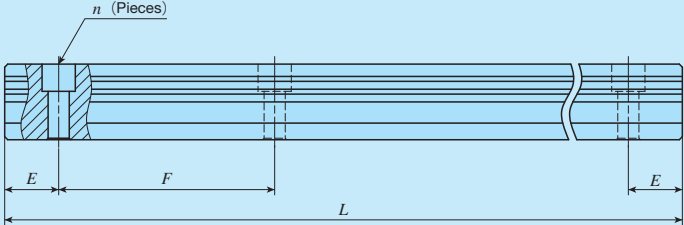
Remark: For the models indicated in , the interchangeable specification is available.

Table 2.1 Standard and maximum lengths of high carbon steel track rails

|  |                  |                  |                  |                  |                  |                  |
|------------------------------------------------------------------------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| unit: mm                                                                           |                  |                  |                  |                  |                  |                  |
| Identification number                                                              | ME 15<br>LWE 15  | ME 20<br>LWE 20  | ME 25<br>LWE 25  | ME 30<br>LWE 30  | ME 35<br>LWE 35  | ME 45<br>LWE 45  |
| Item                                                                               | LWE 15...Q       | LWE 20...Q       | LWE 25...Q       | LWE 30...Q       | LWE 35...Q       | LWE 45           |
| Standard length $L$ (n)                                                            | 160 ( 3)         | 220 ( 4)         | 220 ( 4)         | 280 ( 4)         | 280 ( 4)         | 570 ( 6)         |
|                                                                                    | 220 ( 4)         | 280 ( 5)         | 280 ( 5)         | 440 ( 6)         | 440 ( 6)         | 885 ( 9)         |
|                                                                                    | 280 ( 5)         | 340 ( 6)         | 340 ( 6)         | 600 ( 8)         | 600 ( 8)         | 1 200 (12)       |
|                                                                                    | 340 ( 6)         | 460 ( 8)         | 460 ( 8)         | 760 (10)         | 760 (10)         | 1 620 (16)       |
|                                                                                    | 460 ( 8)         | 640 (11)         | 640 (11)         | 1 000 (13)       | 1 000 (13)       | 2 040 (20)       |
|                                                                                    | 640 (11)         | 820 (14)         | 820 (14)         | 1 240 (16)       | 1 240 (16)       | 2 460 (24)       |
|                                                                                    | 820 (14)         | 1 000 (17)       | 1 000 (17)       | 1 640 (21)       | 1 640 (21)       | 2 985 (29)       |
|                                                                                    |                  | 1 240 (21)       | 1 240 (21)       | 2 040 (26)       | 2 040 (26)       |                  |
|                                                                                    |                  |                  | 1 600 (27)       | 2 520 (32)       | 2 520 (32)       |                  |
|                                                                                    |                  |                  |                  | 3 000 (38)       | 3 000 (38)       |                  |
| Pitch of mounting holes $F$                                                        | 60               | 60               | 60               | 80               | 80               | 105              |
| $E$ <sup>(1)</sup>                                                                 | 20               | 20               | 20               | 20               | 20               | 22.5             |
| Standard $E$ dimensions <sup>(2)</sup>                                             | or higher        | 6                | 8                | 9                | 9                | 12               |
|                                                                                    | below            | 36               | 38               | 39               | 49               | 64.5             |
| Maximum length <sup>(3)</sup>                                                      | 1 600<br>(2 980) | 2 200<br>(2 980) | 2 980<br>(4 000) | 3 000<br>(3 960) | 3 000<br>(3 960) | 2 985<br>(3 930) |

Notes <sup>(1)</sup> When specifying a butt-jointing track rail (supplemental code "/T"), pay attention to the  $E$  dimension at the butt-jointing part.  
<sup>(2)</sup> Not applicable to the track rail with female threads for bellows (supplemental code "/J").  
<sup>(3)</sup> Length up to the value in ( ) can be produced. If needed, please contact **IKO**. The values in ( ) is not applicable to LWE...Q series.

Remarks 1. A typical identification number is indicated, but is applied to all models of the same size.  
2. Indicate "LWE" for the model code of single track rail regardless of the series and the slide unit model to be combined.  
3. If not directed, E dimensions for both ends will be the same within the range of standard E dimensions. To change the dimensions, indicate the specified rail mounting hole positions "/E" of special specification. For more information, see page III-29.

Table 2.2 Standard and maximum lengths of stainless steel track rails

| unit: mm                               |                           |                           |                           |                           |
|----------------------------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| Identification number                  | ME 15...SL<br>LWE 15...SL | ME 20...SL<br>LWE 20...SL | ME 25...SL<br>LWE 25...SL | ME 30...SL<br>LWE 30...SL |
| Item                                   | LWE 15...SL               | LWE 20...SL               | LWE 25...SL               | LWE 30...SL               |
| Standard length $L$ (n)                | 160 ( 3)                  | 220 ( 4)                  | 220 ( 4)                  | 280 ( 4)                  |
|                                        | 220 ( 4)                  | 280 ( 5)                  | 280 ( 5)                  | 440 ( 6)                  |
|                                        | 280 ( 5)                  | 340 ( 6)                  | 340 ( 6)                  | 600 ( 8)                  |
|                                        | 340 ( 6)                  | 460 ( 8)                  | 460 ( 8)                  | 760 (10)                  |
|                                        | 460 ( 8)                  | 640 (11)                  | 640 (11)                  | 1 000 (13)                |
|                                        | 640 (11)                  | 820 (14)                  | 820 (14)                  |                           |
|                                        | 820 (14)                  | 1 000 (17)                | 1 000 (17)                |                           |
| Pitch of mounting holes $F$            | 60                        | 60                        | 60                        | 80                        |
| $E$ <sup>(1)</sup>                     | 20                        | 20                        | 20                        | 20                        |
| Standard $E$ dimensions <sup>(2)</sup> | or higher                 | 6                         | 8                         | 9                         |
|                                        | below                     | 36                        | 38                        | 49                        |
| Maximum length <sup>(3)</sup>          | 1 200<br>(1 600)          | 1 200<br>(1 960)          | 1 200<br>(1 960)          | 1 200<br>(1 960)          |

Notes <sup>(1)</sup> When specifying a butt-jointing track rail (supplemental code "/T"), pay attention to the  $E$  dimension at the butt-jointing part.  
<sup>(2)</sup> Not applicable to the track rail with female threads for bellows (supplemental code "/J").  
<sup>(3)</sup> Track rails with the maximum lengths shown in ( ) can also be manufactured. Consult **IKO** for further information.

Remarks 1. A typical identification number is indicated, but is applied to all models of the same size.  
2. Indicate "LWE" for the model code of single track rail regardless of the series and the slide unit model to be combined.  
3. If not directed, E dimensions for both ends will be the same within the range of standard E dimensions. To change the dimensions, indicate the specified rail mounting hole positions "/E" of special specification. For more information, see page III-29.

|                         |                 |             |                                                                                                                |
|-------------------------|-----------------|-------------|----------------------------------------------------------------------------------------------------------------|
| <b>7</b> Preload amount | Clearance       | : $T_c$     | Specify this item for an assembled set or a single slide unit.                                                 |
|                         | Standard        | : No symbol | For details of the preload amount, see Table 3.                                                                |
|                         | Light preload   | : $T_1$     | For applicable combinations of accuracy class and preload amount, see Table 4.                                 |
|                         | Medium preload  | : $T_2$     |                                                                                                                |
| <b>8</b> Accuracy class | Ordinary        | : No symbol | For interchangeable specification products, assemble a slide unit and a track rail of the same accuracy class. |
|                         | High            | : H         | For details of accuracy class, see Table 5.                                                                    |
|                         | Precision       | : P         |                                                                                                                |
|                         | Super precision | : SP        | For applicable combinations of accuracy class and preload amount, see Table 4.                                 |

Table 3 Preload amount

| Item           | Preload symbol | Preload amount N | Operational conditions                                  |
|----------------|----------------|------------------|---------------------------------------------------------|
| Clearance      | $T_c$          | 0 <sup>(1)</sup> | · Very light motion<br>· To absorb slight errors        |
| Standard       | (No symbol)    | 0 <sup>(2)</sup> | · Light and precise motion<br>· Almost no vibrations    |
| Light preload  | $T_1$          | $0.02C_0$        | · Load is evenly balanced<br>· Light and precise motion |
| Medium preload | $T_2$          | $0.05C_0$        | · Medium vibration<br>· Medium overhung load            |

Notes <sup>(1)</sup> Clearance of about  $10\mu\text{m}$   
<sup>(2)</sup> Indicates zero or minimal amount of preload  
Remark:  $C_0$  indicates the basic static load rating.

Table 4 Combination of accuracy class and preload

| Classification (classification symbol)  | Ordinary    | High | Precision | Super precision |
|-----------------------------------------|-------------|------|-----------|-----------------|
| Preload type (preload symbol)           | (No symbol) | (H)  | (P)       | (SP)            |
| Clearance ( $T_c$ ) <sup>(1)</sup>      | ○           | —    | —         | —               |
| Standard (no symbol)                    | ○           | ○    | ○         | ○               |
| Light preload ( $T_1$ )                 | —           | ○    | ○         | ○               |
| Medium preload ( $T_2$ ) <sup>(1)</sup> | —           | ○    | ○         | ○               |



Note <sup>(1)</sup> Not applicable to LWE...Q series.  
Remark: The mark  indicates that interchangeable specification products are available.

Table 5 Tolerance and allowance

| unit: mm                                                          |             |             |             |                 |
|-------------------------------------------------------------------|-------------|-------------|-------------|-----------------|
| Class (classification symbol)                                     | Ordinary    | High        | Precision   | Super precision |
| Item                                                              | (No symbol) | (H)         | (P)         | (SP)            |
| Dim. $H$ tolerance                                                | $\pm 0.080$ | $\pm 0.040$ | $\pm 0.020$ | $\pm 0.010$     |
| Dim. $N$ tolerance                                                | $\pm 0.100$ | $\pm 0.050$ | $\pm 0.025$ | $\pm 0.015$     |
| Dim. variation of $H$ <sup>(1)</sup>                              | 0.025       | 0.015       | 0.007       | 0.005           |
| Dim. variation of $N$ <sup>(1)</sup>                              | 0.030       | 0.020       | 0.010       | 0.007           |
| Dim. variation of $H$ for multiple assembled sets <sup>(2)</sup>  | 0.045       | 0.035       | 0.025       | —               |
| Parallelism in operation of the slide unit C surface to A surface | See Fig. 1. |             |             |                 |
| Parallelism in operation of the slide unit D surface to B surface | See Fig. 1. |             |             |                 |

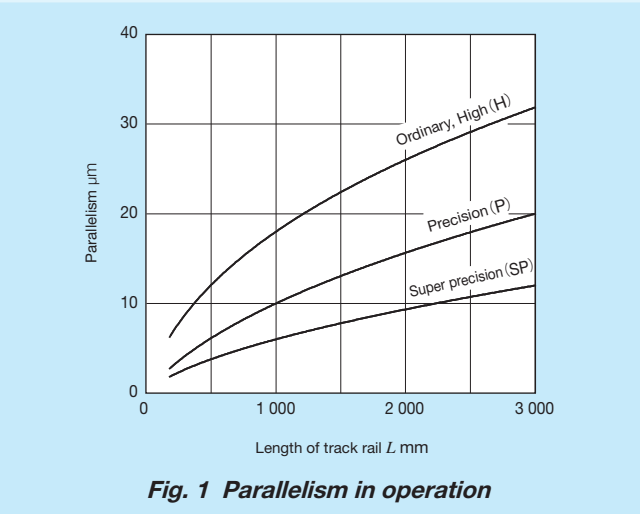Notes <sup>(1)</sup> It means the size variation between slide units mounted on the same track rail.  
<sup>(2)</sup> Applicable to the interchangeable specification.






## 10 Special specification

|                                                                                                  |                                                                                                                                                                                                                |
|--------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| /A, /BS, /D, /E, /F, /I, /JO, /LO,<br>/LFO, /MA, /M4, /N, /Q, /RE, /T,<br>/U, /VO, /WO, /YO, /ZO | For applicable special specifications, see Tables 6.1,<br>6.2, 6.3, and 6.4.<br>For combination of multiple special specifications, see<br>Table 7.<br>For details of special specifications, see page III-28. |
|--------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

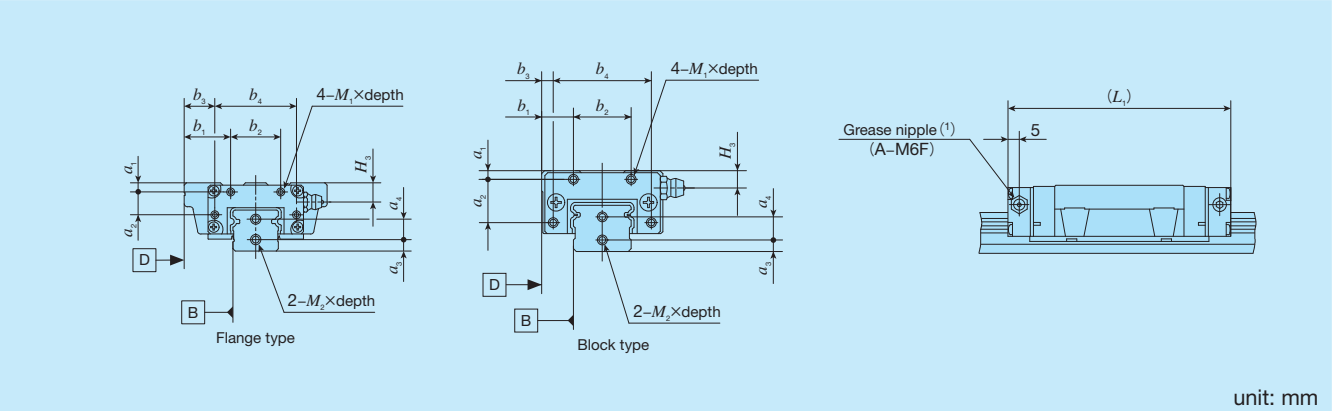Table 8 Dimension of female threads for bellows (Supplemental code Single unit: /J Assembled set: /J /JJ)



| Identification number |            |             | Slide unit |       |       |       |       |       |                           |                 |       | Track Rail |       |                           |
|-----------------------|------------|-------------|------------|-------|-------|-------|-------|-------|---------------------------|-----------------|-------|------------|-------|---------------------------|
|                       |            |             | $a_1$      | $a_2$ | $b_1$ | $b_2$ | $b_3$ | $b_4$ | $M_1 \times \text{depth}$ | $L_1(^{\circ})$ | $H_3$ | $a_3$      | $a_4$ | $M_2 \times \text{depth}$ |
| ME(T)C 15             | LWE(T)C 15 | —           | 3          | 12    | 18    | 16    | 28    | M3×6  | 58                        | 5.7             | 4     | 7          | M3× 6 |                           |
| ME(T) 15              | LWE(T) 15  | LWE(T) 15…Q |            |       | 9     |       |       |       | 3                         |                 |       |            |       | 74                        |
| ME(T)G 15             | LWE(T)G 15 | —           |            |       |       |       |       |       |                           |                 |       |            |       | 87                        |
| MESC 15               | LWESC 15   | —           |            |       |       | 58    |       |       |                           |                 |       |            |       |                           |
| MES 15                | LWES 15    | LWES 15…Q   |            |       |       | 74    |       |       |                           |                 |       |            |       |                           |
| MESG 15               | LWESG 15   | —           |            |       |       | 87    |       |       |                           |                 |       |            |       |                           |
| ME(T)C 20             | LWE(T)C 20 | —           | 3          | 15    | 19.5  | 20    | 34    | M3×6  | 64                        | 6               | 4     | 8          | M3× 6 |                           |
| ME(T) 20              | LWE(T) 20  | LWE(T) 20…Q |            |       | 11    |       |       |       | 4                         |                 |       |            |       | 83                        |
| ME(T)G 20             | LWE(T)G 20 | —           |            |       |       |       |       |       |                           |                 |       |            |       | 99                        |
| MESC 20               | LWESC 20   | —           |            |       |       | 64    |       |       |                           |                 |       |            |       |                           |
| MES 20                | LWES 20    | LWES 20…Q   |            |       |       | 83    |       |       |                           |                 |       |            |       |                           |
| MESG 20               | LWESG 20   | —           |            |       |       | 99    |       |       |                           |                 |       |            |       |                           |
| ME(T)C 25             | LWE(T)C 25 | —           | 3.5        | 17    | 23.5  | 26    | 40    | M3×6  | 76                        | 7               | 5     | 9          | M4× 8 |                           |
| ME(T) 25              | LWE(T) 25  | LWE(T) 25…Q |            |       | 11    |       |       |       | 4                         |                 |       |            |       | 100                       |
| ME(T)G 25             | LWE(T)G 25 | —           |            |       |       |       |       |       |                           |                 |       |            |       | 119                       |
| MESC 25               | LWESC 25   | —           |            |       |       | 76    |       |       |                           |                 |       |            |       |                           |
| MES 25                | LWES 25    | LWES 25…Q   |            |       |       | 100   |       |       |                           |                 |       |            |       |                           |
| MESG 25               | LWESG 25   | —           |            |       |       | 119   |       |       |                           |                 |       |            |       |                           |
| ME(T)C 30             | LWE(T)C 30 | —           | 5          | 17    | 28    | 34    | 20    | 50    | M3×6                      | 83              | 11    | 6          | 14    | M4× 8                     |
| ME(T) 30              | LWE(T) 30  | —           |            | 20    | 28    | 34    |       |       |                           | 112             |       |            |       |                           |
| —                     | —          | LWE(T) 30…Q |            |       |       |       |       |       |                           | 111             |       |            |       |                           |
| ME(T)G 30             | LWE(T)G 30 | —           |            |       |       |       |       |       |                           | 144             |       |            |       |                           |
| MESC 30               | LWESC 30   | —           |            | 17    | 13    | 34    | 5     |       |                           | 83              | 11    |            |       |                           |
| MES 30                | LWES 30    | —           |            | 20    | 10    | 40    |       |       |                           | 112             |       |            |       |                           |
| —                     | —          | LWES 30…Q   |            |       |       |       |       |       |                           | 111             |       |            |       |                           |
| MESG 30               | LWESG 30   | —           |            |       |       |       |       |       |                           | 144             |       |            |       |                           |
| ME(T)C 35             | LWE(T)C 35 | —           | 6          | 20    | 30    | 40    | 60    | M3×6  | 93                        | 13              | 7     | 15         | M4× 8 |                           |
| ME(T) 35              | LWE(T) 35  | —           |            |       | 15    |       |       |       | 5                         |                 |       |            |       | 126                       |
| —                     | —          | LWE(T) 35…Q |            |       |       |       |       |       |                           |                 |       |            |       | 125                       |
| MESC 35               | LWESC 35   | —           |            |       |       | 93    |       |       |                           | 13              |       |            |       |                           |
| MES 35                | LWES 35    | —           |            |       |       | 126   |       |       |                           |                 |       |            |       |                           |
| —                     | —          | LWES 35…Q   |            |       |       | 125   |       |       |                           |                 |       |            |       |                           |
| ME(T) 45              | LWE(T) 45  | —           | 7          | 26    | 35    | 50    | 23    | 74    | M4×8                      |                 | 138   | 15         | 8     | 19                        |
| MES 45                | LWES 45    | —           |            |       | 18    |       |       |       |                           | 6               |       |            |       |                           |

Notes <sup>(1)</sup> The specification and mounting positions of grease nipple are different from those of the standard specification product. Provided grease nipple for size 15 models is NPB2 type (special specification).

For details of dimensions, please contact **IKO**

<sup>(2)</sup> Dimensions of the specification that female threads for bellows are fitted to both ends of the slide unit are indicated.

Remark: This is applicable to stainless steel models of the same size.

Table 9 Track rail mounting bolt size (Supplemental code /MA)


| Size | Bolt size for track rail        |
|------|---------------------------------|
| 15   | M 3×16<br>M 4×16 <sup>(1)</sup> |
| 20   | M 5×16                          |
| 25   | M 6×20                          |
| 30   | M 6×25                          |
| 35   | M 8×30                          |
| 45   | M10×35                          |

Note <sup>(1)</sup> Applicable to the track rail of supplemental code "/M4" of special specification.

Remarks 1. Hexagon socket head bolts equivalent to JIS B 1176


2. For stainless steel model, stainless steel made bolts are appended.

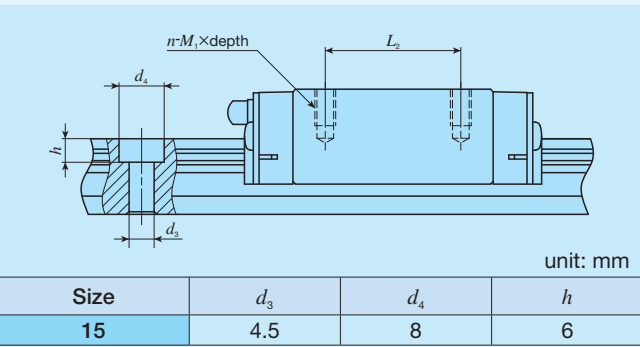Table 10 Changed dimensions of mounting holes (Supplemental code /M4)



| Size | d <sub>3</sub> | d <sub>4</sub> | h |
|------|----------------|----------------|---|
| 15   | 4.5            | 8              | 6 |

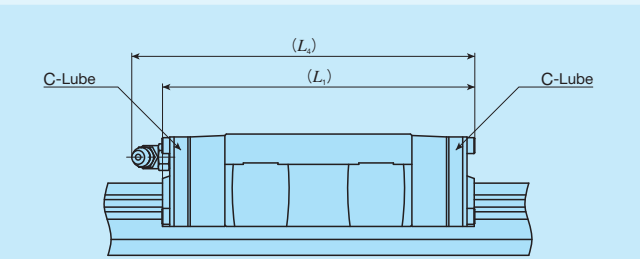Table 11 Dimension of slide unit with C-Lube plate (Supplemental code /Q)




| Identification number |         |   | L <sub>1</sub> | L <sub>2</sub> |
|-----------------------|---------|---|----------------|----------------|
| LWEC 15               | —       | — | 52             | 55             |
| LWE 15                | —       | — | 68             | 71             |
| —                     | LWE15…Q | — |                | 70             |
| LWEG 15               | —       | — | 81             | 83             |
| LWEC 20               | —       | — | 58             | 70             |
| LWE 20                | LWE20…Q | — | 78             | 90             |
| LWEG 20               | —       | — | 94             | 105            |
| LWEC 25               | —       | — | 70             | 82             |
| LWE 25                | LWE25…Q | — | 94             | 106            |
| LWEG 25               | —       | — | 113            | 125            |
| LWEC 30               | —       | — | 80             | 91             |
| LWE 30                | LWE30…Q | — | 109            | 119            |
| LWEG 30               | —       | — | 141            | 151            |
| LWEC 35               | —       | — | 90             | 102            |
| LWE 35                | —       | — | 123            | 135            |
| —                     | LWE35…Q | — | 124            |                |
| LWE 45                | —       | — | 138            | 148            |

Remarks 1. The dimensions of the slide unit with C-Lube at both ends are indicated.

2. A typical identification number is indicated, but is applied to all LWE (…Q) series models of the same size.

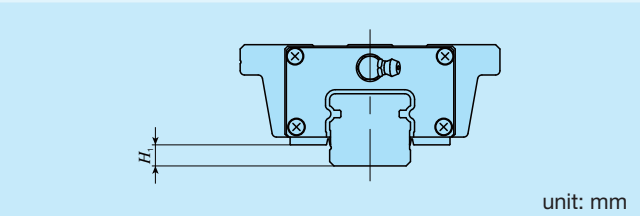Table 12 H<sub>1</sub> dimension of slide unit with under seals (Supplemental code /U)




| Identification number |        |   | H <sub>1</sub> |
|-----------------------|--------|---|----------------|
| ME 15                 | LWE 15 | — | 5              |
| ME 20                 | LWE 20 | — | 5              |
| ME 25                 | LWE 25 | — | 6              |
| ME 30                 | —      | — | 9              |
| —                     | LWE 30 | — | 7              |
| ME 35                 | —      | — | 10             |
| —                     | LWE 35 | — | 8              |
| ME 45                 | —      | — | 13             |
| —                     | LWE 45 | — | 10             |

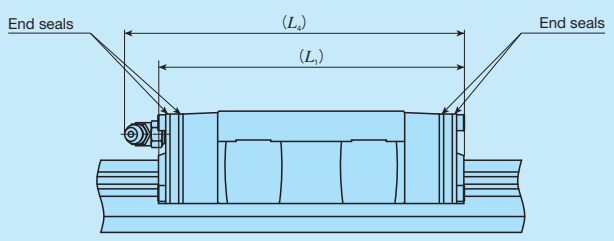Remark: A typical identification number is indicated, but is applied to all models of the same size.

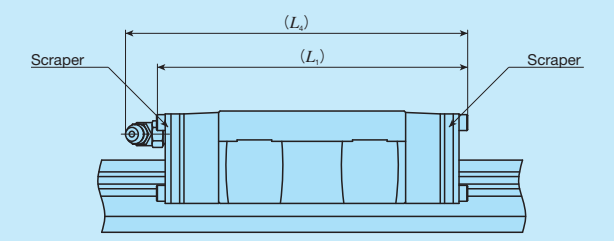


Table 13 Dimension of slide unit with double end seals  
(Supplemental code Single unit: /V  
Assembled set: /V /VV)

|  |         |           |                |                |
|-----------------------------------------------------------------------------------|---------|-----------|----------------|----------------|
| unit: mm                                                                          |         |           |                |                |
| Identification number                                                             |         |           | L <sub>1</sub> | L <sub>4</sub> |
| MEC 15                                                                            | LWEC 15 | —         | 48             | 50             |
| ME 15                                                                             | LWE 15  | LWE15···Q | 64             | 66             |
| MEG 15                                                                            | LWEG 15 | —         | 76             | 78             |
| MEC 20                                                                            | LWEC 20 | —         | 54             | 68             |
| ME 20                                                                             | LWE 20  | LWE20···Q | 73             | 87             |
| MEG 20                                                                            | LWEG 20 | —         | 89             | 103            |
| MEC 25                                                                            | LWEC 25 | —         | 67             | 80             |
| ME 25                                                                             | LWE 25  | LWE25···Q | 91             | 104            |
| MEG 25                                                                            | LWEG 25 | —         | 110            | 123            |
| MEC 30                                                                            | LWEC 30 | —         | 78             | 89             |
| ME 30                                                                             | LWE 30  | LWE30···Q | 107            | 118            |
| MEG 30                                                                            | LWEG 30 | —         | 138            | 150            |
| MEC 35                                                                            | LWEC 35 | —         | 88             | 101            |
| ME 35                                                                             | LWE 35  | LWE35···Q | 121            | 134            |
| ME 45                                                                             | LWE 45  | —         | 137            | 148            |

Remarks 1. The dimensions of the slide unit with double end seals at both ends are indicated.  
2. A typical identification number is indicated, but is applied to all models of the same size.

Table 14 Dimension of slide unit with scrapers  
(Supplemental code Single unit: /Z  
Assembled set: /Z /ZZ)

|  |         |           |                |                |
|------------------------------------------------------------------------------------|---------|-----------|----------------|----------------|
| unit: mm                                                                           |         |           |                |                |
| Identification number                                                              |         |           | L <sub>1</sub> | L <sub>4</sub> |
| MEC 15                                                                             | LWEC 15 | —         | 48             | 50             |
| ME 15                                                                              | LWE 15  | LWE15···Q | 64             | 66             |
| MEG 15                                                                             | LWEG 15 | —         | 77             | 79             |
| MEC 20                                                                             | LWEC 20 | —         | 55             | 69             |
| ME 20                                                                              | LWE 20  | LWE20···Q | 75             | 88             |
| MEG 20                                                                             | LWEG 20 | —         | 91             | 104            |
| MEC 25                                                                             | LWEC 25 | —         | 69             | 81             |
| ME 25                                                                              | LWE 25  | LWE25···Q | 93             | 105            |
| MEG 25                                                                             | LWEG 25 | —         | 112            | 124            |
| MEC 30                                                                             | LWEC 30 | —         | 79             | 90             |
| ME 30                                                                              | LWE 30  | —         | 108            | 119            |
| —                                                                                  | —       | LWE30···Q | 109            |                |
| MEG 30                                                                             | LWEG 30 | —         | 140            | 151            |
| MEC 35                                                                             | LWEC 35 | —         | 89             | 101            |
| ME 35                                                                              | LWE 35  | —         | 122            | 134            |
| —                                                                                  | —       | LWE35···Q | 123            | 135            |
| ME 45                                                                              | LWE 45  | —         | 138            | 148            |

Remarks 1. The dimensions of the slide unit with scrapers at both ends are indicated.  
2. A typical identification number is indicated, but is applied to all models of the same size.

Lubrication

Lithium-soap base grease with extreme-pressure additive (Alvania EP grease 2 [SHOWA SHELL SEKIYU K. K.]) is pre-packed in ME and LWE (···Q) series. Additionally, ME series has C-Lube placed in the recirculation part of balls, so that the interval for reapplying lubricant can be extended and maintenance works such as grease job can be reduced significantly.  
ME and LWE (···Q) series are provided with grease nipple shown in Table 15. Supply nozzles matching the size of grease nipple are also available. For order of these parts for lubrication, see Table 15.1 on page III-22 and Table 16 on page III-23.

Table 15 Parts for lubrication

| Size | Grease nipple type <sup>(1)</sup> | Applicable supply nozzle type      |                    | Bolt size of female threads for piping |
|------|-----------------------------------|------------------------------------|--------------------|----------------------------------------|
| 15   | A-M4                              | A-5120V<br>B-5120V                 | A-5240V<br>B-5240V | M4                                     |
| 20   | B-M6                              | Grease gun available on the market |                    | M6                                     |
| 25   |                                   |                                    |                    |                                        |
| 30   |                                   |                                    |                    |                                        |
| 35   | JIS type 4                        |                                    |                    | PT1/8                                  |
| 45   |                                   |                                    |                    |                                        |

Note <sup>(1)</sup> For the specifications of grease nipple, see Tables 15.1 and 15.2 on page III-22.

Dust Protection

ME and LWE (···Q) series of slide units are equipped with end seals as standard for dust protection. However, if large amount of contaminant or dust are floating, or if large particles of foreign substances such as chips or sand may adhere to the track rail, it is recommended to cover the whole unit with bellows or telescope type shield, etc. Bellows to match the dimension of ME and LWE (···Q) are optionally available. The bellows are easy to mount and provide excellent dust protection. For order of these products, see page III-25.

Precaution for Use

① Mounting surface, reference mounting surface, and general mounting structure

To mount ME or LWE (···Q) series, correctly fit the reference mounting surfaces B and D of the slide unit and the track rail to the reference mounting surfaces of the table and the bed, and then fix them tightly. (See Fig. 2.)  
The reference mounting surfaces B and D and mounting surfaces A and C are precisely ground. Machining the mounting surface of the table and bed, such as machine or device, to high accuracy and mounting them properly will ensure stable linear motion with high accuracy.  
Reference mounting surface of the slide unit is the opposite side of the **IKO** mark. The track rail reference mounting surface is identified by locating the **IKO** mark on the top surface of the track rail. It is the side surface above the mark (in the direction of the arrow). (See Fig. 3.)

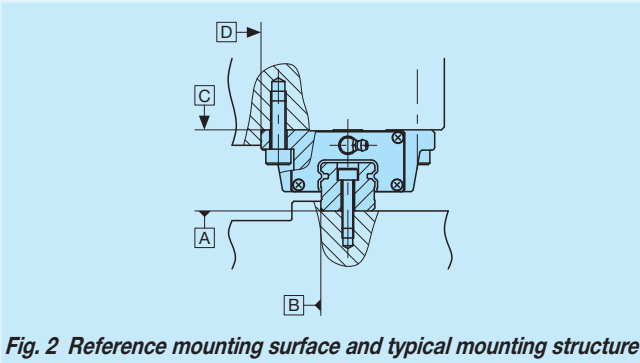


Fig. 2 Reference mounting surface and typical mounting structure

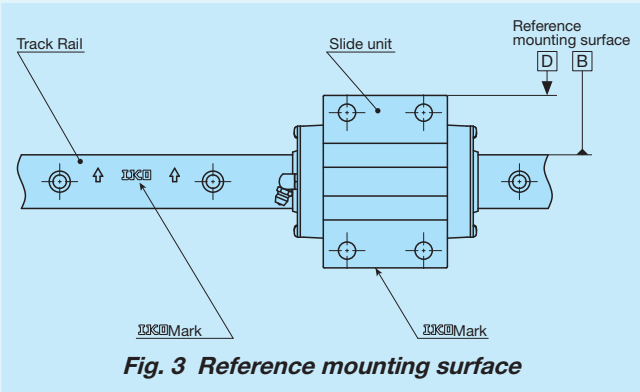


Fig. 3 Reference mounting surface

② Corner radius and shoulder height of reference mounting surfaces

For the opposite corner of the mating reference mounting, it is recommended to have relieved fillet as indicated in Fig. 4. Table 17 shows recommended shoulder heights and corner radius of the mating reference mounting surfaces.

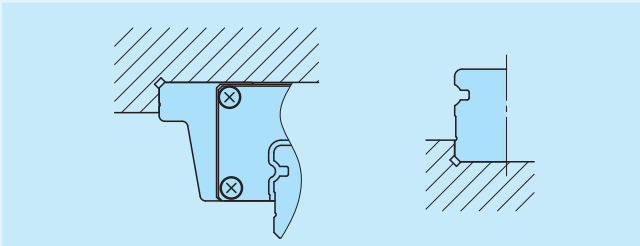


Fig. 4 Corner of the mating reference mounting

③ Tightening torque for fixing screw

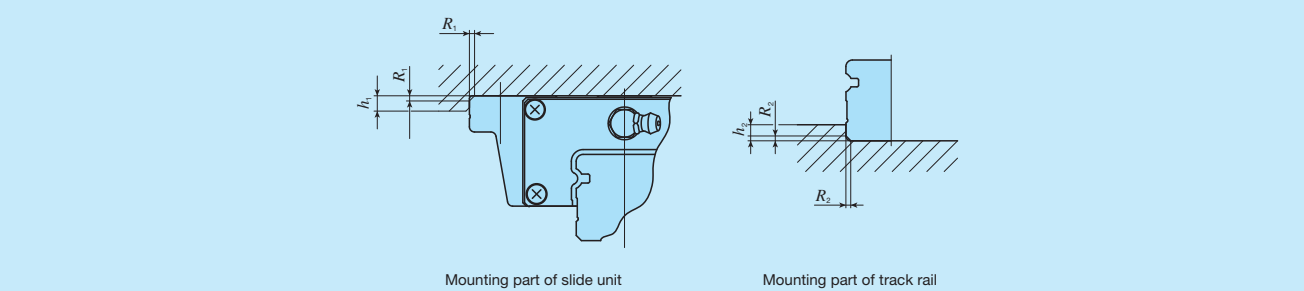
Typical tightening torque for mounting of the ME or LWE (···Q) series to the steel mating member material is indicated in Table 16. When vibration and shock of the machine or device are large, fluctuating load is large, or moment load is applied, fix it by using the torque 1.2 to 1.5 times larger than the value indicated in the table as necessary. If the mating member material is cast iron or aluminum, reduce the tightening torque depending on the strength characteristic of the mating member material.

Table 16 Tightening torque for fixing screw

| Bolt size | Tightening torque N · m      |                            |
|-----------|------------------------------|----------------------------|
|           | High carbon steel-made screw | Stainless steel-made screw |
| M 3×0.5   | 1.7                          | 1.1                        |
| M 4×0.7   | 4.0                          | 2.5                        |
| M 5×0.8   | 7.9                          | 5.0                        |
| M 6×1     | 13.3                         | 8.5                        |
| M 8×1.25  | 32.0                         | 20.4                       |
| M10×1.5   | 62.7                         | —                          |
| M12×1.75  | 108                          | —                          |

Remark: The calculation is based on the tightening torque, strength division 12.9 and property division A2-70.

Table 17 Shoulder height and corner radius of the reference mounting surface


|  |                                   |                                           |                                   |                                           |
|---------------------------------------------------------------------------------------|-----------------------------------|-------------------------------------------|-----------------------------------|-------------------------------------------|
| unit: mm                                                                              |                                   |                                           |                                   |                                           |
| Size                                                                                  | Mounting part of slide unit       |                                           | Mounting part of track rail       |                                           |
|                                                                                       | Shoulder height<br>h <sub>1</sub> | Corner radius<br>R <sub>1</sub> (maximum) | Shoulder height<br>h <sub>2</sub> | Corner radius<br>R <sub>2</sub> (maximum) |
| 15                                                                                    | 4                                 | 1 (0.5) <sup>(1)</sup>                    | 3                                 | 0.5                                       |
| 20                                                                                    | 5                                 | 1 (0.5) <sup>(1)</sup>                    | 3                                 | 0.5                                       |
| 25                                                                                    | 6                                 | 1                                         | 4                                 | 1                                         |
| 30                                                                                    | 8                                 | 1                                         | 5                                 | 1                                         |
| 35                                                                                    | 8                                 | 1                                         | 6                                 | 1                                         |
| 45                                                                                    | 8                                 | 1.5                                       | 7                                 | 1.5                                       |



Note <sup>(1)</sup> The values in ( ) are applied to MES and LWES (···Q).

1N=0.102kgf=0.2248lbs.  
1mm=0.03937inch

IKO C-Lube Linear Way ME


Flange type mounting from bottom

|       |                                                                                   |    |    |
|-------|-----------------------------------------------------------------------------------|----|----|
| Shape | ME · LWE                                                                          |    |    |
|       |  |    |    |
| Size  | 15                                                                                | 20 | 25 |
|       | 30                                                                                | 35 | 45 |

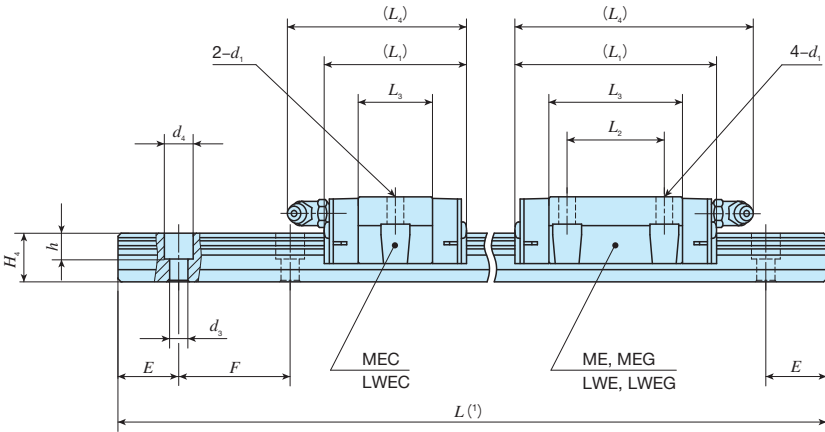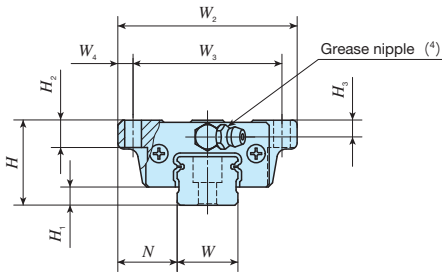

| Identification number |                        | Interchangeable | Mass (Ref.)   |                 | Dimensions of assembly mm |                |      | Dimensions of slide unit mm |                |                |                |                |                |                |                |  |                | Dimensions of track rail mm |    |                |                |                |             |    |    | Recommended mounting bolt for track rail <sup>(2)</sup> mm | Basic dynamic load rating <sup>(3)</sup> | Basic static load rating <sup>(3)</sup> | Static moment rating <sup>(3)</sup> |                       |                       |     |  |   |     |    |    |   |     |     |    |    |       |        |        |     |             |             |   |     |    |    |   |     |     |    |    |       |        |        |     |            |            |  |  |  |  |  |  |  |  |  |  |
|-----------------------|------------------------|-----------------|---------------|-----------------|---------------------------|----------------|------|-----------------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|--|----------------|-----------------------------|----|----------------|----------------|----------------|-------------|----|----|------------------------------------------------------------|------------------------------------------|-----------------------------------------|-------------------------------------|-----------------------|-----------------------|-----|--|---|-----|----|----|---|-----|-----|----|----|-------|--------|--------|-----|-------------|-------------|---|-----|----|----|---|-----|-----|----|----|-------|--------|--------|-----|------------|------------|--|--|--|--|--|--|--|--|--|--|
| ME series             | LWE series (No C-Lube) |                 | Slide unit kg | Track rail kg/m | H                         | H <sub>1</sub> | N    | W <sub>2</sub>              | W <sub>3</sub> | W <sub>4</sub> | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | L <sub>4</sub> | d <sub>1</sub> |  | H <sub>2</sub> | H <sub>3</sub>              | W  | H <sub>4</sub> | d <sub>3</sub> | d <sub>4</sub> | h           | E  | F  | Bolt size×ℓ                                                | C<br>N                                   | C <sub>0</sub><br>N                     | T <sub>0</sub><br>N・m               | T <sub>x</sub><br>N・m | T <sub>y</sub><br>N・m |     |  |   |     |    |    |   |     |     |    |    |       |        |        |     |             |             |   |     |    |    |   |     |     |    |    |       |        |        |     |            |            |  |  |  |  |  |  |  |  |  |  |
| MEC 15                | LWEC 15                | ○               | 0.11          | 1.57            | 24                        | 5.8            | 18.5 | 52                          | 41             | 5.5            | 41             | —              | 22.4           | 45             | 4.5            |  | 7              | 4.5                         | 15 | 14.5           | 3.6<br>(4.5)   | 6.5<br>(8 )    | 4.5<br>(6 ) | 20 | 60 | M3×16<br>(M4×16)                                           | 5 240                                    | 5 480                                   | 43.8                                | 21.3<br>149           | 21.3<br>149           |     |  |   |     |    |    |   |     |     |    |    |       |        |        |     |             |             |   |     |    |    |   |     |     |    |    |       |        |        |     |            |            |  |  |  |  |  |  |  |  |  |  |
| MEC 15…SL             | LWEC 15…SL             | ○               |               |                 |                           |                |      |                             |                |                |                |                |                |                |                |  |                |                             |    |                |                |                |             |    |    |                                                            |                                          |                                         |                                     |                       |                       |     |  |   |     |    |    |   |     |     |    |    |       |        |        |     |             |             |   |     |    |    |   |     |     |    |    |       |        |        |     |            |            |  |  |  |  |  |  |  |  |  |  |
| ME 15                 | LWE 15                 | ○               |               |                 |                           |                |      |                             |                |                |                |                |                |                |                |  |                |                             |    |                |                |                |             |    |    |                                                            |                                          |                                         |                                     |                       |                       |     |  |   |     |    |    |   |     |     |    |    |       |        |        |     |             |             |   |     |    |    |   |     |     |    |    |       |        |        |     |            |            |  |  |  |  |  |  |  |  |  |  |
| ME 15…SL              | LWE 15…SL              | ○               |               |                 |                           |                |      |                             |                |                |                |                |                |                |                |  |                |                             |    |                |                |                |             |    |    |                                                            |                                          |                                         |                                     |                       |                       |     |  |   |     |    |    |   |     |     |    |    |       |        |        |     |             |             |   |     |    |    |   |     |     |    |    |       |        |        |     |            |            |  |  |  |  |  |  |  |  |  |  |
| —                     | LWE 15…Q               | —               |               |                 |                           |                |      |                             |                |                |                |                |                |                |                |  |                |                             |    |                |                |                |             |    |    |                                                            |                                          |                                         |                                     |                       |                       |     |  |   |     |    |    |   |     |     |    |    |       |        |        |     |             |             |   |     |    |    |   |     |     |    |    |       |        |        |     |            |            |  |  |  |  |  |  |  |  |  |  |
| MEG 15                | LWEG 15                | ○               |               |                 |                           |                |      |                             |                |                |                |                |                |                |                |  |                |                             |    |                |                |                |             |    |    |                                                            |                                          |                                         |                                     |                       |                       |     |  |   |     |    |    |   |     |     |    |    |       |        |        |     |             |             |   |     |    |    |   |     |     |    |    |       |        |        |     |            |            |  |  |  |  |  |  |  |  |  |  |
| MEG 15…SL             | LWEG 15…SL             | ○               |               |                 |                           |                |      |                             |                |                |                |                |                |                |                |  |                |                             |    |                |                |                |             |    |    |                                                            |                                          |                                         |                                     |                       |                       |     |  |   |     |    |    |   |     |     |    |    |       |        |        |     |             |             |   |     |    |    |   |     |     |    |    |       |        |        |     |            |            |  |  |  |  |  |  |  |  |  |  |
| MEC 20                |                        | ○               | 0.18          | 2.28            | 28                        | 6              | 19.5 | 59                          | 49             | 5              | 47             | —              | 24.7           | 58             | 5.5            |  | 9              | 5.5                         | 20 | 16             | 6              | 9.5            | 8.5         | 20 | 60 | M5×16                                                      | 7 580                                    | 7 340                                   | 78.9                                | 31.5<br>235           | 31.5<br>235           |     |  |   |     |    |    |   |     |     |    |    |       |        |        |     |             |             |   |     |    |    |   |     |     |    |    |       |        |        |     |            |            |  |  |  |  |  |  |  |  |  |  |
|                       | LWEC 20                | ○               |               |                 |                           |                |      |                             |                |                |                |                | 24.5           |                |                |  |                |                             |    |                |                |                |             |    |    |                                                            |                                          |                                         |                                     |                       |                       |     |  |   |     |    |    |   |     |     |    |    |       |        |        |     |             |             |   |     |    |    |   |     |     |    |    |       |        |        |     |            |            |  |  |  |  |  |  |  |  |  |  |
| MEC 20…SL             |                        | ○               |               |                 |                           |                |      |                             |                |                |                |                | 24.7           |                |                |  |                |                             |    |                |                |                |             |    |    |                                                            |                                          |                                         |                                     |                       |                       |     |  |   |     |    |    |   |     |     |    |    |       |        |        |     |             |             |   |     |    |    |   |     |     |    |    |       |        |        |     |            |            |  |  |  |  |  |  |  |  |  |  |
|                       | LWEC 20…SL             | ○               |               |                 |                           |                |      |                             |                |                |                |                | 24.5           |                |                |  |                |                             |    |                |                |                |             |    |    |                                                            |                                          |                                         |                                     |                       |                       |     |  |   |     |    |    |   |     |     |    |    |       |        |        |     |             |             |   |     |    |    |   |     |     |    |    |       |        |        |     |            |            |  |  |  |  |  |  |  |  |  |  |
| ME 20                 |                        | ○               | 0.30          |                 |                           |                |      |                             |                |                |                | 6              | 19.5           | 59             | 49             |  |                |                             |    |                |                |                |             |    |    |                                                            | 5                                        | 67                                      | 32                                  | 44.2                  | 78                    | 5.5 |  | 9 | 5.5 | 20 | 16 | 6 | 9.5 | 8.5 | 20 | 60 | M5×16 | 11 600 | 13 400 | 145 | 95.6<br>566 | 95.6<br>566 |   |     |    |    |   |     |     |    |    |       |        |        |     |            |            |  |  |  |  |  |  |  |  |  |  |
|                       | LWE 20                 | ○               |               |                 |                           | 44             |      |                             |                |                |                |                |                |                |                |  |                |                             |    |                |                |                |             |    |    |                                                            |                                          |                                         |                                     |                       |                       |     |  |   |     |    |    |   |     |     |    |    |       |        |        |     |             |             |   |     |    |    |   |     |     |    |    |       |        |        |     |            |            |  |  |  |  |  |  |  |  |  |  |
| ME 20…SL              |                        | ○               |               |                 |                           | 44.2           |      |                             |                |                |                |                |                |                |                |  |                |                             |    |                |                |                |             |    |    |                                                            |                                          |                                         |                                     |                       |                       |     |  |   |     |    |    |   |     |     |    |    |       |        |        |     |             |             |   |     |    |    |   |     |     |    |    |       |        |        |     |            |            |  |  |  |  |  |  |  |  |  |  |
|                       | LWE 20…SL              | ○               |               |                 |                           | 44             |      |                             |                |                |                |                |                |                |                |  |                |                             |    |                |                |                |             |    |    |                                                            |                                          |                                         |                                     |                       |                       |     |  |   |     |    |    |   |     |     |    |    |       |        |        |     |             |             |   |     |    |    |   |     |     |    |    |       |        |        |     |            |            |  |  |  |  |  |  |  |  |  |  |
| —                     | LWE 20…Q               | —               |               |                 |                           |                |      |                             |                |                |                | 5              |                |                |                |  |                |                             |    |                |                |                |             |    |    |                                                            |                                          | 19.5                                    | 59                                  | 49                    | 5                     | 83  |  |   |     |    |    |   |     |     |    |    |       | 45     | 60.1   | 94  | 5.5         |             | 9 | 5.5 | 20 | 16 | 6 | 9.5 | 8.5 | 20 | 60 | M5×16 | 10 500 | 18 300 | 197 | 172<br>930 | 172<br>930 |  |  |  |  |  |  |  |  |  |  |
| MEG 20                |                        | ○               | 59.9          |                 |                           |                |      |                             |                |                |                |                |                |                |                |  |                |                             |    |                |                |                |             |    |    |                                                            |                                          |                                         |                                     |                       |                       |     |  |   |     |    |    |   |     |     |    |    |       |        |        |     |             |             |   |     |    |    |   |     |     |    |    |       |        |        |     |            |            |  |  |  |  |  |  |  |  |  |  |
|                       | LWEG 20                | ○               | 60.1          |                 |                           |                |      |                             |                |                |                |                |                |                |                |  |                |                             |    |                |                |                |             |    |    |                                                            |                                          |                                         |                                     |                       |                       |     |  |   |     |    |    |   |     |     |    |    |       |        |        |     |             |             |   |     |    |    |   |     |     |    |    |       |        |        |     |            |            |  |  |  |  |  |  |  |  |  |  |
| MEG 20…SL             |                        | ○               | 60.1          |                 |                           |                |      |                             |                |                |                |                |                |                |                |  |                |                             |    |                |                |                |             |    |    |                                                            |                                          |                                         |                                     |                       |                       |     |  |   |     |    |    |   |     |     |    |    |       |        |        |     |             |             |   |     |    |    |   |     |     |    |    |       |        |        |     |            |            |  |  |  |  |  |  |  |  |  |  |
|                       | LWEG 20…SL             | ○               |               |                 |                           |                |      |                             |                |                |                |                |                |                |                |  |                |                             |    |                |                |                |             |    |    |                                                            |                                          |                                         |                                     |                       |                       |     |  |   |     |    |    |   |     |     |    |    |       |        |        |     |             |             |   |     |    |    |   |     |     |    |    |       |        |        |     |            |            |  |  |  |  |  |  |  |  |  |  |

Notes (1) Track rail lengths  $L$  are shown in Tables 2.1 and 2.2 on page II-45.  
(2) Track rail mounting bolts are not appended. Hexagon socket head bolts of JIS B 1176 with strength division 12.9 are recommended.  
(3) The direction of basic dynamic load rating ( $C$ ), basic static load rating ( $C_0$ ), and static moment rating ( $T_0$ ,  $T_x$ ,  $T_y$ ) are shown in the sketches below. The upper values of  $T_x$  and  $T_y$  are for one slide unit and the lower values are for two slide units in close contact.  
(4) The shapes of grease nipple vary by size. The specifications are shown in Table 15 on page II-51.  
Remark: Values in ( ) represent dimensions when the track rail mounting hole is "M4". Indicate the identification number with "/M4" at the end.




Example of identification number of assembled set



| Model code | Dimensions | Part code | Model code | Material code | Preload symbol | Classification symbol | Interchangeable code | Special specification |
|------------|------------|-----------|------------|---------------|----------------|-----------------------|----------------------|-----------------------|
| ME         | G          | 15        | C2         | R340          | T1             | P                     | S1                   | /U                    |
| 1          | 2          | 3         | 4          | 5             | 6              | 7                     | 8                    | 9                     |

|                                 |                                                                   |                  |                            |                                 |                                                                                |                                                                                                 |                                                                                       |                                                                                                                |                                                                                              |
|---------------------------------|-------------------------------------------------------------------|------------------|----------------------------|---------------------------------|--------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|
| ① Model<br>ME<br>LWE<br>LWE...Q | ② Length of slide unit<br>C Short<br>No symbol Standard<br>G Long | ③ Size<br>15, 20 | ④ Number of slide unit (2) | ⑤ Length of track rail (340 mm) | ⑥ Material type<br>No symbol High carbon steel made<br>SL Stainless steel made | ⑦ Preload amount<br>T0 Clearance<br>No symbol Standard<br>T1 Light preload<br>T2 Medium preload | ⑧ Accuracy class<br>No symbol Ordinary<br>H High<br>P Precision<br>SP Super precision | ⑨ Interchangeable<br>S1 S1 specification<br>S2 S2 specification<br>No symbol Non-interchangeable specification | ⑩ Special specification<br>A, BS, D, E, F, I, J, L, LF, MA<br>M4, N, Q, RE, T, U, V, W, Y, Z |
|---------------------------------|-------------------------------------------------------------------|------------------|----------------------------|---------------------------------|--------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|




Flange type mounting from bottom

|       |                                                                                   |    |    |
|-------|-----------------------------------------------------------------------------------|----|----|
| Shape | ME · LWE                                                                          |    |    |
|       |  |    |    |
| Size  | 15                                                                                | 20 | 25 |
|       | 30                                                                                | 35 | 45 |

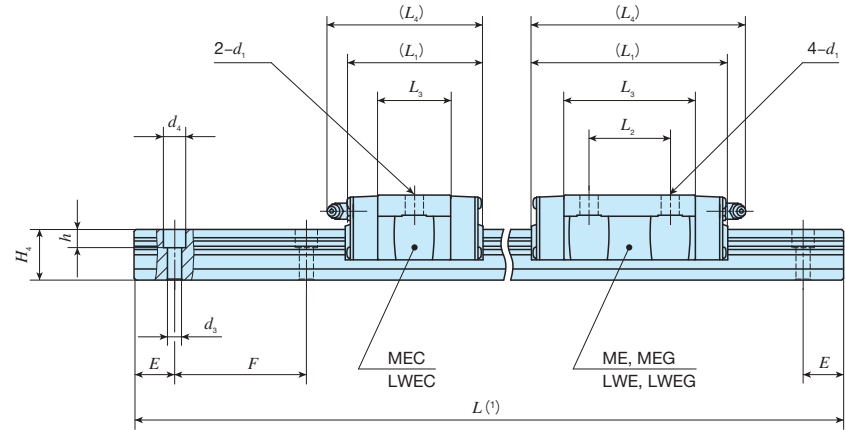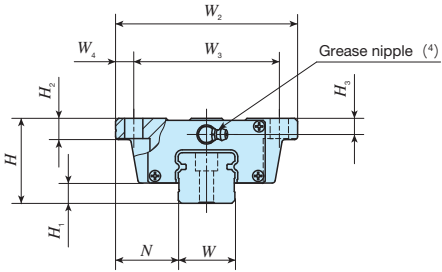

| Identification number |                        | Interchangeable | Mass (Ref.)   |                 | Dimensions of assembly mm |                |    | Dimensions of slide unit mm |                |                |                |                |                |                |                |  |                | Dimensions of track rail mm |   |                |                |                |   |    |    | Recommended mounting bolt for track rail <sup>(2)</sup> mm | Basic dynamic load rating <sup>(3)</sup> | Basic static load rating <sup>(3)</sup> | Static moment rating <sup>(3)</sup> |                       |                       |    |   |    |    |        |        |        |     |              |              |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|-----------------------|------------------------|-----------------|---------------|-----------------|---------------------------|----------------|----|-----------------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|--|----------------|-----------------------------|---|----------------|----------------|----------------|---|----|----|------------------------------------------------------------|------------------------------------------|-----------------------------------------|-------------------------------------|-----------------------|-----------------------|----|---|----|----|--------|--------|--------|-----|--------------|--------------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| ME series             | LWE series (No C-Lube) |                 | Slide unit kg | Track rail kg/m | H                         | H <sub>1</sub> | N  | W <sub>2</sub>              | W <sub>3</sub> | W <sub>4</sub> | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | L <sub>4</sub> | d <sub>1</sub> |  | H <sub>2</sub> | H <sub>3</sub>              | W | H <sub>4</sub> | d <sub>3</sub> | d <sub>4</sub> | h | E  | F  | Bolt size× ℓ                                               | C<br>N                                   | C <sub>0</sub><br>N                     | T <sub>0</sub><br>N・m               | T <sub>x</sub><br>N・m | T <sub>y</sub><br>N・m |    |   |    |    |        |        |        |     |              |              |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| MEC 25                | LWEC 25                | ○               | 0.33          | 3.09            | 33                        | 7              | 25 | 73                          | 60             | 6.5            | 59             | —              | 32             | 70             | 7              |  |                |                             |   |                | 7              | 11             | 9 | 20 | 60 | M 6×20                                                     | 12 400                                   | 12 300                                  | 153                                 | 71.8<br>480           | 71.8<br>480           |    |   |    |    |        |        |        |     |              |              |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| MEC 25…SL             | LWEC 25…SL             | ○               |               |                 |                           |                |    |                             |                |                | 83             | 35             | 56             | 94             |                |  |                |                             |   |                |                |                |   |    |    |                                                            | 10                                       | 6.5                                     | 23                                  | 19                    | 7                     | 11 | 9 | 20 | 60 | M 6×20 | 18 100 | 21 100 | 262 | 195<br>1 090 | 195<br>1 090 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| ME 25                 | LWE 25                 | ○               |               |                 |                           |                |    |                             |                |                |                |                |                |                |                |  |                |                             |   |                |                |                |   |    |    |                                                            |                                          |                                         |                                     |                       |                       |    |   |    |    |        | 15 500 | 19 400 | 240 | 175<br>1 010 | 175<br>1 010 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| ME 25…SL              | LWE 25…SL              | ○               |               |                 |                           |                |    |                             |                |                |                |                |                |                |                |  |                |                             |   |                |                |                |   |    |    |                                                            |                                          |                                         |                                     |                       |                       |    |   |    |    |        |        |        |     |              |              |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| —                     | LWE 25…Q               | —               |               |                 |                           |                |    |                             |                |                |                |                |                |                |                |  |                |                             |   |                |                |                |   |    |    |                                                            |                                          |                                         |                                     |                       |                       |    |   |    |    |        |        |        |     |              |              |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| MEG 25                | LWEG 25                | ○               | 22 200        |                 |                           | 28 200         |    |                             |                |                | 349            | 336<br>1 740   | 336<br>1 740   |                |                |  |                |                             |   |                |                |                |   |    |    |                                                            |                                          |                                         |                                     |                       |                       |    |   |    |    |        |        |        |     |              |              |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| MEG 25…SL             | LWEG 25…SL             | ○               |               |                 |                           |                |    |                             |                |                |                |                |                | 7              |                |  |                |                             |   |                |                |                |   |    |    |                                                            |                                          |                                         |                                     |                       |                       |    |   |    |    |        |        |        |     |              |              |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |

- Notes (1) Track rail lengths  $L$  are shown in Tables 2.1 and 2.2 on page II -45.  
(2) Track rail mounting bolts are not appended. Hexagon socket head bolts of JIS B 1176 with strength division 12.9 are recommended.  
(3) The direction of basic dynamic load rating ( $C$ ), basic static load rating ( $C_0$ ), and static moment rating ( $T_0$ ,  $T_x$ ,  $T_y$ ) are shown in the sketches below. The upper values of  $T_x$  and  $T_y$  are for one slide unit and the lower values are for two slide units in close contact.  
(4) The shapes of grease nipple vary by size. The specifications are shown in Table 15 on page II -51.





Example of identification number of assembled set

| Model code |          | Dimensions | Part code |             | Model code | Material code | Preload symbol       | Classification symbol | Interchangeable code | Special specification |
|------------|----------|------------|-----------|-------------|------------|---------------|----------------------|-----------------------|----------------------|-----------------------|
| <u>ME</u>  | <u>G</u> | <u>30</u>  | <u>C2</u> | <u>R440</u> | <u>  </u>  | <u>  </u>     | <u>T<sub>1</sub></u> | <u>P</u>              | <u>S1</u>            | <u>/U</u>             |
| 1          | 2        | 3          | 4         | 5           | 1          | 6             | 7                    | 8                     | 9                    | 10                    |

|                        |                                  |                                 |  |                  |                 |                                 |                                   |
|------------------------|----------------------------------|---------------------------------|--|------------------|-----------------|---------------------------------|-----------------------------------|
| ① Model                |                                  | ③ Size                          |  | ⑦ Preload amount |                 | ⑨ Interchangeable               |                                   |
| ME                     | Flange type mounting from bottom | 25, 30, 35, 45                  |  | T <sub>0</sub>   | Clearance       | S1                              | S1 specification                  |
| LWE                    |                                  |                                 |  | No symbol        | Standard        | S2                              | S2 specification                  |
| LWE...Q                |                                  |                                 |  | T <sub>1</sub>   | Light preload   | No symbol                       | Non-interchangeable specification |
|                        |                                  |                                 |  | T <sub>2</sub>   | Medium preload  |                                 |                                   |
| ② Length of slide unit |                                  | ⑤ Length of track rail (440 mm) |  | ⑧ Accuracy class |                 | ⑩ Special specification         |                                   |
| C                      | Short                            |                                 |  | No symbol        | Ordinary        | A, BS, D, E, F, I, J, L, LF, MA |                                   |
| No symbol              | Standard                         |                                 |  | H                | High            | N, Q, RE, T, U, V, W, Y, Z      |                                   |
| G                      | Long                             |                                 |  | P                | Precision       |                                 |                                   |
|                        |                                  |                                 |  | SP               | Super precision |                                 |                                   |

### Flange type mounting from top
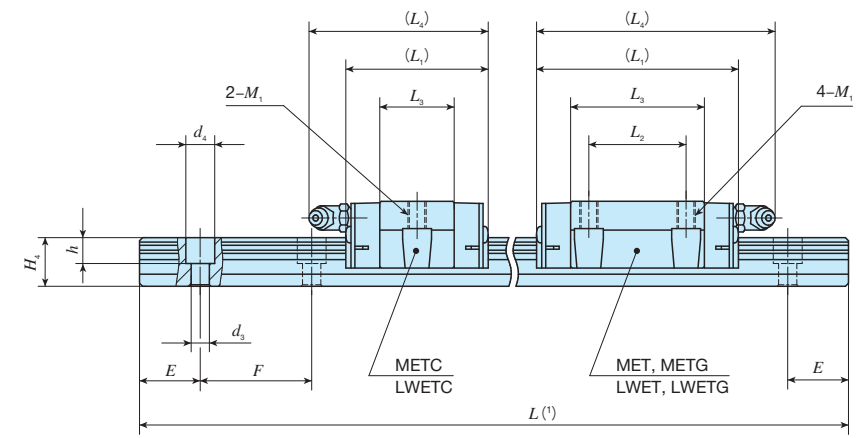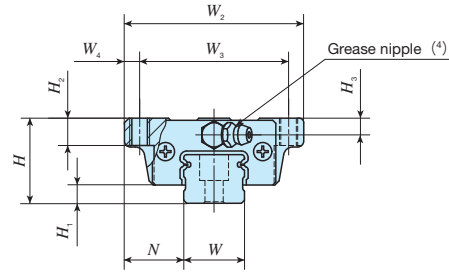
|       |                        |                        |                        |
|-------|------------------------|------------------------|------------------------|
| Shape |                        |                        |                        |
| Size  | <b>15</b><br><b>30</b> | <b>20</b><br><b>35</b> | <b>25</b><br><b>45</b> |



| Identification number |                           | Interchangeable | Mass (Ref.)         |                    | Dimensions of assembly<br>mm |                |      | Dimensions of slide unit<br>mm |                |                |                |                |                |                |                |  |                |                | Dimensions of track rail<br>mm |                  |                |                |             |             |             | Recommended<br>mounting bolt<br>for track rail <sup>(2)</sup><br>mm | Basic dynamic<br>load rating <sup>(3)</sup> | Basic static<br>load rating <sup>(3)</sup> | Static moment rating <sup>(3)</sup> |             |                     |                       |                       |                       |             |                  |       |       |      |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  |       |       |                  |       |        |     |             |             |        |        |             |             |                  |             |             |
|-----------------------|---------------------------|-----------------|---------------------|--------------------|------------------------------|----------------|------|--------------------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|--|----------------|----------------|--------------------------------|------------------|----------------|----------------|-------------|-------------|-------------|---------------------------------------------------------------------|---------------------------------------------|--------------------------------------------|-------------------------------------|-------------|---------------------|-----------------------|-----------------------|-----------------------|-------------|------------------|-------|-------|------|-------------|-------------|--|--|--|--|--|--|--|-------|------------------|-------|-------|------|-------------|-------------|--|--|--|--|-------|-------|------------------|-------|--------|-----|-------------|-------------|--------|--------|-------------|-------------|------------------|-------------|-------------|
| ME series             | LWE series<br>(No C-Lube) |                 | Slide<br>unit<br>kg | Track rail<br>kg/m | H                            | H <sub>1</sub> | N    | W <sub>2</sub>                 | W <sub>3</sub> | W <sub>4</sub> | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | L <sub>4</sub> | M <sub>1</sub> |  | H <sub>2</sub> | H <sub>3</sub> | W                              | H <sub>4</sub>   | d <sub>3</sub> | d <sub>4</sub> | h           | E           | F           |                                                                     |                                             |                                            | Bolt size×ℓ                         | C<br>N      | C <sub>0</sub><br>N | T <sub>0</sub><br>N・m | T <sub>x</sub><br>N・m | T <sub>y</sub><br>N・m |             |                  |       |       |      |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  |       |       |                  |       |        |     |             |             |        |        |             |             |                  |             |             |
| METC 15               | LWETC 15                  | ○               | 0.11                | 1.57               | 24                           | 5.8            | 18.5 | 52                             | 41             | 5.5            | 41             | —              | 22.4           | 45             | M5             |  |                |                |                                |                  | 3.6<br>(4.5)   | 6.5<br>(8 )    | 4.5<br>(6 ) | 20          | 60          | M3×16<br>(M4×16)                                                    | 5 240                                       | 5 480                                      | 43.8                                | 21.3<br>149 | 21.3<br>149         |                       |                       |                       |             |                  |       |       |      |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  |       |       |                  |       |        |     |             |             |        |        |             |             |                  |             |             |
| METC 15…SL            | LWETC 15…SL               | ○               |                     |                    |                              |                |      |                                |                |                | 57             | 26             | 38.4           | 61             |                |  |                |                |                                |                  |                |                |             |             |             |                                                                     | 7                                           | 4.5                                        | 15                                  | 14.5        | 3.6<br>(4.5)        | 6.5<br>(8 )           | 4.5<br>(6 )           | 20                    | 60          | M3×16<br>(M4×16) | 7 640 | 9 390 | 75.1 | 57.6<br>333 | 57.6<br>333 |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  |       |       |                  |       |        |     |             |             |        |        |             |             |                  |             |             |
| MET 15                | LWET 15                   | ○               |                     |                    |                              |                |      |                                |                |                |                |                |                |                |                |  |                |                |                                |                  |                |                |             |             |             |                                                                     |                                             |                                            |                                     |             |                     |                       |                       |                       |             |                  | 5     | 38.3  | 61   | M5          |             |  |  |  |  |  |  |  |       | M3×16<br>(M4×16) | 6 550 | 8 610 | 68.9 | 53.0<br>307 | 53.0<br>307 |  |  |  |  |       |       |                  |       |        |     |             |             |        |        |             |             |                  |             |             |
| MET 15…SL             | LWET 15…SL                | ○               | 70                  |                    |                              | 36             |      |                                |                |                |                |                |                |                |                |  |                |                |                                |                  |                |                |             |             |             |                                                                     |                                             |                                            |                                     |             |                     |                       |                       |                       |             |                  |       |       |      |             |             |  |  |  |  |  |  |  |       |                  | 51.1  | 73    | M5   |             |             |  |  |  |  |       |       | M3×16<br>(M4×16) | 9 340 | 12 500 | 100 | 99.5<br>533 | 99.5<br>533 |        |        |             |             |                  |             |             |
| —                     | LWET 15…Q                 | —               |                     |                    |                              |                |      |                                |                |                | 5              | 38.3           | 61             | M5             |                |  |                |                |                                |                  |                |                |             |             |             |                                                                     |                                             |                                            |                                     |             |                     |                       |                       |                       |             |                  |       |       |      |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  |       |       |                  |       |        |     |             |             |        |        |             |             | M3×16<br>(M4×16) | 9 340       | 12 500      |
| METG 15               | LWETG 15                  | ○               |                     |                    |                              |                |      |                                |                |                |                |                |                |                |                |  |                |                |                                |                  |                |                |             |             |             |                                                                     |                                             |                                            |                                     |             |                     |                       |                       |                       |             |                  | 5.8   | 70    | 36   |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  |       |       |                  |       |        |     |             |             |        |        |             |             |                  | 51.1        | 73          |
| METG 15…SL            | LWETG 15…SL               | ○               | 5.8                 | 70                 | 36                           | 51.1           | 73   | M5                             |                |                |                |                |                |                |                |  |                |                |                                | M3×16<br>(M4×16) | 9 340          | 12 500         | 100         | 99.5<br>533 | 99.5<br>533 |                                                                     |                                             |                                            |                                     |             |                     |                       |                       |                       |             |                  |       |       |      |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  |       |       |                  |       |        |     |             |             |        |        |             |             |                  |             |             |
| METC 20               | LWETC 20                  | ○               |                     |                    |                              |                |      |                                |                |                | 47             | —              | 24.7           |                |                |  |                |                |                                |                  | 58             | M6             |             |             |             |                                                                     |                                             |                                            |                                     |             | M5×16               | 7 580                 | 7 340                 | 78.9                  | 31.5<br>235 | 31.5<br>235      |       |       |      |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  |       |       |                  |       |        |     |             |             |        |        |             |             |                  |             |             |
|                       | LWETC 20                  | ○               |                     |                    |                              |                |      |                                |                |                |                |                |                |                |                |  |                |                |                                |                  |                |                |             |             |             |                                                                     |                                             |                                            |                                     |             |                     | 47                    |                       |                       |             |                  | —     | 24.5  | 58   | M6          |             |  |  |  |  |  |  |  | M5×16 | 7 570            | 7 340 | 78.9  |      |             |             |  |  |  |  |       |       |                  |       |        |     |             |             |        |        |             |             |                  | 31.5<br>235 | 31.5<br>235 |
| METC 20…SL            | LWETC 20…SL               | ○               | 47                  | —                  | 24.7                         | 58             | M6   |                                |                |                |                |                |                |                |                |  |                |                |                                |                  |                |                |             |             |             |                                                                     |                                             |                                            |                                     |             |                     |                       |                       |                       |             |                  |       |       |      |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  | M5×16 | 7 580 | 7 340            |       |        |     |             |             |        |        |             |             |                  |             |             |
|                       | LWETC 20…SL               | ○               |                     |                    |                              |                |      |                                |                |                | 47             | —              | 24.5           | 58             |                |  |                |                |                                |                  | M6             |                |             |             |             |                                                                     |                                             |                                            |                                     |             |                     |                       |                       |                       |             |                  |       |       |      |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  |       |       |                  |       |        |     | M5×16       | 7 570       | 7 340  | 78.9   | 31.5<br>235 | 31.5<br>235 |                  |             |             |
| MET 20                | LWET 20                   | ○               |                     |                    |                              |                |      |                                |                |                |                |                |                |                |                |  |                |                |                                |                  |                |                |             |             |             |                                                                     |                                             |                                            |                                     |             |                     | 47                    |                       |                       |             |                  | —     | 24.2  | 78   |             |             |  |  |  |  |  |  |  |       |                  | M6    |       |      |             |             |  |  |  |  |       |       |                  |       |        |     |             |             |        |        |             |             |                  |             |             |
|                       | LWET 20                   | ○               | 47                  | —                  | 44                           | 78             |      | M6                             |                |                |                |                |                |                |                |  |                |                |                                |                  |                |                |             |             |             |                                                                     |                                             |                                            |                                     |             |                     |                       |                       |                       |             |                  |       |       |      |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  |       |       | M5×16            |       |        |     |             |             |        |        |             |             |                  |             |             |
| MET 20…SL             | LWET 20…SL                | ○               |                     |                    |                              |                |      |                                |                |                | 47             | —              | 44.2           | 78             |                |  |                |                |                                |                  |                | M6             |             |             |             |                                                                     |                                             |                                            |                                     |             | M5×16               |                       |                       |                       |             |                  |       |       |      |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  |       |       |                  |       |        |     |             |             | 11 600 | 13 400 | 145         | 95.6<br>566 |                  |             |             |
|                       | LWET 20…SL                | ○               |                     |                    |                              |                |      |                                |                |                |                |                |                |                |                |  |                |                |                                |                  |                |                |             |             |             |                                                                     |                                             |                                            |                                     |             |                     | 47                    |                       |                       |             |                  | —     | 44    | 78   | M6          |             |  |  |  |  |  |  |  | M5×16 |                  |       |       |      |             |             |  |  |  |  |       |       |                  |       |        |     |             |             | 11 600 |        |             |             |                  |             |             |
| —                     | LWET 20…Q                 | —               | 5                   | 44                 | 78                           | M6             |      |                                |                |                |                |                |                |                |                |  |                |                |                                |                  |                |                |             |             |             |                                                                     |                                             |                                            |                                     |             |                     |                       |                       |                       |             |                  |       |       |      |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  | M5×16 |       |                  |       |        |     |             |             | 10 500 |        |             |             |                  |             |             |
| METG 20               | LWETG 20                  | ○               |                     |                    |                              |                |      |                                |                |                | 5              | 44             | 78             | M6             |                |  |                |                |                                |                  |                |                |             |             |             |                                                                     |                                             |                                            |                                     |             |                     |                       |                       |                       |             |                  |       |       |      |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  |       |       |                  |       |        |     | M5×16       |             | 10 500 | 13 400 | 145         | 100<br>562  |                  |             |             |
|                       | LWETG 20                  | ○               |                     |                    |                              |                |      |                                |                |                |                |                |                |                |                |  |                |                |                                |                  |                |                |             |             |             |                                                                     |                                             |                                            |                                     |             |                     | 5                     |                       |                       |             |                  | 44    | 78    | M6   |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  |       |       |                  |       |        |     |             |             |        |        |             |             |                  |             |             |
| METG 20…SL            | LWETG 20…SL               | ○               | 5                   | 44                 | 78                           |                |      | M6                             |                |                |                |                |                |                |                |  |                |                |                                |                  |                |                |             |             |             |                                                                     |                                             |                                            |                                     |             |                     |                       |                       |                       |             |                  |       |       |      |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  |       |       |                  |       |        |     |             |             |        |        |             |             |                  |             |             |
|                       | LWETG 20…SL               | ○               |                     |                    |                              |                |      |                                |                |                | 5              | 44             | 78             |                |                |  |                |                |                                |                  |                | M6             |             |             |             |                                                                     |                                             |                                            |                                     |             |                     |                       |                       |                       |             |                  |       |       |      |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  |       |       |                  |       |        |     |             |             |        | M5×16  | 10 500      | 13 400      |                  |             |             |
| METG 20               | LWETG 20                  | ○               |                     |                    |                              |                |      |                                |                |                |                |                |                |                |                |  |                |                |                                |                  |                |                |             |             |             |                                                                     |                                             |                                            |                                     |             |                     | 5                     |                       |                       |             |                  | 44    | 78    |      | M6          |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  |       |       |                  |       |        |     |             |             |        |        | M5×16       |             |                  |             |             |
|                       | LWETG 20                  | ○               | 5                   | 44                 | 78                           | M6             |      |                                |                |                |                |                |                |                |                |  |                |                |                                |                  |                |                |             |             |             |                                                                     |                                             |                                            |                                     |             |                     |                       |                       |                       |             |                  |       |       |      |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  | M5×16 |       |                  |       |        |     |             |             |        |        |             |             |                  |             |             |
| METG 20…SL            | LWETG 20…SL               | ○               |                     |                    |                              |                |      |                                |                |                | 5              | 44             | 78             | M6             |                |  |                |                |                                |                  |                |                |             |             |             |                                                                     |                                             |                                            |                                     |             |                     |                       |                       |                       |             |                  |       |       |      |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  |       |       |                  |       |        |     | M5×16       |             |        |        |             | 10 500      |                  |             |             |
|                       | LWETG 20…SL               | ○               |                     |                    |                              |                |      |                                |                |                |                |                |                |                |                |  |                |                |                                |                  |                |                |             |             |             |                                                                     |                                             |                                            |                                     |             |                     | 5                     |                       |                       |             |                  | 44    | 78    | M6   |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  |       |       |                  |       |        |     |             |             |        |        |             |             |                  |             |             |
| METG 20               | LWETG 20                  | ○               | 5                   | 44                 | 78                           |                |      | M6                             |                |                |                |                |                |                |                |  |                |                |                                |                  |                |                |             |             |             |                                                                     |                                             |                                            |                                     |             |                     |                       |                       |                       |             |                  |       |       |      |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  |       |       |                  |       |        |     |             |             |        |        |             |             |                  |             |             |
|                       | LWETG 20                  | ○               |                     |                    |                              |                |      |                                |                |                | 5              | 44             | 78             |                |                |  |                |                |                                |                  |                | M6             |             |             |             |                                                                     |                                             |                                            |                                     |             |                     |                       |                       |                       |             |                  |       |       |      |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  |       |       |                  |       |        |     |             |             |        | M5×16  |             |             |                  |             |             |
| METG 20…SL            | LWETG 20…SL               | ○               |                     |                    |                              |                |      |                                |                |                |                |                |                |                |                |  |                |                |                                |                  |                |                |             |             |             |                                                                     |                                             |                                            |                                     |             |                     | 5                     |                       |                       |             |                  | 44    | 78    |      | M6          |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  |       |       |                  |       |        |     |             |             |        |        | M5×16       |             |                  |             |             |
|                       | LWETG 20…SL               | ○               | 5                   | 44                 | 78                           | M6             |      |                                |                |                |                |                |                |                |                |  |                |                |                                |                  |                |                |             |             |             |                                                                     |                                             |                                            |                                     |             |                     |                       |                       |                       |             |                  |       |       |      |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  | M5×16 |       |                  |       |        |     |             |             |        |        |             |             |                  |             |             |
| METG 20               | LWETG 20                  | ○               |                     |                    |                              |                |      |                                |                |                | 5              | 44             | 78             | M6             |                |  |                |                |                                |                  |                |                |             |             |             |                                                                     |                                             |                                            |                                     |             |                     |                       |                       |                       |             |                  |       |       |      |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  |       |       |                  |       |        |     | M5×16       |             |        |        |             |             |                  |             |             |
|                       | LWETG 20                  | ○               |                     |                    |                              |                |      |                                |                |                |                |                |                |                |                |  |                |                |                                |                  |                |                |             |             |             |                                                                     |                                             |                                            |                                     |             |                     | 5                     |                       |                       |             |                  | 44    | 78    | M6   |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  |       |       |                  |       |        |     |             |             |        |        |             |             |                  |             |             |
| METG 20…SL            | LWETG 20…SL               | ○               | 5                   | 44                 | 78                           |                |      | M6                             |                |                |                |                |                |                |                |  |                |                |                                |                  |                |                |             |             |             |                                                                     |                                             |                                            |                                     |             |                     |                       |                       |                       |             |                  |       |       |      |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  |       |       |                  |       |        |     |             |             |        |        |             |             |                  |             |             |
|                       | LWETG 20…SL               | ○               |                     |                    |                              |                |      |                                |                |                | 5              | 44             | 78             |                |                |  |                |                |                                |                  |                | M6             |             |             |             |                                                                     |                                             |                                            |                                     |             |                     |                       |                       |                       |             |                  |       |       |      |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  |       |       |                  |       |        |     |             |             |        | M5×16  |             |             |                  |             |             |
| METG 20               | LWETG 20                  | ○               |                     |                    |                              |                |      |                                |                |                |                |                |                |                |                |  |                |                |                                |                  |                |                |             |             |             |                                                                     |                                             |                                            |                                     |             |                     | 5                     |                       |                       |             |                  | 44    | 78    |      | M6          |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  |       |       |                  |       |        |     |             |             |        |        | M5×16       |             |                  |             |             |
|                       | LWETG 20                  | ○               | 5                   | 44                 | 78                           | M6             |      |                                |                |                |                |                |                |                |                |  |                |                |                                |                  |                |                |             |             |             |                                                                     |                                             |                                            |                                     |             |                     |                       |                       |                       |             |                  |       |       |      |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  | M5×16 |       |                  |       |        |     |             |             |        |        |             |             |                  |             |             |
| METG 20…SL            | LWETG 20…SL               | ○               |                     |                    |                              |                |      |                                |                |                | 5              | 44             | 78             | M6             |                |  |                |                |                                |                  |                |                |             |             |             |                                                                     |                                             |                                            |                                     |             |                     |                       |                       |                       |             |                  |       |       |      |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  |       |       |                  |       |        |     | M5×16       |             |        |        |             |             |                  |             |             |
|                       | LWETG 20…SL               | ○               |                     |                    |                              |                |      |                                |                |                |                |                |                |                |                |  |                |                |                                |                  |                |                |             |             |             |                                                                     |                                             |                                            |                                     |             |                     | 5                     |                       |                       |             |                  | 44    | 78    | M6   |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  |       |       |                  |       |        |     |             |             |        |        |             |             |                  |             |             |
| METG 20               | LWETG 20                  | ○               | 5                   | 44                 | 78                           |                |      | M6                             |                |                |                |                |                |                |                |  |                |                |                                |                  |                |                |             |             |             |                                                                     |                                             |                                            |                                     |             |                     |                       |                       |                       |             |                  |       |       |      |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  |       |       |                  |       |        |     |             |             |        |        |             |             |                  |             |             |
|                       | LWETG 20                  | ○               |                     |                    |                              |                |      |                                |                |                | 5              | 44             | 78             |                |                |  |                |                |                                |                  |                | M6             |             |             |             |                                                                     |                                             |                                            |                                     |             |                     |                       |                       |                       |             |                  |       |       |      |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  |       |       |                  |       |        |     |             |             |        | M5×16  |             |             |                  |             |             |
| METG 20…SL            | LWETG 20…SL               | ○               |                     |                    |                              |                |      |                                |                |                |                |                |                |                |                |  |                |                |                                |                  |                |                |             |             |             |                                                                     |                                             |                                            |                                     |             |                     | 5                     |                       |                       |             |                  | 44    | 78    |      | M6          |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  |       |       |                  |       |        |     |             |             |        |        | M5×16       |             |                  |             |             |
|                       | LWETG 20…SL               | ○               | 5                   | 44                 | 78                           | M6             |      |                                |                |                |                |                |                |                |                |  |                |                |                                |                  |                |                |             |             |             |                                                                     |                                             |                                            |                                     |             |                     |                       |                       |                       |             |                  |       |       |      |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  | M5×16 |       |                  |       |        |     |             |             |        |        |             |             |                  |             |             |
| METG 20               | LWETG 20                  | ○               |                     |                    |                              |                |      |                                |                |                | 5              | 44             | 78             | M6             |                |  |                |                |                                |                  |                |                |             |             |             |                                                                     |                                             |                                            |                                     |             |                     |                       |                       |                       |             |                  |       |       |      |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  |       |       |                  |       |        |     | M5×16       |             |        |        |             |             |                  |             |             |
|                       | LWETG 20                  | ○               |                     |                    |                              |                |      |                                |                |                |                |                |                |                |                |  |                |                |                                |                  |                |                |             |             |             |                                                                     |                                             |                                            |                                     |             |                     | 5                     |                       |                       |             |                  | 44    | 78    | M6   |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  |       |       |                  |       |        |     |             |             |        |        |             |             |                  |             |             |
| METG 20…SL            | LWETG 20…SL               | ○               | 5                   | 44                 | 78                           |                |      | M6                             |                |                |                |                |                |                |                |  |                |                |                                |                  |                |                |             |             |             |                                                                     |                                             |                                            |                                     |             |                     |                       |                       |                       |             |                  |       |       |      |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  |       |       |                  |       |        |     |             |             |        |        |             |             |                  |             |             |
|                       | LWETG 20…SL               | ○               |                     |                    |                              |                |      |                                |                |                | 5              | 44             | 78             |                |                |  |                |                |                                |                  |                | M6             |             |             |             |                                                                     |                                             |                                            |                                     |             |                     |                       |                       |                       |             |                  |       |       |      |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  |       |       |                  |       |        |     |             |             |        | M5×16  |             |             |                  |             |             |
| METG 20               | LWETG 20                  | ○               |                     |                    |                              |                |      |                                |                |                |                |                |                |                |                |  |                |                |                                |                  |                |                |             |             |             |                                                                     |                                             |                                            |                                     |             |                     | 5                     |                       |                       |             |                  | 44    | 78    |      | M6          |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  |       |       |                  |       |        |     |             |             |        |        | M5×16       |             |                  |             |             |
|                       | LWETG 20                  | ○               | 5                   | 44                 | 78                           | M6             |      |                                |                |                |                |                |                |                |                |  |                |                |                                |                  |                |                |             |             |             |                                                                     |                                             |                                            |                                     |             |                     |                       |                       |                       |             |                  |       |       |      |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  | M5×16 |       |                  |       |        |     |             |             |        |        |             |             |                  |             |             |
| METG 20…SL            | LWETG 20…SL               | ○               |                     |                    |                              |                |      |                                |                |                | 5              | 44             | 78             | M6             |                |  |                |                |                                |                  |                |                |             |             |             |                                                                     |                                             |                                            |                                     |             |                     |                       |                       |                       |             |                  |       |       |      |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  |       |       |                  |       |        |     | M5×16       |             |        |        |             |             |                  |             |             |
|                       | LWETG 20…SL               | ○               |                     |                    |                              |                |      |                                |                |                |                |                |                |                |                |  |                |                |                                |                  |                |                |             |             |             |                                                                     |                                             |                                            |                                     |             |                     | 5                     |                       |                       |             |                  | 44    | 78    | M6   |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  |       |       |                  |       |        |     |             |             |        |        |             |             |                  |             |             |
| METG 20               | LWETG 20                  | ○               | 5                   | 44                 | 78                           |                |      | M6                             |                |                |                |                |                |                |                |  |                |                |                                |                  |                |                |             |             |             |                                                                     |                                             |                                            |                                     |             |                     |                       |                       |                       |             |                  |       |       |      |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  |       |       |                  |       |        |     |             |             |        |        |             |             |                  |             |             |
|                       | LWETG 20                  | ○               |                     |                    |                              |                |      |                                |                |                | 5              | 44             | 78             |                |                |  |                |                |                                |                  |                | M6             |             |             |             |                                                                     |                                             |                                            |                                     |             |                     |                       |                       |                       |             |                  |       |       |      |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  |       |       |                  |       |        |     |             |             |        | M5×16  |             |             |                  |             |             |
| METG 20…SL            | LWETG 20…SL               | ○               |                     |                    |                              |                |      |                                |                |                |                |                |                |                |                |  |                |                |                                |                  |                |                |             |             |             |                                                                     |                                             |                                            |                                     |             |                     | 5                     |                       |                       |             |                  | 44    | 78    |      | M6          |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  |       |       |                  |       |        |     |             |             |        |        | M5×16       |             |                  |             |             |
|                       | LWETG 20…SL               | ○               | 5                   | 44                 | 78                           | M6             |      |                                |                |                |                |                |                |                |                |  |                |                |                                |                  |                |                |             |             |             |                                                                     |                                             |                                            |                                     |             |                     |                       |                       |                       |             |                  |       |       |      |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  | M5×16 |       |                  |       |        |     |             |             |        |        |             |             |                  |             |             |
| METG 20               | LWETG 20                  | ○               |                     |                    |                              |                |      |                                |                |                | 5              | 44             | 78             | M6             |                |  |                |                |                                |                  |                |                |             |             |             |                                                                     |                                             |                                            |                                     |             |                     |                       |                       |                       |             |                  |       |       |      |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  |       |       |                  |       |        |     | M5×16       |             |        |        |             |             |                  |             |             |
|                       | LWETG 20                  | ○               |                     |                    |                              |                |      |                                |                |                |                |                |                |                |                |  |                |                |                                |                  |                |                |             |             |             |                                                                     |                                             |                                            |                                     |             |                     | 5                     |                       |                       |             |                  | 44    | 78    | M6   |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  |       |       |                  |       |        |     |             |             |        |        |             |             |                  |             |             |
| METG 20…SL            | LWETG 20…SL               | ○               | 5                   | 44                 | 78                           |                |      | M6                             |                |                |                |                |                |                |                |  |                |                |                                |                  |                |                |             |             |             |                                                                     |                                             |                                            |                                     |             |                     |                       |                       |                       |             |                  |       |       |      |             |             |  |  |  |  |  |  |  |       |                  |       |       |      |             |             |  |  |  |  |       |       |                  |       |        |     |             |             |        |        |             |             |                  |             |             |


Notes (1) Track rail lengths  $L$  are shown in Tables 2.1 and 2.2 on page II-45.

(2) Track rail mounting bolts are not appended. Hexagon socket head bolts of JIS B 1176 with strength division 12.9 are recommended.

<sup>(3)</sup> The direction of basic dynamic load rating ( $C$ ), basic static load rating ( $C_0$ ), and static moment rating ( $T_0$ ,  $T_x$ ,  $T_y$ ) are shown in the sketches below. The upper values of  $T_x$  and  $T_y$  are for one slide unit and the lower values are for two slide units in close contact.

(4) The shapes of grease nipple vary by size. The specifications are shown in Table 15 on page II -51.

Remark: Values in ( ) represent dimensions when the track rail mounting hole is "M4". Indicate the identification number with "/M4" at the end.



### Example of identification number of assembled set

| Model code |          | Dimensions | Part code |             | Model code | Material code | Preload symbol       | Classification symbol | Interchangeable code | Special specification |
|------------|----------|------------|-----------|-------------|------------|---------------|----------------------|-----------------------|----------------------|-----------------------|
| <u>MET</u> | <u>G</u> | <u>15</u>  | <u>C2</u> | <u>R340</u> | <u>  </u>  | <u>  </u>     | <u>T<sub>1</sub></u> | <u>P</u>              | <u>S1</u>            | <u>/U</u>             |
| 1          | 2        | 3          | 4         | 5           | 1          | 6             | 7                    | 8                     | 9                    | 10                    |

| ① Model  |                               |
|----------|-------------------------------|
| MET      | Flange type mounting from top |
| LWET     |                               |
| LWET...Q |                               |

| ② Length of slide unit |          |
|------------------------|----------|
| C                      | Short    |
| No symbol              | Standard |
| G                      | Long     |

④ Number of slide unit (2)

|                                 |                        |
|---------------------------------|------------------------|
| ⑤ Length of track rail (340 mm) |                        |
| ⑥ Material type                 |                        |
| No symbol                       | High carbon steel made |
| SL                              | Stainless steel made   |

| ⑦ Preload amount |                |
|------------------|----------------|
| T <sub>c</sub>   | Clearance      |
| No symbol        | Standard       |
| T <sub>1</sub>   | Light preload  |
| T <sub>2</sub>   | Medium preload |


| ⑧ Accuracy class |                 |
|------------------|-----------------|
| No symbol        | Ordinary        |
| H                | High            |
| P                | Precision       |
| SP               | Super precision |

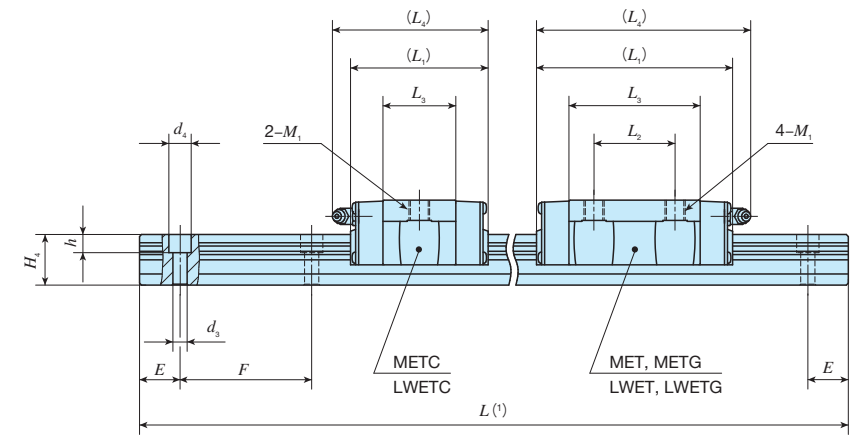
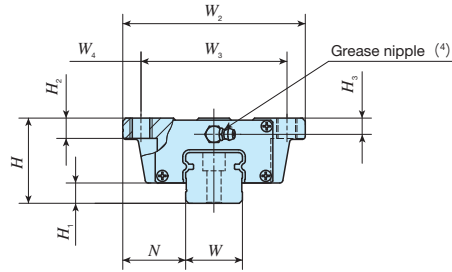
| ⑨ Interchangeable |                                   |
|-------------------|-----------------------------------|
| S1                | S1 specification                  |
| S2                | S2 specification                  |
| No symbol         | Non-interchangeable specification |

**⑩ Special specification**  
A, BS, D, E, F, I, J, L, LF, MA  
M4, N, Q, RE, T, U, V, W, Y, Z



### Flange type mounting from top

|       |                                                                                   |          |          |
|-------|-----------------------------------------------------------------------------------|----------|----------|
| Shape |  |          |          |
| Size  | 15<br>30                                                                          | 20<br>35 | 25<br>45 |




| Identification number |                           | Interchangeable | Mass (Ref.)         |                    | Dimensions of assembly<br>mm |                |    | Dimensions of slide unit<br>mm |                |                |                |                |                |                |                |        |                |                | Dimensions of track rail<br>mm |                |                |                |      |     |        | Recommended<br>mounting bolt<br>for track rail <sup>(2)</sup><br>mm | Basic dynamic<br>load rating <sup>(3)</sup> | Basic static<br>load rating <sup>(3)</sup> | Static moment rating <sup>(3)</sup> |             |                     |                       |                       |                       |              |        |      |              |              |    |   |    |   |      |    |     |    |    |    |    |   |    |    |    |    |        |        |        |     |              |              |      |     |     |        |        |     |              |              |    |    |      |     |     |        |        |     |              |              |        |        |     |              |              |    |    |      |    |      |     |        |        |        |       |              |              |     |  |    |    |    |
|-----------------------|---------------------------|-----------------|---------------------|--------------------|------------------------------|----------------|----|--------------------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|--------|----------------|----------------|--------------------------------|----------------|----------------|----------------|------|-----|--------|---------------------------------------------------------------------|---------------------------------------------|--------------------------------------------|-------------------------------------|-------------|---------------------|-----------------------|-----------------------|-----------------------|--------------|--------|------|--------------|--------------|----|---|----|---|------|----|-----|----|----|----|----|---|----|----|----|----|--------|--------|--------|-----|--------------|--------------|------|-----|-----|--------|--------|-----|--------------|--------------|----|----|------|-----|-----|--------|--------|-----|--------------|--------------|--------|--------|-----|--------------|--------------|----|----|------|----|------|-----|--------|--------|--------|-------|--------------|--------------|-----|--|----|----|----|
| ME series             | LWE series<br>(No C-Lube) |                 | Slide<br>unit<br>kg | Track rail<br>kg/m | H                            | H <sub>1</sub> | N  | W <sub>2</sub>                 | W <sub>3</sub> | W <sub>4</sub> | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | L <sub>4</sub> | M <sub>1</sub> |        | H <sub>2</sub> | H <sub>3</sub> | W                              | H <sub>4</sub> | d <sub>3</sub> | d <sub>4</sub> | h    | E   | F      |                                                                     |                                             |                                            | Bolt size×ℓ                         | C<br>N      | C <sub>0</sub><br>N | T <sub>0</sub><br>N・m | T <sub>x</sub><br>N・m | T <sub>y</sub><br>N・m |              |        |      |              |              |    |   |    |   |      |    |     |    |    |    |    |   |    |    |    |    |        |        |        |     |              |              |      |     |     |        |        |     |              |              |    |    |      |     |     |        |        |     |              |              |        |        |     |              |              |    |    |      |    |      |     |        |        |        |       |              |              |     |  |    |    |    |
| METC 25               | LWETC 25                  | ○               | 0.33                | 3.09               | 33                           | 7              | 25 | 73                             | 60             | 6.5            | 59             | —              | 32             | 70             | M 8            |        | 10             | 6.5            | 23                             | 19             | 7              | 11             | 9    | 20  | 60     | M 6×20                                                              | 12 400                                      | 12 300                                     | 153                                 | 71.8<br>480 | 71.8<br>480         |                       |                       |                       |              |        |      |              |              |    |   |    |   |      |    |     |    |    |    |    |   |    |    |    |    |        |        |        |     |              |              |      |     |     |        |        |     |              |              |    |    |      |     |     |        |        |     |              |              |        |        |     |              |              |    |    |      |    |      |     |        |        |        |       |              |              |     |  |    |    |    |
| METC 25…SL            | LWETC 25…SL               | ○               |                     |                    |                              |                |    |                                |                |                | 83             | 35             | 56             | 94             |                |        |                |                |                                |                |                |                |      |     |        |                                                                     | M 6×20                                      | 18 100                                     | 21 100                              | 262         | 195<br>1 090        | 195<br>1 090          |                       |                       |              |        |      |              |              |    |   |    |   |      |    |     |    |    |    |    |   |    |    |    |    |        |        |        |     |              |              |      |     |     |        |        |     |              |              |    |    |      |     |     |        |        |     |              |              |        |        |     |              |              |    |    |      |    |      |     |        |        |        |       |              |              |     |  |    |    |    |
| MET 25                | LWET 25                   | ○               |                     |                    |                              |                |    |                                |                |                |                |                |                |                |                |        |                |                |                                |                |                |                |      |     |        |                                                                     |                                             | 6                                          | M 6×20                              | 15 500      | 19 400              | 240                   | 175<br>1 010          | 175<br>1 010          |              |        |      |              |              |    |   |    |   |      |    |     |    |    |    |    |   |    |    |    |    |        |        |        |     |              |              |      |     |     |        |        |     |              |              |    |    |      |     |     |        |        |     |              |              |        |        |     |              |              |    |    |      |    |      |     |        |        |        |       |              |              |     |  |    |    |    |
| MET 25…SL             | LWET 25…SL                | ○               | 7                   |                    |                              |                |    |                                |                |                |                |                |                |                |                |        |                |                |                                |                |                |                |      |     |        |                                                                     |                                             |                                            |                                     | M 6×20      | 22 200              | 28 200                | 349                   | 175<br>1 010          | 175<br>1 010 |        |      |              |              |    |   |    |   |      |    |     |    |    |    |    |   |    |    |    |    |        |        |        |     |              |              |      |     |     |        |        |     |              |              |    |    |      |     |     |        |        |     |              |              |        |        |     |              |              |    |    |      |    |      |     |        |        |        |       |              |              |     |  |    |    |    |
| —                     | LWET 25…Q                 | —               |                     |                    |                              |                |    |                                |                |                |                |                |                |                |                |        |                |                |                                |                |                |                |      |     |        |                                                                     |                                             | 102                                        |                                     |             | 50                  | 75                    | 113                   | M 6×25                | 20 600       | 18 800 | 287  | 328<br>1 920 | 328<br>1 920 |    |   |    |   |      |    |     |    |    |    |    |   |    |    |    |    |        |        |        |     |              |              |      |     |     |        |        |     |              |              |    |    |      |     |     |        |        |     |              |              |        |        |     |              |              |    |    |      |    |      |     |        |        |        |       |              |              |     |  |    |    |    |
| METG 25               | LWETG 25                  | ○               | 0.73                |                    |                              |                |    |                                |                |                | 42             | 10             | 31             | 90             |                |        |                |                |                                |                |                |                |      |     |        |                                                                     |                                             |                                            |                                     |             |                     |                       |                       |                       |              |        |      |              |              | 72 | 9 | 68 | — | 36   | 78 | M10 | 10 | 8  | 28 | 25 | 7 | 11 | 9  | 20 | 80 | M 6×25 | 29 500 | 31 300 | 479 | 328<br>1 920 | 328<br>1 920 |      |     |     |        |        |     |              |              |    |    |      |     |     |        |        |     |              |              |        |        |     |              |              |    |    |      |    |      |     |        |        |        |       |              |              |     |  |    |    |    |
| METG 25…SL            | LWETG 25…SL               | ○               |                     | 0.58               | 5.09                         | 97             | 40 | 64.8                           | 107            | M10            |                |                |                |                | 21 600         | 26 400 | 398            | 278<br>1 580   | 278<br>1 580                   |                |                |                |      |     |        |                                                                     |                                             |                                            |                                     |             |                     |                       |                       |                       |              |        |      |              |              |    |   |    |   |      |    |     |    |    |    |    |   |    |    |    |    |        |        |        |     |              |              |      |     |     |        |        |     |              |              |    |    |      |     |     |        |        |     |              |              |        |        |     |              |              |    |    |      |    |      |     |        |        |        |       |              |              |     |  |    |    |    |
| METC 30               | LWETC 30                  | ○               | 0.99                |                    |                              |                |    |                                |                |                |                |                |                |                |                |        |                |                |                                | 96             | 60             | 96.5           | 139  | M10 | 39 200 | 47 000                                                              | 718                                         | 704<br>3 690                               |                                     |             | 704<br>3 690        |                       |                       |                       |              |        |      |              |              |    |   |    |   |      |    |     |    |    |    |    |   |    |    |    |    |        |        |        |     |              |              |      |     |     |        |        |     |              |              |    |    |      |     |     |        |        |     |              |              |        |        |     |              |              |    |    |      |    |      |     |        |        |        |       |              |              |     |  |    |    |    |
| METC 30…SL            | LWETC 30…SL               | ○               |                     | 1.50               |                              |                |    |                                |                |                |                |                |                |                |                |        |                |                |                                |                |                |                |      |     |        |                                                                     |                                             |                                            | 5.09                                |             |                     | 129                   | 60                    |                       |              |        |      |              |              |    |   |    |   |      |    |     |    |    |    |    |   |    |    |    |    |        |        |        |     |              |              | 96.5 | 139 | M10 | 39 200 | 47 000 | 718 | 704<br>3 690 | 704<br>3 690 |    |    |      |     |     |        |        |     |              |              |        |        |     |              |              |    |    |      |    |      |     |        |        |        |       |              |              |     |  |    |    |    |
| MET 30                | LWET 30                   | ○               | 0.97                |                    |                              |                |    |                                |                |                |                |                |                |                |                |        |                |                |                                |                |                |                |      |     |        |                                                                     |                                             |                                            |                                     | 5.04        |                     |                       |                       |                       |              |        |      |              |              |    |   |    |   |      |    |     |    |    |    |    |   |    |    |    |    |        |        |        |     |              |              |      |     |     |        |        |     |              |              | 96 | 60 | 96.5 | 139 | M10 | 39 200 | 47 000 | 718 | 704<br>3 690 | 704<br>3 690 |        |        |     |              |              |    |    |      |    |      |     |        |        |        |       |              |              |     |  |    |    |    |
| —                     | LWET 30…Q                 | —               |                     | 1.50               |                              |                |    |                                |                |                |                |                |                |                |                |        |                |                |                                |                |                |                |      |     |        |                                                                     |                                             |                                            |                                     |             |                     |                       |                       | 5.09                  | 129          | 60     | 96.5 | 139          | M10          |    |   |    |   |      |    |     |    |    |    |    |   |    |    |    |    |        |        |        |     |              |              |      |     |     |        |        |     |              |              |    |    |      |     |     |        |        |     |              |              | 39 200 | 47 000 | 718 | 704<br>3 690 | 704<br>3 690 |    |    |      |    |      |     |        |        |        |       |              |              |     |  |    |    |    |
| METG 30               | LWETG 30                  | ○               | 0.84                |                    |                              |                |    |                                |                |                | 48             | 11             | 33             | 100            |                |        |                |                |                                |                |                |                |      |     |        |                                                                     |                                             |                                            |                                     |             |                     |                       |                       |                       |              |        |      |              |              | 82 | 9 | 78 | — | 41.6 | 90 | M10 | 13 | 10 | 34 | 28 | 9 | 14 | 12 | 20 | 80 | M 8×30 | 29 900 | 26 800 | 412 | 176<br>1 190 | 162<br>1 100 |      |     |     |        |        |     |              |              |    |    |      |     |     |        |        |     |              |              |        |        |     |              |              |    |    |      |    |      |     |        |        |        |       |              |              |     |  |    |    |    |
| METG 30…SL            | LWETG 30…SL               | ○               |                     | 1.52               | 6.85                         | 111            | 50 | 74.6                           | 123            | M10            |                |                |                |                | 42 900         | 44 700 | 686            | 448<br>2 460   | 448<br>2 460                   |                |                |                |      |     |        |                                                                     |                                             |                                            |                                     |             |                     |                       |                       |                       |              |        |      |              |              |    |   |    |   |      |    |     |    |    |    |    |   |    |    |    |    |        |        |        |     |              |              |      |     |     |        |        |     |              |              |    |    |      |     |     |        |        |     |              |              |        |        |     |              |              |    |    |      |    |      |     |        |        |        |       |              |              |     |  |    |    |    |
| —                     | LWET 35…Q                 | —               | 1.53                |                    |                              |                |    |                                |                |                |                |                |                |                |                |        |                |                |                                | 6.84           | 110            | 60             | 81.4 | 136 | M12    |                                                                     | 15                                          | 13                                         |                                     |             | 45                  |                       |                       |                       |              |        |      |              |              |    |   |    |   |      |    |     |    |    |    |    |   |    |    |    |    |        |        |        |     |              |              |      |     |     |        |        |     |              |              |    |    |      |     |     |        |        |     |              |              |        |        |     |              |              | 34 | 11 | 17.5 | 14 | 22.5 | 105 | M10×35 | 61 100 | 60 200 | 1 210 | 672<br>4 070 | 618<br>3 750 |     |  |    |    |    |
| MET 45                | LWET 45                   | ○               |                     | 2.46               |                              |                |    |                                |                |                |                |                |                |                |                |        |                |                |                                |                |                |                |      |     |        |                                                                     |                                             |                                            | 11.2                                |             |                     | 60                    | 14                    |                       |              |        |      |              |              |    |   |    |   |      |    |     |    |    |    |    |   |    |    |    |    |        |        |        |     |              |              | 37.5 | 120 | 100 | 10     | 125    | 60  | 81.4         | 136          |    |    |      |     |     |        |        |     |              |              |        |        |     |              |              |    |    |      |    |      |     |        |        |        |       |              |              | M12 |  | 15 | 13 | 45 |

Notes (1) Track rail lengths  $L$  are shown in Tables 2.1 and 2.2 on page II-45.

(2) Track rail mounting bolts are not appended. Hexagon socket head bolts of JIS B 1176 with strength division 12.9 are recommended.

<sup>(3)</sup> The direction of basic dynamic load rating ( $C$ ), basic static load rating ( $C_0$ ), and static moment rating ( $T_0$ ,  $T_x$ ,  $T_y$ ) are shown in the sketches below. The upper values of  $T_x$  and  $T_y$  are for one slide unit and the lower values are for two slide units in close contact.

(4) The shapes of grease nipple vary by size. The specifications are shown in Table 15 on page II -51.



### Example of identification number of assembled set

| Model code |          | Dimensions | Part code |             | Model code | Material code | Preload symbol       | Classification symbol | Interchangeable code | Special specification |
|------------|----------|------------|-----------|-------------|------------|---------------|----------------------|-----------------------|----------------------|-----------------------|
| <u>MET</u> | <u>G</u> | <u>30</u>  | <u>C2</u> | <u>R440</u> | <u>  </u>  | <u>  </u>     | <u>T<sub>1</sub></u> | <u>P</u>              | <u>S1</u>            | <u>/U</u>             |
| 1          | 2        | 3          | 4         | 5           | 1          | 6             | 7                    | 8                     | 9                    | 10                    |

|          |                               |
|----------|-------------------------------|
| ① Model  |                               |
| MET      |                               |
| LWET     | Flange type mounting from top |
| LWET...Q |                               |

| ② Length of slide unit |          |
|------------------------|----------|
| C                      | Short    |
| No symbol              | Standard |
| G                      | Long     |

④ Number of slide unit (2)

|                                 |                        |
|---------------------------------|------------------------|
| ⑤ Length of track rail (440 mm) |                        |
| ⑥ Material type                 |                        |
| No symbol                       | High carbon steel made |
| SL                              | Stainless steel made   |

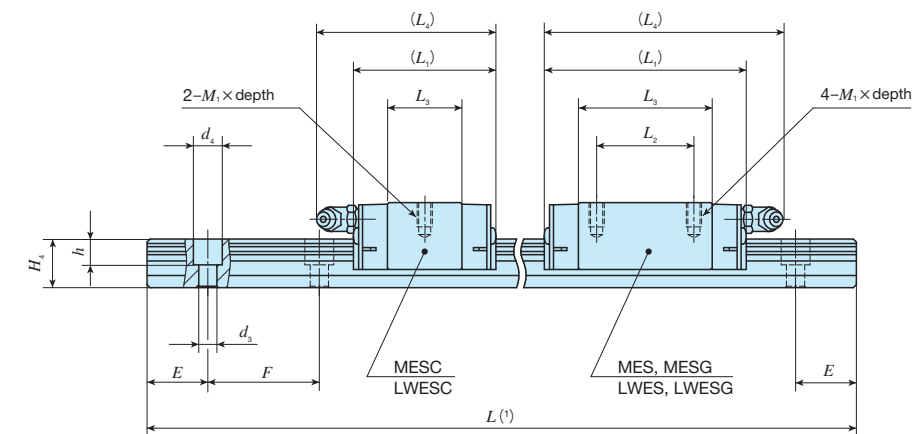
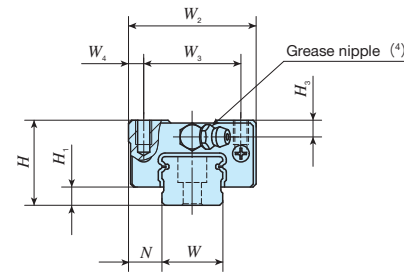
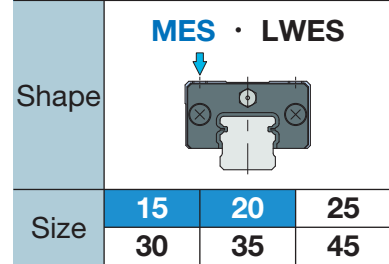
| ⑦ Preload amount |                |
|------------------|----------------|
| $T_c$            | Clearance      |
| No symbol        | Standard       |
| $T_1$            | Light preload  |
| $T_2$            | Medium preload |

| Accuracy class |                 |
|----------------|-----------------|
| No symbol      | Ordinary        |
| H              | High            |
| P              | Precision       |
| SP             | Super precision |

| ⑨ Interchangeable |                                   |
|-------------------|-----------------------------------|
| S1                | S1 specification                  |
| S2                | S2 specification                  |
| No symbol         | Non-interchangeable specification |

**10 Special specification**  
A, BS, D, E, F, 1, J, L, LF, MA  
N, Q, RE, T, U, V, W, Y, Z


### Block type mounting from top



| Identification number |                        | Interchangeable | Mass (Ref.)   |                 | Dimensions of assembly mm |                |     | Dimensions of slide unit mm |                |                |                |                |                |                |                       |                |    | Dimensions of track rail mm |                |                |          |    |    |               |       | Recommended mounting bolt for track rail <sup>(2)</sup> mm<br><br>Bolt size×ℓ | Basic dynamic load rating <sup>(3)</sup><br><br>C<br>N | Basic static load rating <sup>(3)</sup><br><br>C <sub>0</sub><br>N | Static moment rating <sup>(3)</sup><br><br>T <sub>0</sub><br>N·m<br><br>T <sub>x</sub><br>N·m<br><br>T <sub>y</sub><br>N·m |  |  |
|-----------------------|------------------------|-----------------|---------------|-----------------|---------------------------|----------------|-----|-----------------------------|----------------|----------------|----------------|----------------|----------------|----------------|-----------------------|----------------|----|-----------------------------|----------------|----------------|----------|----|----|---------------|-------|-------------------------------------------------------------------------------|--------------------------------------------------------|--------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|--|--|
| ME series             | LWE series (No C-Lube) |                 | Slide unit kg | Track rail kg/m | H                         | H <sub>1</sub> | N   | W <sub>2</sub>              | W <sub>3</sub> | W <sub>4</sub> | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | L <sub>4</sub> | M <sub>1</sub> ×depth | H <sub>3</sub> | W  | H <sub>4</sub>              | d <sub>3</sub> | d <sub>4</sub> | h        | E  | F  |               |       |                                                                               |                                                        |                                                                    |                                                                                                                            |  |  |
| MESC 15               | LWESC 15               | ○               | 0.09          | 1.57            | 24                        | 5.8            | 9.5 | 34                          | 26             | 4              | 41             | —              | 22.4           | 45             | M4×7                  | 4.5            | 15 | 14.5                        | 3.6 (4.5)      | 6.5 (8 )       | 4.5 (6 ) | 20 | 60 | M3×16 (M4×16) | 5 240 | 5 480                                                                         | 43.8                                                   | 21.3 <sub>149</sub>                                                | 21.3 <sub>149</sub>                                                                                                        |  |  |
| MESC 15…SL            | LWESC 15…SL            | ○               |               |                 |                           |                |     |                             |                |                | 57             | 26             | 38.4           | 61             |                       |                |    |                             |                |                |          |    |    |               |       |                                                                               |                                                        |                                                                    |                                                                                                                            |  |  |
| MES 15                | LWES 15                | ○               |               |                 |                           |                |     |                             |                |                |                |                |                |                |                       |                |    |                             |                |                |          |    |    |               |       |                                                                               |                                                        |                                                                    |                                                                                                                            |  |  |
| MES 15…SL             | LWES 15…SL             | ○               |               |                 |                           |                |     |                             |                |                |                |                |                |                |                       |                |    |                             |                |                |          |    |    |               |       |                                                                               |                                                        |                                                                    |                                                                                                                            |  |  |
| —                     | LWES 15…Q              | —               |               |                 |                           |                |     |                             |                |                |                |                |                |                |                       |                |    |                             |                |                |          |    |    |               |       |                                                                               |                                                        |                                                                    |                                                                                                                            |  |  |
| MESG 15               | LWESG 15               | ○               |               |                 |                           |                |     |                             |                |                | 70             | 36             | 51.1           | 73             |                       |                |    |                             |                |                |          |    |    |               |       |                                                                               |                                                        |                                                                    |                                                                                                                            |  |  |
| MESG 15…SL            | LWESG 15…SL            | ○               |               |                 |                           |                |     |                             |                |                |                |                |                |                |                       |                |    |                             |                |                |          |    |    |               |       |                                                                               |                                                        |                                                                    |                                                                                                                            |  |  |
| MESC 20               |                        | ○               | 0.15          | 2.28            | 28                        | 6              | 11  | 42                          | 32             | 5              | 47             | —              | 24.7           | 58             | M5×8                  | 5.5            | 20 | 16                          | 6              | 9.5            | 8.5      | 20 | 60 | M5×16         | 7 580 | 7 340                                                                         | 78.9                                                   | 31.5 <sub>235</sub>                                                | 31.5 <sub>235</sub>                                                                                                        |  |  |
|                       | LWESC 20               | ○               |               |                 |                           |                |     |                             |                |                |                |                | 24.5           |                |                       |                |    |                             |                |                |          |    |    |               |       |                                                                               |                                                        |                                                                    |                                                                                                                            |  |  |
| MESC 20…SL            |                        | ○               |               |                 |                           |                |     |                             |                |                |                |                | 24.7           |                |                       |                |    |                             |                |                |          |    |    |               |       |                                                                               |                                                        |                                                                    |                                                                                                                            |  |  |
|                       | LWESC 20…SL            | ○               |               |                 |                           |                |     |                             |                |                |                |                | 24.5           |                |                       |                |    |                             |                |                |          |    |    |               |       |                                                                               |                                                        |                                                                    |                                                                                                                            |  |  |
| MES 20                |                        | ○               |               |                 |                           |                |     |                             |                |                |                |                | 44.2           |                |                       |                |    |                             |                |                |          |    |    |               | 78    |                                                                               |                                                        |                                                                    |                                                                                                                            |  |  |
|                       | LWES 20                | ○               |               |                 |                           |                |     |                             |                |                |                |                |                |                |                       |                |    |                             |                |                |          |    |    |               |       | 44                                                                            |                                                        |                                                                    |                                                                                                                            |  |  |
| MES 20…SL             |                        | ○               |               |                 |                           |                |     |                             |                |                | 44.2           |                |                |                |                       |                |    |                             |                |                |          |    |    |               |       |                                                                               |                                                        |                                                                    |                                                                                                                            |  |  |
|                       | LWES 20…SL             | ○               |               |                 |                           |                |     |                             |                |                | 44             |                |                |                |                       |                |    |                             |                |                |          |    |    |               |       |                                                                               |                                                        |                                                                    |                                                                                                                            |  |  |
| —                     | LWES 20…Q              | —               |               |                 |                           |                |     |                             |                |                | 44             |                |                |                |                       |                |    |                             |                |                |          |    |    |               |       |                                                                               |                                                        |                                                                    |                                                                                                                            |  |  |
| MESG 20               |                        | ○               |               |                 |                           |                |     |                             |                |                | 83             | 45             | 60.1           | 94             |                       |                |    |                             |                |                |          |    |    |               |       |                                                                               |                                                        |                                                                    |                                                                                                                            |  |  |
|                       | LWESG 20               | ○               | 59.9          |                 |                           |                |     |                             |                |                |                |                |                |                |                       |                |    |                             |                |                |          |    |    |               |       |                                                                               |                                                        |                                                                    |                                                                                                                            |  |  |
| MESG 20…SL            |                        | ○               | 60.1          |                 |                           |                |     |                             |                |                |                |                |                |                |                       |                |    |                             |                |                |          |    |    |               |       |                                                                               |                                                        |                                                                    |                                                                                                                            |  |  |
|                       | LWESG 20…SL            | ○               | 59.9          |                 |                           |                |     |                             |                |                |                |                |                |                |                       |                |    |                             |                |                |          |    |    |               |       |                                                                               |                                                        |                                                                    |                                                                                                                            |  |  |

Notes (1) Track rail lengths  $L$  are shown in Tables 2.1 and 2.2 on page II -45.  
 (2) Track rail mounting bolts are not appended. Hexagon socket head bolts of JIS B 1176 with strength division 12.9 are recommended.  
 (3) The direction of basic dynamic load rating ( $C$ ), basic static load rating ( $C_0$ ), and static moment rating ( $T_0$ ,  $T_x$ ,  $T_y$ ) are shown in the sketches below. The upper values of  $T_x$  and  $T_y$  are for one slide unit and the lower values are for two slide units in close contact.  
 (4) The shapes of grease nipple vary by size. The specifications are shown in Table 15 on page II -51.

Remark: Values in ( ) represent dimensions when the track rail mounting hole is "M4". Indicate the identification number with "/M4" at the end.




### Example of identification number of assembled set

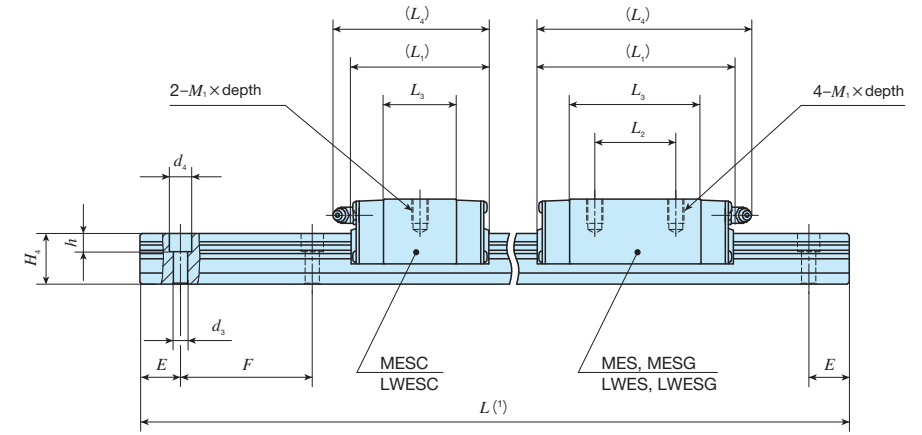
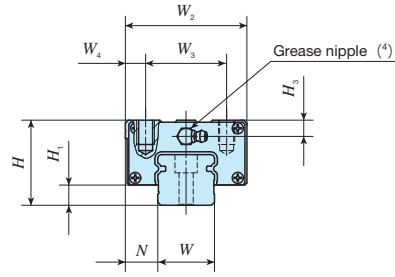
| Model code |          | Dimensions | Part code |             | Model code | Material code | Preload symbol       | Classification symbol | Interchangeable code | Special specification |
|------------|----------|------------|-----------|-------------|------------|---------------|----------------------|-----------------------|----------------------|-----------------------|
| <b>MES</b> | <b>G</b> | <b>15</b>  | <b>C2</b> | <b>R340</b> | —          | —             | <b>T<sub>1</sub></b> | <b>P</b>              | <b>S1</b>            | <b>/U</b>             |
| 1          | 2        | 3          | 4         | 5           | 1          | 6             | 7                    | 8                     | 9                    | 10                    |

|                        |          |                              |                                 |                  |                  |           |                                  |                                                                                             |
|------------------------|----------|------------------------------|---------------------------------|------------------|------------------|-----------|----------------------------------|---------------------------------------------------------------------------------------------|
| ① Model                |          | Block type mounting from top | ③ Size                          |                  | ⑦ Preload amount |           | ⑨ Interchangeable                |                                                                                             |
| MES                    |          |                              | 15, 20                          |                  | Tc               | Clearance | S1                               | S1 specification                                                                            |
| LWES                   |          |                              | ④ Number of slide unit (2)      | No symbol        | Standard         | S2        | S2 specification                 |                                                                                             |
| LWES...Q               |          |                              |                                 | T1               | Light preload    | No symbol | No-interchangeable specification |                                                                                             |
| ② Length of slide unit |          |                              | ⑤ Length of track rail (340 mm) |                  | T2               |           | Medium preload                   | ⑩ Special specification<br>A BS, D, E, F, 1, J, L, LF, MA<br>M4, N, Q, RE, T, U, V, W, Y, Z |
| C                      | Short    | ⑥ Material type              |                                 | ⑧ Accuracy class |                  |           |                                  |                                                                                             |
| No symbol              | Standard | No symbol                    | High carbon steel made          | No symbol        | Ordinary         |           |                                  |                                                                                             |
| G                      | Long     | SL                           | Stainless steel made            | H                | High             |           |                                  |                                                                                             |
|                        |          |                              |                                 | P                | Precision        |           |                                  |                                                                                             |
|                        |          |                              |                                 | SP               | Super precision  |           |                                  |                                                                                             |



### Block type mounting from top

|       |                                                                                   |          |          |
|-------|-----------------------------------------------------------------------------------|----------|----------|
| Shape |  |          |          |
| Size  | 15<br>30                                                                          | 20<br>35 | 25<br>45 |




| Identification number |                           | Interchangeable | Mass (Ref.)         |                    | Dimensions of assembly<br>mm |                |      | Dimensions of slide unit<br>mm |                |                |                |                |                |                |                       |  |                | Dimensions of track rail<br>mm |                |                |                |    |      |     |             | Recommended<br>mounting bolt<br>for track rail <sup>(2)</sup><br>mm | Basic dynamic<br>load rating <sup>(3)</sup> | Basic static<br>load rating <sup>(3)</sup> | Static moment rating <sup>(3)</sup> |                     |                       |                       |                       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|-----------------------|---------------------------|-----------------|---------------------|--------------------|------------------------------|----------------|------|--------------------------------|----------------|----------------|----------------|----------------|----------------|----------------|-----------------------|--|----------------|--------------------------------|----------------|----------------|----------------|----|------|-----|-------------|---------------------------------------------------------------------|---------------------------------------------|--------------------------------------------|-------------------------------------|---------------------|-----------------------|-----------------------|-----------------------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| ME series             | LWE series<br>(No C-Lube) |                 | Slide<br>unit<br>kg | Track rail<br>kg/m | H                            | H <sub>1</sub> | N    | W <sub>2</sub>                 | W <sub>3</sub> | W <sub>4</sub> | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | L <sub>4</sub> | M <sub>1</sub> ×depth |  | H <sub>3</sub> | W                              | H <sub>4</sub> | d <sub>3</sub> | d <sub>4</sub> | h  | E    | F   | Bolt size×ℓ |                                                                     |                                             |                                            | C<br>N                              | C <sub>0</sub><br>N | T <sub>0</sub><br>N・m | T <sub>x</sub><br>N・m | T <sub>y</sub><br>N・m |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| MESC 25               | LWESC 25                  | ○               | 0.26                | 3.09               | 33                           | 7              | 12.5 | 48                             | 35             | 6.5            | 59             | —              | 32             | 70             | M 6×9                 |  | 6.5            | 23                             | 19             | 7              | 11             | 9  | 20   | 60  | M 6×20      | 12 400                                                              | 12 300                                      | 153                                        | 71.8<br>480                         | 71.8<br>480         |                       |                       |                       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| MESC 25…SL            | LWESC 25…SL               | ○               |                     |                    |                              |                |      |                                |                |                |                |                |                |                |                       |  |                |                                |                |                |                |    |      |     |             |                                                                     |                                             |                                            |                                     |                     |                       |                       |                       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| MES 25                | LWES 25                   | ○               |                     |                    |                              |                |      |                                |                |                |                |                |                |                |                       |  |                |                                |                |                |                |    |      |     |             |                                                                     |                                             |                                            |                                     |                     |                       |                       |                       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| MES 25…SL             | LWES 25…SL                | ○               | 0.43                |                    |                              |                |      |                                |                |                |                |                |                |                |                       |  |                |                                |                |                |                |    |      |     |             |                                                                     |                                             |                                            |                                     |                     |                       |                       |                       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| —                     | LWES 25…Q                 | —               |                     |                    |                              |                |      |                                |                |                |                |                |                |                |                       |  |                |                                |                |                |                |    |      |     |             |                                                                     |                                             |                                            |                                     |                     |                       |                       |                       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| MESG 25               | LWESG 25                  | ○               | 0.55                |                    |                              |                |      |                                |                |                |                |                |                |                |                       |  |                |                                |                |                |                |    |      |     |             |                                                                     |                                             |                                            |                                     |                     |                       |                       |                       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| MESG 25…SL            | LWESG 25…SL               | ○               |                     |                    |                              |                |      |                                |                |                |                |                |                |                |                       |  |                |                                |                |                |                |    |      |     |             |                                                                     |                                             |                                            |                                     |                     |                       |                       |                       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| MESC 30               | LWESC 30                  | ○               | 0.46                | 5.09               | 42                           | 10             | 16   | 60                             | 40             | 10             | 68             | —              | 36             | 78             | M 8×12                |  | 8              | 28                             | 25             | 7              | 11             | 9  | 20   | 80  | M 6×25      | 20 600                                                              | 18 800                                      | 287                                        | 129<br>855                          | 129<br>855          |                       |                       |                       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| MESC 30…SL            | LWESC 30…SL               | ○               |                     |                    |                              |                |      |                                |                |                |                |                |                |                |                       |  |                |                                |                |                |                |    |      |     |             |                                                                     |                                             |                                            |                                     |                     |                       |                       |                       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| MES 30                | LWES 30                   | ○               | 0.78                |                    |                              |                |      |                                |                |                |                |                |                |                |                       |  |                |                                |                |                |                |    |      |     |             |                                                                     |                                             |                                            |                                     |                     |                       |                       |                       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| MES 30…SL             | LWES 30…SL                | ○               |                     |                    |                              |                |      |                                |                |                |                |                |                |                |                       |  |                |                                |                |                |                |    |      |     |             |                                                                     |                                             |                                            |                                     |                     |                       |                       |                       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| —                     | LWES 30…Q                 | —               | 0.75                |                    |                              |                |      |                                |                |                | 5.04           |                |                |                |                       |  |                |                                |                |                |                |    |      |     |             |                                                                     |                                             |                                            |                                     |                     |                       |                       |                       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| MESG 30               | LWESG 30                  | ○               | 1.13                |                    |                              |                |      |                                |                |                | 5.09           |                |                |                |                       |  |                |                                |                |                |                |    |      |     |             |                                                                     |                                             |                                            |                                     |                     |                       |                       |                       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| MESG 30…SL            | LWESG 30…SL               | ○               |                     |                    |                              |                |      |                                |                |                |                |                |                |                |                       |  |                |                                |                |                |                |    |      |     |             |                                                                     |                                             |                                            |                                     |                     |                       |                       |                       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| MESC 35               | LWESC 35                  | ○               | 0.67                | 6.85               | 48                           | 11             | 18   | 70                             | 50             | 10             | 78             | —              | 41.6           | 90             | M 8×12                |  | 10             | 34                             | 28             | 9              | 14             | 12 | 20   | 80  | M 8×30      | 29 900                                                              | 26 800                                      | 412                                        | 176<br>1 190                        | 162<br>1 100        |                       |                       |                       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| MES 35                | LWES 35                   | ○               | 1.21                |                    |                              |                |      |                                |                |                |                |                |                |                |                       |  |                |                                |                |                |                |    |      |     |             |                                                                     |                                             |                                            |                                     |                     |                       |                       |                       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| —                     | LWES 35…Q                 | —               | 1.20                |                    |                              |                |      |                                |                |                |                |                |                |                |                       |  |                |                                |                |                |                |    |      |     |             |                                                                     |                                             |                                            |                                     |                     |                       |                       |                       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| MES 45                | LWES 45                   | ○               | 2.05                | 11.2               | 60                           | 14             | 20.5 | 86                             | 60             | 13             | 125            | 60             | 81.4           | 136            | M10×15                |  | 13             | 45                             | 34             | 11             | 17.5           | 14 | 22.5 | 105 | M10×35      | 61 100                                                              | 60 200                                      | 1 210                                      | 672<br>4 070                        | 618<br>3 750        |                       |                       |                       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |

Notes (1) Track rail lengths  $L$  are shown in Tables 2.1 and 2.2 on page II-45.

(2) Track rail mounting bolts are not appended. Hexagon socket head bolts of JIS B 1176 with strength division 12.9 are recommended.

<sup>(3)</sup> The direction of basic dynamic load rating ( $C$ ), basic static load rating ( $C_0$ ), and static moment rating ( $T_0, T_x, T_y$ ) are shown in the sketches below. The upper values of  $T_x$  and  $T_y$  are for one slide unit and the lower values are for two slide units in close contact.

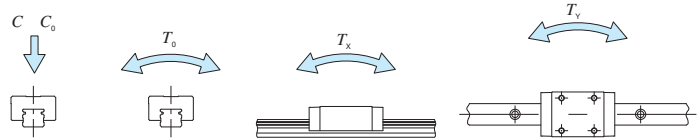(4) The shapes of grease nipple vary by size. The specifications are shown in Table 15 on page II -51.



### Example of identification number of assembled set

| Model code |          | Dimensions | Part code |             | Model code | Material code | Preload symbol       | Classification symbol | Interchangeable code | Special specification |
|------------|----------|------------|-----------|-------------|------------|---------------|----------------------|-----------------------|----------------------|-----------------------|
| <u>MES</u> | <u>G</u> | <u>30</u>  | <u>C2</u> | <u>R440</u> | <u>  </u>  | <u>  </u>     | <u>T<sub>1</sub></u> | <u>P</u>              | <u>S1</u>            | <u>/U</u>             |
| 1          | 2        | 3          | 4         | 5           | 1          | 6             | 7                    | 8                     | 9                    | 10                    |

| ① Model  |                              |
|----------|------------------------------|
| MES      | Block type mounting from top |
| LWES     |                              |
| LWES...Q |                              |

| ② Length of slide unit |          |
|------------------------|----------|
| C                      | Short    |
| No symbol              | Standard |
| G                      | Long     |

④ Number of slide unit (2)

|                                 |                        |
|---------------------------------|------------------------|
| ⑤ Length of track rail (440 mm) |                        |
| ⑥ Material type                 |                        |
| No symbol                       | High carbon steel made |
| SL                              | Stainless steel made   |

| ⑦ Preload amount |               | ⑨ Interchangeable |                                   |
|------------------|---------------|-------------------|-----------------------------------|
| T <sub>c</sub>   | Clearance     | S1                | S1 specification                  |
| No symbol        | Standard      | S2                | S2 specification                  |
| T <sub>1</sub>   | Light preload | No symbol         | Non-interchangeable specification |

|                         |                 |                                 |  |
|-------------------------|-----------------|---------------------------------|--|
| <b>⑧ Accuracy class</b> |                 | <b>⑩ Special specification</b>  |  |
| No symbol               | Ordinary        | A, BS, D, E, F, I, J, L, LF, MA |  |
| H                       | High            | N, Q, RE, T, U, V, W, Y, Z      |  |
| P                       | Precision       |                                 |  |
| SP                      | Super precision |                                 |  |

## C-Lube Linear Way MH Linear Way H

MH • LWH





C-Lube Linear Way MH

MH



The aquamarine end plate is the symbol of maintenance free.

Track rail

Slide unit

Casing

C-Lube

Ball

End plate

Under seal

Ball retaining band

End seal

Grease nipple

Linear Way H

LWH

Points

- High rigidity series with the maximum load rating among ball types

High rigidity linear motion rolling guide having a maximum load rating among ball-type units by incorporating a large-diameter ball.

- Wide range of variations for your needs For details P.I-26

As the lineup of 5 types of slide unit shape including the flange type, block type with small width and side mounting type, etc., and 3 types with different slide unit length with same section are available, you can select an optimal product for the specifications of your machine and device.

- Stainless steels superior in corrosion resistance are listed on lineup. For details P.I-41

Products made of stainless steel are highly resistant to corrosion, so that they are suitable for applications where rust prevention oil is not preferred, such as in cleanroom environment.

- Series of ultra seal specification for excellent dust protection performance

Products of ultra seal specifications have excellent dust protection performance thanks to the combination of the dedicated track rail finished with total ground and slide unit with end seal and under seal of special shapes. Special specification with inner seal further improves dust protection property of the ball circulation section against foreign substances from the upper surface of the track rail.

Identification Number and Specification

Example of an identification number

The specifications of MH and LWH series are indicated by the identification number. Indicate the identification number, consisting of a model code, dimensions, a part code, a dust protection code, a material code, a preload symbol, a classification symbol, an interchangeable code, and a supplemental code for each specification to apply.

| Interchangeable specification     |     |   |    |    |      |   |  |                |   |        |
|-----------------------------------|-----|---|----|----|------|---|--|----------------|---|--------|
| Single slide unit                 | MHT | G | 20 | C1 |      |   |  | T <sub>1</sub> | P | S1 /V  |
| Single track rail (1)             | LWH |   | 20 |    | R840 | B |  |                | P | S1 /F  |
| Assembled set                     | MHT | G | 20 | C1 | R840 |   |  | T <sub>1</sub> | P | S1 /FV |
| Non-interchangeable specification |     |   |    |    |      |   |  |                |   |        |
| Assembled set                     | MHT | G | 20 | C1 | R840 |   |  | T <sub>1</sub> | P | /FV    |




















|                                 |                                     |
|---------------------------------|-------------------------------------|
| 1 Model                         | Model code Page II-69<br>Page II-70 |
| 2 Length of slide unit          |                                     |
| 3 Size                          | Dimensions Page II-70               |
| 4 Number of slide units         | Part code Page II-70<br>Page II-71  |
| 5 Length of track rail          |                                     |
| 6 Dust protection specification | Dust protection code Page II-72     |
| 7 Material type                 | Material code Page II-74            |
| 8 Preload amount                | Preload code Page II-74             |
| 9 Accuracy class                | Classification code Page II-75      |
| 10 Interchangeable              | Interchangeable code Page II-76     |
| 11 Special specification        | Supplemental code Page II-76        |


Note (1) Indicate "LWH...B" or "LWH" for the model code of the single track rail regardless of the series and the combination of slide unit models.

Identification Number and Specification — Model —

|                                                                                                                                                                                                           |       |                                             |                                                                                                                                                                                                                                      |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|---------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1                                                                                                                                                                                                         | Model | C-Lube Linear Way MH<br>(MH series)         | Flange type mounting from bottom : MH<br>Flange type mounting from top <sup>(2)</sup> : MHT<br>Block type mounting from top : MHD<br>Compact block type mounting from top : MHS                                                      |
|                                                                                                                                                                                                           |       | Linear Way H <sup>(1)</sup><br>(LWH series) | Flange type mounting from bottom : LWH (…B)<br>Flange type mounting from top <sup>(2)</sup> : LWHT (…B)<br>Block type mounting from top : LWHD (…B)<br>Compact block type mounting from top : LWHS (…B)<br>Side mounting type : LWHY |
| For applicable models and sizes, see Table 1.1 and Table 1.2.<br>Indicate "LWH…B" or "LWH" for the model code of the single track rail regardless of the series and the combination of slide unit models. |       |                                             |                                                                                                                                                                                                                                      |
| Notes <sup>(1)</sup> This model has no built-in C-Lube.<br><sup>(2)</sup> Some models may be mounted upward.                                                                                              |       |                                             |                                                                                                                                                                                                                                      |

Table 1.1 Models and sizes of MH and LWH series






| Material               | Shape                                                                               | Length of slide unit                                                                | Model               | Size             |                  |                     |                  |    |    |    |    |    |    |    |                  |  |  |
|------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------|------------------|------------------|---------------------|------------------|----|----|----|----|----|----|----|------------------|--|--|
|                        |                                                                                     |                                                                                     |                     | 8                | 10               | 12                  | 15               | 20 | 25 | 30 | 35 | 45 | 55 | 65 | 85               |  |  |
| High carbon steel made |    | Standard                                                                            | MH                  | —                | —                | —                   | ○                | ○  | ○  | ○  | ○  | ○  | —  | —  | —                |  |  |
|                        |                                                                                     |                                                                                     | LWH…B               | —                | —                | —                   | ○                | ○  | ○  | ○  | ○  | ○  | ○  | ○  | —                |  |  |
|                        |                                                                                     |    | MH…M (U)            | —                | —                | —                   | —                | —  | ○  | ○  | —  | —  | —  | —  | —                |  |  |
|                        |                                                                                     |                                                                                     | LWH…M (U)           | —                | —                | —                   | ○                | ○  | ○  | ○  | ○  | —  | —  | —  | —                |  |  |
|                        |  | Standard                                                                            | MHG                 | —                | —                | —                   | —                | ○  | ○  | ○  | ○  | ○  | —  | —  | —                |  |  |
|                        |                                                                                     |                                                                                     | LWHG                | —                | —                | —                   | —                | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○ <sup>(3)</sup> |  |  |
|                        |                                                                                     |  | MHT                 | —                | —                | ○ <sup>(1)</sup>    | ○                | ○  | ○  | ○  | ○  | ○  | —  | —  | —                |  |  |
|                        |                                                                                     |                                                                                     | LWHT…B              | —                | —                | ○ <sup>(1)(2)</sup> | ○                | ○  | ○  | ○  | ○  | ○  | ○  | ○  | —                |  |  |
|                        |                                                                                     |  | MHT…M (U)           | —                | —                | —                   | —                | —  | ○  | ○  | —  | —  | —  | —  | —                |  |  |
|                        |                                                                                     |                                                                                     | LWHT…M (U)          | —                | —                | —                   | ○                | ○  | ○  | ○  | ○  | —  | —  | —  | —                |  |  |
|                        |                                                                                     |  | MHTG                | —                | —                | —                   | ○ <sup>(1)</sup> | ○  | ○  | ○  | ○  | ○  | —  | —  | —                |  |  |
|                        |                                                                                     |                                                                                     | LWHTG               | —                | —                | —                   | —                | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○ <sup>(3)</sup> |  |  |
|                        |  | Standard                                                                            | MHTL <sup>(1)</sup> | —                | —                | —                   | —                | —  | —  | ○  | ○  | ○  | —  | —  | —                |  |  |
|                        |                                                                                     |                                                                                     | MHD                 | —                | —                | ○                   | ○                | —  | ○  | ○  | ○  | ○  | —  | —  | —                |  |  |
|                        |                                                                                     |  | LWHD…B              | —                | —                | ○ <sup>(2)</sup>    | ○                | —  | ○  | ○  | ○  | ○  | ○  | ○  | —                |  |  |
|                        |                                                                                     |                                                                                     | MHD…M (U)           | —                | —                | —                   | —                | —  | ○  | ○  | —  | —  | —  | —  | —                |  |  |
|                        |                                                                                     |  | LWHD…M (U)          | —                | —                | —                   | ○                | —  | ○  | ○  | ○  | —  | —  | —  | —                |  |  |
|                        |                                                                                     |                                                                                     | MHDG                | —                | —                | —                   | —                | —  | ○  | ○  | ○  | ○  | —  | —  | —                |  |  |
|                        |                                                                                     |  | LWHDG               | —                | —                | —                   | —                | —  | ○  | ○  | ○  | ○  | ○  | ○  | —                |  |  |
|                        |                                                                                     |                                                                                     | MHDL                | —                | —                | —                   | —                | —  | —  | ○  | ○  | ○  | —  | —  | —                |  |  |
|                        |  | Standard                                                                            | MHS                 | —                | —                | —                   | ○                | ○  | ○  | ○  | —  | —  | —  | —  | —                |  |  |
|                        |                                                                                     |                                                                                     | LWHS…B              | —                | —                | —                   | ○                | ○  | ○  | ○  | —  | —  | —  | —  | —                |  |  |
|                        |                                                                                     |  | MHS…M (U)           | —                | —                | —                   | —                | —  | ○  | ○  | —  | —  | —  | —  | —                |  |  |
|                        |                                                                                     |                                                                                     | LWHS…M (U)          | —                | —                | —                   | ○                | ○  | ○  | ○  | —  | —  | —  | —  | —                |  |  |
|                        |                                                                                     |  | MHSG                | —                | —                | —                   | ○                | ○  | ○  | ○  | —  | —  | —  | —  | —                |  |  |
|                        |                                                                                     |                                                                                     | LWHS                | —                | —                | —                   | —                | ○  | ○  | ○  | —  | —  | —  | —  | —                |  |  |
|                        |  | Standard                                                                            | MHSG                | —                | —                | —                   | —                | ○  | ○  | ○  | —  | —  | —  | —  | —                |  |  |
|                        |                                                                                     |                                                                                     | LWHS                | —                | —                | —                   | —                | —  | —  | —  | —  | —  | —  | —  | —                |  |  |
|                        |  | Standard                                                                            | MHS…SL              | —                | —                | —                   | ○                | ○  | ○  | ○  | —  | —  | —  | —  | —                |  |  |
|                        |                                                                                     |                                                                                     | LWHS…SL             | —                | —                | —                   | ○                | ○  | ○  | ○  | —  | —  | —  | —  | —                |  |  |
|                        |  | Standard                                                                            | MHT…SL              | ○ <sup>(1)</sup> | ○ <sup>(1)</sup> | ○ <sup>(1)</sup>    | ○                | ○  | ○  | ○  | —  | —  | —  | —  | —                |  |  |
|                        |                                                                                     |                                                                                     | LWHT…SL             | ○ <sup>(1)</sup> | ○ <sup>(1)</sup> | ○ <sup>(1)</sup>    | ○                | ○  | ○  | ○  | —  | —  | —  | —  | —                |  |  |
|                        |  | Short                                                                               | MHDC…SL             | ○                | ○                | ○                   | —                | —  | —  | —  | —  | —  | —  | —  | —                |  |  |
|                        |                                                                                     |                                                                                     | LWHDC…SL            | ○                | ○                | ○                   | —                | —  | —  | —  | —  | —  | —  | —  | —                |  |  |
|                        |                                                                                     | Standard                                                                            | MHD…SL              | ○                | ○                | ○                   | —                | —  | —  | —  | —  | —  | —  | —  | —                |  |  |
|                        |                                                                                     |                                                                                     | LWHD…SL             | ○                | ○                | ○                   | —                | —  | —  | —  | —  | —  | —  | —  | —                |  |  |
|                        |  | Long                                                                                | MHDG…SL             | ○                | ○                | ○                   | —                | —  | —  | —  | —  | —  | —  | —  | —                |  |  |
|                        |                                                                                     |                                                                                     | LWHDG…SL            | ○                | ○                | ○                   | —                | —  | —  | —  | —  | —  | —  | —  | —                |  |  |
|                        |  | Standard                                                                            | MHS…SL              | —                | —                | —                   | ○                | ○  | ○  | ○  | —  | —  | —  | —  | —                |  |  |
|                        |                                                                                     |                                                                                     | LWHS…SL             | —                | —                | —                   | ○                | ○  | ○  | ○  | —  | —  | —  | —  | —                |  |  |


Notes <sup>(1)</sup> This may be mounted upward.  
<sup>(2)</sup> "…B" is not included in the model code.  
<sup>(3)</sup> This unit is prepared based on respective usages.  
Remark: For the models indicated in , the interchangeable specification is available.

— Model · Length of Slide Unit · Size · Number of Slide Unit —

|   |                       |                                               |                                                               |                                                                                                                                       |
|---|-----------------------|-----------------------------------------------|---------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| 2 | Length of slide unit  | Short                                         | : C                                                           | For applicable models and sizes, see Table 1.1 and Table 1.2.                                                                         |
|   |                       | Standard                                      | : No symbol                                                   |                                                                                                                                       |
|   |                       | Long                                          | : G                                                           |                                                                                                                                       |
|   |                       | Extra long                                    | : L                                                           |                                                                                                                                       |
| 3 | Size                  | 8, 10, 12, 15, 20, 25, 30, 35, 45, 55, 65, 85 | For applicable models and sizes, see Table 1.1 and Table 1.2. |                                                                                                                                       |
|   |                       |                                               |                                                               |                                                                                                                                       |
| 4 | Number of slide units |                                               | : C○                                                          | For an assembled set, indicates the number of slide units assembled on a track rail. For a single slide unit, only "C1" is specified. |
|   |                       |                                               |                                                               |                                                                                                                                       |

Table 1.2 Models and sizes of MH and LWH series

| Material             | Shape                                                                                 | Slide unit Length | Model    | Size             |                  |                  |    |    |    |    |    |    |    |    |    |  |  |
|----------------------|---------------------------------------------------------------------------------------|-------------------|----------|------------------|------------------|------------------|----|----|----|----|----|----|----|----|----|--|--|
|                      |                                                                                       |                   |          | 8                | 10               | 12               | 15 | 20 | 25 | 30 | 35 | 45 | 55 | 65 | 85 |  |  |
| Stainless steel made |    | Standard          | LWH…SL   | —                | —                | —                | ○  | ○  | ○  | ○  | —  | —  | —  | —  | —  |  |  |
|                      |                                                                                       |                   | MHT…SL   | ○ <sup>(1)</sup> | ○ <sup>(1)</sup> | ○ <sup>(1)</sup> | ○  | ○  | ○  | ○  | —  | —  | —  | —  | —  |  |  |
|                      |    | Standard          | LWHT…SL  | ○ <sup>(1)</sup> | ○ <sup>(1)</sup> | ○ <sup>(1)</sup> | ○  | ○  | ○  | ○  | —  | —  | —  | —  | —  |  |  |
|                      |                                                                                       |                   | MHDC…SL  | ○                | ○                | ○                | —  | —  | —  | —  | —  | —  | —  | —  | —  |  |  |
|                      |  | Short             | LWHDC…SL | ○                | ○                | ○                | —  | —  | —  | —  | —  | —  | —  | —  | —  |  |  |
|                      |                                                                                       |                   | MHD…SL   | ○                | ○                | ○                | —  | —  | —  | —  | —  | —  | —  | —  | —  |  |  |
|                      |                                                                                       | Standard          | LWHD…SL  | ○                | ○                | ○                | —  | —  | —  | —  | —  | —  | —  | —  | —  |  |  |
|                      |                                                                                       |                   | MHDG…SL  | ○                | ○                | ○                | —  | —  | —  | —  | —  | —  | —  | —  | —  |  |  |
|                      |  | Long              | LWHDG…SL | ○                | ○                | ○                | —  | —  | —  | —  | —  | —  | —  | —  | —  |  |  |
|                      |                                                                                       |                   | MHS…SL   | —                | —                | —                | ○  | ○  | ○  | ○  | —  | —  | —  | —  | —  |  |  |
|                      |  | Standard          | LWHS…SL  | —                | —                | —                | ○  | ○  | ○  | ○  | —  | —  | —  | —  | —  |  |  |
|                      |                                                                                       |                   | MHT…SL   | —                | —                | —                | ○  | ○  | ○  | ○  | —  | —  | —  | —  | —  |  |  |

Note <sup>(1)</sup> This may be mounted upward.  
Remark: For the models indicated in , the interchangeable specification is available.


MH · LWH



5 Length of track rail

: RO      Indicate the length of track rail in mm.  
For standard and maximum length, see Table 2.1 and Table 2.2.

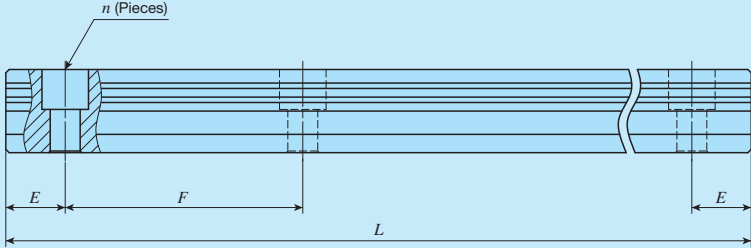Table 2.1 Standard and maximum length of high carbon steel track rail

|  |                       |                    |                    |                    |                    |                       |
|------------------------------------------------------------------------------------|-----------------------|--------------------|--------------------|--------------------|--------------------|-----------------------|
| unit: mm                                                                           |                       |                    |                    |                    |                    |                       |
| Item                                                                               | Identification number | MH 12<br>LWH12     | MH 15<br>LWH15...B | MH 20<br>LWH20...B | MH 25<br>LWH25...B | MH 30<br>LWH30...B    |
| Standard length <i>L</i> ( <i>n</i> )                                              |                       | 80 ( 2)            | 180 ( 3)           | 240 ( 4)           | 240 ( 4)           | 480 ( 6)              |
|                                                                                    |                       | 160 ( 4)           | 240 ( 4)           | 480 ( 8)           | 480 ( 8)           | 640 ( 8)              |
|                                                                                    |                       | 240 ( 6)           | 360 ( 6)           | 660 (11)           | 660 (11)           | 800 (10)              |
|                                                                                    |                       | 320 ( 8)           | 480 ( 8)           | 840 (14)           | 840 (14)           | 1 040 (13)            |
|                                                                                    |                       | 400 (10)           | 660 (11)           | 1 020 (17)         | 1 020 (17)         | 1 200 (15)            |
|                                                                                    |                       | 480 (12)           | 900 (15)           | 1 200 (20)         | 1 200 (20)         | 1 520 (19)            |
|                                                                                    |                       | 560 (14)           | 1 200 (20)         | 1 500 (25)         | 1 500 (25)         | 2 000 (25)            |
|                                                                                    |                       | 640 (16)           |                    |                    | 1 980 (33)         |                       |
|                                                                                    | 720 (18)              |                    |                    |                    |                    |                       |
| Pitch of mounting holes <i>F</i>                                                   |                       | 40                 | 60                 | 60                 | 60                 | 80                    |
| <i>E</i>                                                                           |                       | 20                 | 30                 | 30                 | 30                 | 40                    |
| Standard <i>E</i> or higher                                                        |                       | 5.5                | 7                  | 8                  | 9                  | 10                    |
| dimensions <sup>(1)</sup> below                                                    |                       | 25.5               | 37                 | 38                 | 39                 | 50                    |
| Maximum length <sup>(2)</sup>                                                      |                       | 1 480              | 1 500<br>(3 000)   | 1 980<br>(3 000)   | 3 000<br>(3 960)   | 2 960<br>(4 000)      |
| Item                                                                               | Identification number | MH 35<br>LWH35...B | MH 45<br>LWH45...B | LWH55...B          | LWH65...B          | LWHG85 <sup>(3)</sup> |
| Standard length <i>L</i> ( <i>n</i> )                                              |                       | 480 ( 6)           | 840 ( 8)           | 840 ( 7)           | 1 500 (10)         | —                     |
|                                                                                    |                       | 640 ( 8)           | 1 050 (10)         | 1 200 (10)         | 1 950 (13)         |                       |
|                                                                                    |                       | 800 (10)           | 1 260 (12)         | 1 560 (13)         | 3 000 (20)         |                       |
|                                                                                    |                       | 1 040 (13)         | 1 470 (14)         | 1 920 (16)         |                    |                       |
|                                                                                    |                       | 1 200 (15)         | 1 995 (19)         | 3 000 (25)         |                    |                       |
|                                                                                    |                       | 1 520 (19)         |                    |                    |                    |                       |
| Pitch of mounting holes <i>F</i>                                                   |                       | 80                 | 105                | 120                | 150                | 180                   |
| <i>E</i>                                                                           |                       | 40                 | 52.5               | 60                 | 75                 | 90                    |
| Standard <i>E</i> or higher                                                        |                       | 10                 | 12.5               | 15                 | 17                 | 23                    |
| dimensions <sup>(1)</sup> below                                                    |                       | 50                 | 65                 | 75                 | 92                 | 113                   |
| Maximum length <sup>(2)</sup>                                                      |                       | 2 960<br>(4 000)   | 2 940<br>(3 990)   | 3 000<br>(3 960)   | 3 000<br>(3 900)   | 2 880                 |

Notes <sup>(1)</sup> This does not apply to female threads for bellows (supplemental code "/J").  
<sup>(2)</sup> Length up to the value in ( ) can be produced. If needed, please contact **IKO**.  
<sup>(3)</sup> This unit is prepared based on respective usages.

Remarks 1. A typical identification number is indicated, but is applied to all models of the same size.  
2. Indicate "LWH" for series of size 12 or "LWH...B" for series of size 15 or above for the model code of the single track rail regardless of the series and the combination of slide unit models.  
3. For high sealed specifications, refer to Table 2.3 and Table 2.4.  
4. If not directed, E dimensions for both ends will be the same within the range of standard E dimensions. To change the dimensions, indicate the specified rail mounting hole positions "/E" of special specification. For more information, see page III-29.

6 Dust protection specification

Standard specification : No symbol      For applicable models and sizes, see Table 1.1 and Table 1.2.  
Ultra seal specification : M      Each specification of ultra seal specification with track rail mounting from bottom is in compliance to the ultra seal specification.  
Ultra seal specification : MU      Ultra seal specification with track rail mounting from bottom applies to products to fix the track rail on the mounting surface side by pressing in the aluminum caps for rail mounting holes to the mounting hole of the track rail in advance. As the upper surface of the track rail is flat, adhesion to the seal is high and dust protection effect is improved further.  
with track rail mounting from bottom      For track rail specifications, see Table 2.3 and Table 2.4.

Table 2.2 Standard and maximum length of stainless steel track rail

The diagram illustrates a stainless steel track rail assembly. It shows a side view of the rail with a cross-section of a mounting hole. The dimensions are labeled as follows:
 

- $n$  (Pieces): The number of rail sections.
- $E$ : The length of the end flange.
- $F$ : The pitch of the mounting holes.
- $L$ : The total length of the rail assembly.

unit: mm

| Item \ Identification number    | MH 8...SL<br>LWH8...SL                                                         | MH 10...SL<br>LWH10...SL                                                                                            | MH 12...SL<br>LWH12...SL                                                                                | MH 15...SL<br>LWH15...SL                                 | MH 20...SL<br>LWH20...SL                     | MH 25...SL<br>LWH25...SL                     | MH 30...SL<br>LWH30...SL                       |
|---------------------------------|--------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|----------------------------------------------------------|----------------------------------------------|----------------------------------------------|------------------------------------------------|
| Standard length $L$ ( $n$ )     | 40 ( 2)<br>80 ( 4)<br>120 ( 6)<br>160 ( 8)<br>200 (10)<br>240 (12)<br>280 (14) | 50 ( 2)<br>100 ( 4)<br>150 ( 6)<br>200 ( 8)<br>250 (10)<br>300 (12)<br>350 (14)<br>400 (16)<br>450 (18)<br>500 (20) | 80 ( 2)<br>160 ( 4)<br>240 ( 6)<br>320 ( 8)<br>400 (10)<br>480 (12)<br>560 (14)<br>640 (16)<br>720 (18) | 180 ( 3)<br>240 ( 4)<br>360 ( 6)<br>480 ( 8)<br>660 (11) | 240 ( 4)<br>480 ( 8)<br>660 (11)<br>840 (14) | 240 ( 4)<br>480 ( 8)<br>660 (11)<br>840 (14) | 480 ( 6)<br>640 ( 8)<br>800 (10)<br>1 040 (13) |
| Pitch of mounting holes $F$     | 20                                                                             | 25                                                                                                                  | 40                                                                                                      | 60                                                       | 60                                           | 60                                           | 80                                             |
| $E$                             | 10                                                                             | 12.5                                                                                                                | 20                                                                                                      | 30                                                       | 30                                           | 30                                           | 40                                             |
| Standard $E$ or higher          | 4.5                                                                            | 5                                                                                                                   | 5.5                                                                                                     | 7                                                        | 8                                            | 9                                            | 10                                             |
| dimensions <sup>(1)</sup> below | 14.5                                                                           | 17.5                                                                                                                | 25.5                                                                                                    | 37                                                       | 38                                           | 39                                           | 50                                             |
| Maximum length <sup>(2)</sup>   | 480<br>(1 000)                                                                 | 850<br>(1 000)                                                                                                      | 1 000<br>(1 480)                                                                                        | 1 200<br>(1 500)                                         | 1 200<br>(3 000)                             | 1 200<br>(3 000)                             | 1 200<br>(2 960)                               |

Notes <sup>(1)</sup> This does not apply to female threads for bellows (supplemental code "/J").  
<sup>(2)</sup> Length up to the value in ( ) can be produced. If needed, please contact **IKO**.

Remarks 1. A typical identification number is indicated, but is applied to all models of the same size.  
2. Indicate "LWH" for the model code of the single track rail regardless of the series and the combination of slide unit models.  
3. If not directed, E dimensions for both ends will be the same within the range of standard E dimensions. To change the dimensions, indicate the specified rail mounting hole positions "/E" of special specification. For more information, see page III-29.

Table 2.3 Standard and maximum length of ultra seal specification high carbon steel track rail

unit: mm

| Item                                                           | Identification number | LWH15...M  | LWH20...M  | MH 25...M<br>LWH25...M | MH 30...M<br>LWH30...M | LWH35...M  | LWH45...M  |
|----------------------------------------------------------------|-----------------------|------------|------------|------------------------|------------------------|------------|------------|
| Standard length <i>L</i> ( <i>n</i> )                          |                       | 180 ( 3)   | 240 ( 4)   | 240 ( 4)               | 480 ( 6)               | 480 ( 6)   | 840 ( 8)   |
|                                                                |                       | 240 ( 4)   | 480 ( 8)   | 480 ( 8)               | 640 ( 8)               | 640 ( 8)   | 1 050 (10) |
|                                                                |                       | 360 ( 6)   | 660 (11)   | 660 (11)               | 800 (10)               | 800 (10)   | 1 260 (12) |
|                                                                |                       | 480 ( 8)   | 840 (14)   | 840 (14)               | 1 040 (13)             | 1 040 (13) | 1 470 (14) |
|                                                                |                       | 660 (11)   | 1 020 (17) | 1 020 (17)             | 1 200 (15)             | 1 200 (15) | 1 995 (19) |
|                                                                |                       | 1 200 (20) | 1 200 (20) | 1 520 (19)             | 1 520 (19)             |            |            |
|                                                                |                       | 1 500 (25) | 1 500 (25) |                        |                        |            |            |
| Pitch of mounting holes <i>F</i>                               |                       | 60         | 60         | 60                     | 80                     | 80         | 105        |
| <i>E</i>                                                       |                       | 30         | 30         | 30                     | 40                     | 40         | 52.5       |
| Standard <i>E</i> or higher<br>dimensions <sup>(1)</sup> below |                       | 7          | 8          | 9                      | 10                     | 10         | 12.5       |
|                                                                |                       | 37         | 38         | 39                     | 50                     | 50         | 65         |
| Maximum length                                                 |                       | 1 500      | 1 980      | 3 000                  | 2 960                  | 2 960      | 2 940      |
| Maximum number of<br>butt-jointing track rails                 |                       | 3          | 3          | 3                      | 3                      | 3          | 3          |
| Maximum length of<br>butt-jointing track rail                  |                       | 4 200      | 5 640      | 8 700                  | 8 480                  | 8 480      | 8 295      |

Note <sup>(1)</sup> This does not apply to female threads for bellows (supplemental code "/J").

Remarks 1. A typical identification number is indicated, but is applied to all models of the same size.

2. If not directed, E dimensions for both ends will be the same within the range of standard E dimensions. To change the dimensions, indicate the specified rail mounting hole positions "/E" of special specification. For more information, see page III-29.

Table 2.4 Standard and maximum length of ultra seal specification with track rail mounting from bottom

The diagram illustrates a track rail assembly. It shows a cross-section of the rail with mounting holes. The dimension 'n (Pieces)' indicates the number of rail sections. The dimension 'E' represents the standard length of a single rail section, and 'F' represents the pitch of the mounting holes. The drawing shows a continuous rail with a break in the middle, indicating it can be joined.

unit: mm

| Item                                                           | Identification number | LWH15...MU | LWH20...MU | MH 25...MU<br>LWH25...MU | MH 30...MU<br>LWH30...MU | LWH35...MU | LWH45...MU |
|----------------------------------------------------------------|-----------------------|------------|------------|--------------------------|--------------------------|------------|------------|
| Standard length <i>L</i> ( <i>n</i> )                          |                       | 180 ( 3)   | 240 ( 4)   | 240 ( 4)                 | 480 ( 6)                 | 480 ( 6)   | 840 ( 8)   |
|                                                                |                       | 240 ( 4)   | 480 ( 8)   | 480 ( 8)                 | 640 ( 8)                 | 640 ( 8)   | 1 050 (10) |
|                                                                |                       | 360 ( 6)   | 660 (11)   | 660 (11)                 | 800 (10)                 | 800 (10)   | 1 260 (12) |
|                                                                |                       | 480 ( 8)   | 840 (14)   | 840 (14)                 | 1 040 (13)               | 1 040 (13) | 1 470 (14) |
|                                                                |                       | 660 (11)   | 1 020 (17) | 1 020 (17)               | 1 200 (15)               | 1 200 (15) | 1 995 (19) |
|                                                                |                       | 1 200 (20) | 1 200 (20) | 1 520 (19)               | 1 520 (19)               |            |            |
|                                                                |                       | 1 500 (25) | 1 500 (25) |                          |                          |            |            |
| Pitch of mounting holes <i>F</i>                               |                       | 60         | 60         | 60                       | 80                       | 80         | 105        |
| <i>E</i>                                                       |                       | 30         | 30         | 30                       | 40                       | 40         | 52.5       |
| Standard <i>E</i> or higher<br>dimensions <sup>(1)</sup> below |                       | 7          | 8          | 9                        | 10                       | 10         | 12.5       |
|                                                                |                       | 37         | 38         | 39                       | 50                       | 50         | 65         |
| Maximum length                                                 |                       | 1 500      | 1 980      | 3 000                    | 2 960                    | 2 960      | 2 940      |
| Maximum number of<br>butt-jointing track rails                 |                       | 3          | 3          | 3                        | 3                        | 3          | 3          |
| Maximum length of<br>butt-jointing track rail                  |                       | 4 200      | 5 640      | 8 700                    | 8 480                    | 8 480      | 8 295      |

Note <sup>(1)</sup> This does not apply to female threads for bellows (supplemental code "/J").

Remarks 1. A typical identification number is indicated, but is applied to all models of the same size.

2. Track rail mounting bolt is not included.

3. If not directed, E dimensions for both ends will be the same within the range of standard E dimensions. To change the dimensions, indicate the specified rail mounting hole positions "/E" of special specification. For more information, see page III-29.

|   |                |                        |                  |                                                                |
|---|----------------|------------------------|------------------|----------------------------------------------------------------|
| 7 | Material type  | High carbon steel made | : No symbol      | For applicable models and sizes, see Table 1.1 and             |
|   |                | Stainless steel made   | : SL             | Table 1.2.                                                     |
| 8 | Preload amount | Clearance              | : T <sub>0</sub> | Specify this item for an assembled set or a single slide unit. |
|   |                | Standard               | : No symbol      | For details of the preload amount, see Table 3.                |
|   |                | Light preload          | : T <sub>1</sub> | For applicable preload types, see Table 4.                     |
|   |                | Medium preload         | : T <sub>2</sub> |                                                                |
|   |                | Heavy preload          | : T <sub>3</sub> |                                                                |

Table 3 Preload amount

| Item           | Preload symbol | Preload amount N   | Operational conditions                                                                   |
|----------------|----------------|--------------------|------------------------------------------------------------------------------------------|
| Preload type   |                |                    |                                                                                          |
| Clearance      | T <sub>0</sub> | 0 <sup>(1)</sup>   | · Very light motion                                                                      |
| Standard       | (No symbol)    | 0 <sup>(2)</sup>   | · Light and precise motion                                                               |
| Light preload  | T <sub>1</sub> | 0.02C <sub>0</sub> | · Almost no vibrations<br>· Load is evenly balanced<br>· Light and precise motion        |
| Medium preload | T <sub>2</sub> | 0.05C <sub>0</sub> | · Medium vibration<br>· Medium overhung load                                             |
| Heavy preload  | T <sub>3</sub> | 0.08C <sub>0</sub> | · Operation with vibration and/or shock<br>· Overhanging load applied<br>· Heavy cutting |

Notes <sup>(1)</sup> There is zero or subtle clearance.

<sup>(2)</sup> Indicates zero or minimal amount of preload.

Remark: C<sub>0</sub> indicates the basic static load rating.

Table 4 Application of preload

| Size | Preload type (preload symbol) |                      |                                 |                                  |                                 |
|------|-------------------------------|----------------------|---------------------------------|----------------------------------|---------------------------------|
|      | Clearance (T <sub>0</sub> )   | Standard (No symbol) | Light preload (T <sub>1</sub> ) | Medium preload (T <sub>2</sub> ) | Heavy preload (T <sub>3</sub> ) |
| 8    | ○                             | ○                    | ○                               | —                                | —                               |
| 10   | ○                             | ○                    | ○                               | —                                | —                               |
| 12   | ○                             | ○                    | ○                               | —                                | —                               |
| 15   | —                             | ○                    | ○                               | ○                                | ○                               |
| 20   | —                             | ○                    | ○                               | ○                                | ○                               |
| 25   | —                             | ○                    | ○                               | ○                                | ○                               |
| 30   | —                             | ○                    | ○                               | ○                                | ○                               |
| 35   | —                             | ○                    | ○                               | ○                                | ○                               |
| 45   | —                             | ○                    | ○                               | ○                                | ○                               |
| 55   | —                             | ○                    | ○                               | ○                                | ○                               |
| 65   | —                             | ○                    | ○                               | ○                                | ○                               |
| 85   | —                             | ○                    | ○                               | ○                                | ○                               |

Remark: The values indicated in   are also applicable to the interchangeable specifications.



|   |                |                 |      |                                                                                                                                                                                                                              |
|---|----------------|-----------------|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 9 | Accuracy class | High            | : H  | For interchangeable specification products, assemble a slide unit and a track rail of the same accuracy class.<br>For details of accuracy class, see Table 5.1 and Table 5.2.<br>For applicable accuracy class, see Table 6. |
|   |                | Precision       | : P  |                                                                                                                                                                                                                              |
|   |                | Super precision | : SP |                                                                                                                                                                                                                              |
|   |                |                 |      |                                                                                                                                                                                                                              |

Table 5.1 Tolerance and allowance (Series of size 15 or higher)

Flange type, block type, and compact block type

Side mounting type

unit: mm

| Item                                                                            | Class (classification symbol) | High (H)          | Precision (P) | Super precision (SP) |
|---------------------------------------------------------------------------------|-------------------------------|-------------------|---------------|----------------------|
| Dim. $H$ tolerance                                                              |                               | $\pm 0.040$       | $\pm 0.020$   | $\pm 0.010$          |
| Dim. $N$ tolerance                                                              |                               | $\pm 0.050$       | $\pm 0.025$   | $\pm 0.015$          |
| Dim. variation of $H$ <sup>(1)</sup>                                            |                               | 0.015             | 0.007         | 0.005                |
| Dim. variation of $N$ <sup>(1)</sup>                                            |                               | 0.020             | 0.010         | 0.007                |
| Dim. variation of $H$ for multiple assembled sets <sup>(2)</sup>                |                               | 0.035             | 0.025         | —                    |
| Slide unit against the A surface<br>Parallelism during running on the C surface |                               | Based on Fig. 1.1 |               |                      |
| Slide unit against the B surface<br>Parallelism during running on the D surface |                               | Based on Fig. 1.1 |               |                      |

Notes <sup>(1)</sup> The value shows variation of slide units incorporated in the same track rail.  
<sup>(2)</sup> Applicable to the interchangeable specifications.

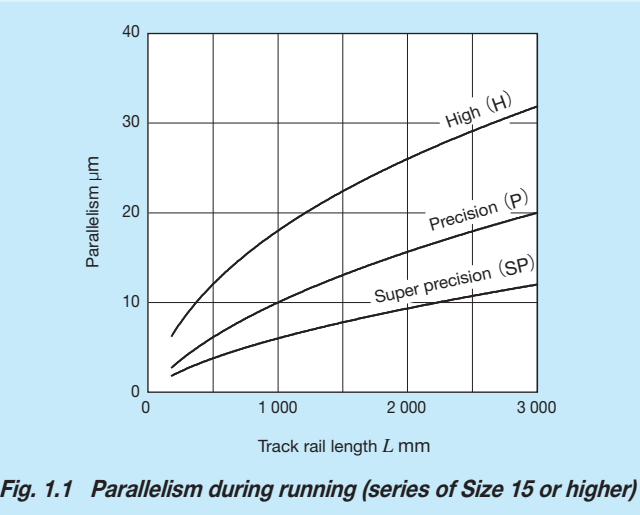
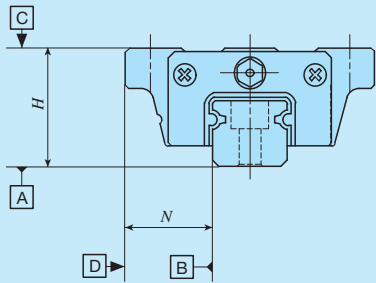


Table 5.2 Tolerance and allowance (Series of size 8 to 12)

|  |                               | unit: mm          |               |
|-------------------------------------------------------------------------------------|-------------------------------|-------------------|---------------|
| Item                                                                                | Class (classification symbol) | High (H)          | Precision (P) |
| Dim. <i>H</i> tolerance                                                             |                               | ±0.020            | ±0.010        |
| Dim. <i>N</i> tolerance                                                             |                               | ±0.025            | ±0.015        |
| Dim. variation of <i>H</i> <sup>(1)</sup>                                           |                               | 0.015             | 0.007         |
| Dim. variation of <i>N</i> <sup>(1)</sup>                                           |                               | 0.020             | 0.010         |
| Dim. variation of <i>H</i> for multiple assembled sets <sup>(2)</sup>               |                               | 0.030             | 0.020         |
| Parallelism in operation of the slide unit C surface to A surface                   |                               | Based on Fig. 1.2 |               |
| Parallelism in operation of the slide unit D surface to B surface                   |                               | Based on Fig. 1.2 |               |

Notes <sup>(1)</sup> The value shows variation of slide units incorporated in the same track rail.  
<sup>(2)</sup> Applicable to the interchangeable specifications.

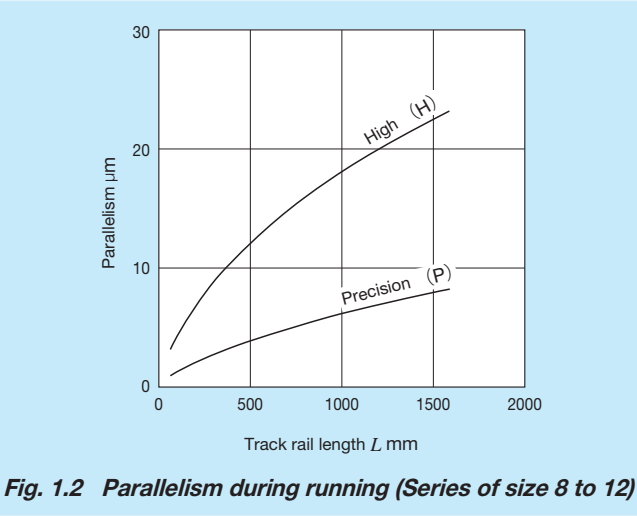


Table 6 Application of accuracy class

| Size              | Class (classification symbol) |               |                      |
|-------------------|-------------------------------|---------------|----------------------|
|                   | High (H)                      | Precision (P) | Super precision (SP) |
| 8                 | ○                             | ○             | —                    |
| 10                | ○                             | ○             | —                    |
| 12                | ○                             | ○             | —                    |
| 15                | ○                             | ○             | ○                    |
| 20                | ○                             | ○             | ○                    |
| 25                | ○                             | ○             | ○                    |
| 30                | ○                             | ○             | ○                    |
| 35                | ○                             | ○             | ○                    |
| 45                | ○                             | ○             | ○                    |
| 55                | ○                             | ○             | ○                    |
| 65                | ○                             | ○             | ○                    |
| 85 <sup>(1)</sup> | ○                             | ○             | ○                    |

Note <sup>(1)</sup> This is individually corresponding.  
Remark: The values indicated in   are also applicable to the interchangeable specifications.

|    |                 |                                   |             |                                                                                                                                                                                                                                                                                                                                   |
|----|-----------------|-----------------------------------|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 10 | Interchangeable | S1 specification                  | : S1        | This is specified for the interchangeable specifications.<br>Assemble a track rail and a slide unit with the same interchangeable code. Performance and accuracy of "S1" and "S2" are the same.<br>For applicable models and sizes, see Table 1.1 and Table 1.2.<br>No symbol is indicated for non-interchangeable specification. |
|    |                 | S2 specification                  | : S2        |                                                                                                                                                                                                                                                                                                                                   |
|    |                 | Non-interchangeable specification | : No symbol |                                                                                                                                                                                                                                                                                                                                   |
|    |                 |                                   |             |                                                                                                                                                                                                                                                                                                                                   |

## 11 Special specification

/A, /BS, /D, /E, /F, /I, /JO,  
/LO, /LFO, /MA, /MN, /N,  
/PS, /Q, /RE, /T, /U, /VO,  
/WO, /YO, /ZO

For applicable special specification, see Table 7.1, Table 7.2, Table 7.3, and Table 7.4.  
For combination of multiple special specifications, see Table 8.  
For details of special specification, see page III-28.

**Table 7.1 Application of special specifications (Interchangeable specification and slide unit specification)**

[illegible]

Notes (1) Applicable to LWH series.

(2) Not applicable to stainless steel made products.

**Table 7.2 Application of special specifications (Interchangeable specification and track rail specification)**

[illegible]

Note (1) Not applicable to stainless steel made products.

**Table 7.3 Application of special specifications (Interchangeable specification and assembled set)**

| Special specification                           | Supplemental code | Size |    |    |    |    |    |    |    |    |    |    |    |  |
|-------------------------------------------------|-------------------|------|----|----|----|----|----|----|----|----|----|----|----|--|
|                                                 |                   | 8    | 10 | 12 | 15 | 20 | 25 | 30 | 35 | 45 | 55 | 65 | 85 |  |
| Stainless steel end plate <sup>(1)</sup>        | /BS               | ×    | ×  | ×  | ○  | ○  | ○  | ○  | ×  | ×  | ×  | ×  | —  |  |
| Opposite reference surfaces arrangement         | /D                | ○    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | —  |  |
| Specified rail mounting hole positions          | /E                | ○    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | —  |  |
| Caps for rail mounting holes                    | /F                | ×    | ×  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | —  |  |
| Female threads for bellows <sup>(2)</sup>       | /J○               | ×    | ×  | ×  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | —  |  |
| Black chrome surface treatment                  | /L○               | ×    | ×  | ×  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | —  |  |
| Fluorine black chrome surface treatment         | /LF○              | ×    | ×  | ×  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | —  |  |
| With track rail mounting bolt <sup>(3)</sup>    | /MA               | ○    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ×  | ×  | —  |  |
| Without track rail mounting bolt <sup>(1)</sup> | /MN               | ○    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | —  |  |
| No end seal                                     | /N                | ○    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | —  |  |
| With C-Lube plate <sup>(1)</sup>                | /Q                | ○    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | —  |  |
| Special environment seal <sup>(1)</sup>         | /RE               | ×    | ×  | ×  | ○  | ○  | ○  | ○  | ×  | ×  | ×  | ×  | —  |  |
| Butt-jointing track rails                       | /T                | ×    | ×  | ×  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | —  |  |
| Under seal                                      | /U                | ○    | ○  | ○  | ×  | ×  | ×  | ×  | ×  | ×  | ×  | ×  | —  |  |
| Double end seals                                | /V○               | ×    | ×  | ×  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | —  |  |
| Specified grease <sup>(4)</sup>                 | /Y○               | ×    | ×  | ×  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | —  |  |
| Scrapers                                        | /Z○               | ×    | ×  | ×  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | —  |  |

Notes (1) Applicable to LWH series.

(2) Not applicable to stainless steel made products.

(3) Applicable to MH series.

(4) MH series is applicable only to YCG.

**Table 7.4 Application of special specifications (Non-interchangeable specification)**

| Special specification                                          | Supplemental code | Size             |                  |                  |    |    |    |    |    |    |    |    |    |
|----------------------------------------------------------------|-------------------|------------------|------------------|------------------|----|----|----|----|----|----|----|----|----|
|                                                                |                   | 8                | 10               | 12               | 15 | 20 | 25 | 30 | 35 | 45 | 55 | 65 | 85 |
| Butt-jointing track rails                                      | /A                | ○                | ○                | ○ <sup>(1)</sup> | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ×  |
| Stainless steel end plate <sup>(2)</sup> <sup>(3)</sup>        | /BS               | ×                | ×                | ×                | ○  | ○  | ○  | ○  | ×  | ×  | ×  | ×  | ×  |
| Opposite reference surfaces arrangement <sup>(3)</sup>         | /D                | ○                | ○                | ○                | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ×  |
| Specified rail mounting hole positions                         | /E                | ○                | ○                | ○                | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ×  |
| Caps for rail mounting holes <sup>(4)</sup>                    | /F                | ×                | ×                | ○                | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ×  |
| Inspection sheet                                               | /I                | ○                | ○                | ○                | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ×  |
| Female threads for bellows <sup>(3)</sup>                      | /J○               | ×                | ×                | ×                | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ×  |
| Black chrome surface treatment                                 | /L○               | ○ <sup>(5)</sup> | ○ <sup>(5)</sup> | ○ <sup>(5)</sup> | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ×  |
| Fluorine black chrome surface treatment                        | /LF○              | ×                | ×                | ×                | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ×  |
| With track rail mounting bolt <sup>(6)</sup>                   | /MA               | ○                | ○                | ○                | ○  | ○  | ○  | ○  | ○  | ○  | ×  | ×  | ×  |
| Without track rail mounting bolt <sup>(2)</sup> <sup>(4)</sup> | /MN               | ○                | ○                | ○                | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ×  |
| No end seal <sup>(7)</sup>                                     | /N                | ○                | ○                | ○                | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ×  |
| Rail cover plate for track rail <sup>(7)</sup> <sup>(8)</sup>  | /PS               | ×                | ×                | ×                | ×  | ×  | ○  | ○  | ○  | ○  | ○  | ○  | ×  |
| With C-Lube plate <sup>(2)</sup> <sup>(3)</sup> <sup>(7)</sup> | /Q                | ○                | ○                | ○                | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ×  |
| Special environment seal <sup>(2)</sup> <sup>(7)</sup>         | /RE               | ×                | ×                | ×                | ○  | ○  | ○  | ○  | ×  | ×  | ×  | ×  | ×  |
| Under seal                                                     | /U                | ○                | ○                | ○                | ×  | ×  | ×  | ×  | ×  | ×  | ×  | ×  | ×  |
| Inner seal <sup>(6)</sup>                                      | /UR               | ×                | ×                | ×                | ×  | ×  | ○  | ○  | ×  | ×  | ×  | ×  | ×  |
| Double end seals                                               | /V○               | ×                | ×                | ×                | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ×  |
| A pair of multiple assembled sets <sup>(3)</sup>               | /W○               | ○                | ○                | ○                | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ×  |
| Specified grease <sup>(9)</sup>                                | /Y○               | ○                | ○                | ○                | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ×  |
| Scrapers                                                       | /Z○               | ×                | ×                | ×                | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ×  |

Notes (1) Not applicable to high carbon steel made products.

(2) Applicable to LWH series. / YCG is applicable to MH series.

(3) This does not apply to side mounting type (LWHY).

(4) This does not apply to ultra seal specification with t

(5) Applicable only to "LR".

(6) Applicable to MH series

(7) This does not apply to

MU).

(8) Not applicable to stainless steel made products.

(<sup>9</sup>) MH series is applicable only to /YCG.

**Table 8** *Combination of supplemental codes*

[illegible]

Note (1) Contact IKO for the case of size 8 to 12.

Remarks 1. The combination of "-" shown in the table is not available.

2. Contact **IKO** for the combination of the interchangeable specification marked with ●.

3. When using multiple types for combination, indicate the symbols in alphabetical order.



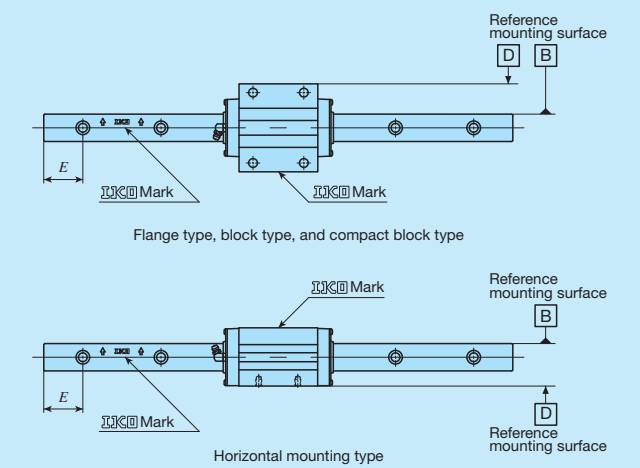


Fig. 2 Specified rail mounting hole positions (Supplemental code /E)

Remark: For details of specified rail mounting hole positions (supplemental code /E), see page III-29.

Table 9.1 Dimensions of female threads for bellows (Supplemental code Single unit: /J Assembled set: /J /JJ)

Flange type

unit: mm

| Identification number |                |  | Slide unit |       |       |       |       |       |                           |             |       | Track rail |       |                           |
|-----------------------|----------------|--|------------|-------|-------|-------|-------|-------|---------------------------|-------------|-------|------------|-------|---------------------------|
|                       |                |  | $a_1$      | $a_2$ | $b_1$ | $b_2$ | $b_3$ | $b_4$ | $M_1 \times \text{depth}$ | $L_1^{(2)}$ | $H_3$ | $a_3$      | $a_4$ | $M_2 \times \text{depth}$ |
| MH(T) 15              | LWH(T) 15…B    |  | 3          | 7     | 15.5  | 16    | 9.5   | 28    | $M3 \times 6$             | 83          | 6.5   | 4          | 8     | $M3 \times 6$             |
| —                     | LWH(T) 15…M    |  |            |       |       |       |       |       |                           | 86          |       |            |       |                           |
| MHTG 15               | —              |  |            |       |       |       |       |       |                           | 99          |       |            |       |                           |
| MH(T) 20              | LWH(T) 20…B    |  | 4          | 10    | 20.5  | 22    | 13.5  | 36    | $M3 \times 6$             | 99          | 8.5   | 5          | 9     | $M4 \times 8$             |
| —                     | LWH(T) 20…M(U) |  |            |       |       |       |       |       |                           | 103         |       |            |       |                           |
| MH(T)G 20             | LWH(T)G 20     |  |            |       |       |       |       |       |                           | 128         |       |            |       |                           |
| MH(T) 25              | LWH(T) 25…B    |  | 4          | 13    | 22    | 26    | 15    | 40    | $M3 \times 6$             | 110         | 8.5   | 5          | 12    | $M4 \times 8$             |
| MH(T) 25…M(U)         | LWH(T) 25…M(U) |  |            |       |       |       |       |       |                           | 115         |       |            |       |                           |
| MH(T)G 25             | LWH(T)G 25     |  |            |       |       |       |       |       |                           | 133         |       |            |       |                           |
| MH(T) 30              | LWH(T) 30…B    |  | 5          | 17    | 28    | 34    | 20    | 50    | $M3 \times 6$             | 128         | 11    | 6          | 14    | $M4 \times 8$             |
| MH(T) 30…M(U)         | LWH(T) 30…M(U) |  |            |       |       |       |       |       |                           | 133         |       |            |       |                           |
| MH(T)G 30             | LWH(T)G 30     |  |            |       |       |       |       |       |                           | 154         |       |            |       |                           |
| MHTL 30               | —              |  | 6          | 20    | 30    | 40    | 20    | 60    | $M3 \times 6$             | 200         | 13    | 7          | 15    | $M4 \times 8$             |
| MH(T) 35              | LWH(T) 35…B    |  |            |       |       |       |       |       |                           | 137         |       |            |       |                           |
| —                     | LWH(T) 35…M(U) |  |            |       |       |       |       |       |                           | 143         |       |            |       |                           |
| MH(T)G 35             | LWH(T)G 35     |  | 7          | 26    | 35    | 50    | 23    | 74    | $M4 \times 8$             | 165         | 15    | 8          | 19    | $M5 \times 10$            |
| MHTL 35               | —              |  |            |       |       |       |       |       |                           | 213         |       |            |       |                           |
| MH(T) 45              | LWH(T) 45…B    |  |            |       |       |       |       |       |                           | 160         |       |            |       |                           |
| —                     | LWH(T) 45…M(U) |  | 7          | 32    | 40    | 60    | 27    | 86    | $M4 \times 8$             | 167         | 15    | 8          | 19    | $M5 \times 10$            |
| MH(T)G 45             | LWH(T)G 45     |  |            |       |       |       |       |       |                           | 203         |       |            |       |                           |
| MHTL 45               | —              |  |            |       |       |       |       |       |                           | 251         |       |            |       |                           |
| —                     | LWH(T) 55…B    |  | 7          | 32    | 40    | 60    | 27    | 86    | $M4 \times 8$             | 196         | 17    | 8          | 25    | $M5 \times 10$            |
| —                     | LWH(T)G 55     |  |            |       |       |       |       |       |                           | 248         |       |            |       |                           |
| —                     | LWH(T) 65…B    |  |            |       |       |       |       |       |                           | 240         |       |            |       |                           |
| —                     | LWH(T)G 65     |  | 10         | 46    | 50    | 70    | 32    | 106   | $M5 \times 10$            | 314         | 20    | 10         | 28    | $M6 \times 12$            |

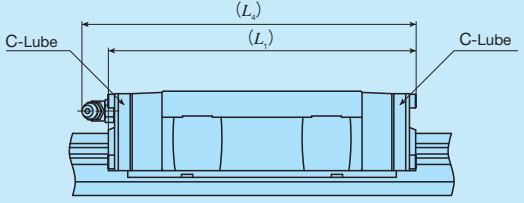
Notes (1) Grease nipple specifications and mounting position are different from standard specifications. Provided grease nipple for size 15 models is NPB2 type (special specification). For details of dimensions, contact IKO.  
(2) Dimensions of the specification that female threads for bellows are fitted to both ends of the slide unit are indicated.  
Remark: This is applicable to stainless steel models of the same size.

Table 9.2 Dimensions of female threads for bellows (Supplemental code Single unit: /J Assembled set: /J /JJ)

| Block type            |              |    | Compact block type |                |                |                |                |                |                       |                               |                |                |                |
|-----------------------|--------------|----|--------------------|----------------|----------------|----------------|----------------|----------------|-----------------------|-------------------------------|----------------|----------------|----------------|
|                       |              |    | unit: mm           |                |                |                |                |                |                       |                               |                |                |                |
| Identification number |              |    | Slide unit         |                |                |                |                |                |                       |                               | Track rail     |                |                |
|                       |              |    | a <sub>1</sub>     | a <sub>2</sub> | b <sub>1</sub> | b <sub>2</sub> | b <sub>3</sub> | b <sub>4</sub> | M <sub>1</sub> ×depth | L <sub>1</sub> <sup>(2)</sup> | H <sub>3</sub> | a <sub>3</sub> | a <sub>4</sub> |
| MHD 15                | LWHD 15…B    | 7  | 7                  | 9              | 16             | 3              | 28             | M3× 6          | 83                    | 10.5                          | 4              | 8              | M3× 6          |
| —                     | LWHD 15…M    |    |                    |                |                |                |                |                | 86                    |                               |                |                |                |
| MHS 15                | LWHS 15…B    | 3  | 7                  | 9              | 16             | 3              | 28             | M3× 6          | 83                    | 6.5                           | 4              | 8              | M3× 6          |
| —                     | LWHS 15…M(U) |    |                    |                |                |                |                |                | 86                    |                               |                |                |                |
| MHSG 15               | —            | 4  | 10                 | 11             | 22             | 4              | 36             | M3× 6          | 99                    | 8.5                           | 5              | 9              | M4× 8          |
| MHS 20                | LWHS 20…B    |    |                    |                |                |                |                |                | 99                    |                               |                |                |                |
| —                     | LWHS 20…M(U) | 8  | 13                 | 11             | 26             | 4              | 40             | M3× 6          | 103                   | 12.5                          | 5              | 12             | M4× 8          |
| MHSG 20               | LWHS 20      |    |                    |                |                |                |                |                | 128                   |                               |                |                |                |
| MHD 25                | LWHD 25…B    | 4  | 13                 | 11             | 26             | 4              | 40             | M3× 6          | 110                   | 8.5                           | 5              | 12             | M4× 8          |
| MHD 25…M(U)           | LWHD 25…M(U) |    |                    |                |                |                |                |                | 115                   |                               |                |                |                |
| MHDG 25               | LWHDG 25     | 8  | 17                 | 13             | 34             | 5              | 50             | M3× 6          | 133                   | 14                            | 6              | 14             | M4× 8          |
| MHS 25                | LWHS 25…B    |    |                    |                |                |                |                |                | 110                   |                               |                |                |                |
| MHS 25…M(U)           | LWHS 25…M(U) | 5  | 17                 | 13             | 34             | 5              | 50             | M3× 6          | 115                   | 11                            | 6              | 14             | M4× 8          |
| MHSG 25               | LWHS 25      |    |                    |                |                |                |                |                | 133                   |                               |                |                |                |
| MHD 30                | LWHD 30…B    | 13 | 20                 | 15             | 40             | 5              | 60             | M3× 6          | 128                   | 20                            | 7              | 15             | M4× 8          |
| MHD 30…M(U)           | LWHD 30…M(U) |    |                    |                |                |                |                |                | 133                   |                               |                |                |                |
| MHDG 30               | LWHDG 30     | 17 | 26                 | 18             | 50             | 6              | 74             | M3× 6          | 154                   | 25                            | 8              | 19             | M4× 8          |
| MHDL 30               | —            |    |                    |                |                |                |                |                | 154                   |                               |                |                |                |
| MHS 30                | LWHS 30…B    | 5  | 17                 | 13             | 34             | 5              | 50             | M3× 6          | 160                   | 11                            | 6              | 14             | M4× 8          |
| MHS 30…M(U)           | LWHS 30…M(U) |    |                    |                |                |                |                |                | 160                   |                               |                |                |                |
| MHSG 30               | LWHS 30      | 13 | 20                 | 15             | 40             | 5              | 60             | M3× 6          | 167                   | 20                            | 7              | 15             | M4× 8          |
| MHD 35                | LWHD 35…B    |    |                    |                |                |                |                |                | 167                   |                               |                |                |                |
| —                     | LWHD 35…M(U) | 17 | 26                 | 18             | 50             | 6              | 74             | M4× 8          | 196                   | 25                            | 8              | 19             | M5×10          |
| MHDG 35               | LWHDG 35     |    |                    |                |                |                |                |                | 203                   |                               |                |                |                |
| MHDL 35               | —            | 10 | 46                 | 28             | 70             | 10             | 106            | M5×10          | 251                   | 20                            | 10             | 28             | M6×12          |
| MHD 45                | LWHD 45…B    |    |                    |                |                |                |                |                | 251                   |                               |                |                |                |
| —                     | LWHD 45…M(U) | 7  | 32                 | 20             | 60             | 7              | 86             | M4× 8          | 248                   | 27                            | 8              | 25             | M5×10          |
| MHDG 45               | LWHDG 45     |    |                    |                |                |                |                |                | 248                   |                               |                |                |                |
| MHDL 45               | —            | 10 | 46                 | 28             | 70             | 10             | 106            | M5×10          | 240                   | 20                            | 10             | 28             | M6×12          |
| —                     | LWHD 55…B    |    |                    |                |                |                |                |                | 314                   |                               |                |                |                |
| —                     | LWHDG 55     | 7  | 32                 | 20             | 60             | 7              | 86             | M4× 8          | 248                   | 17                            | 8              | 25             | M5×10          |
| —                     | LWHD 65…B    |    |                    |                |                |                |                |                | 248                   |                               |                |                |                |
| —                     | LWHDG 65     | 10 | 46                 | 28             | 70             | 10             | 106            | M5×10          | 314                   | 20                            | 10             | 28             | M6×12          |
| —                     | LWHD 65…B    |    |                    |                |                |                |                |                | 314                   |                               |                |                |                |

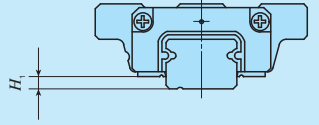
Notes (1) Grease nipple specifications and mounting position are different from standard specifications. Provided grease nipple for size 15 models is NPB2 type (special specification). For details of dimensions, contact IKO.  
(2) Dimensions of the specification that female threads for bellows are fitted to both ends of the slide unit are indicated.  
Remark: This is applicable to stainless steel models of the same size.

Table 10 Dimension of slide unit with C-Lube plate  
(Supplemental code /Q)

|  |       |       |
|-----------------------------------------------------------------------------------|-------|-------|
| unit: mm                                                                          |       |       |
| Identification number                                                             | $L_1$ | $L_4$ |
| LWHDC 8...SL                                                                      | 26    | —     |
| LWHT 8...SL                                                                       | 32    | —     |
| LWHD 8...SL                                                                       |       |       |
| LWHDG 8...SL                                                                      | 38.5  | —     |
| LWHDC 10...SL                                                                     | 34    | —     |
| LWHT 10...SL                                                                      | 42    | —     |
| LWHD 10...SL                                                                      |       |       |
| LWHDG 10...SL                                                                     | 50    | —     |
| LWHDC 12...SL                                                                     | 44    | 48    |
| LWHT 12                                                                           | 56    | 60    |
| LWHD 12                                                                           |       |       |
| LWHDG 12...SL                                                                     | 68    | 72    |
| LWH 15...B                                                                        | 75    | 78    |
| LWH 20...B                                                                        | 92    | 105   |
| LWHG 20                                                                           | 121   | 134   |
| LWH 25...B                                                                        | 105   | 116   |
| LWHG 25                                                                           | 127   | 139   |
| LWH 30...B                                                                        | 125   | 135   |
| LWHG 30                                                                           | 151   | 161   |
| LWH 35...B                                                                        | 134   | 146   |
| LWHG 35                                                                           | 162   | 174   |
| LWH 45...B                                                                        | 160   | 170   |
| LWHG 45                                                                           | 203   | 214   |
| LWH 55...B                                                                        | 196   | 207   |
| LWHG 55                                                                           | 248   | 258   |
| LWH 65...B                                                                        | 246   | 253   |
| LWHG 65                                                                           | 321   | 328   |

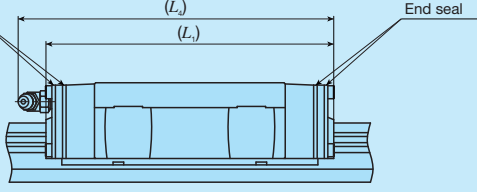
Remarks 1. The dimensions of the slide unit with C-Lube at both ends are indicated.  
2. A typical identification number is indicated, but is applied to all LWH series models of the same size.

Table 11  $H_1$  dimension with under seal (Supplemental code /U)

|  |                    |
|------------------------------------------------------------------------------------|--------------------|
| unit: mm                                                                           |                    |
| Size                                                                               | $H_1$              |
| 8                                                                                  | 1.5                |
| 10                                                                                 | 1.8                |
| 12                                                                                 | 3.2 <sup>(1)</sup> |

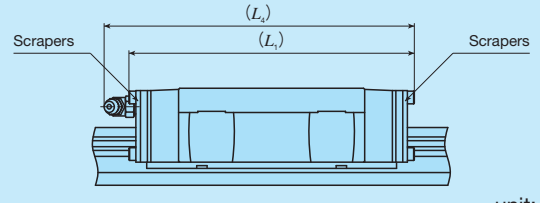
Note <sup>(1)</sup> The dimensions are the same as those before mounting of under seal.

Table 12 Dimension of slide unit with double end seals  
(Supplemental code Single unit: /V Assembled set: /V /VV)

|  |               |       |       |  |
|------------------------------------------------------------------------------------|---------------|-------|-------|--|
| unit: mm                                                                           |               |       |       |  |
| Identification number                                                              |               | $L_1$ | $L_4$ |  |
| MH 15                                                                              | LWH 15...B    | 72    | 77    |  |
| —                                                                                  | LWH 15...M(U) | 71    | 76    |  |
| MHTG 15                                                                            | —             | 88    | 93    |  |
| MH 20                                                                              | LWH 20...B    | 91    | 104   |  |
| —                                                                                  | LWH 20...M(U) | 90    | 103   |  |
| MHG 20                                                                             | LWHG 20       | 119   | 133   |  |
| MH 25                                                                              | LWH 25...B    | 104   | 116   |  |
| MH 25...M(U)                                                                       | LWH 25...M(U) | 103   | 115   |  |
| MHG 25                                                                             | LWHG 25       | 127   | 139   |  |
| MH 30                                                                              | LWH 30...B    | 122   | 134   |  |
| MH 30...M(U)                                                                       | LWH 30...M(U) | 121   |       |  |
| MHG 30                                                                             | LWHG 30       | 148   | 160   |  |
| MHL 30                                                                             | —             | 194   | 206   |  |
| MH 35                                                                              | LWH 35...B    | 133   | 146   |  |
| —                                                                                  | LWH 35...M(U) |       |       |  |
| MHG 35                                                                             | LWHG 35       | 161   | 173   |  |
| MHL 35                                                                             | —             | 209   | 222   |  |
| MH 45                                                                              | LWH 45...B    | 159   | 170   |  |
| —                                                                                  | LWH 45...M(U) | 158   |       |  |
| MHG 45                                                                             | LWHG 45       | 202   | 213   |  |
| MHL 45                                                                             | —             | 251   | 261   |  |
| —                                                                                  | LWH 55...B    | 195   | 206   |  |
| —                                                                                  | LWHG 55       | 247   | 258   |  |
| —                                                                                  | LWH 65...B    | 241   | 251   |  |
| —                                                                                  | LWHG 65       | 316   | 325   |  |

Remarks 1. The dimensions of the slide unit with double end seals at both ends are indicated.  
2. A typical identification number is indicated, but is applied to all models of the same size.

Table 13 Dimensions of slide unit with scrapers (Supplemental code Single unit: /Z Assembled set: /Z /ZZ)

|  |               |       |       |  |
|-------------------------------------------------------------------------------------|---------------|-------|-------|--|
| unit: mm                                                                            |               |       |       |  |
| Identification number                                                               |               | $L_1$ | $L_4$ |  |
| MH 15                                                                               | LWH 15...B    | 73    | 75    |  |
| —                                                                                   | LWH 15...M(U) | 72    | 74    |  |
| MHTG 15                                                                             | —             | 89    | 91    |  |
| MH 20                                                                               | LWH 20...B    | 91    | 104   |  |
| —                                                                                   | LWH 20...M(U) | 90    | 100   |  |
| MHG 20                                                                              | LWHG 20       | 119   | 133   |  |
| MH 25                                                                               | LWH 25...B    | 104   | 116   |  |
| MH 25...M(U)                                                                        | LWH 25...M(U) | 103   | 112   |  |
| MHG 25                                                                              | LWHG 25       | 126   | 138   |  |
| MH 30                                                                               | LWH 30...B    | 124   | 135   |  |
| MH 30...M(U)                                                                        | LWH 30...M(U) | 123   | 131   |  |
| MHG 30                                                                              | LWHG 30       | 150   | 161   |  |
| MHL 30                                                                              | —             | 196   | 206   |  |
| MH 35                                                                               | LWH 35...B    | 133   | 146   |  |
| —                                                                                   | LWH 35...M(U) |       |       |  |
| MHG 35                                                                              | LWHG 35       | 161   | 174   |  |
| MHL 35                                                                              | —             | 209   | 222   |  |
| MH 45                                                                               | LWH 45...B    | 160   | 170   |  |
| —                                                                                   | LWH 45...M(U) | 159   |       |  |
| MHG 45                                                                              | LWHG 45       | 203   | 214   |  |
| MHL 45                                                                              | —             | 251   | 262   |  |
| —                                                                                   | LWH 55...B    | 196   | 207   |  |
| —                                                                                   | LWHG 55       | 248   | 258   |  |
| —                                                                                   | LWH 65...B    | 242   | 251   |  |
| —                                                                                   | LWHG 65       | 317   | 326   |  |

Remarks 1. The dimensions of the slide unit with scraper at both ends are indicated.  
2. A typical identification number is indicated, but is applied to all models of the same size.

Table 15 Parts for lubrication


| Size              | Grease nipple type <sup>(1)</sup> | Applicable supply nozzle type      | Bolt size of female threads for piping |
|-------------------|-----------------------------------|------------------------------------|----------------------------------------|
| 8                 | Oil hole                          | Miniature greaser                  | —                                      |
| 10                |                                   |                                    |                                        |
| 12                | A-M3                              | A-5120V A-5240V<br>B-5120V B-5240V | —                                      |
| 15                | A-M4                              |                                    |                                        |
| 20                | B-M6                              | Grease gun available on the market | M6                                     |
| 25                |                                   |                                    |                                        |
| 30                |                                   |                                    |                                        |
| 35                |                                   |                                    |                                        |
| 45                | JIS type 4                        |                                    | PT1/8                                  |
| 55                |                                   |                                    |                                        |
| 65                |                                   |                                    |                                        |
| 85 <sup>(2)</sup> |                                   |                                    |                                        |

Notes <sup>(1)</sup> For specifications of grease nipple, refer to Tables 15.1 and 15.2 in page III -22.  
<sup>(2)</sup> This unit is prepared based on respective usages.

## Lubrication

In the series of size 8 to 12 of MH series and LWH series, lithium-soap base grease (MULTEMP PS No.2, KYODO YUSHI) is pre-packed, and in the series of size 15 to 85, lithium-soap base grease containing extreme-pressure additive (Alvania EP grease 2, SHOWA SHELL SEKIYU K. K.) is pre-packed. Additionally, MH series has C-Lube placed in the recirculation part of balls, so that the interval for reapplying lubricant can be extended and maintenance works such as grease job can be reduced significantly.  
MH series and LWH series have grease nipple or oil hole as indicated in Table 15. Supply nozzles fit to each shapes of grease nipple and dedicated supplying equipment (miniature greasers) fit to oil holes are also available. For these parts for lubrication, refer to Table 14 and Table 15.1 on Page III -22, and Table 16 on page III-23 if required.

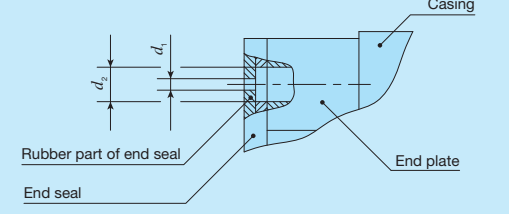Table 14 Oil hole specifications

|  |       |       |
|-------------------------------------------------------------------------------------|-------|-------|
| unit: mm                                                                            |       |       |
| Size                                                                                | $d_1$ | $d_2$ |
| 8                                                                                   | 0.5   | 1.5   |
| 10                                                                                  |       |       |

Dust Protection

The slide units of MH series and LWH series are equipped with end seals and under seals as standard for dust protection. However, if large amount of contaminant or dust are floating, or if large particles of foreign substances such as chips or sand may adhere to the track rail, it is recommended to cover the entire unit with bellows, telescopic shields, etc. MH series and LWH series are provided with specific bellows. The bellows are easy to mount and provide excellent dust protection. If needed, please refer to Ⅲ-25 for ordering. And, track rail mounting from bottom with no mounting hole on the upper surface of the track rail (Figure 3) is also available. If needed, contact **IKO**.

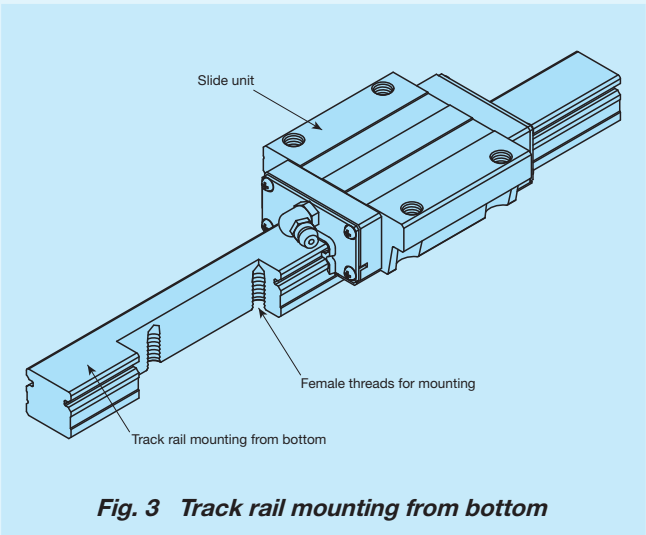


Fig. 3 Track rail mounting from bottom

Precaution for Use

① Mounting surface, reference mounting surface and typical mounting structure

When mounting the MH series and LWH series, properly align the reference mounting surfaces B and D of the track rail and slide unit with the reference mounting surface of the table and bed and fix them. (See Fig. 4.) The reference mounting surfaces B and D and mounting surfaces A and C are precisely ground. Machining the mounting surface of the table and bed, such as machine or device, to high accuracy and mounting them properly will ensure stable linear motion with high accuracy. Reference mounting surface of the slide unit is the opposite side of the **IKO** mark. The track rail reference mounting surface is identified by locating the **IKO** mark on the top surface of the track rail. It is the side surface above the mark (in the direction of the arrow). (See Fig. 5.)

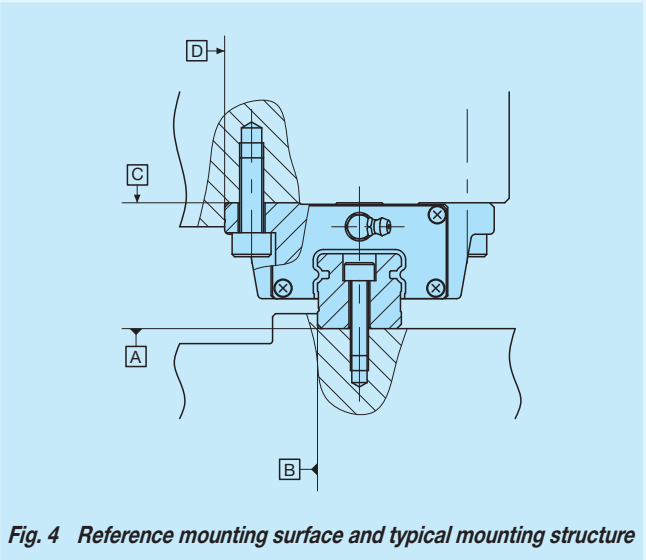


Fig. 4 Reference mounting surface and typical mounting structure

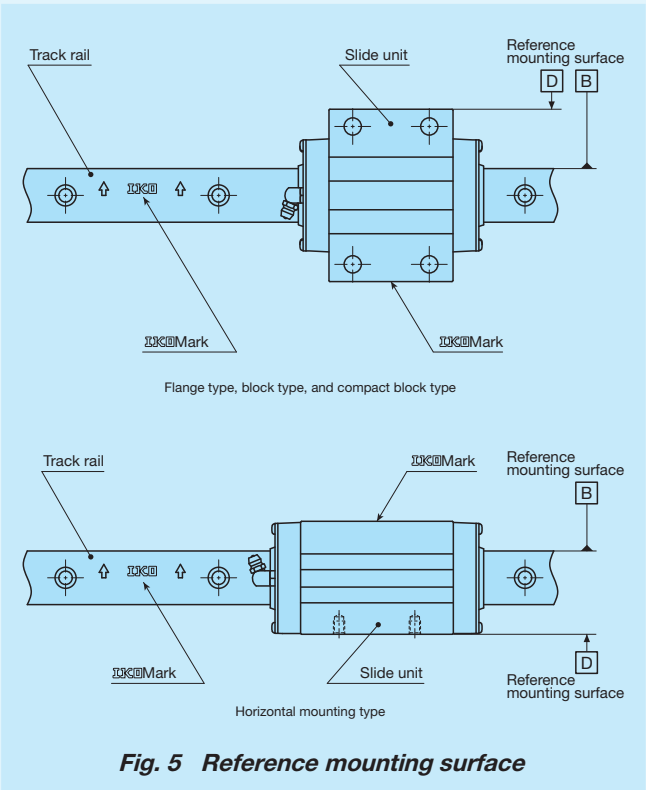


Fig. 5 Reference mounting surface

② Corner radius and shoulder height of reference mounting surfaces

For the opposite corner of the mating reference mounting, it is recommended to have relieved fillet as indicated in Fig. 6. Recommended value for the shoulder height on the mating side is indicated in Table 16.

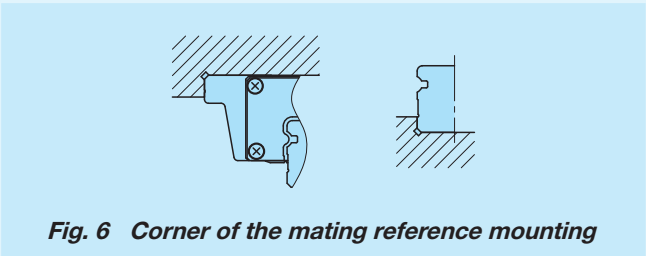


Fig. 6 Corner of the mating reference mounting

Table 16 Shoulder height and corner radius of the reference mounting surface

| Size | Mounting part of slide unit |                               | Mounting part of track rail |                               |
|------|-----------------------------|-------------------------------|-----------------------------|-------------------------------|
|      | Shoulder height $h_1$       | Corner radius $R_1$ (Maximum) | Shoulder height $h_2$       | Corner radius $R_2$ (Maximum) |
| 8    | 3.5(4) <sup>(1)</sup>       | 0.5                           | 1.6 <sup>(2)</sup>          | 0.2                           |
| 10   | 4.5(5) <sup>(1)</sup>       | 0.5                           | 1.9 <sup>(2)</sup>          | 0.2                           |
| 12   | 6                           | 0.5                           | 2.7 <sup>(2)</sup>          | 0.7                           |
| 15   | 4                           | 0.5                           | 3                           | 0.5                           |
| 20   | 5                           | 0.5                           | 3                           | 0.5                           |
| 25   | 6                           | 1                             | 4                           | 1                             |
| 30   | 8                           | 1                             | 5                           | 1                             |
| 35   | 8                           | 1                             | 6                           | 1                             |
| 45   | 8                           | 1.5                           | 7                           | 1.5                           |
| 55   | 10                          | 1.5                           | 8                           | 1.5                           |
| 65   | 10                          | 1.5                           | 10                          | 1.5                           |

Notes <sup>(1)</sup> For MHD and LWHD, the values within ( ) are applied.  
<sup>(2)</sup> For models with under seals (supplemental code "/U"), it is recommended to use the values 0.6 mm smaller than the values in the table.

③ Tightening torque for fixing screw

Typical tightening torques for mounting of the MH series and LWH series to the steel mating member material are indicated in Table 17. When vibration and shock of the machine or device are large, fluctuating load is large, or moment load is applied, fix it by using the torque 1.2 to 1.5 times larger than the value indicated in the table as necessary. If the mating member material is cast iron or aluminum, reduce the tightening torque depending on the strength characteristic of the mating member material.

Table 17 Tightening torque for fixing screw

| Bolt size  | Tightening torque N · m      |                    |                            |
|------------|------------------------------|--------------------|----------------------------|
|            | High carbon steel-made screw |                    | Stainless steel-made screw |
|            | Size: 12                     | Size: 15 or larger |                            |
| M 1.6×0.35 | —                            | —                  | 0.15                       |
| M 2 ×0.4   | —                            | —                  | 0.31                       |
| M 2.3×0.4  | —                            | —                  | 0.48                       |
| M 2.6×0.45 | —                            | —                  | 0.70                       |
| M 3 ×0.5   | 1.2                          | —                  | 1.1                        |
| M 4 ×0.7   | 2.8                          | 4.0                | 2.5                        |
| M 5 ×0.8   | —                            | 7.9                | 5.0                        |
| M 6 ×1     | —                            | 13.3               | 8.5                        |
| M 8 ×1.25  | —                            | 32.0               | 20.4                       |
| M10 ×1.5   | —                            | 62.7               | 39.7                       |
| M12 ×1.75  | —                            | 108                | —                          |
| M14 ×2     | —                            | 172                | —                          |
| M16 ×2     | —                            | 263                | —                          |
| M20 ×2.5   | —                            | 512                | —                          |
| M24 ×3     | —                            | 882                | —                          |



Remark: The recommended tightening torque is calculated based on strength division 8.8 for high carbon steel bolts in product size 12, strength division 12.9 for carbon steel bolts in product size 15 or larger, and property division A2-70 for stainless steel bolt.



IKO C-Lube Linear Way MH

Flange type mounting from bottom

|       |          |    |    |    |    |
|-------|----------|----|----|----|----|
| Shape | MH · LWH |    |    |    |    |
|       |          |    |    |    |    |
| Size  | 15       | 20 | 25 | 30 | 35 |
|       | 45       | 55 | 65 | 85 |    |

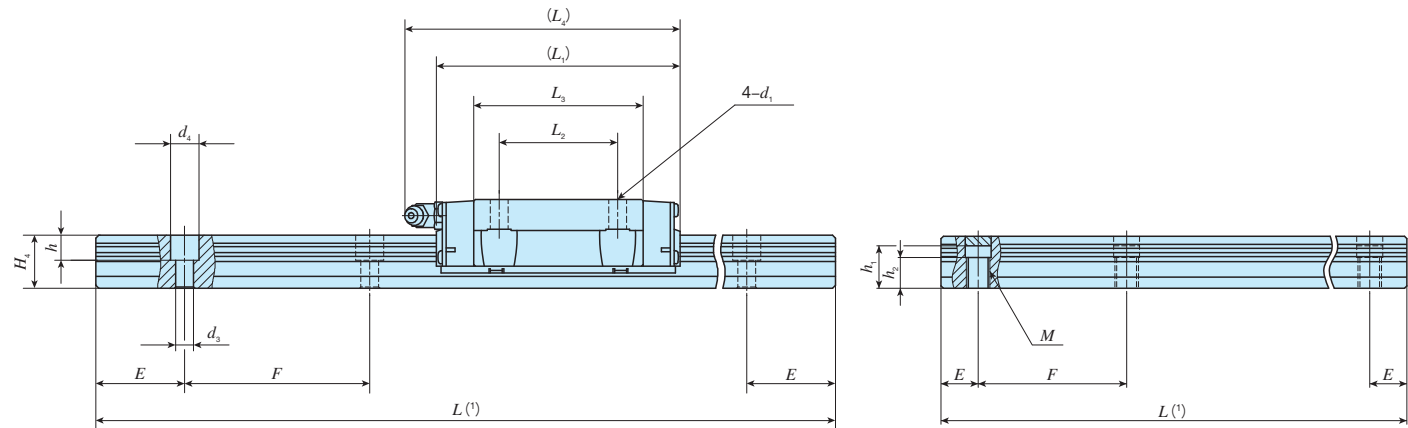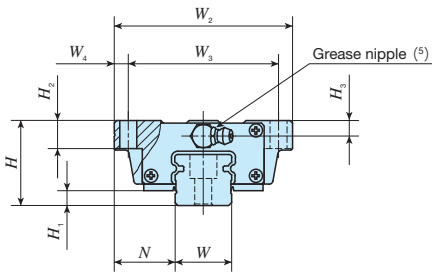


Ultra seal specification with track rail mounting from bottom

| Identification number |                           | Interchangeable | Mass (Ref.)         |                       | Dimensions of assembly<br>mm |                |      | Dimensions of slide unit<br>mm |                |                |                |                |                |                |                |                |                |  |   |                |                |                |     |     |                               |                |   | Dimensions of track rail<br>mm |             |        |                     |                       |                       |                       |              |              |  | Appended<br>mounting bolt<br>for track rail <sup>(3)</sup><br>mm | Basic<br>dynamic load<br>rating <sup>(4)</sup> | Basic<br>static load<br>rating <sup>(4)</sup> | Static moment rating <sup>(4)</sup> |  |  |
|-----------------------|---------------------------|-----------------|---------------------|-----------------------|------------------------------|----------------|------|--------------------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|--|---|----------------|----------------|----------------|-----|-----|-------------------------------|----------------|---|--------------------------------|-------------|--------|---------------------|-----------------------|-----------------------|-----------------------|--------------|--------------|--|------------------------------------------------------------------|------------------------------------------------|-----------------------------------------------|-------------------------------------|--|--|
|                       |                           |                 |                     |                       |                              |                |      |                                |                |                |                |                |                |                |                |                |                |  |   |                |                |                |     |     |                               |                |   |                                |             |        |                     |                       |                       |                       |              |              |  |                                                                  |                                                |                                               |                                     |  |  |
| MH series             | LWH series<br>(No C-Lube) |                 | Slide<br>unit<br>kg | Track<br>rail<br>kg/m | H                            | H <sub>1</sub> | N    | W <sub>2</sub>                 | W <sub>3</sub> | W <sub>4</sub> | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | L <sub>4</sub> | d <sub>1</sub> | H <sub>2</sub> | H <sub>3</sub> |  | W | H <sub>4</sub> | d <sub>3</sub> | d <sub>4</sub> | h   | M   | h <sub>1</sub> <sup>(2)</sup> | h <sub>2</sub> | E | F                              | Bolt size×ℓ | C<br>N | C <sub>0</sub><br>N | T <sub>0</sub><br>N・m | T <sub>x</sub><br>N・m | T <sub>y</sub><br>N・m |              |              |  |                                                                  |                                                |                                               |                                     |  |  |
| MH 15                 |                           | ○               | 0.22                | 1.47                  | 24                           | 4.5            | 16   | 47                             | 38             | 4.5            | 66             | 30             | 44.2           | 69             | 4.5            | 7              | 4.5            |  |   | 15             | 15             | 4.5            | 8   | 6   | —                             | —              | — | 30                             | 60          | M4×16  | 11 600              | 13 400                | 112                   | 95.6<br>556           | 95.6<br>556  |              |  |                                                                  |                                                |                                               |                                     |  |  |
| —                     | LWH 15…B                  | ○               |                     |                       |                              |                |      |                                |                |                |                |                | 44.6           |                |                |                |                |  |   |                |                |                |     |     |                               |                |   |                                |             |        |                     |                       |                       |                       |              |              |  |                                                                  |                                                |                                               |                                     |  |  |
| —                     | LWH 15…SL                 | ○               |                     |                       |                              |                |      |                                |                |                |                |                |                |                |                |                |                |  |   |                |                |                |     |     |                               |                |   |                                |             |        |                     |                       |                       |                       |              |              |  |                                                                  |                                                |                                               |                                     |  |  |
| —                     | LWH 15…M*                 | —               |                     |                       |                              |                |      |                                |                |                |                |                |                |                |                |                |                |  |   |                |                |                |     |     |                               |                |   |                                |             |        |                     |                       |                       |                       |              |              |  |                                                                  |                                                |                                               |                                     |  |  |
| —                     | LWH 15…MU*                | —               |                     |                       |                              |                |      |                                |                |                |                |                |                |                |                |                |                |  |   |                |                | —              | M 6 | 12  | 9                             |                |   | —                              |             |        |                     |                       |                       |                       |              |              |  |                                                                  |                                                |                                               |                                     |  |  |
| MH 20                 |                           | ○               | 0.48                | 2.56                  | 30                           | 5              | 21.5 | 63                             | 53             | 5              | 83             | 40             | 56             | 94             | 6              | 10             | 5.5            |  |   | 20             | 18             | 6              | 9.5 | 8.5 | —                             | —              | — | 30                             | 60          | M5×18  | 18 100              | 21 100                | 232                   | 195<br>1 090          | 195<br>1 090 |              |  |                                                                  |                                                |                                               |                                     |  |  |
| —                     | LWH 20…B                  | ○               |                     |                       |                              |                |      |                                |                |                |                |                | 57.2           |                |                |                |                |  |   |                |                |                |     |     |                               |                |   |                                |             |        |                     |                       |                       |                       |              |              |  |                                                                  |                                                |                                               |                                     |  |  |
| —                     | LWH 20…SL                 | ○               |                     |                       |                              |                |      |                                |                |                |                |                |                |                |                |                |                |  |   |                |                |                |     |     |                               |                |   |                                |             |        |                     |                       |                       |                       |              |              |  |                                                                  |                                                |                                               |                                     |  |  |
| —                     | LWH 20…M*                 | —               |                     |                       |                              |                |      |                                |                |                |                |                |                |                |                |                |                |  |   |                |                |                |     |     |                               |                |   |                                | 84.8        |        |                     |                       |                       |                       |              |              |  | —                                                                | M 8                                            | 13.5                                          | 9.5                                 |  |  |
| —                     | LWH 20…MU*                | —               |                     |                       |                              |                |      |                                |                |                |                |                | 86             | 122            |                |                |                |  |   |                |                | 6              | 9.5 | 8.5 | —                             | —              | — |                                |             | M5×18  | 24 100              | 31 700                | 349                   | 421<br>2 140          | 421<br>2 140 |              |  |                                                                  |                                                |                                               |                                     |  |  |
| MHG 20                |                           | ○               | 0.71                |                       |                              |                |      |                                |                |                | 112            |                | 84.8           | 122            |                |                |                |  |   |                |                |                | 6   | 9.5 | 8.5                           | —              | — | —                              |             |        | M5×18               | 24 100                | 31 700                | 349                   | 421<br>2 140 | 421<br>2 140 |  |                                                                  |                                                |                                               |                                     |  |  |
| —                     | LWHG 20                   | ○               |                     |                       |                              |                |      |                                |                |                |                |                | 86             |                |                |                |                |  |   |                |                |                |     |     |                               |                |   |                                |             |        |                     |                       |                       |                       |              |              |  |                                                                  |                                                |                                               |                                     |  |  |
| MH 25                 |                           | ○               | 0.70                | 3.50                  | 36                           | 6.5            | 23.5 | 70                             | 57             | 6.5            | 95             | 45             | 63.9           | 105            | 7              | 10             | 6.5            |  |   | 23             | 22             | 7              | 11  | 9   | —                             | —              | — | 30                             | 60          | M6×22  | 25 200              | 28 800                | 362                   | 309<br>1 690          | 309<br>1 690 |              |  |                                                                  |                                                |                                               |                                     |  |  |
| —                     | LWH 25…B                  | ○               |                     |                       |                              |                |      |                                |                |                |                |                | 64.7           |                |                |                |                |  |   |                |                |                |     |     |                               |                |   |                                |             |        |                     |                       |                       |                       |              |              |  |                                                                  |                                                |                                               |                                     |  |  |
| —                     | LWH 25…SL                 | ○               |                     |                       |                              |                |      |                                |                |                |                |                | 63.9           |                |                |                |                |  |   |                |                |                |     |     |                               |                |   |                                |             |        |                     |                       |                       |                       |              |              |  |                                                                  |                                                |                                               |                                     |  |  |
| MH 25…M*              |                           | —               |                     |                       |                              |                |      |                                |                |                |                |                | 64.7           |                |                |                |                |  |   |                |                |                |     |     |                               |                |   |                                |             |        |                     |                       |                       |                       |              |              |  |                                                                  |                                                |                                               |                                     |  |  |
| —                     | LWH 25…M*                 | —               |                     |                       |                              |                |      |                                |                |                |                |                | 63.9           |                |                |                |                |  |   |                |                |                |     |     |                               |                |   |                                |             |        |                     |                       |                       |                       |              |              |  |                                                                  |                                                |                                               |                                     |  |  |
| —                     | LWH 25…MU*                | —               |                     |                       |                              |                |      |                                |                |                | 64.7           |                |                |                |                |                |                |  |   |                |                |                |     |     |                               |                |   |                                |             |        |                     |                       |                       |                       |              |              |  |                                                                  |                                                |                                               |                                     |  |  |
| MH 25…MU*             |                           | —               |                     |                       |                              |                |      |                                |                |                | 118            |                | 86.6           | 128            |                |                |                |  |   |                |                | 7              | 11  | 9   | —                             | —              | — |                                |             | M6×22  | 30 800              | 38 300                | 483                   | 533<br>2 740          | 533<br>2 740 |              |  |                                                                  |                                                |                                               |                                     |  |  |
| —                     | LWHG 25                   | ○               | 87.4                |                       |                              |                |      |                                |                |                |                |                |                |                |                |                |                |  |   |                |                |                |     |     |                               |                |   |                                |             |        |                     |                       |                       |                       |              |              |  |                                                                  |                                                |                                               |                                     |  |  |

Notes (1) Track rail lengths  $L$  are shown in Table 2.1 on page II-71, Table 2.2 on page II-72, and Tables 2.3 and 2.4 on page II-73.  
(2) Choose bolts whose dimension allow fixing thread depth into track rail to be less than  $h_1$ .  
(3) The appended track rail mounting bolts are hexagon socket head bolts equivalent to JIS B 1176. For stainless steel model, stainless steel bolts are appended.  
In an assembled set of MH series and LWH···MU model, track rail mounting bolts are not appended.  
(4) Basic dynamic load rating ( $C$ ), Basic static load rating ( $C_0$ ), static moment rating ( $T_0$ ,  $T_x$ , and  $T_y$ ) are values for the direction indicated in the following figure.  
The upper values of  $T_x$  and  $T_y$  are for one slide unit and the lower values are for two slide units in close contact.  
(5) The shapes of grease nipple vary by size. For details of special specifications, see page Table 15 on page II-82.

Remark: The identification numbers with \* are our semi-standard items.





Example of identification number of assembled set

| Model code                 | Dimensions                          | Part code                        | Model code                                                       | Dust protection code | Material code                               | Preload symbol     | Classification symbol | Interchangeable code | Special specification |
|----------------------------|-------------------------------------|----------------------------------|------------------------------------------------------------------|----------------------|---------------------------------------------|--------------------|-----------------------|----------------------|-----------------------|
| MH                         | G                                   | 20                               | C2                                                               | R480                 |                                             |                    |                       |                      |                       |
| 1                          | 2                                   | 3                                | 4                                                                | 5                    | 6                                           | 7                  | 8                     | 9                    | 10                    |
| 11                         |                                     |                                  |                                                                  |                      |                                             |                    |                       |                      |                       |
| ① Model                    | MH Flange type mounting from bottom | ⑤ Length of track rail (480 mm)  | ⑥ Dust protection code                                           | ⑧ Preload amount     | ⑩ Interchangeable                           | ⑨ Accuracy class   |                       |                      |                       |
| LWH(···B)                  |                                     | No symbol Standard specification | M Ultra seal specification                                       | No symbol Standard   | S1 S1 specification                         | H High             |                       |                      |                       |
| ② Length of slide unit     | No symbol Standard                  | T1 Light preload                 | MU Ultra seal specification with track rail mounting from bottom | T2 Medium preload    | S2 S2 specification                         | P Precision        |                       |                      |                       |
| G Long                     |                                     | T3 Heavy preload                 |                                                                  |                      | No symbol Non-interchangeable specification | SP Super precision |                       |                      |                       |
| ③ Size                     | 15, 20, 25                          | ⑦ Material type                  |                                                                  |                      | ⑪ Special specification                     |                    |                       |                      |                       |
|                            |                                     | No symbol High carbon steel made |                                                                  |                      | A, BS, D, E, F, I, J, L, LF, MA             |                    |                       |                      |                       |
| ④ Number of slide unit (2) |                                     | SL Stainless steel made          |                                                                  |                      | MN, N, PS, Q, RE, T, UR, V, W, Y, Z         |                    |                       |                      |                       |

IKO C-Lube Linear Way MH

Flange type mounting from bottom

|       |          |    |    |    |    |
|-------|----------|----|----|----|----|
| Shape | MH · LWH |    |    |    |    |
|       |          |    |    |    |    |
| Size  | 15       | 20 | 25 | 30 | 35 |
|       | 45       | 55 | 65 | 85 |    |

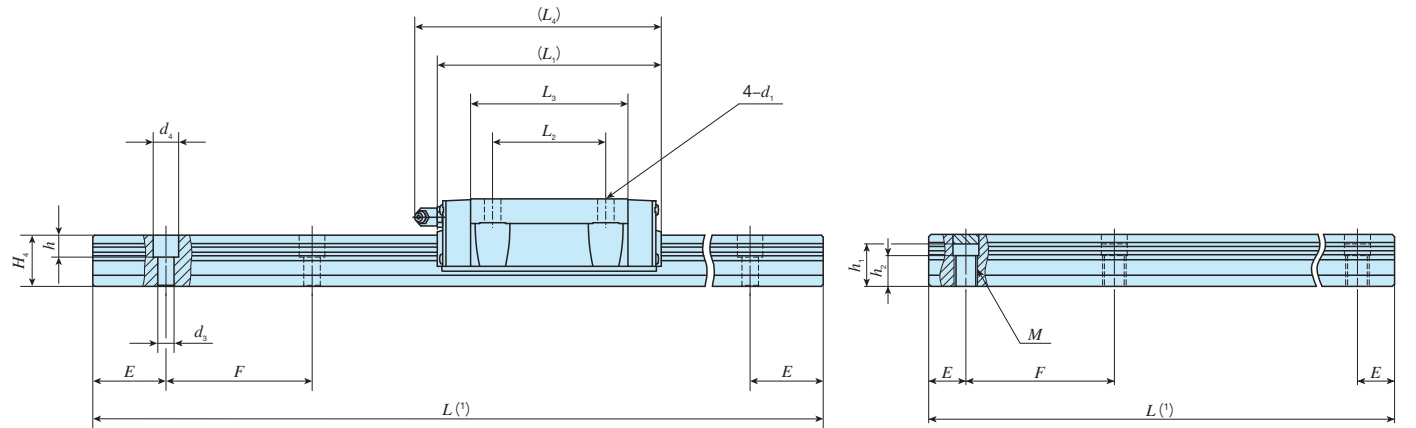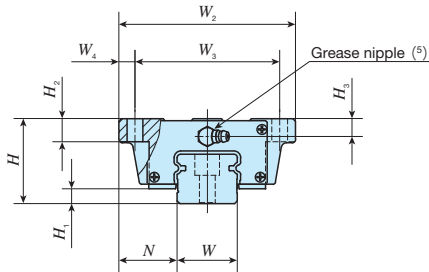


Ultra seal specification with track rail mounting from bottom

| Identification number |                           | Interchangeable | Mass (Ref.)         |                       | Dimensions of assembly<br>mm |                |      | Dimensions of slide unit<br>mm |                |                |                |                |                |                |                |                |                | Dimensions of track rail<br>mm |    |                |                |                |    |    |                               |                |      | Appended<br>mounting bolt<br>for track rail <sup>(3)</sup><br>mm | Basic<br>dynamic load<br>rating <sup>(4)</sup> | Basic<br>static load<br>rating <sup>(4)</sup> | Static moment rating <sup>(4)</sup> |                       |                       |                       |                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|-----------------------|---------------------------|-----------------|---------------------|-----------------------|------------------------------|----------------|------|--------------------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|--------------------------------|----|----------------|----------------|----------------|----|----|-------------------------------|----------------|------|------------------------------------------------------------------|------------------------------------------------|-----------------------------------------------|-------------------------------------|-----------------------|-----------------------|-----------------------|-----------------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
|                       |                           |                 |                     |                       |                              |                |      |                                |                |                |                |                |                |                |                |                |                |                                |    |                |                |                |    |    |                               |                |      |                                                                  |                                                |                                               |                                     |                       |                       |                       |                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| MH series             | LWH series<br>(No C-Lube) |                 | Slide<br>unit<br>kg | Track<br>rail<br>kg/m | H                            | H <sub>1</sub> | N    | W <sub>2</sub>                 | W <sub>3</sub> | W <sub>4</sub> | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | L <sub>4</sub> | d <sub>1</sub> | H <sub>2</sub> | H <sub>3</sub> |                                | W  | H <sub>4</sub> | d <sub>3</sub> | d <sub>4</sub> | h  | M  | h <sub>1</sub> <sup>(2)</sup> | h <sub>2</sub> | E    | F                                                                | Bolt size×ℓ                                    | C<br>N                                        | C <sub>0</sub><br>N                 | T <sub>0</sub><br>N・m | T <sub>x</sub><br>N・m | T <sub>y</sub><br>N・m |                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| MH 30                 |                           | ○               | 1.28                | 4.82                  | 42                           | 9              | 31   | 90                             | 72             | 9              | 113            | 52             | 80.6           | 123            | 9              | 10             | 8              |                                | 28 | 25             | 9              | 14             | 12 | —  | —                             | —              | 40   | 80                                                               | M 8×28                                         | 35 400                                        | 40 700                              | 623                   | 536<br>2 820          | 536<br>2 820          |                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                       | LWH 30…B                  | ○               |                     |                       |                              |                |      |                                |                |                |                |                |                |                |                |                |                |                                |    |                |                |                |    |    |                               |                |      |                                                                  |                                                |                                               |                                     |                       |                       |                       |                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| —                     | LWH 30…SL                 | ○               |                     |                       |                              |                |      |                                |                |                |                |                |                |                |                |                |                |                                |    |                |                |                |    |    |                               |                |      |                                                                  |                                                |                                               |                                     |                       |                       |                       |                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| MH 30…M*              |                           | —               |                     |                       |                              | 7              |      |                                |                |                |                |                |                |                |                |                |                |                                |    |                |                |                |    |    |                               |                |      |                                                                  |                                                |                                               |                                     |                       |                       |                       |                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                       | LWH 30…M*                 | —               |                     |                       |                              |                |      |                                |                |                |                |                |                |                |                |                |                |                                |    |                |                |                |    |    |                               |                |      |                                                                  |                                                |                                               |                                     |                       |                       |                       |                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| MH 30…MU*             |                           | —               |                     |                       |                              |                |      |                                |                |                |                |                |                |                |                |                |                |                                |    |                |                |                |    |    |                               |                |      |                                                                  |                                                |                                               |                                     |                       |                       |                       |                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                       | LWH 30…MU*                | —               |                     |                       |                              |                |      |                                |                |                |                |                |                |                |                |                |                |                                |    |                |                |                |    |    |                               |                |      |                                                                  |                                                |                                               |                                     |                       |                       |                       |                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| MHG 30                |                           | ○               | 1.69                |                       | 42                           | 9              |      |                                |                |                |                | 139            |                | 106.6          | 149            |                |                |                                |    | 28             | 25             | —              | —  | —  | M12                           | 20             | 13   |                                                                  |                                                |                                               |                                     |                       |                       |                       |                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                       | LWHG 30                   | ○               |                     |                       |                              | 7              |      |                                |                |                |                |                |                |                |                |                |                |                                |    |                |                |                |    |    |                               |                |      |                                                                  |                                                |                                               |                                     |                       |                       |                       |                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| MH 35                 |                           | ○               | 1.79                | 6.85                  | 48                           | 10             | 33   | 100                            | 82             | 9              | 123            | 62             | 86.2           | 135            | 9              | 13             | 10             |                                | 34 | 28             | 9              | 14             | 12 | —  | —                             | —              | 40   | 80                                                               | M 8×28                                         | 48 700                                        | 53 700                              | 823                   | 631<br>3 480          | 579<br>3 190          |                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                       | LWH 35…B                  | ○               |                     |                       |                              |                |      |                                |                |                |                |                |                |                |                |                |                |                                |    |                |                |                |    |    |                               |                |      |                                                                  |                                                |                                               |                                     |                       |                       |                       | 8               |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| —                     | LWH 35…M*                 | —               |                     |                       |                              |                |      |                                |                |                |                |                |                |                |                |                |                |                                |    |                |                |                |    |    |                               |                |      |                                                                  |                                                |                                               |                                     |                       |                       |                       |                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| —                     | LWH 35…MU*                | —               |                     |                       |                              |                |      |                                |                |                |                |                |                |                |                |                |                |                                |    |                |                |                |    |    |                               |                |      |                                                                  |                                                |                                               |                                     |                       |                       |                       |                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| MHG 35                |                           | ○               | 2.35                |                       | 48                           | 10             |      |                                |                |                | 151            |                | 114            | 163            |                |                |                |                                |    | 34             | 28             | 9              | 14 | 12 | —                             | —              | —    | 40                                                               | 80                                             | M 8×28                                        | 59 500                              | 71 600                | 1 100                 | 1 090<br>5 570        | 1 000<br>5 110  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                       | LWHG 35                   | ○               |                     |                       |                              | 8              |      |                                |                |                |                |                |                |                |                |                |                |                                |    |                |                |                |    |    |                               |                |      |                                                                  |                                                |                                               |                                     |                       |                       |                       |                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| MH 45                 |                           | ○               | 3.17                | 10.7                  | 60                           | 13             | 37.5 | 120                            | 100            | 10             | 147            | 80             | 103.4          | 158            | 11             | 15             | 13             |                                | 45 | 34             | 14             | 20             | 17 | —  | —                             | —              | 52.5 | 105                                                              | M12×35                                         | 74 600                                        | 80 200                              | 1 610                 | 1 150<br>6 190        | 1 060<br>5 690        |                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                       | LWH 45…B                  | ○               |                     |                       |                              |                |      |                                |                |                |                |                |                |                |                |                |                |                                |    |                |                |                |    |    |                               |                |      |                                                                  |                                                |                                               |                                     |                       |                       |                       | 10              |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| —                     | LWH 45…M*                 | —               |                     |                       |                              |                |      |                                |                |                |                |                |                |                |                |                |                |                                |    |                |                |                |    |    |                               |                |      |                                                                  |                                                |                                               |                                     |                       |                       |                       |                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| —                     | LWH 45…MU*                | —               |                     |                       |                              |                |      |                                |                |                |                |                |                |                |                |                |                |                                |    |                |                |                |    |    |                               |                |      |                                                                  |                                                |                                               |                                     |                       |                       |                       |                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| MHG 45                |                           | ○               | 4.34                |                       | 60                           | 13             |      |                                |                |                | 190            |                | 146.6          | 201            |                |                |                |                                |    | 45             | 34             | 14             | 20 | 17 | —                             | —              | —    | 52.5                                                             | 105                                            | M12×35                                        | 95 200                              | 114 000               | 2 280                 | 2 240<br>11 100       | 2 050<br>10 200 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                       | LWHG 45                   | ○               |                     |                       |                              | 10             |      |                                |                |                |                |                |                |                |                |                |                |                                |    |                |                |                |    |    |                               |                |      |                                                                  |                                                |                                               |                                     |                       |                       |                       |                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |

Notes (1) Track rail lengths  $L$  are shown in Table 2.1 on page II-71, Table 2.2 on page II-72, and Tables 2.3 and 2.4 on page II-73.  
(2) Choose bolts whose dimension allow fixing thread depth into track rail to be less than  $h_1$ .  
(3) The appended track rail mounting bolts are hexagon socket head bolts equivalent to JIS B 1176. For stainless steel model, stainless steel bolts are appended.  
In an assembled set of MH series and LWH···MU model, track rail mounting bolts are not appended.  
(4) Basic dynamic load rating ( $C$ ), Basic static load rating ( $C_0$ ), static moment rating ( $T_0$ ,  $T_x$ , and  $T_y$ ) are values for the direction indicated in the following figure.  
The upper values of  $T_x$  and  $T_y$  are for one slide unit and the lower values are for two slide units in close contact.  
(5) The shapes of grease nipple vary by size. For details of special specifications, see page Table 15 on page II-82.

Remark: The identification numbers with \* are our semi-standard items.




Example of identification number of assembled set


| Model code                 | Dimensions | Part code            | Model code                      | Dust protection code   | Material code | Preload symbol   | Classification symbol | Interchangeable code                | Special specification |    |
|----------------------------|------------|----------------------|---------------------------------|------------------------|---------------|------------------|-----------------------|-------------------------------------|-----------------------|----|
| MH                         | G          | 35                   | C2                              | R800                   |               |                  | T <sub>1</sub>        | P                                   | S1                    | /N |
| 1                          | 2          | 3                    | 4                               | 5                      | 6             | 7                | 8                     | 9                                   | 10                    | 11 |
| ① Model                    |            |                      | ⑤ Length of track rail (800 mm) |                        |               | ⑧ Preload amount |                       |                                     | ⑩ Interchangeable     |    |
| MH                         |            | Flange type          |                                 | ⑥ Dust protection code |               |                  | No symbol             |                                     | S1                    |    |
| LWVH(---B)                 |            | mounting from bottom |                                 |                        |               |                  | Standard              |                                     | S1 specification      |    |
| ② Length of slide unit     |            |                      | ⑨ Accuracy class                |                        |               | T <sub>1</sub>   |                       | S2                                  |                       |    |
| No symbol                  |            | Standard             |                                 | M                      |               | Light preload    |                       | S2 specification                    |                       |    |
| G                          |            | Long                 |                                 | MU                     |               | T <sub>2</sub>   |                       | No symbol                           |                       |    |
| ③ Size                     |            |                      | ⑦ Material type                 |                        |               | Medium preload   |                       | Non-interchangeable specification   |                       |    |
|                            |            |                      |                                 |                        |               | T <sub>3</sub>   |                       | Heavy preload                       |                       |    |
| ④ Number of slide unit (2) |            |                      | ⑪ Special specification         |                        |               | ⑨ Accuracy class |                       | A, BS, D, E, F, I, J, L, LF, MA     |                       |    |
|                            |            |                      |                                 |                        |               | H                |                       | MN, N, PS, Q, RE, T, UR, V, W, Y, Z |                       |    |
|                            |            |                      |                                 |                        |               | High             |                       |                                     |                       |    |
|                            |            |                      |                                 |                        |               | P                |                       |                                     |                       |    |
|                            |            |                      |                                 |                        |               | Precision        |                       |                                     |                       |    |
|                            |            |                      |                                 |                        |               | SP               |                       |                                     |                       |    |
|                            |            |                      |                                 |                        |               | Super precision  |                       |                                     |                       |    |

### Flange type mounting from bottom


## LWH



|      |    |    |    |    |    |
|------|----|----|----|----|----|
| Size | 15 | 20 | 25 | 30 | 35 |
|      | 45 | 55 | 65 | 85 |    |

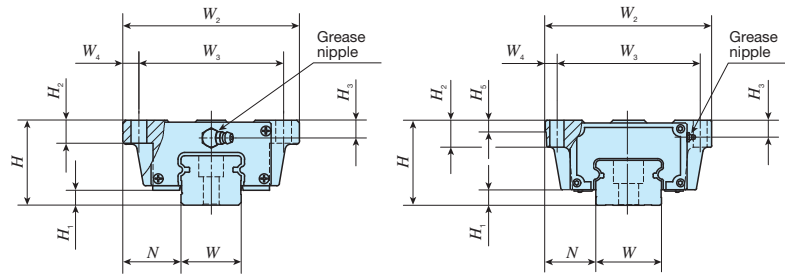

LWHG85

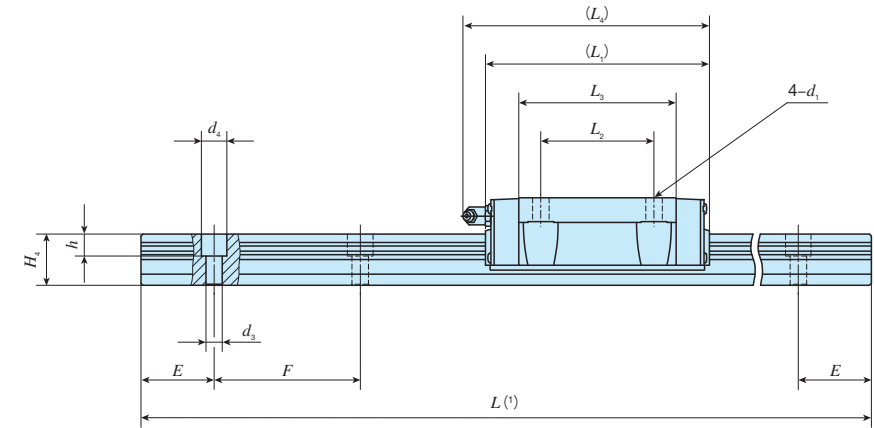

| Identification number |                           | Interchangeable | Mass (Ref.)         |                       | Dimensions of assembly<br>mm |                |      | Dimensions of slide unit<br>mm |                |                |                |                |                |                |                |                |  |                |                |    | Dimensions of track rail<br>mm |                |                |    |    |     |             | Appended<br>mounting bolt for<br>track rail <sup>(2)</sup><br>mm | Basic<br>dynamic load<br>rating <sup>(3)</sup><br><br>C<br>N | Basic<br>static load<br>rating <sup>(3)</sup><br><br>C <sub>0</sub><br>N | Static moment rating <sup>(3)</sup> |                       |                       |
|-----------------------|---------------------------|-----------------|---------------------|-----------------------|------------------------------|----------------|------|--------------------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|--|----------------|----------------|----|--------------------------------|----------------|----------------|----|----|-----|-------------|------------------------------------------------------------------|--------------------------------------------------------------|--------------------------------------------------------------------------|-------------------------------------|-----------------------|-----------------------|
| MH series             | LWH series<br>(No C-Lube) |                 | Slide<br>unit<br>kg | Track<br>rail<br>kg/m | H                            | H <sub>1</sub> | N    | W <sub>2</sub>                 | W <sub>3</sub> | W <sub>4</sub> | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | L <sub>4</sub> | d <sub>1</sub> | H <sub>2</sub> |  | H <sub>3</sub> | H <sub>5</sub> | W  | H <sub>4</sub>                 | d <sub>3</sub> | d <sub>4</sub> | h  | E  | F   | Bolt size×ℓ |                                                                  |                                                              |                                                                          | T <sub>0</sub><br>N・m               | T <sub>x</sub><br>N・m | T <sub>y</sub><br>N・m |
|                       |                           |                 |                     |                       |                              |                |      |                                |                |                |                |                |                |                |                |                |  |                |                |    |                                |                |                |    |    |     |             |                                                                  |                                                              |                                                                          |                                     |                       |                       |
| —                     | LWH 55-B                  | ○               | 5.30                | 15.5                  | 70                           | 17             | 43.5 | 140                            | 116            | 12             | 183            | 95             | 132            | 194            | 14             | 17             |  | 14             | —              | 53 | 41                             | 16             | 23             | 20 | 60 | 120 | M14×45      | 113 000                                                          | 121 000                                                      | 2 870                                                                    | 2 210<br>11 600                     | 2 030<br>10 600       |                       |
| —                     | LWHG 55                   | ○               | 7.40                |                       |                              |                |      |                                |                |                | 235            |                | 183.6          | 246            |                |                |  |                |                |    |                                |                |                |    |    |     |             | 20 200                                                           | 3 780                                                        |                                                                          |                                     |                       |                       |
| —                     | LWH 65-B                  | ○               | 12.3                | 22.2                  | 90                           | 18             | 53.5 | 170                            | 142            | 14             | 229            | 110            | 164            | 239            | 16             | 23             |  | 20             | —              | 63 | 48                             | 18             | 26             | 22 | 75 | 150 | M16×50      | 176 000                                                          | 184 000                                                      | 5 180                                                                    | 4 130<br>22 000                     | 3 790<br>20 200       |                       |
| —                     | LWHG 65                   | ○               | 17.6                |                       |                              |                |      |                                |                |                | 303            |                | 238.8          | 313            |                |                |  |                |                |    |                                |                |                |    |    |     |             | 41 500                                                           | 7 810                                                        |                                                                          |                                     |                       |                       |
| —                     | LWHG 85 <sup>(4)</sup>    | —               | 25.9                | 34.6                  | 110                          | 16             | 65   | 215                            | 185            | 15             | 318            | 140            | 240            | —              | 18             | 30             |  | 22             | 15             | 85 | 58                             | 26             | 39             | 30 | 90 | 180 | M24×60      | 374 000                                                          | 384 000                                                      | 11 900                                                                   | 11 100<br>55 100                    | 11 100<br>55 300      |                       |

Notes (1) Track rail lengths  $L$  are shown in Table 2.1 on page II-71.

(<sup>2</sup>) The appended track rail mounting bolts are hexagon socket head bolts equivalent to JIS B 1176.

(3) Basic dynamic load rating ( $C$ ), Basic static load rating ( $C_0$ ), static moment rating ( $T_0$ ,  $T_x$ , and  $T_y$ ) are values for the direction indicated in the following figure.

The upper values of  $T_x$  and  $T_y$  are for one slide unit and the lower values are for two slide units in close contact.

(4) This unit is prepared based on respective usages.

Remark: The specifications of grease nipple are shown in Table 15 on page II -82.

### Example of identification number of assembled set

| Model code |          | Dimensions | Part code |              | Model code | Preload symbol       | Classification symbol | Interchangeable code | Special specification |
|------------|----------|------------|-----------|--------------|------------|----------------------|-----------------------|----------------------|-----------------------|
| <u>LWH</u> | <u>G</u> | <u>55</u>  | <u>C2</u> | <u>R1200</u> | <u>  </u>  | <u>T<sub>1</sub></u> | <u>P</u>              | <u>S1</u>            | <u>N</u>              |
| 1          | 2        | 3          | 4         | 5            | 1          | 6                    | 7                     | 8                    | 9                     |

|         |                                  |
|---------|----------------------------------|
| ① Model |                                  |
| LWH(…B) | Flange type mounting from bottom |

|        |            |
|--------|------------|
| ③ Size | 55, 65, 85 |
|--------|------------|

| ⑥ Preload amount |                |
|------------------|----------------|
| No symbol        | Standard       |
| T <sub>1</sub>   | Light preload  |
| T <sub>2</sub>   | Medium preload |
| T <sub>3</sub>   | Heavy preload  |


| ⑧ Interchangeable |                                   |
|-------------------|-----------------------------------|
| S1                | S1 specification                  |
| S2                | S2 specification                  |
| No symbol         | Non-interchangeable specification |

| ② Length of slide unit |          |
|------------------------|----------|
| No symbol              | Standard |
| G                      | Long     |

⑤ Length of track rail (1 200 mm)

| ⑦ Accuracy class |                 |
|------------------|-----------------|
| H                | High            |
| P                | Precision       |
| SP               | Super precision |

⑨ Special specification  
A, D, E, F, I, J, L, LF, MN  
N, PS, Q, T, V, W, Y, Z







IKO C-Lube Linear Way MH

Flange type mounting from top

|       |            |    |    |    |    |    |
|-------|------------|----|----|----|----|----|
| Shape | MHT · LWHT |    |    |    |    |    |
|       |            |    |    |    |    |    |
| Size  | 8          | 10 | 12 | 15 | 20 | 25 |
|       | 30         | 35 | 45 | 55 | 65 | 85 |

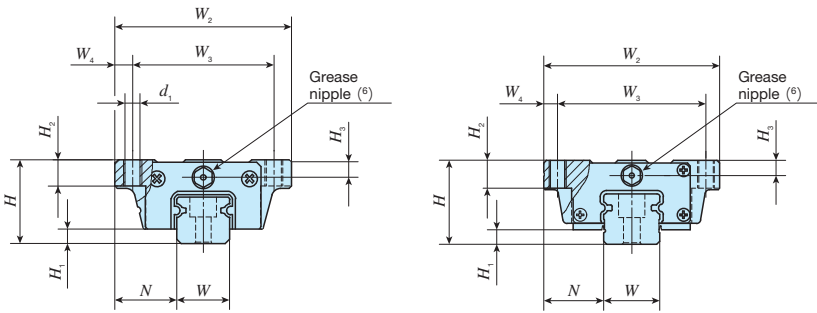


MHT 8 ...SL, LWHT 8 ...SL  
MHT 10 ...SL, LWHT 10 ...SL  
MHT 12 (...SL) , LWHT 12 (...SL)  
MHTG 15

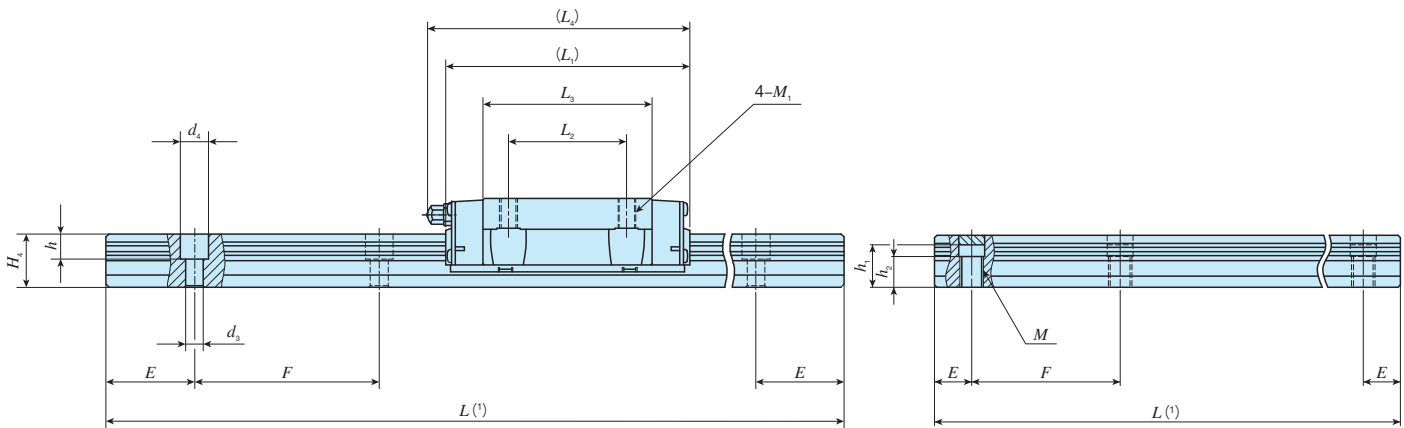

Ultra seal specification with track rail mounting from bottom

| Identification number |                        | Interchangeable | Mass (Ref.)   |                 | Dimensions of assembly mm |                |    | Dimensions of slide unit mm |                |                |                |                |                |                |                               |                |                | Dimensions of track rail mm |  |    |                |                |                |     |   |                               |                | Appended mounting bolt for track rail <sup>(4)</sup> mm | Basic dynamic load rating <sup>(5)</sup> | Basic static load rating <sup>(5)</sup> | Static moment rating <sup>(5)</sup> |                     |                       |                       |                       |  |
|-----------------------|------------------------|-----------------|---------------|-----------------|---------------------------|----------------|----|-----------------------------|----------------|----------------|----------------|----------------|----------------|----------------|-------------------------------|----------------|----------------|-----------------------------|--|----|----------------|----------------|----------------|-----|---|-------------------------------|----------------|---------------------------------------------------------|------------------------------------------|-----------------------------------------|-------------------------------------|---------------------|-----------------------|-----------------------|-----------------------|--|
| MH series             | LWH series (No C-Lube) |                 | Slide unit kg | Track rail kg/m | H                         | H <sub>1</sub> | N  | W <sub>2</sub>              | W <sub>3</sub> | W <sub>4</sub> | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | L <sub>4</sub> | d <sub>1</sub> <sup>(2)</sup> | M <sub>1</sub> | H <sub>2</sub> | H <sub>3</sub>              |  | W  | H <sub>4</sub> | d <sub>3</sub> | d <sub>4</sub> | h   | M | h <sub>1</sub> <sup>(3)</sup> | h <sub>2</sub> | E                                                       | F                                        | Bolt size×ℓ                             | C<br>N                              | C <sub>0</sub><br>N | T <sub>0</sub><br>N·m | T <sub>x</sub><br>N·m | T <sub>y</sub><br>N·m |  |
| MHT 8…SL              | LWHT 8…SL              | ○               | 0.015         | 0.32            | 10                        | 2.1            | 8  | 24                          | 19             | 2.5            | 24             | 10             | 15.3           | —              | 1.9                           | M2.3           | 3.5            | 2                           |  | 8  | 6              | 2.4            | 4.2            | 2.3 | — | —                             | —              | 10                                                      | 20                                       | M2× 8                                   | 1 510                               | 2 120               | 8.8                   | 5.5<br>32.0           | 4.7<br>26.9           |  |
| MHT 10…SL             | LWHT 10…SL             | ○               | 0.031         | 0.47            | 12                        | 2.4            | 10 | 30                          | 24             | 3              | 32             | 12             | 21.4           | —              | 2.6                           | M3             | 4.5            | 2.5                         |  | 10 | 7              | 3.5            | 6              | 3.5 | — | —                             | —              | 12.5                                                    | 25                                       | M3× 8                                   | 2 640                               | 3 700               | 19.2                  | 13.3<br>73.8          | 11.1<br>61.9          |  |
|                       |                        | ○               | 0.032         |                 |                           |                |    |                             |                |                |                |                |                |                |                               |                |                |                             |  |    |                |                |                |     |   |                               |                |                                                         |                                          |                                         |                                     |                     |                       |                       |                       |  |
| MHT 12                | LWHT 12                | ○               | 0.108         | 0.86            | 19                        | 3.2            | 14 | 40                          | 32             | 4              | 46             | 15             | 31.6           | 50             | 3.4                           | M4             | 6              | 4                           |  | 12 | 10.5           | 3.5            | 6              | 4.5 | — | —                             | —              | 20                                                      | 40                                       | M3×12                                   | 6 260                               | 8 330               | 51.6                  | 44.7<br>237           | 37.5<br>199           |  |
|                       |                        | ○               | 0.11          |                 |                           |                |    |                             |                |                |                |                |                |                |                               |                |                |                             |  |    |                |                |                |     |   |                               |                |                                                         |                                          |                                         |                                     |                     |                       |                       |                       |  |
| MHT 12…SL             | LWHT 12…SL             | ○               | 0.108         |                 |                           |                |    |                             |                |                |                |                |                |                |                               |                |                |                             |  |    |                |                |                |     |   |                               |                |                                                         |                                          |                                         |                                     |                     |                       |                       |                       |  |
| MHT 15                | LWHT 15…B              | ○               | 0.22          | 1.47            | 24                        | 4.5            | 16 | 47                          | 38             | 4.5            | 66             | 30             | 44.2           | 69             | —                             | M5             | 7              | 4.5                         |  | 15 | 15             | 4.5            | 8              | 6   | — | —                             | —              | 30                                                      | 60                                       | M4×16                                   | 11 600                              | 13 400              | 112                   | 95.6<br>556           | 95.6<br>556           |  |
|                       |                        | ○               |               |                 |                           |                |    |                             |                |                |                |                | 44.6           |                |                               |                |                |                             |  |    |                |                |                |     |   |                               |                |                                                         |                                          |                                         |                                     |                     |                       |                       |                       |  |
| MHT 15…SL             | LWHT 15…SL             | ○               |               |                 |                           |                |    |                             |                |                |                |                | 44.2           |                |                               |                |                |                             |  |    |                |                |                |     |   |                               |                |                                                         |                                          |                                         |                                     |                     |                       |                       |                       |  |
| —                     | LWHT 15…M*             | —               |               |                 |                           |                |    |                             |                |                |                |                | 44.6           |                |                               |                |                |                             |  |    |                |                |                |     |   |                               |                |                                                         |                                          |                                         |                                     |                     |                       |                       |                       |  |
| —                     | LWHT 15…MU*            | —               |               |                 |                           |                |    |                             |                |                |                |                |                |                |                               |                |                |                             |  |    |                |                |                |     |   |                               |                |                                                         |                                          |                                         |                                     |                     |                       |                       |                       |  |
| MHTG 15               | —                      | ○               | 0.29          |                 |                           |                |    |                             |                |                | 82             |                | 60.1           | 85             | 4.4                           |                |                |                             |  |    |                | 4.5            | 8              | 6   | — | —                             | —              |                                                         |                                          | M4×16                                   | 14 400                              | 18 300              | 153                   | 172<br>918            | 172<br>918            |  |

Notes (1) Track rail lengths  $L$  are shown in Table 2.1 on page II-71, Table 2.2 on page II-72, and Tables 2.3 and 2.4 on page II-73.  
(2) Series of size 8 to 12 and MHTG15 can also be mounted in upward direction.  
(3) Choose bolts whose dimension allow fixing thread depth into track rail to be less than  $h_1$ .  
(4) The appended track rail mounting bolts are hexagon socket head bolts equivalent to JIS B 1176. For stainless steel model, stainless steel bolts are appended.  
In an assembled set of MH series and LWHT...MU model, track rail mounting bolts are not appended.  
(5) Basic dynamic load rating ( $C$ ), Basic static load rating ( $C_0$ ), static moment rating ( $T_0$ ,  $T_x$ , and  $T_y$ ) are values for the direction indicated in the following figure.  
The upper values of  $T_x$  and  $T_y$  are for one slide unit and the lower values are for two slide units in close contact.  
(6) Series of size 8 and 10 are provided with an oil hole. The specifications of oil holes are shown in Table 14 on page II-82.  
The shapes of grease nipples of size 12 and 15 vary by size. For details of special specifications, see page Table 15 on page II-82.  
Remark: The identification numbers with \* are our semi-standard items.




Example of identification number of assembled set

| Model code |          | Dimensions |           | Part code   |          | Model code | Dust protection code | Material code | Preload symbol       | Classification symbol | Interchangeable code | Special specification |
|------------|----------|------------|-----------|-------------|----------|------------|----------------------|---------------|----------------------|-----------------------|----------------------|-----------------------|
| <u>MHT</u> | <u>G</u> | <u>15</u>  | <u>C2</u> | <u>R900</u> | <u> </u> | <u> </u>   | <u> </u>             | <u> </u>      | <u>T<sub>1</sub></u> | <u>P</u>              | <u>S1</u>            | <u>/N</u>             |
| 1          | 2        | 3          | 4         | 5           | 1        | 6          | 7                    | 8             | 9                    | 10                    | 11                   |                       |



|                                                        |                                                                                                                                                              |                                                                                                              |                                                                                                                |
|--------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|
| ① Model<br>MHT<br>LWHT (...B)                          | ⑤ Length of track rail (900 mm)                                                                                                                              | ⑧ Preload amount<br>T0 Clearance<br>T1 Standard<br>T2 Light preload<br>T3 Medium preload<br>T4 Heavy preload | ⑩ Interchangeable<br>S1 S1 specification<br>S2 S2 specification<br>No symbol Non-interchangeable specification |
| ② Length of slide unit<br>No symbol Standard<br>G Long | ⑥ Dust protection code<br>No symbol Standard specification<br>M Ultra seal specification<br>MU Ultra seal specification with track rail mounting from bottom | ⑨ Accuracy class<br>H High<br>P Precision<br>SP Super precision                                              | ⑪ Special specification<br>A, BS, D, E, F, 1, J, L, LF, MA<br>MN, N, Q, RE, T, U, V, W, Y, Z                   |
| ③ Size<br>8, 10, 12, 15                                | ⑦ Material type<br>No symbol High carbon steel made<br>SL Stainless steel made                                                                               |                                                                                                              |                                                                                                                |
| ④ Number of slide unit (2)                             |                                                                                                                                                              |                                                                                                              |                                                                                                                |

### Flange type mounting from top

MHT • LWHT



|      |    |    |    |    |    |    |
|------|----|----|----|----|----|----|
| Size | 8  | 10 | 12 | 15 | 20 | 25 |
|      | 30 | 35 | 45 | 55 | 65 | 85 |

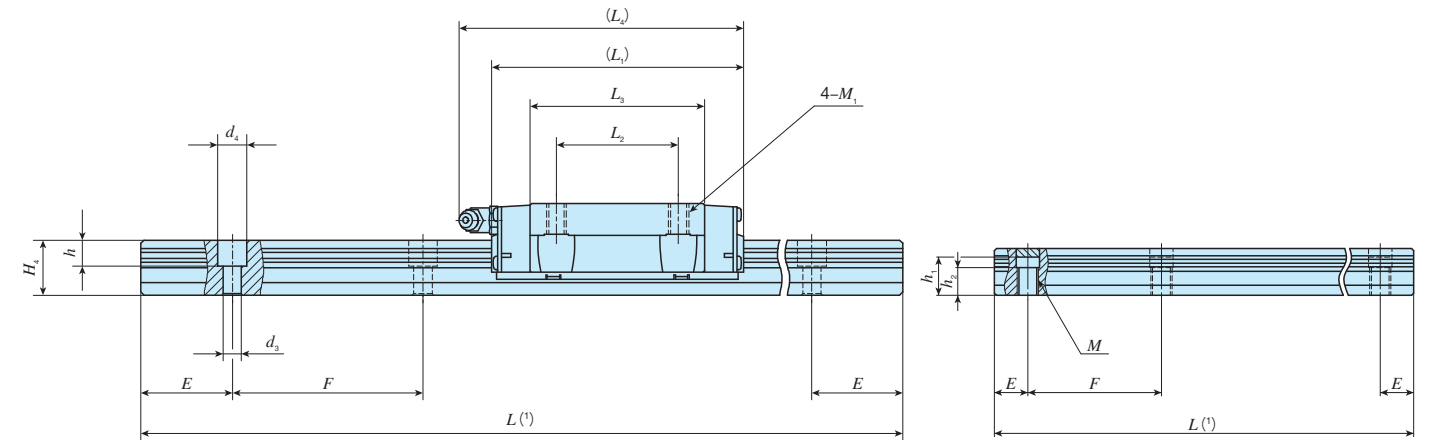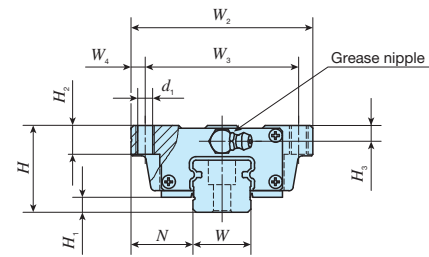

Ultra seal specification with track rail mounting from bottom

| Identification number |                        | Interchangeable | Mass (Ref.)   |                 | Dimensions of assembly mm |                |      | Dimensions of slide unit mm |                |                |                |                |                |                |                |                |                |  |                | Dimensions of track rail mm |                |                |                |     |   |                               |                |    |    | Appended mounting bolt for track rail <sup>(3)</sup> mm | Basic dynamic load rating <sup>(4)</sup> | Basic static load rating <sup>(4)</sup> | Static moment rating <sup>(4)</sup> |              |                     |
|-----------------------|------------------------|-----------------|---------------|-----------------|---------------------------|----------------|------|-----------------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|--|----------------|-----------------------------|----------------|----------------|----------------|-----|---|-------------------------------|----------------|----|----|---------------------------------------------------------|------------------------------------------|-----------------------------------------|-------------------------------------|--------------|---------------------|
| MH series             | LWH series (No C-Lube) |                 | Slide unit kg | Track rail kg/m | H                         | H <sub>1</sub> | N    | W <sub>2</sub>              | W <sub>3</sub> | W <sub>4</sub> | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | L <sub>4</sub> | d <sub>1</sub> | M <sub>1</sub> | H <sub>2</sub> |  | H <sub>3</sub> | W                           | H <sub>4</sub> | d <sub>3</sub> | d <sub>4</sub> | h   | M | h <sub>1</sub> <sup>(2)</sup> | h <sub>2</sub> | E  | F  |                                                         |                                          |                                         | Bolt size×ℓ                         | C<br>N       | C <sub>0</sub><br>N |
| MHT 20                |                        | ○               | 0.48          | 2.56            | 30                        | 5              | 21.5 | 63                          | 53             | 5              | 83             | 40             | 56             | 94             | —              | M6             | 10             |  | 5.5            | 20                          | 18             | 6              | 9.5            | 8.5 | — | —                             | —              | 30 | 60 | M5×18                                                   | 18 100                                   | 21 100                                  | 232                                 | 195<br>1 090 | 195<br>1 090        |
|                       | LWHT 20…B              | ○               |               |                 |                           |                |      |                             |                |                |                |                | 57.2           |                |                |                |                |  |                |                             |                |                |                |     |   |                               |                |    |    |                                                         |                                          |                                         |                                     |              |                     |
| MHT 20…SL             |                        | ○               |               |                 |                           |                |      |                             |                |                |                |                | 56             |                |                |                |                |  |                |                             |                |                |                |     |   |                               |                |    |    |                                                         |                                          |                                         |                                     |              |                     |
| —                     | LWHT 20…M*             | —               |               |                 |                           |                |      |                             |                |                |                |                | 57.2           |                |                |                |                |  |                |                             |                |                |                |     |   |                               |                |    |    |                                                         |                                          |                                         |                                     |              |                     |
| —                     | LWHT 20…MU*            | —               |               |                 |                           |                |      |                             |                |                |                |                |                |                |                |                |                |  |                |                             |                |                |                |     |   |                               |                |    |    |                                                         |                                          |                                         |                                     |              |                     |
| MHTG 20               |                        | ○               | 0.71          |                 |                           |                |      |                             |                |                | 112            |                | 84.8           | 122            |                |                |                |  |                |                             |                | 6              | 9.5            | 8.5 | — | —                             | —              | 30 | 60 | M5×18                                                   | 24 100                                   | 31 700                                  | 349                                 | 421<br>2 140 | 421<br>2 140        |
|                       | LWHTG 20               | ○               |               |                 |                           |                |      |                             |                |                |                |                | 86             |                |                |                |                |  |                |                             |                |                |                |     |   |                               |                |    |    |                                                         |                                          |                                         |                                     |              |                     |
| MHT 25                |                        | ○               | 0.70          | 3.50            | 36                        | 6.5            | 23.5 | 70                          | 57             | 6.5            | 95             | 45             | 63.9           | 105            | —              | M8             | 10             |  | 6.5            | 23                          | 22             | 7              | 11             | 9   | — | —                             | —              | 30 | 60 | M6×22                                                   | 25 200                                   | 28 800                                  | 362                                 | 309<br>1 690 | 309<br>1 690        |
|                       | LWHT 25…B              | ○               |               |                 |                           |                |      |                             |                |                |                |                | 64.7           |                |                |                |                |  |                |                             |                |                |                |     |   |                               |                |    |    |                                                         |                                          |                                         |                                     |              |                     |
| MHT 25…SL             |                        | ○               |               |                 |                           |                |      |                             |                |                |                |                | 63.9           |                |                |                |                |  |                |                             |                |                |                |     |   |                               |                |    |    |                                                         |                                          |                                         |                                     |              |                     |
|                       | LWHT 25…SL             | ○               |               |                 |                           |                |      |                             |                |                |                |                | 64.7           |                |                |                |                |  |                |                             |                |                |                |     |   |                               |                |    |    |                                                         |                                          |                                         |                                     |              |                     |
| MHT 25…M*             |                        | —               |               |                 |                           |                |      |                             |                |                |                |                | 63.9           |                |                |                |                |  |                |                             |                |                |                |     |   |                               |                |    |    |                                                         |                                          |                                         |                                     |              |                     |
|                       | LWHT 25…M*             | —               |               |                 |                           |                |      |                             |                |                |                |                | 64.7           |                |                |                |                |  |                |                             |                |                |                |     |   |                               |                |    |    |                                                         |                                          |                                         |                                     |              |                     |
| MHT 25…MU*            |                        | —               |               |                 |                           |                |      |                             |                |                |                |                | 63.9           |                |                |                |                |  |                |                             |                |                |                |     |   |                               |                |    |    |                                                         |                                          |                                         |                                     |              |                     |
|                       | LWHT 25…MU*            | —               |               |                 |                           |                |      |                             |                |                | 64.7           |                |                |                |                |                |                |  |                |                             |                |                |                |     |   |                               |                |    |    |                                                         |                                          |                                         |                                     |              |                     |
| MHTG 25               |                        | ○               | 0.93          |                 |                           |                |      |                             |                |                | 118            |                | 86.6           | 128            |                |                |                |  |                |                             |                | 7              | 11             | 9   | — | —                             | —              | 30 | 60 | M6×22                                                   | 30 800                                   | 38 300                                  | 483                                 | 533<br>2 740 | 533<br>2 740        |
|                       | LWHTG 25               | ○               |               |                 |                           |                |      |                             |                |                |                |                | 87.4           |                |                |                |                |  |                |                             |                |                |                |     |   |                               |                |    |    |                                                         |                                          |                                         |                                     |              |                     |

Notes (1) Track rail lengths  $L$  are shown in Table 2.1 on page II-71, Table 2.2 on page II-72, and Tables 2.3 and 2.4 on page II-73.

(2) Choose bolts whose dimension allow fixing thread depth into track rail to be less than  $h_r$ .

(3) The appended track rail mounting bolts are hexagon socket head bolts equivalent to JIS B 1176. For stainless steel model, stainless steel bolts are appended.


In an assembled set of MH series and LWHT...MU model, track rail mounting bolts are not appended.

(4) Basic dynamic load rating ( $C$ ), Basic static load rating ( $C_0$ ), static moment rating ( $T_0$ ,  $T_x$ , and  $T_y$ ) are values for the direction indicated in the following figure.

The upper values of  $T_x$  and  $T_y$  are for one slide unit and the lower values are for two slide units in close contact.

Remarks 1. The specifications of grease nipple are in Table 15 on page II-82.

2. The identification numbers with \* are our semi-standard items.



### Example of identification number of assembled set

| Model code |          | Dimensions | Part code |             | Model code | Dust protection code | Material code | Preload symbol       | Classification symbol | Interchangeable code | Special specification |
|------------|----------|------------|-----------|-------------|------------|----------------------|---------------|----------------------|-----------------------|----------------------|-----------------------|
| <b>MHT</b> | <b>G</b> | <b>25</b>  | <b>C2</b> | <b>R840</b> |            |                      |               | <b>T<sub>1</sub></b> | <b>P</b>              | <b>S1</b>            | <b>/N</b>             |
| 1          | 2        | 3          | 4         | 5           | 1          | 6                    | 7             | 8                    | 9                     | 10                   | 11                    |

|                        |                               |
|------------------------|-------------------------------|
| ① Model                |                               |
| MHT                    | Flange type mounting from top |
| LWHT(...B)             |                               |
| ② Length of slide unit |                               |
| No symbol              | Standard                      |
| G                      | Long                          |
| ③ Size                 |                               |
|                        | 20, 25                        |
| ④ Number of slide unit | ②                             |

|                                 |                                                               |
|---------------------------------|---------------------------------------------------------------|
| ⑤ Length of track rail (840 mm) |                                                               |
| ⑥ Dust protection code          |                                                               |
| No symbol                       | Standard specification                                        |
| M                               | Ultra seal specification                                      |
| MU                              | Ultra seal specification with track rail mounting from bottom |
| ⑦ Material type                 |                                                               |
| No symbol                       | High carbon steel made                                        |
| SL                              | Stainless steel made                                          |

| ⑧ Preload amount |                |
|------------------|----------------|
| No symbol        | Standard       |
| T <sub>1</sub>   | Light preload  |
| T <sub>2</sub>   | Medium preload |
| T <sub>3</sub>   | Heavy preload  |

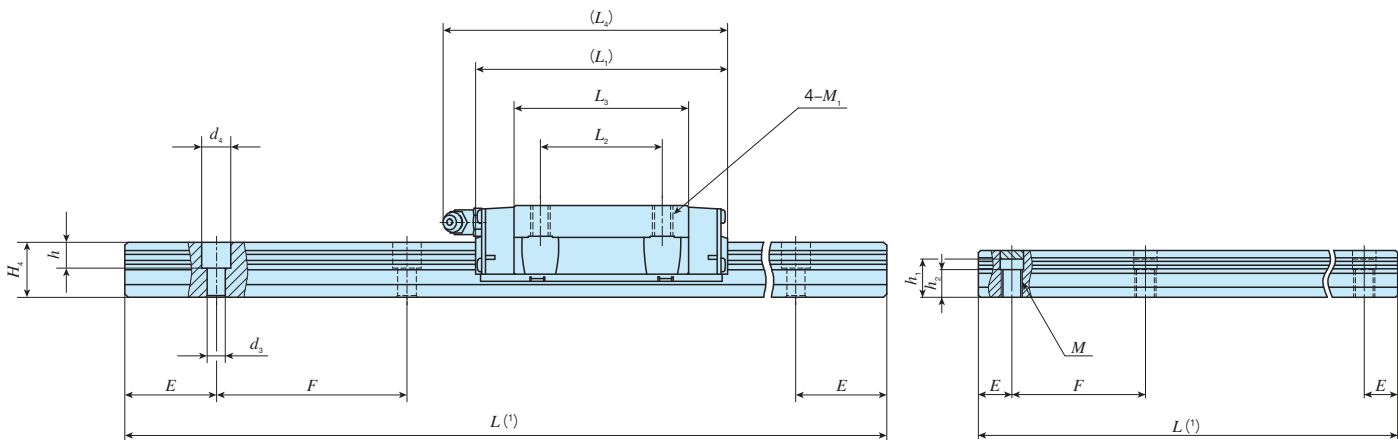
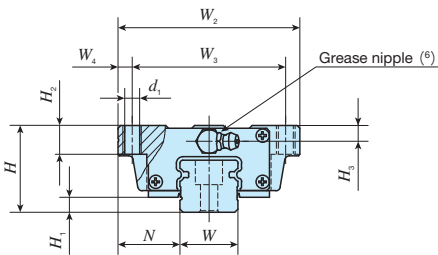
| ⑨ Accuracy class |                 |
|------------------|-----------------|
| H                | High            |
| P                | Precision       |
| SP               | Super precision |

| 10 Interchangeable |                                   |
|--------------------|-----------------------------------|
| S1                 | S1 specification                  |
| S2                 | S2 specification                  |
| No symbol          | Non-interchangeable specification |

IKO C-Lube Linear Way MH


Flange type mounting from top

|       |            |    |    |    |    |    |
|-------|------------|----|----|----|----|----|
| Shape | MHT · LWHT |    |    |    |    |    |
|       |            |    |    |    |    |    |
| Size  | 8          | 10 | 12 | 15 | 20 | 25 |
|       | 30         | 35 | 45 | 55 | 65 | 85 |



| Identification number |                        | Interchangeable | Mass (Ref.)   |                 | Dimensions of assembly mm |                |    | Dimensions of slide unit mm |                |                |                |                |                |                |                               |                |                |    |                |    |                | Dimensions of track rail mm |                |    |   |                               |                |    |        | Appended mounting bolt for track rail <sup>(4)</sup> mm | Basic dynamic load rating <sup>(5)</sup> | Basic static load rating <sup>(5)</sup> | Static moment rating <sup>(5)</sup> |                       |                       |   |  |  |  |  |  |  |  |  |  |  |  |  |    |    |        |        |        |       |                |                |  |  |  |  |  |  |  |
|-----------------------|------------------------|-----------------|---------------|-----------------|---------------------------|----------------|----|-----------------------------|----------------|----------------|----------------|----------------|----------------|----------------|-------------------------------|----------------|----------------|----|----------------|----|----------------|-----------------------------|----------------|----|---|-------------------------------|----------------|----|--------|---------------------------------------------------------|------------------------------------------|-----------------------------------------|-------------------------------------|-----------------------|-----------------------|---|--|--|--|--|--|--|--|--|--|--|--|--|----|----|--------|--------|--------|-------|----------------|----------------|--|--|--|--|--|--|--|
| MH series             | LWH series (No C-Lube) |                 | Slide unit kg | Track rail kg/m | H                         | H <sub>1</sub> | N  | W <sub>2</sub>              | W <sub>3</sub> | W <sub>4</sub> | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | L <sub>4</sub> | d <sub>1</sub> <sup>(2)</sup> | M <sub>1</sub> | H <sub>2</sub> |    | H <sub>3</sub> | W  | H <sub>4</sub> | d <sub>3</sub>              | d <sub>4</sub> | h  | M | h <sub>1</sub> <sup>(3)</sup> | h <sub>2</sub> | E  | F      | Bolt size×ℓ                                             | C<br>N                                   | C <sub>0</sub><br>N                     | T <sub>0</sub><br>N·m               | T <sub>x</sub><br>N·m | T <sub>y</sub><br>N·m |   |  |  |  |  |  |  |  |  |  |  |  |  |    |    |        |        |        |       |                |                |  |  |  |  |  |  |  |
| MHT 30                |                        | ○               | 1.28          | 4.82            | 42                        | 7              | 31 | 90                          | 72             | 9              | 113            | 52             | 80.6           | 123            | —                             | M10            | 10             |    | 8              | 28 | 25             | 9                           | 14             | 12 | — | —                             | —              | 40 | 80     | M 8×28                                                  | 35 400                                   | 40 700                                  | 623                                 | 536<br>2 820          | 536<br>2 820          |   |  |  |  |  |  |  |  |  |  |  |  |  |    |    |        |        |        |       |                |                |  |  |  |  |  |  |  |
|                       | LWHT 30…B              | ○               |               |                 |                           |                |    |                             |                |                |                |                |                |                |                               |                |                |    |                |    |                |                             |                |    |   |                               |                |    |        |                                                         |                                          |                                         |                                     |                       |                       | 7 |  |  |  |  |  |  |  |  |  |  |  |  |    |    |        |        |        |       |                |                |  |  |  |  |  |  |  |
| MHT 30…SL             |                        | ○               |               |                 |                           |                |    |                             |                |                |                |                |                |                |                               |                |                |    |                |    |                |                             |                |    |   |                               |                |    |        |                                                         |                                          |                                         |                                     |                       |                       | 9 |  |  |  |  |  |  |  |  |  |  |  |  |    |    |        |        |        |       |                |                |  |  |  |  |  |  |  |
|                       | LWHT 30…SL             | ○               |               |                 |                           |                |    |                             |                |                |                |                |                |                |                               |                |                |    |                |    |                |                             |                |    |   |                               |                |    |        |                                                         |                                          |                                         |                                     |                       |                       |   |  |  |  |  |  |  |  |  |  |  |  |  |    |    |        |        |        |       |                |                |  |  |  |  |  |  |  |
| MHT 30…M*             |                        | —               |               |                 |                           |                |    |                             |                |                |                |                |                |                |                               |                |                |    |                |    |                |                             |                |    |   |                               |                |    |        |                                                         |                                          |                                         |                                     |                       |                       |   |  |  |  |  |  |  |  |  |  |  |  |  |    |    |        |        |        |       |                |                |  |  |  |  |  |  |  |
|                       | LWHT 30…M*             | —               |               |                 |                           |                |    |                             |                |                |                |                |                |                |                               |                |                |    |                |    |                |                             |                |    |   |                               |                |    |        |                                                         |                                          |                                         |                                     |                       |                       |   |  |  |  |  |  |  |  |  |  |  |  |  |    |    |        |        |        |       |                |                |  |  |  |  |  |  |  |
| MHT 30…MU*            |                        | —               |               |                 |                           |                |    |                             |                |                |                |                |                |                |                               |                |                |    |                |    |                |                             |                |    |   |                               |                |    |        |                                                         |                                          |                                         |                                     |                       |                       |   |  |  |  |  |  |  |  |  |  |  |  |  |    |    |        |        |        |       |                |                |  |  |  |  |  |  |  |
|                       | LWHT 30…MU*            | —               |               |                 |                           |                |    |                             |                |                |                |                |                |                |                               |                |                |    |                |    |                |                             |                |    |   |                               |                |    |        |                                                         |                                          |                                         |                                     |                       |                       |   |  |  |  |  |  |  |  |  |  |  |  |  |    |    |        |        |        |       |                |                |  |  |  |  |  |  |  |
| MHTG 30               |                        | ○               | 1.69          |                 |                           | 9              |    |                             |                |                | 139            | 106.6          | 149            |                |                               |                |                |    |                |    |                | 9                           | 14             | 12 | — | —                             | —              | 40 | 80     | M 8×28                                                  | 42 700                                   | 53 200                                  | 814                                 | 894<br>4 460          | 894<br>4 460          |   |  |  |  |  |  |  |  |  |  |  |  |  |    |    |        |        |        |       |                |                |  |  |  |  |  |  |  |
|                       | LWHTG 30               | ○               |               |                 |                           | 7              |    |                             |                |                |                |                |                |                |                               |                |                |    |                |    |                |                             |                |    |   |                               |                |    |        |                                                         |                                          |                                         |                                     |                       |                       |   |  |  |  |  |  |  |  |  |  |  |  |  |    |    |        |        |        |       |                |                |  |  |  |  |  |  |  |
| MHTL 30               | —                      | ○               | 2.30          |                 |                           | 7              |    |                             |                |                | 185            | 152.2          | 194            | 8.5            |                               |                |                |    |                |    |                |                             |                |    |   |                               |                |    |        |                                                         |                                          |                                         |                                     |                       |                       |   |  |  |  |  |  |  |  |  |  |  |  |  |    |    |        |        |        |       |                |                |  |  |  |  |  |  |  |
| MHT 35                |                        | ○               | 1.79          | 6.85            | 48                        | 10             | 33 | 100                         | 82             | 9              | 123            | 86.2           | 135            | —              | M10                           | 13             |                | 10 | 34             | 28 | 9              | 14                          | 12             | —  | — | —                             | 40             | 80 | M 8×28 | 48 700                                                  | 53 700                                   | 823                                     | 631<br>3 480                        | 579<br>3 190          |                       |   |  |  |  |  |  |  |  |  |  |  |  |  |    |    |        |        |        |       |                |                |  |  |  |  |  |  |  |
|                       | LWHT 35…B              | ○               |               |                 |                           | 8              |    |                             |                |                |                |                |                |                |                               |                |                |    |                |    |                |                             |                |    |   |                               |                |    |        |                                                         |                                          |                                         |                                     |                       |                       |   |  |  |  |  |  |  |  |  |  |  |  |  |    |    |        |        |        |       |                |                |  |  |  |  |  |  |  |
| —                     | LWHT 35…M*             | —               |               |                 |                           |                |    |                             |                |                |                |                |                |                |                               |                |                |    |                |    |                |                             |                |    |   |                               |                |    |        |                                                         |                                          |                                         |                                     |                       |                       |   |  |  |  |  |  |  |  |  |  |  |  |  |    |    |        |        |        |       |                |                |  |  |  |  |  |  |  |
| —                     | LWHT 35…MU*            | —               |               |                 |                           |                |    |                             |                |                |                |                |                |                |                               |                |                |    |                |    |                |                             |                |    |   |                               |                |    |        |                                                         |                                          |                                         |                                     |                       |                       |   |  |  |  |  |  |  |  |  |  |  |  |  |    |    |        |        |        |       |                |                |  |  |  |  |  |  |  |
| MHTG 35               |                        | ○               | 2.35          |                 |                           | 10             |    |                             |                |                | 151            | 114            | 163            |                |                               |                |                |    |                |    |                |                             |                |    |   |                               |                |    |        |                                                         |                                          | 162.2                                   | 211                                 | 8.5                   |                       |   |  |  |  |  |  |  |  |  |  |  |  |  | 40 | 80 | M 8×28 | 59 500 | 71 600 | 1 100 | 1 090<br>5 570 | 1 000<br>5 110 |  |  |  |  |  |  |  |
|                       | LWHTG 35               | ○               |               |                 |                           | 8              |    |                             |                |                |                |                |                |                |                               |                |                |    |                |    |                |                             |                |    |   |                               |                |    |        |                                                         |                                          |                                         |                                     |                       |                       |   |  |  |  |  |  |  |  |  |  |  |  |  |    |    |        |        |        |       |                |                |  |  |  |  |  |  |  |
| MHTL 35               | —                      | ○               | 3.24          |                 |                           |                |    |                             |                |                |                |                |                |                |                               |                |                |    |                |    |                |                             |                |    |   |                               |                |    |        |                                                         |                                          |                                         |                                     |                       |                       |   |  |  |  |  |  |  |  |  |  |  |  |  |    |    |        |        |        |       |                |                |  |  |  |  |  |  |  |
|                       |                        |                 |               |                 |                           |                |    |                             |                |                |                |                |                |                |                               |                |                |    |                |    |                |                             |                |    |   |                               |                |    |        |                                                         |                                          |                                         |                                     |                       |                       |   |  |  |  |  |  |  |  |  |  |  |  |  |    |    |        |        |        |       |                |                |  |  |  |  |  |  |  |

Notes (1) Track rail lengths  $L$  are shown in Table 2.1 on page II-71, Table 2.2 on page II-72, and Tables 2.3 and 2.4 on page II-73.  
(2) MHTL30 and MHTL35 can also be mounted in upward direction.  
(3) Choose bolts whose dimension allow fixing thread depth into track rail to be less than  $h_1$ .  
(4) The appended track rail mounting bolts are hexagon socket head bolts equivalent to JIS B 1176. For stainless steel model, stainless steel bolts are appended.  
In an assembled set of MH series and LWHT...MU model, track rail mounting bolts are not appended.  
(5) Basic dynamic load rating ( $C$ ), Basic static load rating ( $C_0$ ), static moment rating ( $T_0$ ,  $T_x$ , and  $T_y$ ) are values for the direction indicated in the following figure.  
The upper values of  $T_x$  and  $T_y$  are for one slide unit and the lower values are for two slide units in close contact.  
(6) The shapes of grease nipple vary by size. For details of special specifications, see page Table 15 on page II-82.  
Remark: The identification numbers with \* are our semi-standard items.



Example of identification number of assembled set

| Model code |   |   | Dimensions |    | Part code |       | Model code | Dust protection code | Material code | Preload symbol | Classification symbol | Interchangeable code | Special specification |
|------------|---|---|------------|----|-----------|-------|------------|----------------------|---------------|----------------|-----------------------|----------------------|-----------------------|
| MHT        |   |   | G          | 35 | C2        | R1040 |            |                      |               | T <sub>1</sub> | P                     | S1                   | N                     |
| 1          | 2 | 3 | 4          | 5  | 6         | 7     | 8          | 9                    | 10            | 11             |                       |                      |                       |



|                                                                        |                                                                                                                                                              |                                                                                                     |                                                                                                                |
|------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|
| ① Model<br>MHT<br>LWHT (...B)<br>Flange type mounting from top         | ⑤ Length of track rail (1,040 mm)                                                                                                                            | ⑧ Preload amount<br>No symbol Standard<br>T1 Light preload<br>T2 Medium preload<br>T3 Heavy preload | ⑩ Interchangeable<br>S1 S1 specification<br>S2 S2 specification<br>No symbol Non-interchangeable specification |
| ② Length of slide unit<br>No symbol Standard<br>G Long<br>L Extra long | ⑥ Dust protection code<br>No symbol Standard specification<br>M Ultra seal specification<br>MU Ultra seal specification with track rail mounting from bottom | ⑨ Accuracy class<br>H High<br>P Precision<br>SP Super precision                                     | ⑪ Special specification<br>A, BS, D, E, F, 1, J, L, LF, MA<br>MN, N, PS, Q, RE, T, UR, V, W, Y, Z              |
| ③ Size<br>30, 35                                                       | ⑦ Material type<br>No symbol High carbon steel made<br>SL Stainless steel made                                                                               |                                                                                                     |                                                                                                                |
| ④ Number of slide unit (2)                                             |                                                                                                                                                              |                                                                                                     |                                                                                                                |



IKO C-Lube Linear Way MH


Flange type mounting from top

|       |      |    |    |    |    |    |
|-------|------|----|----|----|----|----|
| Shape | LWHT |    |    |    |    |    |
|       |      |    |    |    |    |    |
| Size  | 8    | 10 | 12 | 15 | 20 | 25 |
|       | 30   | 35 | 45 | 55 | 65 | 85 |

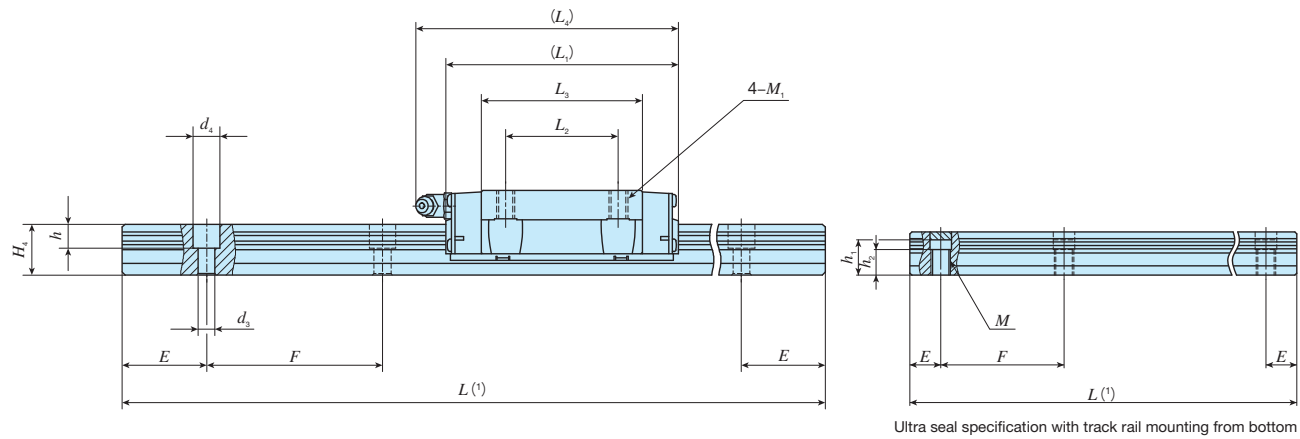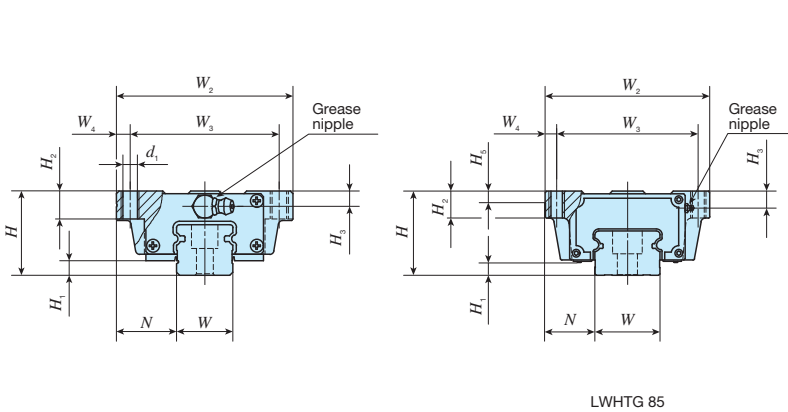

| Identification number |                         | Interchangeable | Mass (Ref.)   |                 | Dimensions of assembly mm |                |      | Dimensions of slide unit mm |                |                |                |                |                |                |                               |                |                |  |                |                |    |                | Dimensions of track rail mm |                |    |   |                               |                |      |     |             |         | Appended mounting bolt for track rail <sup>(4)</sup> mm | Basic dynamic load rating <sup>(5)</sup> | Basic static load rating <sup>(5)</sup> | Static moment rating <sup>(5)</sup> |                       |                       |
|-----------------------|-------------------------|-----------------|---------------|-----------------|---------------------------|----------------|------|-----------------------------|----------------|----------------|----------------|----------------|----------------|----------------|-------------------------------|----------------|----------------|--|----------------|----------------|----|----------------|-----------------------------|----------------|----|---|-------------------------------|----------------|------|-----|-------------|---------|---------------------------------------------------------|------------------------------------------|-----------------------------------------|-------------------------------------|-----------------------|-----------------------|
| MH series             | LWH series (No C-Lube)  |                 | Slide unit kg | Track rail kg/m | H                         | H <sub>1</sub> | N    | W <sub>2</sub>              | W <sub>3</sub> | W <sub>4</sub> | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | L <sub>4</sub> | d <sub>1</sub> <sup>(2)</sup> | M <sub>1</sub> | H <sub>2</sub> |  | H <sub>3</sub> | H <sub>5</sub> | W  | H <sub>4</sub> | d <sub>3</sub>              | d <sub>4</sub> | h  | M | h <sub>1</sub> <sup>(3)</sup> | h <sub>2</sub> | E    | F   | Bolt size×ℓ | C<br>N  |                                                         |                                          |                                         | C <sub>0</sub><br>N                 | T <sub>0</sub><br>N·m | T <sub>x</sub><br>N·m |
| MHT 45                |                         | ○               | 3.17          | 10.7            | 60                        | 13             | 37.5 | 120                         | 100            | 10             | 147            | 80             | 103.4          | 158            | —                             | M12            | 15             |  | 13             | —              | 45 | 34             | 14                          | 20             | 17 | — | —                             | —              | 52.5 | 105 | M12×35      | 74 600  | 80 200                                                  | 1 610                                    | 1 150<br>6 190                          | 1 060<br>5 690                      |                       |                       |
|                       | LWHT 45--B              | ○               |               |                 |                           | 14             |      |                             |                |                |                |                |                |                |                               |                |                |  |                |                |    |                |                             |                |    |   |                               |                |      |     |             |         |                                                         |                                          |                                         |                                     |                       |                       |
| —                     | LWHT 45--M*             | —               |               |                 |                           | 10             |      |                             |                |                |                |                |                |                |                               |                |                |  |                |                |    |                |                             |                |    |   |                               |                |      |     | —           |         |                                                         |                                          |                                         |                                     |                       |                       |
| —                     | LWHT 45--MU*            | —               |               |                 |                           | 10             |      |                             |                |                |                |                |                |                |                               |                |                |  |                |                |    |                |                             |                |    |   |                               |                |      |     |             |         |                                                         |                                          |                                         |                                     |                       |                       |
| MHTG 45               |                         | ○               | 4.34          |                 |                           | 13             |      |                             |                |                | 190            |                | 146.6          | 201            |                               |                |                |  |                |                |    |                | 14                          | 20             | 17 | — | —                             | —              | 52.5 | 105 | M12×35      | 95 200  | 114 000                                                 | 2 280                                    | 2 240<br>11 100                         | 2 050<br>10 200                     |                       |                       |
|                       | LWHTG 45                | ○               |               |                 |                           | 14             |      |                             |                |                |                |                |                |                |                               |                |                |  |                |                |    |                |                             |                |    |   |                               |                |      |     |             |         |                                                         |                                          |                                         |                                     |                       |                       |
| MHTL 45               | —                       | ○               |               |                 |                           | 5.70           |      |                             |                |                |                |                |                |                |                               |                |                |  |                |                |    |                |                             |                |    |   |                               |                |      |     | 12          |         |                                                         |                                          |                                         |                                     | 238                   | 194.8                 |
| —                     | LWHT 55--B              | ○               | 5.30          | 15.5            | 70                        | 17             | 43.5 | 140                         | 116            | 12             | 183            | 95             | 132            | 194            | —                             | M14            | 17             |  | 14             | —              | 53 | 41             | 16                          | 23             | 20 | — | —                             | —              | 60   | 120 | M14×45      | 113 000 | 121 000                                                 | 2 870                                    | 2 210<br>11 600                         | 2 030<br>10 600                     |                       |                       |
| —                     | LWHTG 55                | ○               | 7.40          |                 |                           |                |      |                             |                |                | 235            |                | 183.6          | 246            |                               |                |                |  |                |                |    |                |                             |                |    |   |                               |                |      |     |             |         |                                                         |                                          |                                         |                                     |                       |                       |
| —                     | LWHT 65--B              | ○               | 12.3          | 22.2            | 90                        | 18             | 53.5 | 170                         | 142            | 14             | 229            | 110            | 164            | 239            | —                             | M16            | 23             |  | 20             | —              | 63 | 48             | 18                          | 26             | 22 | — | —                             | —              | 75   | 150 | M16×50      | 176 000 | 184 000                                                 | 5 180                                    | 4 130<br>22 000                         | 3 790<br>20 200                     |                       |                       |
| —                     | LWHTG 65                | ○               | 17.6          |                 |                           |                |      |                             |                |                | 303            |                | 238.8          | 313            |                               |                |                |  |                |                |    |                |                             |                |    |   |                               |                |      |     |             |         |                                                         |                                          |                                         |                                     |                       |                       |
| —                     | LWHTG 85 <sup>(6)</sup> | —               | 25.9          | 34.6            | 110                       | 16             | 65   | 215                         | 185            | 15             | 318            | 140            | 240            | —              | —                             | M20            | 35             |  | 22             | 15             | 85 | 58             | 26                          | 39             | 30 | — | —                             | —              | 90   | 180 | M24×60      | 374 000 | 384 000                                                 | 11 900                                   | 11 100<br>55 100                        | 11 100<br>55 300                    |                       |                       |

- Notes (1) Track rail lengths  $L$  are shown in Table 2.1 on page II-71 and Tables 2.3 and 2.4 on page II-73.  
(2) MHTL45 can also be mounted in upward direction.  
(3) Choose bolts whose dimension allow fixing thread depth into track rail to be less than  $h_1$ .  
(4) The appended track rail mounting bolts are hexagon socket head bolts equivalent to JIS B 1176.  
In an assembled set of MH series and LWHT...MU model, track rail mounting bolts are not appended.  
(5) Basic dynamic load rating ( $C$ ), Basic static load rating ( $C_0$ ), static moment rating ( $T_0$ ,  $T_x$ , and  $T_y$ ) are values for the direction indicated in the following figure.  
The upper values of  $T_x$  and  $T_y$  are for one slide unit and the lower values are for two slide units in close contact.  
(6) This unit is prepared based on respective usages.  
Remarks 1. The specifications of grease nipple are in Table 15 on page II-82.  
2. The identification numbers with \* are our semi-standard items.




Example of identification number of assembled set

| Model code |          | Dimensions | Part code |              | Model code | Dust protection code | Preload symbol       | Classification symbol | Interchangeable code | Special specification |
|------------|----------|------------|-----------|--------------|------------|----------------------|----------------------|-----------------------|----------------------|-----------------------|
| <u>MHT</u> | <u>G</u> | <u>45</u>  | <u>C2</u> | <u>R1260</u> | <u> </u>   | <u> </u>             | <u>T<sub>1</sub></u> | <u>P</u>              | <u>S1</u>            | <u>N</u>              |
| 1          | 2        | 3          | 4         | 5            | 1          | 6                    | 7                    | 8                     | 9                    | 10                    |



|                                                                        |                                                                                                                                                              |                                                                                                     |                                                                                                                |
|------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|
| ① Model<br>MHT<br>LWHT (...B)<br>Flange type mounting from top         | ⑤ Length of track rail (1,260 mm)                                                                                                                            | ⑦ Preload amount<br>No symbol Standard<br>T1 Light preload<br>T2 Medium preload<br>T3 Heavy preload | ⑨ Interchangeable<br>S1 S1 specification<br>S2 S2 specification<br>No symbol Non-interchangeable specification |
| ② Length of slide unit<br>No symbol Standard<br>G Long<br>L Extra long | ⑥ Dust protection code<br>No symbol Standard specification<br>M Ultra seal specification<br>MU Ultra seal specification with track rail mounting from bottom | ⑧ Accuracy class<br>H High<br>P Precision<br>SP Super precision                                     | ⑩ Special specification<br>A, BS, D, E, F, I, J, L, LF, MA<br>MN, N, PS, Q, RE, T, V, W, Y, Z                  |
| ③ Size<br>45, 55, 65, 85                                               |                                                                                                                                                              |                                                                                                     |                                                                                                                |
| ④ Number of slide unit (2)                                             |                                                                                                                                                              |                                                                                                     |                                                                                                                |

### Block type mounting from top

MHD • LWHD



|      |    |    |    |    |    |
|------|----|----|----|----|----|
| Size | 8  | 10 | 12 | 15 | 25 |
|      | 30 | 35 | 45 | 55 | 65 |

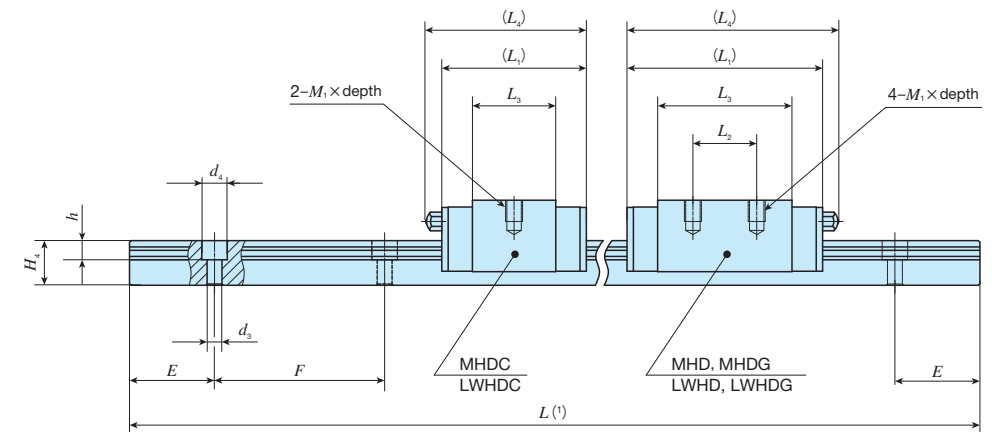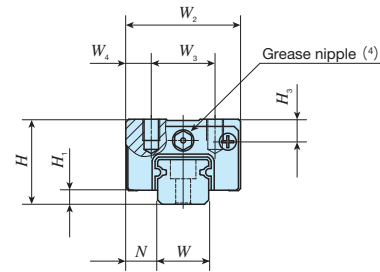

| Identification number |                           | Interchangeable | Mass (Ref.)      |                    | Dimensions of assembly<br>mm |                |     | Dimensions of slide unit<br>mm |                |                |                |                |                |                |                       |       |                | Dimensions of track rail<br>mm |                |                |                |       |      |                                |                                 | Appended mounting<br>bolt for track rail <sup>(2)</sup><br>mm | Basic<br>dynamic load<br>rating <sup>(3)</sup> | Basic<br>static load<br>rating <sup>(3)</sup> | Static moment rating <sup>(3)</sup> |                                |     |     |     |      |       |       |       |       |       |                                 |                                 |    |      |     |      |     |    |     |       |       |       |      |                                |                                |      |     |    |      |     |    |       |       |       |      |                                |                                |   |     |    |    |       |       |       |                                |                                 |                                |                                 |                                 |      |                                |                                 |     |   |     |    |    |       |       |
|-----------------------|---------------------------|-----------------|------------------|--------------------|------------------------------|----------------|-----|--------------------------------|----------------|----------------|----------------|----------------|----------------|----------------|-----------------------|-------|----------------|--------------------------------|----------------|----------------|----------------|-------|------|--------------------------------|---------------------------------|---------------------------------------------------------------|------------------------------------------------|-----------------------------------------------|-------------------------------------|--------------------------------|-----|-----|-----|------|-------|-------|-------|-------|-------|---------------------------------|---------------------------------|----|------|-----|------|-----|----|-----|-------|-------|-------|------|--------------------------------|--------------------------------|------|-----|----|------|-----|----|-------|-------|-------|------|--------------------------------|--------------------------------|---|-----|----|----|-------|-------|-------|--------------------------------|---------------------------------|--------------------------------|---------------------------------|---------------------------------|------|--------------------------------|---------------------------------|-----|---|-----|----|----|-------|-------|
| MH series             | LWH series<br>(No C-Lube) |                 | Slide unit<br>kg | Track rail<br>kg/m | H                            | H <sub>1</sub> | N   | W <sub>2</sub>                 | W <sub>3</sub> | W <sub>4</sub> | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | L <sub>4</sub> | M <sub>1</sub> ×depth |       | H <sub>3</sub> | W                              | H <sub>4</sub> | d <sub>3</sub> | d <sub>4</sub> | h     | E    | F                              | Bolt size×ℓ                     | C<br>N                                                        | C <sub>0</sub><br>N                            | T <sub>0</sub><br>N·m                         | T <sub>x</sub><br>N·m               | T <sub>y</sub><br>N·m          |     |     |     |      |       |       |       |       |       |                                 |                                 |    |      |     |      |     |    |     |       |       |       |      |                                |                                |      |     |    |      |     |    |       |       |       |      |                                |                                |   |     |    |    |       |       |       |                                |                                 |                                |                                 |                                 |      |                                |                                 |     |   |     |    |    |       |       |
| MHDC 8…SL             | LWHDC 8…SL                | ○               | 0.008            | 0.32               | 11                           | 2.1            | 4   | 16                             | 10             | 3              | 18             | —              | 9.0            | —              | M2 ×2.5               |       | 3              | 8                              | 6              | 2.4            | 4.2            | 2.3   | 10   | 20                             | M2× 8                           | 1 050                                                         | 1 270                                          | 5.3                                           | <sup>2.2</sup> <sub>15.5</sub>      | <sup>1.8</sup> <sub>13.0</sub> |     |     |     |      |       |       |       |       |       |                                 |                                 |    |      |     |      |     |    |     |       |       |       |      |                                |                                |      |     |    |      |     |    |       |       |       |      |                                |                                |   |     |    |    |       |       |       |                                |                                 |                                |                                 |                                 |      |                                |                                 |     |   |     |    |    |       |       |
| MHD 8…SL              | LWHD 8…SL                 | ○               | 0.013            |                    |                              |                |     |                                |                |                | 24             | 10             | 15.3           |                |                       |       |                |                                |                |                |                |       |      |                                |                                 | M2.6×3                                                        |                                                | 3.5                                           | 10                                  | 7                              | 3.5 | 6   | 3.5 | 12.5 | 25    | M3× 8 | 1 510 | 2 120 | 8.8   | <sup>5.5</sup> <sub>32.0</sub>  | <sup>4.7</sup> <sub>26.9</sub>  |    |      |     |      |     |    |     |       |       |       |      |                                |                                |      |     |    |      |     |    |       |       |       |      |                                |                                |   |     |    |    |       |       |       |                                |                                 |                                |                                 |                                 |      |                                |                                 |     |   |     |    |    |       |       |
| MHDG 8…SL             | LWHDG 8…SL                | ○               | 0.018            |                    |                              |                |     |                                |                |                | 30.5           |                | 21.7           |                |                       |       |                |                                |                |                |                |       |      |                                |                                 |                                                               |                                                |                                               |                                     |                                |     |     |     |      |       |       | 1 910 | 2 970 | 12.3  | <sup>8.8</sup> <sub>55.4</sub>  | <sup>8.8</sup> <sub>46.4</sub>  |    |      |     |      |     |    |     |       |       |       |      |                                |                                |      |     |    |      |     |    |       |       |       |      |                                |                                |   |     |    |    |       |       |       |                                |                                 |                                |                                 |                                 |      |                                |                                 |     |   |     |    |    |       |       |
| MHDC 10…SL            | LWHDC 10…SL               | ○               | 0.018            | 0.47               | 13                           | 2.4            | 5   | 20                             | 13             | 3.5            | 24             | —              | 13.4           | —              | M2.6×3                |       | 3.5            | 10                             | 7              | 3.5            | 6              | 3.5   | 12.5 | 25                             | M3× 8                           |                                                               |                                                |                                               |                                     |                                |     |     |     |      |       |       | 1 920 | 2 350 | 12.2  | <sup>5.8</sup> <sub>37.1</sub>  | <sup>4.8</sup> <sub>31.2</sub>  |    |      |     |      |     |    |     |       |       |       |      |                                |                                |      |     |    |      |     |    |       |       |       |      |                                |                                |   |     |    |    |       |       |       |                                |                                 |                                |                                 |                                 |      |                                |                                 |     |   |     |    |    |       |       |
| MHD 10…SL             |                           | ○               | 0.026            |                    |                              |                |     |                                |                |                | 32             | 12             | 21.4           |                |                       |       |                |                                |                |                |                |       |      |                                |                                 | M3×12                                                         |                                                | 5                                             | 12                                  | 10.5                           | 3.5 | 6   | 4.5 | 20   | 40    | M3×12 | 2 640 | 3 700 | 19.2  | <sup>13.3</sup> <sub>73.8</sub> | <sup>11.1</sup> <sub>61.9</sub> |    |      |     |      |     |    |     |       |       |       |      |                                |                                |      |     |    |      |     |    |       |       |       |      |                                |                                |   |     |    |    |       |       |       |                                |                                 |                                |                                 |                                 |      |                                |                                 |     |   |     |    |    |       |       |
|                       | LWHD 10…SL                | ○               | 0.027            |                    |                              |                |     |                                |                |                |                |                |                |                |                       |       |                |                                |                |                |                |       |      |                                |                                 |                                                               |                                                |                                               |                                     |                                |     |     |     |      |       |       | 40    | 29.4  | M4 ×5 |                                 | 5                               | 12 | 10.5 | 3.5 | 6    | 4.5 | 20 | 40  | M3×12 | 3 280 | 5 050 | 26.2 | <sup>23.8</sup> <sub>123</sub> | <sup>20.0</sup> <sub>103</sub> |      |     |    |      |     |    |       |       |       |      |                                |                                |   |     |    |    |       |       |       |                                |                                 |                                |                                 |                                 |      |                                |                                 |     |   |     |    |    |       |       |
| MHDG 10…SL            |                           | ○               | 0.035            |                    |                              |                |     |                                |                |                | 40             |                |                |                |                       |       |                |                                |                |                |                |       |      |                                |                                 |                                                               |                                                |                                               |                                     |                                |     |     |     |      |       |       |       |       |       |                                 |                                 |    |      |     |      |     |    |     |       | 29.4  | M4 ×5 |      | 5                              | 12                             | 10.5 | 3.5 | 6  | 4.5  | 20  | 40 | M3×12 | 3 280 | 5 050 | 26.2 | <sup>23.8</sup> <sub>123</sub> | <sup>20.0</sup> <sub>103</sub> |   |     |    |    |       |       |       |                                |                                 |                                |                                 |                                 |      |                                |                                 |     |   |     |    |    |       |       |
|                       | LWHDG 10…SL               | ○               | 0.036            |                    |                              |                |     |                                |                |                |                | 40             | 29.4           |                |                       |       |                |                                |                |                |                |       |      |                                |                                 |                                                               |                                                |                                               |                                     |                                |     |     |     |      |       |       | M4 ×5 |       |       |                                 |                                 |    |      |     |      |     |    |     |       |       |       |      |                                |                                |      |     |    |      |     |    |       |       | 5     | 12   | 10.5                           | 3.5                            | 6 | 4.5 | 20 | 40 | M3×12 | 3 280 | 5 050 | 26.2                           | <sup>23.8</sup> <sub>123</sub>  | <sup>20.0</sup> <sub>103</sub> |                                 |                                 |      |                                |                                 |     |   |     |    |    |       |       |
| MHDC 12…SL            |                           | ○               | 0.057            | 0.86               | 20                           | 3.2            | 7.5 | 27                             | 15             | 6              | 34             |                |                | —              | 19.6                  | 38    | M4 ×5          |                                | 5              | 12             | 10.5           | 3.5   | 6    | 4.5                            | 20                              |                                                               |                                                |                                               |                                     |                                |     |     |     |      |       |       |       | 40    |       |                                 |                                 |    |      |     |      |     |    |     |       |       |       |      |                                |                                |      |     |    |      |     |    |       |       |       |      |                                |                                |   |     |    |    |       | M3×12 | 4 560 | 5 300                          | 32.8                            | <sup>19.4</sup> <sub>117</sub> | <sup>16.3</sup> <sub>98.5</sub> |                                 |      |                                |                                 |     |   |     |    |    |       |       |
|                       | LWHDC 12…SL               | ○               | 0.058            |                    |                              |                |     |                                |                |                | 34             | 15             |                | 31.6           | 50                    | M4 ×5 |                |                                |                |                |                |       |      |                                |                                 |                                                               | 5                                              | 12                                            | 10.5                                | 3.5                            | 6   | 4.5 | 20  | 40   | M3×12 | 4 560 |       |       |       |                                 |                                 |    |      |     |      |     |    |     |       | 5 300 |       |      |                                |                                |      |     |    |      |     |    |       |       |       |      |                                |                                |   |     |    |    |       |       | 32.8  | <sup>19.4</sup> <sub>117</sub> | <sup>16.3</sup> <sub>98.5</sub> |                                |                                 |                                 |      |                                |                                 |     |   |     |    |    |       |       |
| MHD 12                |                           | ○               | 0.089            |                    |                              |                |     |                                |                |                |                |                | 34             |                |                       |       |                |                                |                |                |                |       |      |                                |                                 |                                                               |                                                |                                               |                                     |                                |     |     |     |      |       | 15    |       |       | 31.6  | 50                              | M4 ×5                           |    | 5    | 12  | 10.5 | 3.5 | 6  | 4.5 | 20    | 40    |       |      |                                |                                |      |     |    |      |     |    |       |       |       |      |                                |                                |   |     |    |    |       |       | M3×12 | 4 560                          | 5 300                           | 32.8                           | <sup>19.4</sup> <sub>117</sub>  | <sup>16.3</sup> <sub>98.5</sub> |      |                                |                                 |     |   |     |    |    |       |       |
|                       | LWHD 12                   | ○               | 0.091            |                    |                              |                |     |                                |                |                | 34             |                |                |                |                       |       |                |                                |                |                |                |       |      |                                |                                 |                                                               |                                                |                                               |                                     |                                |     |     |     |      |       |       |       |       |       |                                 |                                 |    |      |     |      |     |    |     |       |       | 15    | 31.6 | 50                             | M4 ×5                          |      | 5   | 12 | 10.5 | 3.5 | 6  | 4.5   |       |       |      |                                |                                |   |     |    |    |       |       |       | 20                             | 40                              | M3×12                          | 4 560                           | 5 300                           | 32.8 | <sup>19.4</sup> <sub>117</sub> | <sup>16.3</sup> <sub>98.5</sub> |     |   |     |    |    |       |       |
| MHD 12…SL             |                           | ○               | 0.089            |                    |                              |                |     |                                |                |                |                | 34             | 15             | 31.6           | 50                    |       |                |                                |                |                |                |       |      |                                |                                 |                                                               |                                                |                                               |                                     |                                |     |     |     |      |       |       | M4 ×5 |       |       |                                 |                                 |    |      |     |      |     |    |     |       |       |       |      |                                |                                |      |     |    |      |     |    |       |       | 5     | 12   | 10.5                           | 3.5                            | 6 | 4.5 | 20 | 40 | M3×12 |       |       |                                |                                 |                                | 4 560                           | 5 300                           | 32.8 | <sup>19.4</sup> <sub>117</sub> | <sup>16.3</sup> <sub>98.5</sub> |     |   |     |    |    |       |       |
|                       | LWHD 12…SL                | ○               | 0.091            |                    |                              |                |     |                                |                |                | 34             |                |                |                |                       |       |                |                                |                |                |                |       |      |                                |                                 |                                                               |                                                |                                               |                                     |                                |     |     |     |      |       | 15    |       |       | 31.6  | 50                              |                                 |    |      |     |      |     |    |     |       |       |       |      |                                |                                |      |     |    |      |     |    |       |       |       |      |                                |                                |   |     |    |    |       |       |       |                                |                                 |                                | M4 ×5                           |                                 | 5    | 12                             | 10.5                            | 3.5 | 6 | 4.5 | 20 | 40 | M3×12 | 4 560 |
| MHDG 12…SL            |                           | ○               | 0.115            |                    |                              |                |     |                                |                |                |                | 34             |                |                |                       |       |                |                                |                |                |                |       |      |                                |                                 |                                                               |                                                |                                               |                                     |                                |     |     |     |      |       |       |       |       |       |                                 |                                 |    |      |     |      |     |    |     |       |       | 15    | 31.6 | 50                             |                                |      |     |    |      |     |    |       |       |       |      |                                |                                |   |     |    |    |       |       |       |                                |                                 |                                |                                 |                                 |      |                                |                                 |     |   |     |    |    |       | M4 ×5 |
|                       | LWHDG 12…SL               | ○               | 0.118            | 34                 | 15                           | 31.6           | 50  | M4 ×5                          |                | 5              | 12             |                | 10.5           | 3.5            | 6                     |       | 4.5            | 20                             | 40             | M3×12          | 4 560          | 5 300 | 32.8 | <sup>19.4</sup> <sub>117</sub> | <sup>16.3</sup> <sub>98.5</sub> |                                                               |                                                |                                               |                                     |                                |     |     |     |      |       |       |       |       |       |                                 |                                 |    |      |     |      |     |    |     |       |       |       |      |                                |                                |      |     |    |      |     |    |       |       |       |      |                                |                                |   |     |    |    |       |       |       |                                |                                 |                                |                                 |                                 |      |                                |                                 |     |   |     |    |    |       |       |

Notes (1) Track rail lengths  $L$  are shown in Table 2.1 on page II -71 and Table 2.2 on page II -72.

(2) The appended track rail mounting bolts are hexagon socket head bolts equivalent to JIS B 1176. For stainless steel model, stainless steel bolts are appended.


In an assembled set of MH series, track rail mounting bolts are not appended.

(3) Basic dynamic load rating ( $C$ ), Basic static load rating ( $C_0$ ), static moment rating ( $T_0$ ,  $T_x$ , and  $T_y$ ) are values for the direction indicated in the following figure.

The upper values of  $T_x$  and  $T_y$  are for one slide unit and the lower values are for two slide units in close contact.

(4) Series of size 8 and 10 are provided with an oil hole. The specifications of oil holes are shown in Table 14 on page II-82.

The specification of grease nipple for size 12 is shown in Table 15 on page II-82.



### Example of identification number of assembled set

| Model code |          | Dimensions | Part code |             | Material code | Preload symbol       | Classification symbol | Interchangeable code | Special specification |
|------------|----------|------------|-----------|-------------|---------------|----------------------|-----------------------|----------------------|-----------------------|
| <b>MHD</b> | <b>G</b> | <b>12</b>  | <b>C2</b> | <b>R320</b> |               | <b>T<sub>1</sub></b> | <b>P</b>              | <b>S1</b>            | <b>N</b>              |
| 1          | 2        | 3          | 4         | 5           | 6             | 7                    | 8                     | 9                    | 10                    |

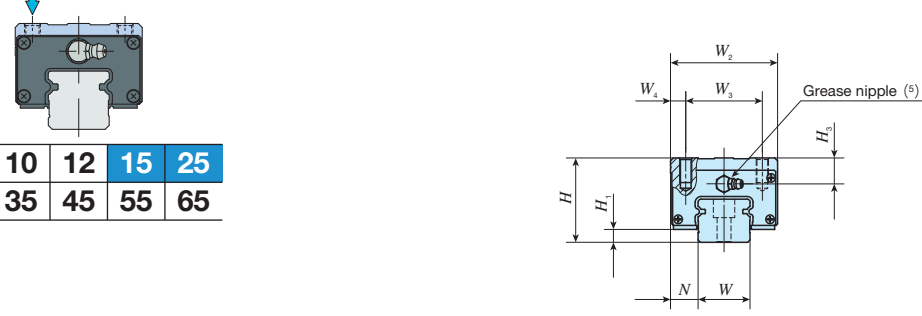
|                        |                              |
|------------------------|------------------------------|
| ① Model                |                              |
| MHD                    | Block type mounting from top |
| LWHD                   |                              |
| ② Length of slide unit |                              |
| C                      | Short                        |
| No symbol              | Standard                     |
| G                      | Long                         |
| ③ Size                 |                              |
|                        | 8 10 12                      |


|           |                               |
|-----------|-------------------------------|
| ④         | Number of slide unit (2)      |
| ⑤         | Length of track rail (320 mm) |
| ⑥         | Material type                 |
| No symbol | High carbon steel made        |
| Sl        | Stainless steel made          |

|                                                                                                                                                                                                                |                                   |           |           |           |                                                                              |               |                                                                                                                                                                                                                              |    |                  |    |                  |           |                                   |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|-----------|-----------|-----------|------------------------------------------------------------------------------|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|------------------|----|------------------|-----------|-----------------------------------|
| <b>⑦ Preload amount</b><br><table border="1"> <tr> <td>T<sub>0</sub></td><td>Clearance</td></tr> <tr> <td>No symbol</td><td>Standard</td></tr> <tr> <td>T<sub>1</sub></td><td>Light preload</td></tr> </table> | T <sub>0</sub>                    | Clearance | No symbol | Standard  | T <sub>1</sub>                                                               | Light preload | <b>⑨ Interchangeable</b><br><table border="1"> <tr> <td>S1</td><td>S1 specification</td></tr> <tr> <td>S2</td><td>S2 specification</td></tr> <tr> <td>No symbol</td><td>Non-interchangeable specification</td></tr> </table> | S1 | S1 specification | S2 | S2 specification | No symbol | Non-interchangeable specification |
| T <sub>0</sub>                                                                                                                                                                                                 | Clearance                         |           |           |           |                                                                              |               |                                                                                                                                                                                                                              |    |                  |    |                  |           |                                   |
| No symbol                                                                                                                                                                                                      | Standard                          |           |           |           |                                                                              |               |                                                                                                                                                                                                                              |    |                  |    |                  |           |                                   |
| T <sub>1</sub>                                                                                                                                                                                                 | Light preload                     |           |           |           |                                                                              |               |                                                                                                                                                                                                                              |    |                  |    |                  |           |                                   |
| S1                                                                                                                                                                                                             | S1 specification                  |           |           |           |                                                                              |               |                                                                                                                                                                                                                              |    |                  |    |                  |           |                                   |
| S2                                                                                                                                                                                                             | S2 specification                  |           |           |           |                                                                              |               |                                                                                                                                                                                                                              |    |                  |    |                  |           |                                   |
| No symbol                                                                                                                                                                                                      | Non-interchangeable specification |           |           |           |                                                                              |               |                                                                                                                                                                                                                              |    |                  |    |                  |           |                                   |
| <b>⑧ Accuracy class</b><br><table border="1"> <tr> <td>H</td><td>High</td></tr> <tr> <td>P</td><td>Precision</td></tr> </table>                                                                                | H                                 | High      | P         | Precision | <b>⑩ Special specification</b><br>A, D, E, F, I, LR, MA<br>MN, N, Q, U, W, Y |               |                                                                                                                                                                                                                              |    |                  |    |                  |           |                                   |
| H                                                                                                                                                                                                              | High                              |           |           |           |                                                                              |               |                                                                                                                                                                                                                              |    |                  |    |                  |           |                                   |
| P                                                                                                                                                                                                              | Precision                         |           |           |           |                                                                              |               |                                                                                                                                                                                                                              |    |                  |    |                  |           |                                   |

IKO C-Lube Linear Way MH

Block type mounting from top


|       |                                                                                    |    |    |    |    |
|-------|------------------------------------------------------------------------------------|----|----|----|----|
| Shape | MHD · LWHD                                                                         |    |    |    |    |
|       |  |    |    |    |    |
| Size  | 8                                                                                  | 10 | 12 | 15 | 25 |
|       | 30                                                                                 | 35 | 45 | 55 | 65 |

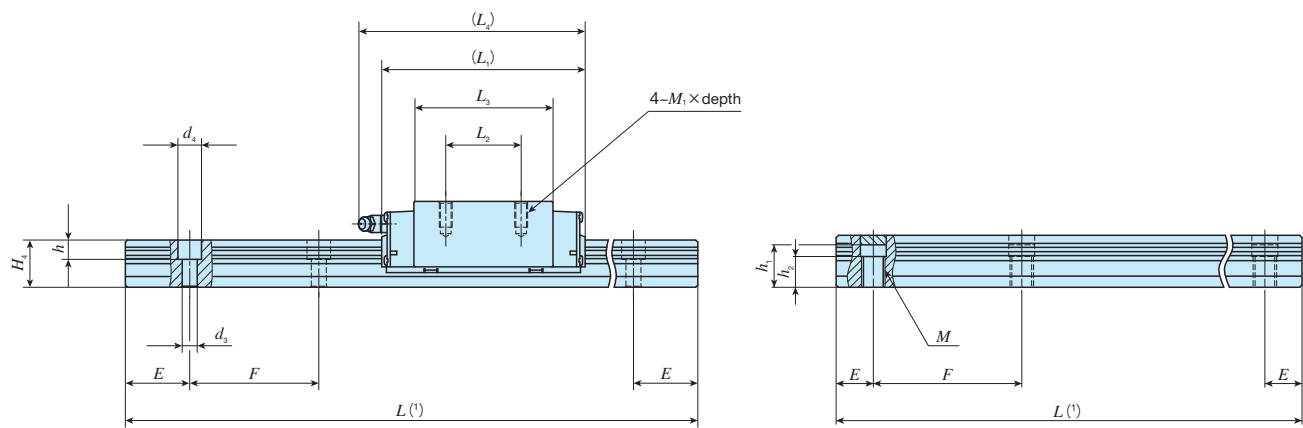

Ultra seal specification with track rail mounting from bottom

| Identification number |                        | Interchangeable | Mass (Ref.)   |                 | Dimensions of assembly mm |                |       | Dimensions of slide unit mm |                |                |                |                |                |                |                       |  |                | Dimensions of track rail mm |                |                |                |     |    |                               |                |    |       | Appended mounting bolt for track rail <sup>(3)</sup> mm | Basic dynamic load rating <sup>(4)</sup> | Basic static load rating <sup>(4)</sup> | Static moment rating <sup>(4)</sup> |                |                     |
|-----------------------|------------------------|-----------------|---------------|-----------------|---------------------------|----------------|-------|-----------------------------|----------------|----------------|----------------|----------------|----------------|----------------|-----------------------|--|----------------|-----------------------------|----------------|----------------|----------------|-----|----|-------------------------------|----------------|----|-------|---------------------------------------------------------|------------------------------------------|-----------------------------------------|-------------------------------------|----------------|---------------------|
| MH series             | LWH series (No C-Lube) |                 | Slide unit kg | Track rail kg/m | H                         | H <sub>1</sub> | N     | W <sub>2</sub>              | W <sub>3</sub> | W <sub>4</sub> | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | L <sub>4</sub> | M <sub>1</sub> ×depth |  | H <sub>3</sub> | W                           | H <sub>4</sub> | d <sub>3</sub> | d <sub>4</sub> | h   | M  | h <sub>1</sub> <sup>(2)</sup> | h <sub>2</sub> | E  | F     |                                                         |                                          |                                         | Bolt size×ℓ                         | C<br>N         | C <sub>0</sub><br>N |
| MHD 15                |                        | ○               | 0.23          | 1.47            | 28                        | 4.5            | 9.5   | 34                          | 26             | 4              | 66             | 26             | 44.2           | 69             | M4×10                 |  | 8.5            | 15                          | 15             | 4.5            | 8              | 6   | —  | —                             | —              | 30 | 60    | M4×16                                                   | 11 600                                   | 13 400                                  | 112                                 | 95.6<br>556    | 95.6<br>556         |
| —                     | LWHD 15…B              | ○               |               |                 |                           |                |       |                             |                |                |                |                | 44.6           |                |                       |  |                |                             |                |                |                |     |    |                               |                |    |       |                                                         |                                          |                                         |                                     |                |                     |
| —                     | LWHD 15…M*             | —               |               |                 |                           |                |       |                             |                |                |                |                | 44.6           |                |                       |  |                |                             |                |                |                |     |    |                               |                |    |       |                                                         |                                          |                                         |                                     |                |                     |
|                       | LWHD 15…MU*            | —               |               |                 |                           |                |       |                             |                |                |                |                |                |                |                       |  |                |                             | —              | —              | —              | M 6 | 12 | 9                             |                |    | —     |                                                         |                                          |                                         |                                     |                |                     |
| MHD 25                |                        | ○               | 0.65          | 3.50            | 40                        | 6.5            | 12.5  | 48                          | 35             | 6.5            | 95             | 35             | 63.9           | 105            | M6×12                 |  | 10.5           | 23                          | 22             | 7              | 11             | 9   | —  | —                             | —              | 30 | 60    | M6×22                                                   | 25 200                                   | 28 800                                  | 362                                 | 309<br>1 690   | 309<br>1 690        |
|                       | LWHD 25…B              | ○               |               |                 |                           |                |       |                             |                |                |                |                | 64.7           |                |                       |  |                |                             |                |                |                |     |    |                               |                |    |       |                                                         |                                          |                                         |                                     |                |                     |
| MHD 25…M*             |                        | —               |               |                 |                           |                |       |                             |                |                |                |                | 63.9           |                |                       |  |                |                             |                |                |                |     |    |                               |                |    |       |                                                         |                                          |                                         |                                     |                |                     |
|                       | LWHD 25…M*             | —               |               |                 |                           |                |       |                             |                |                |                |                | 64.7           |                |                       |  |                |                             |                |                |                |     |    |                               |                |    |       |                                                         |                                          |                                         |                                     |                |                     |
| MHD 25…MU*            |                        | —               |               |                 |                           |                |       |                             |                |                |                |                | 63.9           |                |                       |  |                |                             |                |                |                |     |    |                               |                |    |       |                                                         |                                          |                                         |                                     |                |                     |
|                       | LWHD 25…MU*            | —               |               |                 |                           |                |       |                             |                |                |                |                | 64.7           |                |                       |  |                |                             |                |                |                |     |    |                               |                |    |       |                                                         |                                          |                                         |                                     |                |                     |
| MHDG 25               |                        | ○               | 0.80          |                 |                           |                |       |                             |                |                | 118            | 50             | 86.6           | 128            |                       |  |                |                             | 7              | 11             | 9              | —   | —  | —                             |                |    | M6×22 | 30 800                                                  | 38 300                                   | 483                                     | 533<br>2 740                        | 533<br>2 740   |                     |
|                       | LWHDG 25               | ○               |               | 87.4            |                           |                |       |                             |                |                |                |                |                |                |                       |  |                |                             |                |                |                |     |    |                               |                |    |       |                                                         |                                          |                                         |                                     |                |                     |
| MHD 30                |                        | ○               | 1.12          | 4.82            | 45                        | 9              | 16    | 60                          | 40             | 10             | 113            | 40             | 80.6           | 123            | M8×16                 |  | 11             | 28                          | 25             | 9              | 14             | 12  | —  | —                             | —              | 40 | 80    | M8×28                                                   | 35 400                                   | 40 700                                  | 623                                 | 536<br>2 820   | 536<br>2 820        |
|                       | LWHD 30…B              | ○               |               |                 |                           | 7              |       |                             |                |                |                |                |                |                |                       |  |                |                             |                |                |                |     |    |                               |                |    |       |                                                         |                                          |                                         |                                     |                |                     |
| MHD 30…M*             |                        | —               |               |                 |                           |                |       |                             |                |                |                |                |                |                |                       |  |                |                             |                |                |                |     |    |                               |                |    |       |                                                         |                                          |                                         |                                     |                |                     |
|                       | LWHD 30…M*             | —               |               |                 |                           |                |       |                             |                |                |                |                |                |                |                       |  |                |                             |                |                |                |     |    |                               |                |    |       |                                                         |                                          |                                         |                                     |                |                     |
| MHD 30…MU*            |                        | —               |               |                 |                           |                |       |                             |                |                |                |                |                |                |                       |  |                |                             |                |                |                |     |    |                               |                |    |       |                                                         |                                          |                                         |                                     |                |                     |
|                       | LWHD 30…MU*            | —               |               |                 |                           |                |       |                             |                |                |                |                |                |                |                       |  |                |                             |                |                |                |     |    |                               |                |    |       |                                                         |                                          |                                         |                                     |                |                     |
| MHDG 30               |                        | ○               | 1.44          |                 |                           | 9              |       |                             |                |                | 139            | 60             | 106.6          | 149            |                       |  |                |                             | 9              | 14             | 12             | —   | —  | —                             |                |    | M8×28 | 42 700                                                  | 53 200                                   | 814                                     | 894<br>4 460                        | 894<br>4 460   |                     |
|                       | LWHDG 30               | ○               |               | 7               |                           |                | 152.2 | 194                         |                |                |                |                |                |                |                       |  |                |                             |                |                |                |     |    |                               |                |    |       |                                                         |                                          |                                         |                                     |                |                     |
| MHDL 30               | —                      | ○               | 1.92          |                 |                           |                |       |                             |                |                | 185            |                |                |                |                       |  |                |                             |                |                |                |     |    |                               |                |    |       |                                                         | 54 400                                   | 75 100                                  | 1 150                               | 1 740<br>8 240 | 1 740<br>8 240      |

Notes (1) Track rail lengths  $L$  are shown in Table 2.1 on page II-71 and Tables 2.3 and 2.4 on page II-73.  
(2) Choose bolts whose dimension allow fixing thread depth into track rail to be less than  $h_1$ .  
(3) The appended track rail mounting bolts are hexagon socket head bolts equivalent to JIS B 1176.  
In an assembled set of MH series and LWHD···MU model, track rail mounting bolts are not appended.  
(4) Basic dynamic load rating ( $C$ ), Basic static load rating ( $C_0$ ), static moment rating ( $T_0$ ,  $T_x$ , and  $T_y$ ) are values for the direction indicated in the following figure.  
The upper values of  $T_x$  and  $T_y$  are for one slide unit and the lower values are for two slide units in close contact.  
(5) The shapes of grease nipple vary by size. For details of special specifications, see page Table 15 on page II-82.  
Remark: The identification numbers with \* are our semi-standard items.



Example of identification number of assembled set


| Model code |          | Dimensions | Part code |             | Model code | Dust protection code | Preload symbol | Classification symbol | Interchangeable code | Special specification |
|------------|----------|------------|-----------|-------------|------------|----------------------|----------------|-----------------------|----------------------|-----------------------|
| <u>MHD</u> | <u>G</u> | <u>25</u>  | <u>C2</u> | <u>R840</u> | <u> </u>   | <u> </u>             | <u>T1</u>      | <u>P</u>              | <u>S1</u>            | <u>/N</u>             |
| 1          | 2        | 3          | 4         | 5           | 1          | 6                    | 7              | 8                     | 9                    | 10                    |

|                                                                        |                                                                                                                                                              |                                                                                                     |                                                                                                                |
|------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|
| ① Model<br>MHD<br>LWHD(···B)                                           | ④ Number of slide unit (2)                                                                                                                                   | ⑦ Preload amount<br>No symbol Standard<br>T1 Light preload<br>T2 Medium preload<br>T3 Heavy preload | ⑩ Interchangeable<br>S1 S1 specification<br>S2 S2 specification<br>No symbol Non-interchangeable specification |
| ② Length of slide unit<br>No symbol Standard<br>G Long<br>L Extra long | ⑤ Length of track rail (840 mm)                                                                                                                              | ⑧ Accuracy class<br>H High<br>P Precision<br>SP Super precision                                     |                                                                                                                |
| ③ Size<br>15, 25, 30                                                   | ⑥ Dust protection code<br>No symbol Standard specification<br>M Ultra seal specification<br>MU Ultra seal specification with track rail mounting from bottom |                                                                                                     |                                                                                                                |



### Block type mounting from top



MHD • LWHD



## Shape

Size
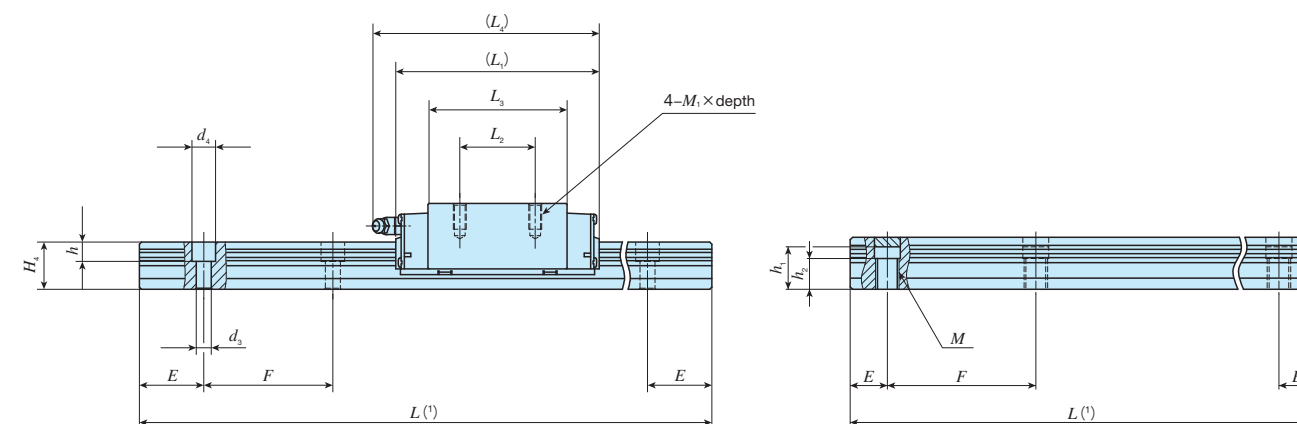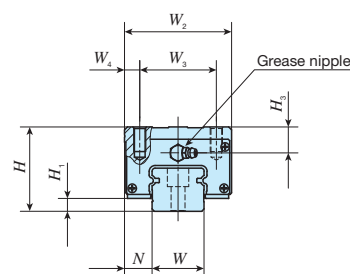
|    |    |    |    |    |
|----|----|----|----|----|
| 8  | 10 | 12 | 15 | 25 |
| 30 | 35 | 45 | 55 | 65 |



Ultra seal specification with track rail mounting from bottom

| Identification number |                           | Interchangeable | Mass (Ref.)         |                    | Dimensions of assembly<br>mm |                |      | Dimensions of slide unit<br>mm |                |                |                |                |                |                |                       |  |                | Dimensions of track rail<br>mm |                |                |                |    |   |                               |                |      |     | Appended<br>mounting bolt for<br>track rail <sup>(3)</sup><br>mm | Basic<br>dynamic load<br>rating <sup>(4)</sup><br><br>C<br>N | Basic<br>static load<br>rating <sup>(4)</sup><br><br>C <sub>0</sub><br>N | Static moment rating <sup>(4)</sup> |                       |                       |                       |    |     |     |     |     |        |        |         |       |                 |                 |    |    |    |   |   |   |    |     |        |         |         |       |                 |                 |
|-----------------------|---------------------------|-----------------|---------------------|--------------------|------------------------------|----------------|------|--------------------------------|----------------|----------------|----------------|----------------|----------------|----------------|-----------------------|--|----------------|--------------------------------|----------------|----------------|----------------|----|---|-------------------------------|----------------|------|-----|------------------------------------------------------------------|--------------------------------------------------------------|--------------------------------------------------------------------------|-------------------------------------|-----------------------|-----------------------|-----------------------|----|-----|-----|-----|-----|--------|--------|---------|-------|-----------------|-----------------|----|----|----|---|---|---|----|-----|--------|---------|---------|-------|-----------------|-----------------|
| MH series             | LWH series<br>(No C-Lube) |                 | Slide<br>unit<br>kg | Track rail<br>kg/m | H                            | H <sub>1</sub> | N    | W <sub>2</sub>                 | W <sub>3</sub> | W <sub>4</sub> | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | L <sub>4</sub> | M <sub>1</sub> ×depth |  | H <sub>3</sub> | W                              | H <sub>4</sub> | d <sub>3</sub> | d <sub>4</sub> | h  | M | h <sub>1</sub> <sup>(2)</sup> | h <sub>2</sub> | E    | F   |                                                                  |                                                              |                                                                          | Bolt size×ℓ                         | T <sub>0</sub><br>N·m | T <sub>x</sub><br>N·m | T <sub>y</sub><br>N·m |    |     |     |     |     |        |        |         |       |                 |                 |    |    |    |   |   |   |    |     |        |         |         |       |                 |                 |
| MHD 35                |                           | ○               | 1.74                | 6.85               | 55                           | 10             | 18   | 70                             | 50             | 10             | 123            | 50             | 86.2           | 135            | M 8×16                |  | 17             | 34                             | 28             | 9              | 14             | 12 | — | —                             | —              | 40   | 80  | M 8×28                                                           | 48 700                                                       | 53 700                                                                   | 823                                 | 631<br>3 480          | 579<br>3 190          |                       |    |     |     |     |     |        |        |         |       |                 |                 |    |    |    |   |   |   |    |     |        |         |         |       |                 |                 |
|                       | LWHD 35--B                | ○               |                     |                    |                              |                |      |                                |                |                |                |                |                |                |                       |  |                |                                |                |                |                |    |   |                               |                |      |     |                                                                  |                                                              |                                                                          |                                     |                       |                       |                       |    |     |     |     |     |        |        |         |       |                 |                 |    |    |    |   |   |   |    |     |        |         |         |       |                 |                 |
| —                     | LWHD 35--M*               | —               |                     |                    |                              |                |      |                                |                |                |                |                |                |                |                       |  |                |                                |                |                |                |    |   |                               |                |      |     |                                                                  |                                                              |                                                                          |                                     |                       |                       |                       |    |     |     |     |     |        |        |         |       |                 |                 |    |    |    |   |   |   |    |     |        |         |         |       |                 |                 |
| —                     | LWHD 35--MU*              | —               |                     |                    |                              |                |      |                                |                |                |                |                |                |                |                       |  |                |                                |                |                |                |    |   |                               |                |      |     | 2.26                                                             | 8                                                            | 151                                                                      | 72                                  | 114                   | 163                   | 9                     | 14 | 12  | —   | —   | —   | M 8×28 | 59 500 | 71 600  | 1 100 | 1 090<br>5 570  | 1 000<br>5 110  |    |    |    |   |   |   |    |     |        |         |         |       |                 |                 |
| MHDG 35               |                           | ○               |                     |                    |                              |                |      |                                |                |                |                |                |                |                |                       |  |                |                                |                |                |                |    |   |                               |                |      |     |                                                                  |                                                              |                                                                          |                                     |                       |                       |                       |    |     |     |     |     |        |        |         |       |                 |                 |    |    |    |   |   |   |    |     |        |         |         |       |                 |                 |
|                       | LWHDG35                   | ○               |                     |                    |                              |                |      |                                |                |                |                |                |                |                |                       |  |                |                                |                |                |                |    |   |                               |                |      |     |                                                                  |                                                              |                                                                          |                                     |                       |                       |                       |    |     |     |     |     |        |        |         |       |                 |                 |    |    |    |   |   |   |    |     |        |         |         |       |                 |                 |
| MHDL 35               | —                         | ○               | 3.08                |                    |                              | 9              |      |                                |                |                | 199            |                | 162.2          | 211            |                       |  |                |                                |                |                |                |    |   |                               |                |      |     |                                                                  |                                                              |                                                                          |                                     |                       |                       |                       |    |     |     |     |     |        |        |         |       |                 |                 |    |    |    |   |   |   |    |     |        |         |         |       |                 |                 |
| MHD 45                |                           | ○               | 3.30                | 10.7               | 70                           | 13             | 20.5 | 86                             | 60             | 13             | 147            | 60             | 103.4          | 158            | M10×20                |  | 23             | 45                             | 34             | 14             | 20             | 17 | — | —                             | —              | 52.5 | 105 | M12×35                                                           | 74 600                                                       | 80 200                                                                   | 1 610                               | 1 150<br>6 190        | 1 060<br>5 690        |                       |    |     |     |     |     |        |        |         |       |                 |                 |    |    |    |   |   |   |    |     |        |         |         |       |                 |                 |
|                       | LWHD 45--B                | ○               |                     |                    |                              |                |      |                                |                |                |                |                |                |                |                       |  |                |                                |                |                |                |    |   |                               |                |      |     |                                                                  |                                                              |                                                                          |                                     |                       |                       |                       |    |     |     |     |     |        |        |         |       |                 |                 |    |    |    |   |   |   |    |     |        |         |         |       |                 |                 |
| —                     | LWHD 45--M*               | —               |                     |                    |                              |                |      |                                |                |                |                |                |                |                |                       |  |                |                                |                |                |                |    |   |                               |                |      |     |                                                                  |                                                              |                                                                          |                                     |                       |                       |                       |    |     |     |     |     |        |        |         |       |                 |                 |    |    |    |   |   |   |    |     |        |         |         |       |                 |                 |
| —                     | LWHD 45--MU*              | —               |                     |                    |                              |                |      |                                |                |                |                |                |                |                |                       |  |                |                                |                |                |                |    |   |                               |                |      |     | 4.57                                                             | 10                                                           | 190                                                                      | 80                                  | 146.6                 | 201                   | 14                    | 20 | 17  | —   | —   | —   | M12×35 | 95 200 | 114 000 | 2 280 | 2 240<br>11 100 | 2 050<br>10 200 |    |    |    |   |   |   |    |     |        |         |         |       |                 |                 |
| MHDG 45               |                           | ○               |                     |                    |                              |                |      |                                |                |                |                |                |                |                |                       |  |                |                                |                |                |                |    |   |                               |                |      |     |                                                                  |                                                              |                                                                          |                                     |                       |                       |                       |    |     |     |     |     |        |        |         |       |                 |                 |    |    |    |   |   |   |    |     |        |         |         |       |                 |                 |
|                       | LWHDG45                   | ○               |                     |                    |                              |                |      |                                |                |                |                |                |                |                |                       |  |                |                                |                |                |                |    |   |                               |                |      |     |                                                                  |                                                              |                                                                          |                                     |                       |                       |                       |    |     |     |     |     |        |        |         |       |                 |                 |    |    |    |   |   |   |    |     |        |         |         |       |                 |                 |
| MHDL 45               | —                         | ○               | 5.85                |                    |                              | 12             |      |                                |                |                | 238            |                | 194.8          | 249            |                       |  |                |                                |                |                |                |    |   |                               |                |      |     |                                                                  |                                                              |                                                                          |                                     |                       |                       |                       |    |     |     |     |     |        |        |         |       |                 |                 |    |    |    |   |   |   |    |     |        |         |         |       |                 |                 |
| —                     | LWHD 55--B                | ○               | 5.36                | 15.5               | 80                           | 17             | 23.5 | 100                            | 75             | 12.5           | 183            | 75             | 132            | 194            | M12×25                |  | 24             | 53                             | 41             | 16             | 23             | 20 | — | —                             | —              | 60   | 120 | M14×45                                                           | 113 000                                                      | 121 000                                                                  | 2 870                               | 2 210<br>11 600       | 2 030<br>10 600       |                       |    |     |     |     |     |        |        |         |       |                 |                 |    |    |    |   |   |   |    |     |        |         |         |       |                 |                 |
| —                     | LWHDG55                   | ○               | 7.20                |                    |                              |                |      |                                |                |                |                |                |                |                |                       |  |                |                                |                |                |                |    |   |                               |                |      |     |                                                                  |                                                              |                                                                          |                                     |                       |                       | 229                   | 70 | 164 | 239 | 303 | 120 | 238.8  | 313    | M16×30  | 20    | 63              | 48              | 18 | 26 | 22 | — | — | — | 75 | 150 | M16×50 | 176 000 | 184 000 | 5 180 | 4 130<br>22 000 | 3 790<br>20 200 |
| —                     | LWHD 65--B                | ○               | 9.80                |                    |                              |                |      |                                |                |                |                |                |                |                |                       |  |                |                                |                |                |                |    |   |                               |                |      |     |                                                                  |                                                              |                                                                          |                                     |                       |                       |                       |    |     |     |     |     |        |        |         |       |                 |                 |    |    |    |   |   |   |    |     |        |         |         |       |                 |                 |
| —                     | LWHDG65                   | ○               | 14.3                |                    |                              |                |      |                                |                |                |                |                |                |                |                       |  |                |                                |                |                |                |    |   |                               |                |      |     |                                                                  |                                                              |                                                                          |                                     |                       |                       |                       |    |     |     |     |     |        |        |         |       |                 |                 |    |    |    |   |   |   |    |     |        |         |         |       |                 |                 |

Notes (1) Track rail lengths  $L$  are shown in Table 2.1 on page II-71 and Tables 2.3 and 2.4 on page II-73.

(2) Choose bolts whose dimension allow fixing thread depth into track rail to be less than  $h_{\text{min}}$ .

(3) The appended track rail mounting bolts are hexagon socket head bolts equivalent to JIS B 1176.


In an assembled set of MH series and LWHD::MU model, track rail mounting bolts are not appended.

(4) Basic dynamic load rating ( $C$ ), Basic static load rating ( $C_0$ ), static moment rating ( $T_r$ ,  $T_x$ , and  $T_y$ ) are values for the direction indicated in the following figure.

The upper values of  $T_v$  and  $T_v$  are for one slide unit and the lower values are for two slide units in close contact.

Remarks 1. The specifications of grease nipple are in Table 15 on page II -82.

1. The specifications of grease nipple are in table 15 on page 21
2. The identification numbers with \* are our semi-standard items.






### Example of identification number of assembled set

| Model code |          | Dimensions | Part code |              | Model code | Dust protection code | Preload symbol       | Classification symbol | Interchangeable code | Special specification |
|------------|----------|------------|-----------|--------------|------------|----------------------|----------------------|-----------------------|----------------------|-----------------------|
| <u>MHD</u> | <u>G</u> | <u>45</u>  | <u>C2</u> | <u>R1260</u> | <u> </u>   | <u> </u>             | <u>T<sub>1</sub></u> | <u>P</u>              | <u>S1</u>            | <u>N</u>              |
| 1          | 2        | 3          | 4         | 5            | 1          | 6                    | 7                    | 8                     | 9                    | 10                    |

|                               |                              |                                          |                                                               |                         |                                   |                                |                  |
|-------------------------------|------------------------------|------------------------------------------|---------------------------------------------------------------|-------------------------|-----------------------------------|--------------------------------|------------------|
| <b>① Model</b>                |                              | <b>④ Number of slide unit (2)</b>        |                                                               | <b>⑦ Preload amount</b> |                                   | <b>⑨ Interchangeable</b>       |                  |
| MHD                           | Block type mounting from top | <b>⑤ Length of track rail (1,260 mm)</b> |                                                               | No symbol               | Standard                          | S1                             | S1 specification |
| LWHD(...B)                    |                              |                                          |                                                               | T <sub>1</sub>          | Light preload                     | S2                             | S2 specification |
|                               |                              | T <sub>2</sub>                           | Medium preload                                                | No symbol               | Non-interchangeable specification |                                |                  |
|                               |                              | T <sub>3</sub>                           | Heavy preload                                                 |                         |                                   |                                |                  |
| <b>② Length of slide unit</b> |                              | <b>⑥ Dust protection code</b>            |                                                               | <b>⑧ Accuracy class</b> |                                   | <b>⑩ Special specification</b> |                  |
| No symbol                     | Standard                     | No symbol                                | Standard specification                                        | H                       | High                              | A, D, E, F, I, J, L, LF, MA    |                  |
| G                             | Long                         | M                                        | Ultra seal specification                                      | P                       | Precision                         | MN, N, PS, Q, T, V, W, Y, Z    |                  |
| L                             | Extra long                   | MU                                       | Ultra seal specification with track rail mounting from bottom | SP                      | Super precision                   |                                |                  |
| <b>③ Size</b>                 |                              |                                          |                                                               |                         |                                   |                                |                  |
|                               | 35 45 55 65                  |                                          |                                                               |                         |                                   |                                |                  |

### Compact block type mounting from top

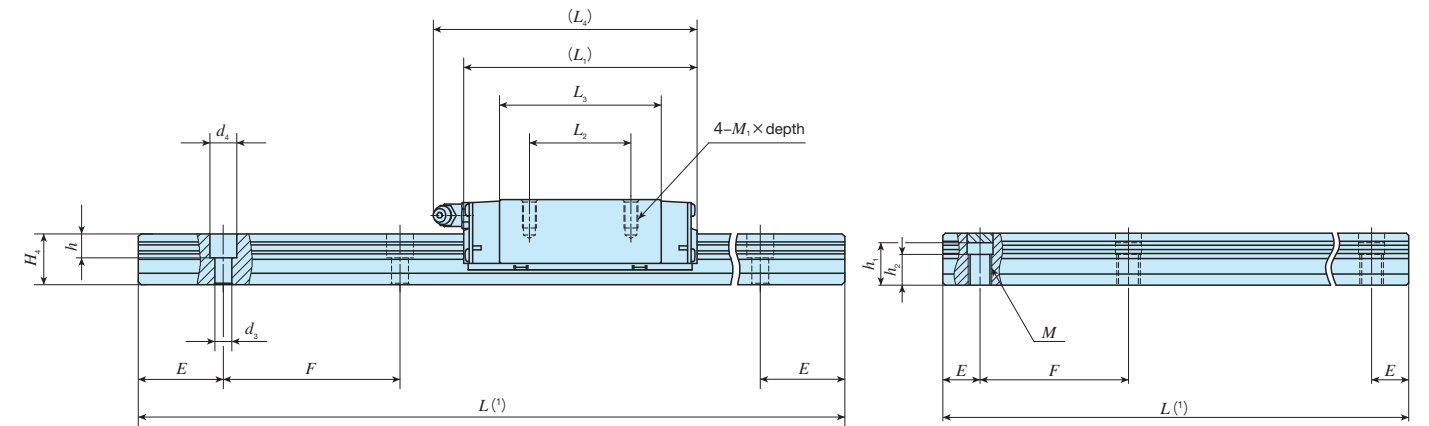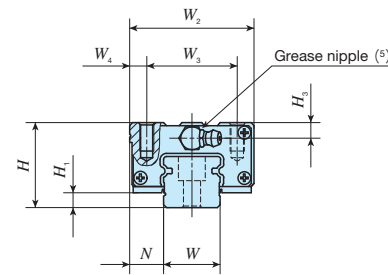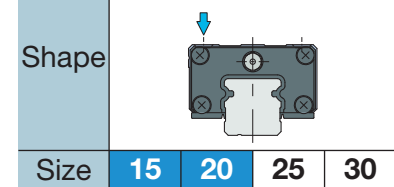MHS • LWHS



Ultra seal specification with track rail mounting from bottom

| Identification number |                           | Interchangeable | Mass (Ref.)         |                       | Dimensions of assembly<br>mm |                |     | Dimensions of slide unit<br>mm |                |                |                |                |                |                |                       |  |                | Dimensions of track rail<br>mm |                |                |                |     |   |                               |                |    |    | Appended<br>mounting bolt for<br>track rail <sup>(3)</sup><br>mm | Basic<br>dynamic load<br>rating <sup>(4)</sup> | Basic<br>static load<br>rating <sup>(4)</sup> | Static moment rating <sup>(4)</sup> |              |                     |
|-----------------------|---------------------------|-----------------|---------------------|-----------------------|------------------------------|----------------|-----|--------------------------------|----------------|----------------|----------------|----------------|----------------|----------------|-----------------------|--|----------------|--------------------------------|----------------|----------------|----------------|-----|---|-------------------------------|----------------|----|----|------------------------------------------------------------------|------------------------------------------------|-----------------------------------------------|-------------------------------------|--------------|---------------------|
| MH series             | LWH series<br>(No C-Lube) |                 | Slide<br>unit<br>kg | Track<br>rail<br>kg/m | H                            | H <sub>1</sub> | N   | W <sub>2</sub>                 | W <sub>3</sub> | W <sub>4</sub> | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | L <sub>4</sub> | M <sub>1</sub> ×depth |  | H <sub>3</sub> | W                              | H <sub>4</sub> | d <sub>3</sub> | d <sub>4</sub> | h   | M | h <sub>1</sub> <sup>(2)</sup> | h <sub>2</sub> | E  | F  |                                                                  |                                                |                                               | Bolt size×ℓ                         | C<br>N       | C <sub>0</sub><br>N |
| MHS 15                |                           | ○               | 0.18                | 1.47                  | 24                           | 4.5            | 9.5 | 34                             | 26             | 4              | 66             | 26             | 44.2           | 69             | M4× 8                 |  | 4.5            | 15                             | 15             | 4.5            | 8              | 6   | — | —                             | —              | 30 | 60 | M4×16                                                            | 11 600                                         | 13 400                                        | 112                                 | 95.6<br>556  | 95.6<br>556         |
|                       | LWHS 15…B                 | ○               |                     |                       |                              |                |     |                                |                |                |                |                | 44.6           |                |                       |  |                |                                |                |                |                |     |   |                               |                |    |    |                                                                  |                                                |                                               |                                     |              |                     |
| MHS 15…SL             |                           | ○               |                     |                       |                              |                |     |                                |                |                |                |                | 44.2           |                |                       |  |                |                                |                |                |                |     |   |                               |                |    |    |                                                                  |                                                |                                               |                                     |              |                     |
|                       | LWHS 15…SL                | ○               |                     |                       |                              |                |     |                                |                |                |                |                | 44.6           |                |                       |  |                |                                |                |                |                |     |   |                               |                |    |    | —                                                                |                                                |                                               |                                     |              |                     |
| —                     | LWHS 15…M*                | —               |                     |                       |                              |                |     |                                |                |                |                |                |                |                |                       |  |                |                                |                |                |                |     |   |                               |                |    |    |                                                                  |                                                |                                               |                                     |              |                     |
| —                     | LWHS 15…MU*               | —               |                     |                       |                              |                |     |                                |                |                |                |                |                |                |                       |  |                |                                |                |                |                |     |   |                               |                |    |    |                                                                  |                                                |                                               |                                     |              |                     |
| MHSG 15               | —                         | ○               | 0.25                |                       |                              |                |     |                                |                |                | 82             |                | 60.1           | 85             |                       |  |                |                                | 4.5            | 8              | 6              | —   | — | —                             |                |    |    |                                                                  |                                                |                                               |                                     |              |                     |
| MHS 20                |                           | ○               | 0.36                | 2.56                  | 30                           | 5              | 12  | 44                             | 32             | 6              | 83             | 36             | 56             | 94             | M5×10                 |  | 5.5            | 20                             | 18             | 6              | 9.5            | 8.5 | — | —                             | —              | 30 | 60 | M5×18                                                            | 18 100                                         | 21 100                                        | 232                                 | 195<br>1 090 | 195<br>1 090        |
|                       | LWHS 20…B                 | ○               |                     |                       |                              |                |     |                                |                |                |                |                | 57.2           |                |                       |  |                |                                |                |                |                |     |   |                               |                |    |    |                                                                  |                                                |                                               |                                     |              |                     |
| MHS 20…SL             |                           | ○               |                     |                       |                              |                |     |                                |                |                |                |                | 56             |                |                       |  |                |                                |                |                |                |     |   |                               |                |    |    |                                                                  |                                                |                                               |                                     |              |                     |
|                       | LWHS 20…SL                | ○               |                     |                       |                              |                |     |                                |                |                |                |                | 57.2           |                |                       |  |                |                                |                |                |                |     |   |                               |                |    |    | —                                                                |                                                |                                               |                                     |              |                     |
| —                     | LWHS 20…M*                | —               |                     |                       |                              |                |     |                                |                |                |                |                |                |                |                       |  |                |                                |                |                |                |     |   |                               |                |    |    |                                                                  |                                                |                                               |                                     |              |                     |
| —                     | LWHS 20…MU*               | —               |                     |                       |                              |                |     |                                |                |                |                |                |                |                |                       |  |                |                                |                |                |                |     |   |                               |                |    |    |                                                                  |                                                |                                               |                                     |              |                     |
| MHSG 20               |                           | ○               | 0.53                |                       |                              |                |     |                                |                |                | 112            | 50             | 84.8           | 122            |                       |  |                |                                |                | 6              | 9.5            | 8.5 | — | —                             | —              |    |    | M5×18                                                            | 24 100                                         | 31 700                                        | 349                                 | 421<br>2 140 | 421<br>2 140        |
|                       | LWHSG20                   | ○               |                     |                       |                              |                |     |                                |                |                |                |                | 86             |                |                       |  |                |                                |                |                |                |     |   |                               |                |    |    |                                                                  |                                                |                                               |                                     |              |                     |

Notes (1) Track rail lengths  $L$  are shown in Table 2.1 on page II-71, Table 2.2 on page II-72, and Tables 2.3 and 2.4 on page II-73.

(2) Choose bolts whose dimension allow fixing thread depth into track rail to be less than  $h_r$ .

<sup>(3)</sup> The appended track rail mounting bolts are hexagon socket head bolts equivalent to JIS B 1176. For stainless steel model, stainless steel bolts are appended.


In an assembled set of MH series and LWHS...MU model, track rail mounting bolts are not appended.

(4) Basic dynamic load rating ( $C$ ), Basic static load rating ( $C_0$ ), static moment rating ( $T_0$ ,  $T_x$ , and  $T_y$ ) are values for the direction indicated in the following figure.

The upper values of  $T_x$  and  $T_y$  are for one slide unit and the lower values are for two slide units in close contact.

(5) The shapes of grease nipple vary by size. For details of special specifications, see page Table 15 on page II -82.

Remark: The identification numbers with \* are our semi-standard items.



### Example of identification number of assembled set

| Model code |          | Dimensions | Part code |             | Model code | Dust protection code | Material code | Preload symbol       | Classification symbol | Interchangeable code | Special specification |
|------------|----------|------------|-----------|-------------|------------|----------------------|---------------|----------------------|-----------------------|----------------------|-----------------------|
| <b>MHS</b> | <b>G</b> | <b>20</b>  | <b>C2</b> | <b>R480</b> |            |                      |               | <b>T<sub>1</sub></b> | <b>P</b>              | <b>S1</b>            | <b>N</b>              |
| <b>1</b>   | <b>2</b> | <b>3</b>   | <b>4</b>  | <b>5</b>    | <b>1</b>   | <b>6</b>             | <b>7</b>      | <b>8</b>             | <b>9</b>              | <b>10</b>            | <b>11</b>             |

|                            |                                      |
|----------------------------|--------------------------------------|
| ① Model                    |                                      |
| MHS                        | Compact block type mounting from top |
| LWHS(...B)                 |                                      |
| ② Length of slide unit     |                                      |
| No symbol                  | Standard                             |
| G                          | Long                                 |
| ③ Size                     |                                      |
| 15, 20                     |                                      |
| ④ Number of slide unit (2) |                                      |

|                                 |                                                               |
|---------------------------------|---------------------------------------------------------------|
| ⑤ Length of track rail (480 mm) |                                                               |
| ⑥ Dust protection code          |                                                               |
| No symbol                       | Standard specification                                        |
| M                               | Ultra seal specification                                      |
| MU                              | Ultra seal specification with track rail mounting from bottom |

| ⑦ Material type |                        |
|-----------------|------------------------|
| No symbol       | High carbon steel made |
| SL              | Stainless steel made   |

| ⑧ Preload amount |                |
|------------------|----------------|
| No symbol        | Standard       |
| T <sub>1</sub>   | Light preload  |
| T <sub>2</sub>   | Medium preload |
| T <sub>3</sub>   | Heavy preload  |

| ⑨ Accuracy class |                 |
|------------------|-----------------|
| H                | High            |
| P                | Precision       |
| SP               | Super precision |

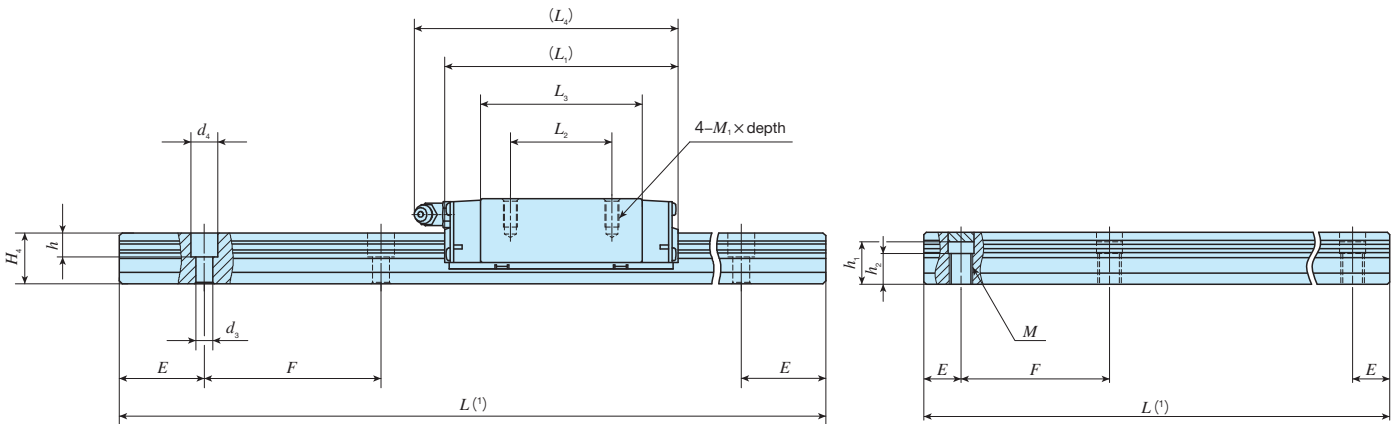
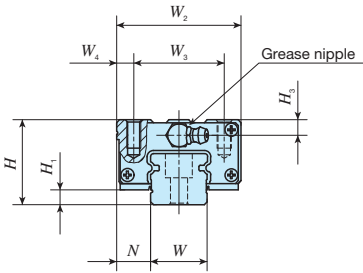
| ⑩ Interchangeable |                                   |
|-------------------|-----------------------------------|
| S1                | S1 specification                  |
| S2                | S2 specification                  |
| No symbol         | Non-interchangeable specification |

**11 Special specification**  
A, BS, D, E, F, 1, J, L, LF, MA  
MN, N, Q, RE, T, V, W, Y, Z

IKO C-Lube Linear Way MH

Compact block type mounting from top


|       |            |    |    |    |
|-------|------------|----|----|----|
| Shape | MHS · LWHS |    |    |    |
| Size  | 15         | 20 | 25 | 30 |



Ultra seal specification with track rail mounting from bottom

| Identification number |                        | Interchangeable | Mass (Ref.)   |                 | Dimensions of assembly mm |     | Dimensions of slide unit mm |    |    |     |     |    |       |     |          |     | Dimensions of track rail mm |    |    |    |    |   |       |    |    |    | Appended mounting bolt for track rail (3) mm | Basic dynamic load rating (4) C N | Basic static load rating (4) C0 N | Static moment rating (4) T0, Tx, Ty N·m |           |           |
|-----------------------|------------------------|-----------------|---------------|-----------------|---------------------------|-----|-----------------------------|----|----|-----|-----|----|-------|-----|----------|-----|-----------------------------|----|----|----|----|---|-------|----|----|----|----------------------------------------------|-----------------------------------|-----------------------------------|-----------------------------------------|-----------|-----------|
| MH series             | LWH series (No C-Lube) |                 | Slide unit kg | Track rail kg/m | H                         | H1  | N                           | W2 | W3 | W4  | L1  | L2 | L3    | L4  | M1×depth | H3  | W                           | H4 | d3 | d4 | h  | M | h1(2) | h2 | E  | F  |                                              |                                   |                                   | T0                                      | Tx        | Ty        |
| MHS 25                | LWHS 25···B            | ○               | 0.55          | 3.50            | 36                        | 6.5 | 12.5                        | 48 | 35 | 6.5 | 95  | 35 | 63.9  | 105 | M6×12    | 6.5 | 23                          | 22 | 7  | 11 | 9  | — | —     | —  | 30 | 60 | M6×22                                        | 25 200                            | 28 800                            | 362                                     | 309 1 690 | 309 1 690 |
| MHS 25···SL           | LWHS 25···SL           | ○               |               |                 |                           |     |                             |    |    |     |     |    |       |     |          |     |                             |    |    |    |    |   |       |    |    |    |                                              |                                   |                                   |                                         |           |           |
| MHS 25···M*           | LWHS 25···M*           | —               |               |                 |                           |     |                             |    |    |     |     |    |       |     |          |     |                             |    |    |    |    |   |       |    |    |    |                                              |                                   |                                   |                                         |           |           |
| MHS 25···MU*          | LWHS 25···MU*          | —               |               |                 |                           |     |                             |    |    |     |     |    |       |     |          |     |                             |    |    |    |    |   |       |    |    |    |                                              |                                   |                                   |                                         |           |           |
| MHSG 25               | LWHS 25···B            | ○               |               |                 |                           |     |                             |    |    |     |     |    |       |     |          |     |                             |    |    |    |    |   |       |    |    |    |                                              |                                   |                                   |                                         |           |           |
| MHSG 25               | LWHS 25···SL           | ○               |               |                 |                           |     |                             |    |    |     |     |    |       |     |          |     |                             |    |    |    |    |   |       |    |    |    |                                              |                                   |                                   |                                         |           |           |
| MHS 30                | LWHS 30···B            | ○               | 1.00          | 4.82            | 42                        | 9   | 16                          | 60 | 40 | 10  | 113 | 40 | 80.6  | 123 | M8×16    | 8   | 28                          | 25 | 9  | 14 | 12 | — | —     | —  | 40 | 80 | M8×28                                        | 35 400                            | 40 700                            | 623                                     | 536 2 820 | 536 2 820 |
| MHS 30···SL           | LWHS 30···SL           | ○               |               |                 |                           |     |                             |    |    |     |     |    |       |     |          |     |                             |    |    |    |    |   |       |    |    |    |                                              |                                   |                                   |                                         |           |           |
| MHS 30···M*           | LWHS 30···M*           | —               |               |                 |                           |     |                             |    |    |     |     |    |       |     |          |     |                             |    |    |    |    |   |       |    |    |    |                                              |                                   |                                   |                                         |           |           |
| MHS 30···MU*          | LWHS 30···MU*          | —               |               |                 |                           |     |                             |    |    |     |     |    |       |     |          |     |                             |    |    |    |    |   |       |    |    |    |                                              |                                   |                                   |                                         |           |           |
| MHSG 30               | LWHS 30···B            | ○               |               |                 |                           |     |                             |    |    |     |     |    |       |     |          |     |                             |    |    |    |    |   |       |    |    |    |                                              |                                   |                                   |                                         |           |           |
| MHSG 30               | LWHS 30···SL           | ○               |               |                 |                           |     |                             |    |    |     |     |    |       |     |          |     |                             |    |    |    |    |   |       |    |    |    |                                              |                                   |                                   |                                         |           |           |
| MHS 30                | LWHS 30···M*           | —               | 1.29          |                 | 42                        | 9   | 16                          | 60 | 40 | 10  | 139 | 60 | 106.6 | 149 | M8×16    | 8   | 28                          | 25 | 9  | 14 | 12 | — | —     | —  | 40 | 80 | M8×28                                        | 42 700                            | 53 200                            | 814                                     | 894 4 460 | 894 4 460 |
| MHSG 30               | LWHS 30···SL           | ○               |               |                 |                           |     |                             |    |    |     |     |    |       |     |          |     |                             |    |    |    |    |   |       |    |    |    |                                              |                                   |                                   |                                         |           |           |

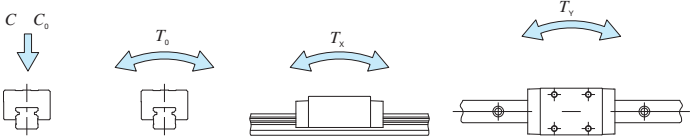- Notes (1) Track rail lengths  $L$  are shown in Table 2.1 on page II-71, Table 2.2 on page II-72, and Tables 2.3 and 2.4 on page II-73.
- (2) Choose bolts whose dimension allow fixing thread depth into track rail to be less than  $h_1$ .
- (3) The appended track rail mounting bolts are hexagon socket head bolts equivalent to JIS B 1176. For stainless steel model, stainless steel bolts are appended.
- In an assembled set of MH series and LWHS···MU model, track rail mounting bolts are not appended.
- (4) Basic dynamic load rating ( $C$ ), Basic static load rating ( $C_0$ ), static moment rating ( $T_0$ ,  $T_x$ , and  $T_y$ ) are values for the direction indicated in the following figure.
- The upper values of  $T_x$  and  $T_y$  are for one slide unit and the lower values are for two slide units in close contact.
- Remarks 1. The specifications of grease nipple are in Table 15 on page II-82.
2. The identification numbers with \* are our semi-standard items.






Example of identification number of assembled set

| Model code                      | Dimensions                                                           | Part code | Model code | Dust protection code | Material code | Preload symbol | Classification symbol | Interchangeable code | Special specification |
|---------------------------------|----------------------------------------------------------------------|-----------|------------|----------------------|---------------|----------------|-----------------------|----------------------|-----------------------|
| MHS                             | G                                                                    | 30        | C2         | R480                 |               | T1             | P                     | S1                   | N                     |
| 1                               | 2                                                                    | 3         | 4          | 5                    | 6             | 7              | 8                     | 9                    | 10                    |
| 11                              |                                                                      |           |            |                      |               |                |                       |                      |                       |
| ① Model                         | Compact block type mounting from top                                 |           |            |                      |               |                |                       |                      |                       |
| ② Length of slide unit          | Standard                                                             |           |            |                      |               |                |                       |                      |                       |
| ③ Size                          | 25, 30                                                               |           |            |                      |               |                |                       |                      |                       |
| ④ Number of slide unit (2)      |                                                                      |           |            |                      |               |                |                       |                      |                       |
| ⑤ Length of track rail (480 mm) |                                                                      |           |            |                      |               |                |                       |                      |                       |
| ⑥ Dust protection code          | Standard specification                                               |           |            |                      |               |                |                       |                      |                       |
| ⑦ Material type                 | High carbon steel made                                               |           |            |                      |               |                |                       |                      |                       |
| ⑧ Preload amount                | Standard                                                             |           |            |                      |               |                |                       |                      |                       |
| ⑨ Accuracy class                | High                                                                 |           |            |                      |               |                |                       |                      |                       |
| ⑩ Interchangeable               | S1 specification                                                     |           |            |                      |               |                |                       |                      |                       |
| ⑪ Special specification         | A, BS, D, E, F, 1, J, L, LF, MA, MN, N, PS, Q, RE, T, UR, V, W, Y, Z |           |            |                      |               |                |                       |                      |                       |




IKO C-Lube Linear Way MH

| Side mounting type |                                                                                   |    |    |    |
|--------------------|-----------------------------------------------------------------------------------|----|----|----|
| Shape              | LWHY                                                                              |    |    |    |
|                    |  |    |    |    |
| Size               | 15                                                                                | 20 | 25 | 30 |
|                    | 35                                                                                | 45 | 55 | 65 |

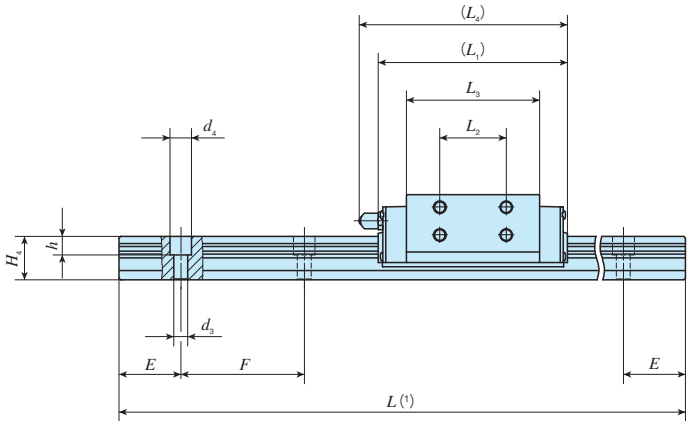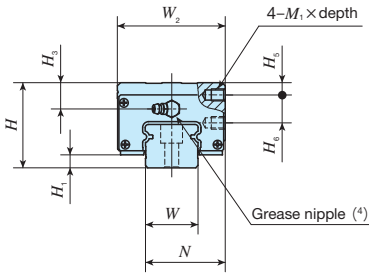

| Identification number |                        | Interchangeable | Mass (Ref.)   |                 | Dimensions of assembly mm |     |      | Dimensions of slide unit mm |     |    |       |     |          |      |  |    |    | Dimensions of track rail mm |    |     |     |     |      |     | Appended mounting bolt for track rail (2) mm | Basic dynamic load rating (3) N | Basic static load rating (3) N | Static moment rating (3) |                 |                 |
|-----------------------|------------------------|-----------------|---------------|-----------------|---------------------------|-----|------|-----------------------------|-----|----|-------|-----|----------|------|--|----|----|-----------------------------|----|-----|-----|-----|------|-----|----------------------------------------------|---------------------------------|--------------------------------|--------------------------|-----------------|-----------------|
| MH series             | LWH series (No C-Lube) |                 | Slide unit kg | Track rail kg/m | H                         | H1  | N    | W2                          | L1  | L2 | L3    | L4  | M1×depth | H3   |  | H5 | H6 | W                           | H4 | d3  | d4  | h   | E    | F   | Bolt size×ℓ                                  | C                               | C0                             | T0                       | Tx              | Ty              |
| —                     | LWHY 15*               | —               | 0.23          | 1.47            | 28                        | 4.5 | 24.3 | 34                          | 66  | 18 | 44.6  | 69  | M 4× 4   | 8.5  |  | 4  | 9  | 15                          | 15 | 4.5 | 8   | 6   | 30   | 60  | M 4×16                                       | 9 360                           | 13 900                         | 116                      | 99.2<br>577     | 99.2<br>577     |
| —                     | LWHY 20*               | —               | 0.36          | 2.56            | 30                        | 5   | 31.5 | 43.7                        | 83  | 25 | 57.2  | 94  | M 5× 5   | 5.5  |  | 4  | 10 | 20                          | 18 | 6   | 9.5 | 8.5 | 30   | 60  | M 5×18                                       | 14 500                          | 21 900                         | 241                      | 202<br>1 130    | 202<br>1 130    |
| —                     | LWHY 25*               | —               | 0.65          | 3.50            | 40                        | 6.5 | 35   | 47.7                        | 95  | 30 | 64.7  | 105 | M 6× 6   | 10.5 |  | 6  | 12 | 23                          | 22 | 7   | 11  | 9   | 30   | 60  | M 6×22                                       | 20 100                          | 29 800                         | 376                      | 320<br>1 750    | 320<br>1 750    |
| —                     | LWHY 30*               | —               | 1.12          | 4.82            | 45                        | 7   | 43.5 | 59.7                        | 113 | 40 | 80.6  | 123 | M 6× 7   | 11   |  | 8  | 14 | 28                          | 25 | 9   | 14  | 12  | 40   | 80  | M 8×28                                       | 28 100                          | 42 200                         | 646                      | 556<br>2 930    | 556<br>2 930    |
| —                     | LWHY 35*               | —               | 1.74          | 6.85            | 55                        | 8   | 51.5 | 69.7                        | 123 | 43 | 86.2  | 135 | M 8× 9   | 17   |  | 8  | 18 | 34                          | 28 | 9   | 14  | 12  | 40   | 80  | M 8×28                                       | 31 200                          | 43 500                         | 878                      | 665<br>3 600    | 601<br>3 310    |
| —                     | LWHY 45*               | —               | 3.30          | 10.7            | 70                        | 10  | 65   | 85.7                        | 147 | 55 | 103.4 | 158 | M10×11   | 23   |  | 10 | 22 | 45                          | 34 | 14  | 20  | 17  | 52.5 | 105 | M12×35                                       | 47 600                          | 65 000                         | 1 720                    | 1 200<br>6 420  | 1 100<br>5 900  |
| —                     | LWHY 55*               | —               | 5.36          | 15.5            | 80                        | 13  | 76   | 99.7                        | 183 | 70 | 132   | 194 | M12×13   | 24   |  | 12 | 25 | 53                          | 41 | 16  | 23  | 20  | 60   | 120 | M14×45                                       | 71 200                          | 98 300                         | 3 050                    | 2 300<br>12 000 | 2 110<br>11 000 |
| —                     | LWHY 65*               | —               | 9.80          | 22.2            | 90                        | 14  | 94.5 | 126                         | 229 | 85 | 164   | 239 | M16×16   | 20   |  | 12 | 30 | 63                          | 48 | 18  | 26  | 22  | 75   | 150 | M16×50                                       | 110 000                         | 149 000                        | 5 510                    | 4 280<br>22 800 | 3 930<br>21 000 |

Notes (1) Track rail lengths  $L$  are shown in Table 2.1 on page II-71.  
(2) The appended track rail mounting bolts are hexagon socket head bolts equivalent to JIS B 1176.  
(3) Basic dynamic load rating ( $C$ ), Basic static load rating ( $C_0$ ), static moment rating ( $T_0$ ,  $T_x$ , and  $T_y$ ) are values for the direction indicated in the following figure.  
The upper values of  $T_x$  and  $T_y$  are for one slide unit and the lower values are for two slide units in close contact.  
(4) The shapes of grease nipple vary by size. For details of special specifications, see page Table 15 on page II-82.  
Remark: The identification numbers with \* are our semi-standard items.



Example of identification number of assembled set

| Model code                      | Dimensions | Part code          | Preload symbol | Classification symbol                  | Special specification |
|---------------------------------|------------|--------------------|----------------|----------------------------------------|-----------------------|
| LWHY                            | 30         | C2 R480            | T1             | P                                      | /N                    |
| 1                               | 2          | 3                  | 4              | 5                                      | 6                     |
| 7                               |            |                    |                |                                        |                       |
| ① Model                         |            | ⑤ Preload amount   |                | ⑦ Special specification                |                       |
| LWHY Side mounting type         |            | No symbol Standard |                | A, E, F, I, L, LF, MA, N, PS, RE, Y, Z |                       |
| ② Size                          |            | T1 Light preload   |                |                                        |                       |
| 15, 20, 25, 30, 35, 45, 55, 65  |            | T2 Medium preload  |                |                                        |                       |
|                                 |            | T3 Heavy preload   |                |                                        |                       |
| ③ Number of slide unit (2)      |            | ⑥ Accuracy class   |                |                                        |                       |
|                                 |            | H High             |                |                                        |                       |
|                                 |            | P Precision        |                |                                        |                       |
| ④ Length of track rail (480 mm) |            | SP Super precision |                |                                        |                       |


## Linear Way F

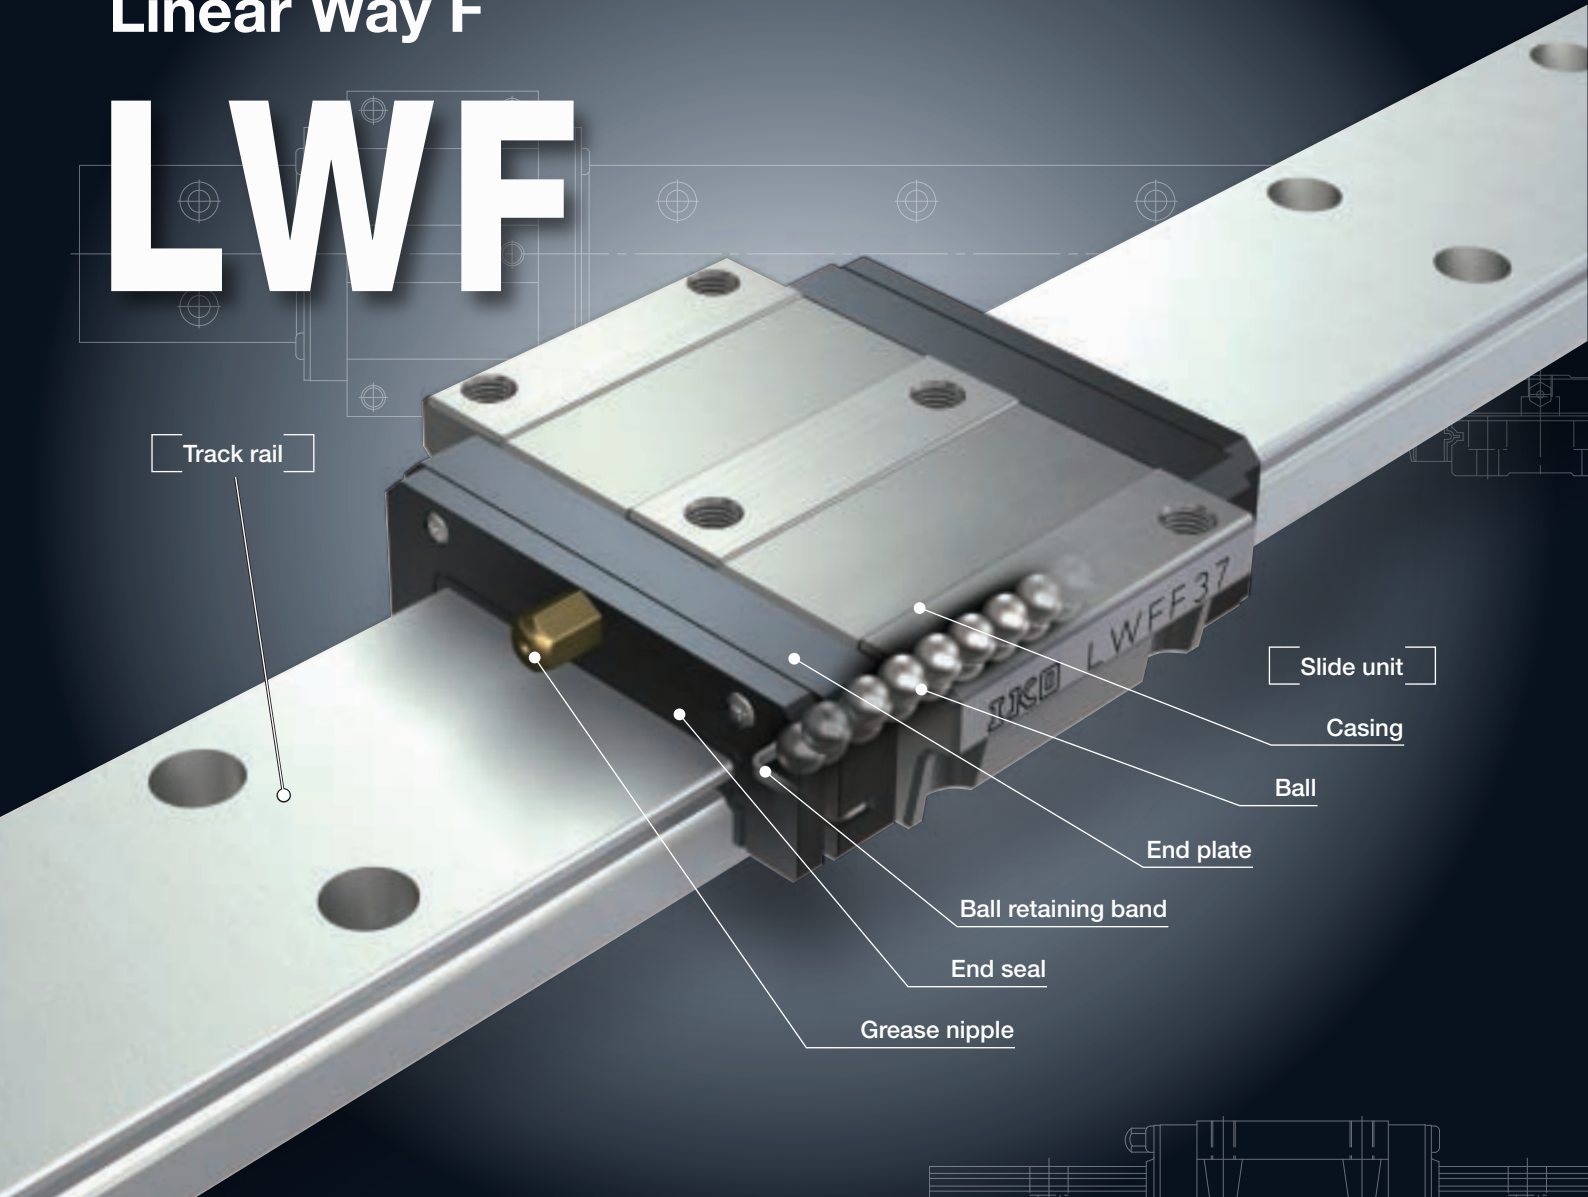LWF



Linear Way F

LWFF



Points

● Wide rail type series resistant to moment load

As track rail width is wide and distance between moment load points is long, this is a linear motion rolling guide resistant to moment load and complex load and suitable for serial use.

● Slide unit shapes for various usage

As the lineup of two flange types of slide unit shape with different dimensional series and three block types with small width are available, you can select an optimal product for the specifications of your machine and device.

● Stainless steels superior in corrosion resistance are listed on lineup.

For details P.I-41

Products made of stainless steel are highly resistant to corrosion, so that they are suitable for applications where rust prevention oil is not preferred, such as in a cleanroom environment.

Identification Number and Specification

Example of an identification number

The specification of LWF series is indicated by the identification number. Indicate the identification number, consisting of a model code, dimensions, a part code, a material code, a preload symbol, a classification symbol, an interchangeable code, and a supplemental code for each specification to apply.

| Interchangeable specification     |      |    |      |      |                |                |    |        |
|-----------------------------------|------|----|------|------|----------------|----------------|----|--------|
| 1                                 | 2    | 3  | 4    | 5    | 6              | 7              | 8  | 9      |
| Single slide unit                 | LWFF | 37 | C1   |      | T <sub>1</sub> | P              | S1 | /Z     |
| Single track rail (1)             | LWFF | 37 | R800 |      |                | P              | S1 | /F     |
| Assembled set                     | LWFF | 37 | C1   | R800 |                | T <sub>1</sub> | P  | S1 /FZ |
| Non-interchangeable specification |      |    |      |      |                |                |    |        |
| Assembled set                     | LWFF | 37 | C1   | R800 |                | T <sub>1</sub> | P  | /FZ    |

1 Model

Model code

Page II - 115

2 Size

Dimensions

Page II - 115

3 Number of slide units

Part code

Page II - 115

4 Length of track rail

5 Material type

Material code

Page II - 115

6 Preload amount

Preload code

Page II - 117

7 Accuracy class

Classification code

Page II - 118

8 Interchangeable

Interchangeable code

Page II - 119

9 Special specification

Supplemental code

Page II - 119

Note (1) Indicate "LWFF" for the model code of the single track rail of block type LWFS mounting from top.

LWF



Identification Number and Specification — Model · Size · Number of Slide Unit ·

|   |                       |                                                                                                                                                                                                              |                                                                                                                                       |
|---|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| 1 | Model                 | Linear Way F <sup>(1)</sup><br>(LWF series)                                                                                                                                                                  | Flange type mounting from top / bottom<br>: LWFH<br>: LWFF<br>: LWFS                                                                  |
|   |                       |                                                                                                                                                                                                              | Block type mounting from top                                                                                                          |
|   |                       | For applicable models and sizes, see Table 1.<br>Indicate "LWFF" for the model code of the single track rail of block type LWFS mounting from top.<br>Note <sup>(1)</sup> This model has no built-in C-Lube. |                                                                                                                                       |
| 2 | Size                  | 33,37,40,42,60,69,90                                                                                                                                                                                         | For applicable models and sizes, see Table 1.                                                                                         |
| 3 | Number of slide units | : C○                                                                                                                                                                                                         | For an assembled set, indicates the number of slide units assembled on a track rail. For a single slide unit, only "C1" is specified. |
| 4 | Length of track rail  | : R○                                                                                                                                                                                                         | Indicate the length of track rail in mm.<br>For standard and maximum length, see Table 2.1 and Table 2.2.                             |
| 5 | Material type         | High carbon steel made : No symbol<br>Stainless steel made : SL                                                                                                                                              | For applicable models and sizes, see Table 1.                                                                                         |

Table 1 Models and sizes of LWF series

| Material               | Shape                                | Model   | Size |    |    |    |    |    |    |
|------------------------|--------------------------------------|---------|------|----|----|----|----|----|----|
|                        |                                      |         | 33   | 37 | 40 | 42 | 60 | 69 | 90 |
| High carbon steel made | Flange type mounting from top/bottom | LWFH    | —    | —  | ○  | —  | ○  | —  | ○  |
|                        | Flange type mounting from top/bottom | LWFF    | ○    | ○  | —  | ○  | —  | ○  | —  |
|                        | Block type mounting from top         | LWFS    | ○    | ○  | —  | —  | —  | —  | —  |
| Stainless steel made   | Block type mounting from top         | LWFS…SL | ○    | ○  | —  | ○  | —  | —  | —  |

Remark: For the models indicated in  , the interchangeable specification is available.

Length of Track Rail · Material Type—

Table 2.1 Standard and maximum length of high carbon steel track rail

unit: mm

| Identification number                  | LWFH40           | LWFH60           | LWFH90     |            |  |
|----------------------------------------|------------------|------------------|------------|------------|--|
| Item                                   |                  |                  |            |            |  |
| Standard length $L$ ( $n$ )            | 180 ( 3 )        | 240 ( 3 )        | 480 ( 6 )  |            |  |
|                                        | 240 ( 4 )        | 480 ( 5 )        | 640 ( 8 )  |            |  |
|                                        | 360 ( 6 )        | 640 ( 8 )        | 800 (10)   |            |  |
|                                        | 480 ( 8 )        | 800 (10)         | 1 040 (13) |            |  |
|                                        | 660 (11)         | 1 040 (13)       | 1 200 (15) |            |  |
|                                        | 840 (14)         |                  | 1 520 (19) |            |  |
| Pitch of mounting holes $F$            | 60               | 80               | 80         |            |  |
| $E$                                    | 30               | 40               | 40         |            |  |
| Standard $E$ dimensions <sup>(1)</sup> | or higher        | 8                | 10         |            |  |
|                                        | below            | 38               | 50         |            |  |
| Maximum length <sup>(2)</sup>          | 1 500            | 1 520            | 1 520      |            |  |
| Identification number                  | LWFF33<br>LWFS33 | LWFF37<br>LWFS37 | LWFF42     | LWFF69     |  |
| Item                                   |                  |                  |            |            |  |
| Standard length $L$ ( $n$ )            | 120 ( 3 )        | 150 ( 3 )        | 180 ( 3 )  | 320 ( 4 )  |  |
|                                        | 200 ( 5 )        | 250 ( 5 )        | 240 ( 4 )  | 480 ( 6 )  |  |
|                                        | 320 ( 8 )        | 400 ( 8 )        | 360 ( 6 )  | 800 (10)   |  |
|                                        | 480 (12)         | 500 (10)         | 480 ( 8 )  | 1 040 (13) |  |
|                                        | 560 (14)         | 600 (12)         | 660 (11)   | 1 280 (16) |  |
|                                        |                  | 800 (16)         | 840 (14)   | 1 600 (20) |  |
| Pitch of mounting holes $F$            | 40               | 50               | 60         | 80         |  |
| $E$                                    | 20               | 25               | 30         | 40         |  |
| Standard $E$ dimensions <sup>(1)</sup> | or higher        | 7                | 7          | 9          |  |
|                                        | below            | 27               | 32         | 49         |  |
| Maximum length <sup>(2)</sup>          | 1 600            | 2 000            | 1 980      | 2 000      |  |

Notes <sup>(1)</sup> This does not apply to female threads for bellows (supplemental code "/J").  
<sup>(2)</sup> We can produce products longer than the maximum length. If needed, please contact **IKO**.  
Remarks 1. Indicate "LWFF" for the model code of the single track rail of block type LWFS mounting from top.  
2. If not directed, E dimensions for both ends will be the same within the range of standard E dimensions. To change the dimensions, indicate the specified rail mounting hole positions "/E" of special specification. For more information, see page III-29.

Table 2.2 Standard and maximum length of stainless steel track rail

|                                             |           |           |           | unit: mm |  |  |  |
|---------------------------------------------|-----------|-----------|-----------|----------|--|--|--|
| Identification number                       | LWFS33…SL | LWFS37…SL | LWFS42…SL |          |  |  |  |
| Item                                        | LWFS33…SL | LWFS37…SL | LWFS42…SL |          |  |  |  |
| Standard length <i>L</i> ( <i>n</i> )       | 120 ( 3 ) | 150 ( 3 ) | 180 ( 3 ) |          |  |  |  |
|                                             | 200 ( 5 ) | 250 ( 5 ) | 240 ( 4 ) |          |  |  |  |
|                                             | 320 ( 8 ) | 400 ( 8 ) | 360 ( 6 ) |          |  |  |  |
|                                             | 480 (12)  | 500 (10)  | 480 ( 8 ) |          |  |  |  |
|                                             | 560 (14)  | 600 (12)  | 660 (11)  |          |  |  |  |
| Pitch of mounting holes <i>F</i>            | 40        | 50        | 60        |          |  |  |  |
|                                             | <i>E</i>  | 20        | 30        |          |  |  |  |
| Standard <i>E</i> dimensions <sup>(1)</sup> | or higher | 7         | 7         |          |  |  |  |
|                                             | below     | 27        | 32        |          |  |  |  |
| Maximum length <sup>(2)</sup>               | 1 200     | 1 200     | 1 200     |          |  |  |  |

Notes <sup>(1)</sup> This does not apply to female threads for bellows (supplemental code "/J").  
<sup>(2)</sup> We can produce products longer than the maximum length. If needed, please contact **IKO**.  
Remarks 1. Indicate "LWFF" for the model code of the single track rail.  
2. If not directed, E dimensions for both ends will be the same within the range of standard E dimensions. To change the dimensions, indicate the specified rail mounting hole positions "/E" of special specification. For more information, see page III-29.

|   |                |                |                  |                                                                |
|---|----------------|----------------|------------------|----------------------------------------------------------------|
| 6 | Preload amount | Standard       | : No symbol      | Specify this item for an assembled set or a single slide unit. |
|   |                | Light preload  | : T <sub>1</sub> | For details of the preload amount, see Table 3.                |
|   |                | Medium preload | : T <sub>2</sub> | For applicable preload types, see Table 4.                     |

Table 3 Preload amount

| Item           | Preload symbol | Preload amount N   | Operational conditions                                                            |
|----------------|----------------|--------------------|-----------------------------------------------------------------------------------|
| Standard       | (No symbol)    | 0 <sup>(1)</sup>   | • Light and precise motion                                                        |
| Light preload  | T <sub>1</sub> | 0.02C <sub>0</sub> | • Almost no vibrations<br>• Load is evenly balanced<br>• Light and precise motion |
| Medium preload | T <sub>2</sub> | 0.05C <sub>0</sub> | • Medium vibration<br>• Medium overhung load                                      |

Note <sup>(1)</sup> Indicates zero or minimal amount of preload.  
Remark: C<sub>0</sub> indicates the basic static load rating.


Table 4 Application of preload

| Size | Preload type (preload symbol) |                                    |                                     |
|------|-------------------------------|------------------------------------|-------------------------------------|
|      | Standard<br>(No symbol)       | Light preload<br>(T <sub>1</sub> ) | Medium preload<br>(T <sub>2</sub> ) |
| 33   | ○                             | ○                                  | ○                                   |
| 37   | ○                             | ○                                  | ○                                   |
| 40   | ○                             | ○                                  | ○                                   |
| 42   | ○                             | ○                                  | ○                                   |
| 60   | ○                             | ○                                  | ○                                   |
| 69   | ○                             | ○                                  | ○                                   |
| 90   | ○                             | ○                                  | ○                                   |

Remark: The mark ○ indicates that interchangeable specification products are available.

|   |                |                 |      |                                                                                            |
|---|----------------|-----------------|------|--------------------------------------------------------------------------------------------|
| 7 | Accuracy class | High            | : H  | For interchangeable specification products, assemble a                                     |
|   |                | Precision       | : P  | slide unit and a track rail of the same accuracy class.                                    |
|   |                | Super precision | : SP | For details of accuracy class, see Table 5.<br>For applicable accuracy class, see Table 6. |

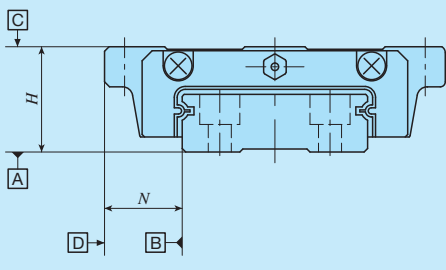Table 5 Tolerance and allowance



unit: mm


| Item                                                              | Class (classification symbol) | High (H)        | Precision (P) | Super precision (SP) |
|-------------------------------------------------------------------|-------------------------------|-----------------|---------------|----------------------|
| Dim. H tolerance                                                  |                               | ±0.040          | ±0.020        | ±0.010               |
| Dim. N tolerance                                                  |                               | ±0.050          | ±0.025        | ±0.015               |
| Dim. variation of H <sup>(1)</sup>                                |                               | 0.015           | 0.007         | 0.005                |
| Dim. variation of N <sup>(1)</sup>                                |                               | 0.020           | 0.010         | 0.007                |
| Dim. variation of H for multiple assembled sets <sup>(2)</sup>    |                               | 0.035           | 0.025         | —                    |
| Parallelism in operation of the slide unit C surface to A surface |                               | Based on Fig. 1 |               |                      |
| Parallelism in operation of the slide unit D surface to B surface |                               | Based on Fig. 1 |               |                      |

Notes <sup>(1)</sup> The value shows variation of slide units incorporated in the same track rail.  
<sup>(2)</sup> Applicable to the interchangeable specifications.

Table 6 Application of accuracy class

| Size | Class (classification symbol) |               |                      |
|------|-------------------------------|---------------|----------------------|
|      | High (H)                      | Precision (P) | Super precision (SP) |
| 33   | ○                             | ○             | ○                    |
| 37   | ○                             | ○             | ○                    |
| 40   | ○                             | ○             | ○                    |
| 42   | ○                             | ○             | ○                    |
| 60   | ○                             | ○             | ○                    |
| 69   | ○                             | ○             | ○                    |
| 90   | ○                             | ○             | ○                    |

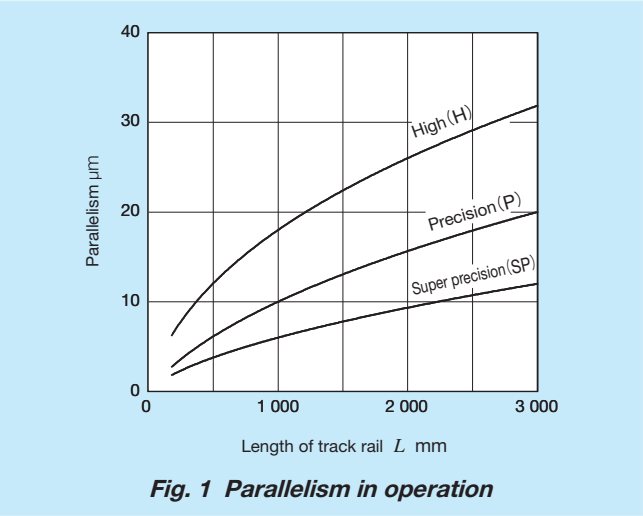Remark: The values indicated in ○ are also applicable to the interchangeable specifications.



## 8 Interchangeable

|                                   |             |                                                                               |
|-----------------------------------|-------------|-------------------------------------------------------------------------------|
| S1 specification                  | : S1        | This is specified for the interchangeable specifications.                     |
| S2 specification                  | : S2        | Assemble a track rail and a slide unit with the same                          |
| Non-interchangeable specification | : No symbol | interchangeable code. Performance and accuracy of "S1" and "S2" are the same. |
|                                   |             | No symbol is indicated for non-interchangeable specification.                 |

## 9 Special specification

|                                                                                   |                                                                                                                                                                                                                |
|-----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| /A, /C, /D, /E, /F, /I, /J○, /L○,<br>/LF○, /MN, /N, /Q, /U, /V○, /W○,<br>/Y○, /Z○ | For applicable special specifications, see Tables 7.1,<br>7.2, 7.3, and 7.4.<br>For combination of multiple special specifications, see<br>Table 8.<br>For details of special specifications, see page III-28. |
|-----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

**Table 7.1 Application of special specifications (Interchangeable specification, single slide unit)**

| Special specification                     | Supplemental code | Size |    |    |    |    |    |    |
|-------------------------------------------|-------------------|------|----|----|----|----|----|----|
|                                           |                   | 33   | 37 | 40 | 42 | 60 | 69 | 90 |
| Female threads for bellows <sup>(1)</sup> | /J○               | ○    | ○  | ○  | ○  | ○  | ○  | ○  |
| No end seal                               | /N                | ○    | ○  | ○  | ○  | ○  | ○  | ○  |
| With C-Lube plate                         | /Q                | ○    | ○  | ○  | ○  | ○  | ○  | ○  |
| Under seal                                | /U                | ○    | ○  | ○  | ○  | ○  | ○  | ○  |
| Double end seals                          | /V○               | ○    | ○  | ×  | ○  | ×  | ○  | ×  |
| Scrapers                                  | /Z○               | ○    | ○  | ○  | ○  | ○  | ○  | ○  |

Note (1) Not applicable to stainless steel made products.

**Table 7.2 Application of special specifications (Interchangeable specification, single track rail)**

| Special specification                  | Supplemental code | Size |    |    |    |    |    |    |
|----------------------------------------|-------------------|------|----|----|----|----|----|----|
|                                        |                   | 33   | 37 | 40 | 42 | 60 | 69 | 90 |
| Specified rail mounting hole positions | /E                | ○    | ○  | ○  | ○  | ○  | ○  | ○  |
| Caps for rail mounting holes           | /F                | ○    | ○  | ○  | ○  | ○  | ○  | ○  |
| Female threads for bellows (1)         | /J○               | ○    | ○  | ○  | ○  | ○  | ○  | ○  |
| Without track rail mounting bolt       | /MN               | ○    | ○  | ○  | ○  | ○  | ○  | ○  |

Note (1) Not applicable to stainless steel made products.

**Table 7.3 Application of special specifications (Interchangeable specification and assembled set)**

| Special specification                     | Supplemental code | Size |    |    |    |    |    |    |
|-------------------------------------------|-------------------|------|----|----|----|----|----|----|
|                                           |                   | 33   | 37 | 40 | 42 | 60 | 69 | 90 |
| Opposite reference surfaces arrangement   | /D                | ○    | ○  | ○  | ○  | ○  | ○  | ○  |
| Specified rail mounting hole positions    | /E                | ○    | ○  | ○  | ○  | ○  | ○  | ○  |
| Caps for rail mounting holes              | /F                | ○    | ○  | ○  | ○  | ○  | ○  | ○  |
| Female threads for bellows <sup>(1)</sup> | /J○               | ○    | ○  | ○  | ○  | ○  | ○  | ○  |
| Black chrome surface treatment            | /L○               | ○    | ○  | ○  | ○  | ○  | ○  | ○  |
| Fluorine black chrome surface treatment   | /LF○              | ○    | ○  | ○  | ○  | ○  | ○  | ○  |
| Without track rail mounting bolt          | /MN               | ○    | ○  | ○  | ○  | ○  | ○  | ○  |
| No end seal                               | /N                | ○    | ○  | ○  | ○  | ○  | ○  | ○  |
| With C-Lube plate                         | /Q                | ○    | ○  | ○  | ○  | ○  | ○  | ○  |
| Under seal                                | /U                | ○    | ○  | ○  | ○  | ○  | ○  | ○  |
| Double end seals                          | /V○               | ○    | ○  | ×  | ○  | ×  | ○  | ×  |
| Specified grease                          | /Y○               | ○    | ○  | ○  | ○  | ○  | ○  | ○  |
| Scrapers                                  | /Z○               | ○    | ○  | ○  | ○  | ○  | ○  | ○  |

Note (1) Not applicable to stainless steel made products.

**Table 7.4 Application of special specifications (Non-interchangeable specification)**

| Special specification                   | Supplemental code | Size |    |    |    |    |    |    |
|-----------------------------------------|-------------------|------|----|----|----|----|----|----|
|                                         |                   | 33   | 37 | 40 | 42 | 60 | 69 | 90 |
| Butt-jointing track rails               | /A                | ○    | ○  | ○  | ○  | ○  | ○  | ○  |
| Chamfered reference surface             | /C○               | ×    | ×  | ○  | ×  | ○  | ×  | ○  |
| Opposite reference surfaces arrangement | /D                | ○    | ○  | ○  | ○  | ○  | ○  | ○  |
| Specified rail mounting hole positions  | /E                | ○    | ○  | ○  | ○  | ○  | ○  | ○  |
| Caps for rail mounting holes            | /F                | ○    | ○  | ○  | ○  | ○  | ○  | ○  |
| Inspection sheet                        | /I                | ○    | ○  | ○  | ○  | ○  | ○  | ○  |
| Female threads for bellows              | /J○               | ○    | ○  | ○  | ○  | ○  | ○  | ○  |
| Black chrome surface treatment          | /L○               | ○    | ○  | ○  | ○  | ○  | ○  | ○  |
| Fluorine black chrome surface treatment | /LF○              | ○    | ○  | ○  | ○  | ○  | ○  | ○  |
| Without track rail mounting bolt        | /MN               | ○    | ○  | ○  | ○  | ○  | ○  | ○  |
| No end seal                             | /N                | ○    | ○  | ○  | ○  | ○  | ○  | ○  |
| With C-Lube plate                       | /Q                | ○    | ○  | ○  | ○  | ○  | ○  | ○  |
| Under seal                              | /U                | ○    | ○  | ○  | ○  | ○  | ○  | ○  |
| Double end seals                        | /V○               | ○    | ○  | ×  | ○  | ×  | ○  | ×  |
| A group of multiple assembled sets      | /W○               | ○    | ○  | ○  | ○  | ○  | ○  | ○  |
| Specified grease                        | /Y○               | ○    | ○  | ○  | ○  | ○  | ○  | ○  |
| Scrapers                                | /Z○               | ○    | ○  | ○  | ○  | ○  | ○  | ○  |

**Table 8** *Combination of supplemental codes*

[illegible]

Note (1) Contact IKO for the case of LWFH.

Remarks 1. The combination of "-" shown in the table is not available.

2. Contact **IKO** for the combination of the interchangeable specification marked with ●.

3. When using multiple types for combination, indicate the symbols in alphabetical order.



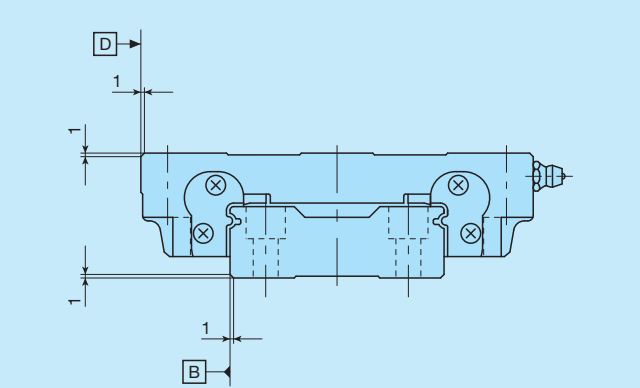


Fig. 2 Dimensions of chamfered reference surface (Supplemental code /C /CC)

Remark: Add chamfer to the reference mounting surface of the slide unit and track rail.  
For corner R of the mounting section, see Table 17.2 on page II -126.

Table 9 Dimensions of female threads for bellows (Supplemental code Single unit: /J Assembled set: /J /JJ)

| Identification number | Slide unit     |                |                |                |                |                |                       |                       | Track rail     |                |                |                       |
|-----------------------|----------------|----------------|----------------|----------------|----------------|----------------|-----------------------|-----------------------|----------------|----------------|----------------|-----------------------|
|                       | a <sub>1</sub> | a <sub>2</sub> | b <sub>1</sub> | b <sub>2</sub> | b <sub>3</sub> | b <sub>4</sub> | M <sub>1</sub> ×depth | M <sub>2</sub> ×depth | a <sub>3</sub> | a <sub>5</sub> | a <sub>6</sub> | M <sub>3</sub> ×depth |
| LWFH 40               | 3              | —              | 23.5           | 35             | —              | —              | M3×6                  | —                     | 9              | 8              | 24             | M3×6                  |
| LWFH 60               | 4              | 11             | 29             | 52             | 10             | 90             | M3×6                  | M3×3                  | 11             | 10             | 40             | M4×8                  |
| LWFH 90               | 5              | 17             | 41             | 80             | 13             | 136            | M3×5                  | M3×5                  | 13             | 15             | 60             | M4×8                  |

unit: mm

Table 10 Dimensions of female threads for bellows (Supplemental code Single unit: /J Assembled set: /J /JJ)


|  |  |  |  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|--|--|--|
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |

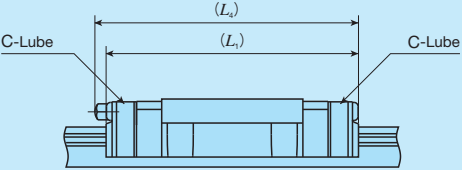unit: mm

| Identification number | Slide unit     |                |                |                               |                |                | Track rail     |                |                |
|-----------------------|----------------|----------------|----------------|-------------------------------|----------------|----------------|----------------|----------------|----------------|
|                       | a <sub>1</sub> | b <sub>1</sub> | b <sub>2</sub> | L <sub>1</sub> <sup>(2)</sup> | L <sub>2</sub> | H <sub>3</sub> | a <sub>3</sub> | b <sub>5</sub> | b <sub>6</sub> |
| LWFF 33               | 4              | 8.25           | 43.5           | 71                            | 5              | 1              | 6              | 7.5            | 18             |
| LWFS 33(…SL)          |                | 3.25           |                |                               |                |                |                |                |                |
| LWFF 37               | 6              | 10             | 48             | 78                            | 5              | 1              | 6.5            | 8.5            | 20             |
| LWFS 37(…SL)          |                | 3              |                |                               |                |                |                |                |                |
| LWFF 42               | 9.5            | 12             | 56             | 92                            | 7              | 4.5            | 8              | 9              | 24             |
| LWFS 42…SL            |                | 3              |                |                               |                |                |                |                |                |
| LWFF 69               | 9              | 35             | 50             | 125                           | 7              | 5              | 11             | 14.5           | 40             |

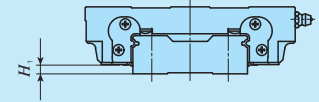
Notes (1) Grease nipple specifications and mounting position are different from standard specifications. For grease nipple specification, see Table 15 on page II -124.  
(2) Dimensions of the specification that female threads for bellows are fitted to both ends of the slide unit are indicated.  
Remark: Dimensions indicated by \* mark for series of size 33 and Size 37 is higher than the H dimension of Linear Way F. For details, contact IKO.

Table 11 Dimension of slide unit with C-Lube plate  
(Supplemental code /Q)

|  |                |                |
|-----------------------------------------------------------------------------------|----------------|----------------|
| unit: mm                                                                          |                |                |
| Size                                                                              | L <sub>1</sub> | L <sub>4</sub> |
| 33                                                                                | 64             | 66             |
| 37                                                                                | 73             | 75             |
| 40                                                                                | 78             | —              |
| 42                                                                                | 86             | 98             |
| 60                                                                                | 98             | —              |
| 69                                                                                | 121            | 132            |
| 90                                                                                | 131            | —              |

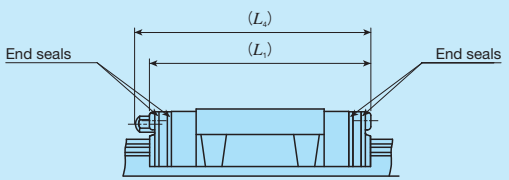
Remark: The dimensions of the slide unit with C-Lube at both ends are indicated.

Table 12 H<sub>1</sub> dimension with under seal (Supplemental code /U)

|  |                |
|-----------------------------------------------------------------------------------|----------------|
| unit: mm                                                                          |                |
| Size                                                                              | H <sub>1</sub> |
| 40                                                                                | 3              |
| 60                                                                                | 4              |
| 90                                                                                | 5              |

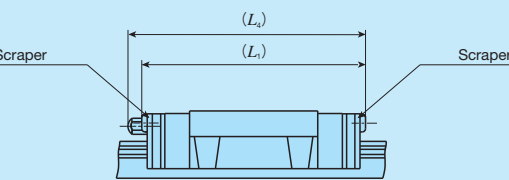
Remark: H<sub>1</sub> dimensions of series of the Size 33, 37, 42, and 69 are the same as dimensions before mounting of under seal.

Table 13 Dimensions of slide unit with double end seals  
(Supplemental code Single unit: /V  
Assembled set: /V /VV)

|  |                |                |
|------------------------------------------------------------------------------------|----------------|----------------|
| unit: mm                                                                           |                |                |
| Size                                                                               | L <sub>1</sub> | L <sub>4</sub> |
| 33                                                                                 | 61             | 64             |
| 37                                                                                 | 70             | 74             |
| 42                                                                                 | 82             | 96             |
| 69                                                                                 | 117            | 130            |

Remark: The dimensions of the slide unit with double end seals at both ends are indicated.

Table 14 Dimensions of slide unit with scrapers  
(Supplemental code Single unit: /Z  
Assembled set: /Z /ZZ)

|  |                |                |
|------------------------------------------------------------------------------------|----------------|----------------|
| unit: mm                                                                           |                |                |
| Size                                                                               | L <sub>1</sub> | L <sub>4</sub> |
| 33                                                                                 | 62             | 64             |
| 37                                                                                 | 71             | 75             |
| 40                                                                                 | 80             | —              |
| 42                                                                                 | 84             | 97             |
| 60                                                                                 | 100            | —              |
| 69                                                                                 | 119            | 131            |
| 90                                                                                 | 130            | —              |

Remark: The dimensions of the slide unit with scraper at both ends are indicated.

## Lubrication

Lithium-soap base grease with extreme-pressure additive (Alvania EP grease 2 [SHOWA SHELL SEKIYU K. K.]) is pre-packed in LWF series.

The LWF series has grease nipple as indicated in Table 15. Supply nozzles matching the size of grease nipple are also available. For order of these parts for lubrication, see Table 15.1 on page -22 and Table 16 on page III-23.

Table 15 Parts for lubrication

| Size | Grease nipple type <sup>(1)</sup> | Applicable supply nozzle type            | Bolt size of female threads for piping |
|------|-----------------------------------|------------------------------------------|----------------------------------------|
| 33   | A-M3                              | A-5120V    A-5240V<br>B-5120V    B-5240V | —                                      |
| 37   | A-M4                              |                                          | M4                                     |
| 40   | JIS type 1                        | Grease gun available on the market       | M6                                     |
| 42   | B-M6                              |                                          |                                        |
| 60   | JIS type 1                        |                                          |                                        |
| 69   | B-M6                              |                                          |                                        |
| 90   | JIS type 1                        |                                          |                                        |

Note <sup>(1)</sup> For grease nipple specification, see Table 15.1 and Table 15.2 on page III-22.

## Dust Protection

The slide unit of LWF series are equipped with end seals as standard for dust protection. However, if large amount of contaminant or dust are floating, or if large particles of foreign substances such as chips or sand may adhere to the track rail, it is recommended to cover the whole unit with bellows or telescope type shield, etc.

The LWF series is provided with specific bellows. The bellows are easy to mount and provide excellent dust protection. If needed, please refer to III-25 for ordering.

Precaution for Use

① Mounting surface, reference mounting surface and typical mounting structure

When mounting the LWF series, properly align the reference mounting surface B and D of the track rail and slide unit with the reference mounting surface of the table and bed and fix it. (See Fig. 3.)  
The reference mounting surfaces B and D and mounting surfaces A and C are precisely ground. Machining the mounting surface of the table and bed, such as machine or device, to high accuracy and mounting them properly will ensure stable linear motion with high accuracy.  
Reference mounting surface of the slide unit is the opposite side of the **IKO** mark. The track rail reference mounting surface is identified by locating the **IKO** mark on the top surface of the track rail. It is the side surface above the mark (in the direction of the arrow). (See Fig. 4)

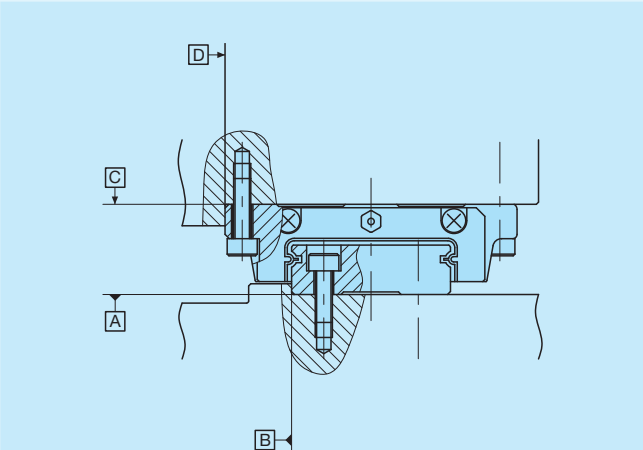


Fig. 3 Reference mounting surface and typical mounting structure

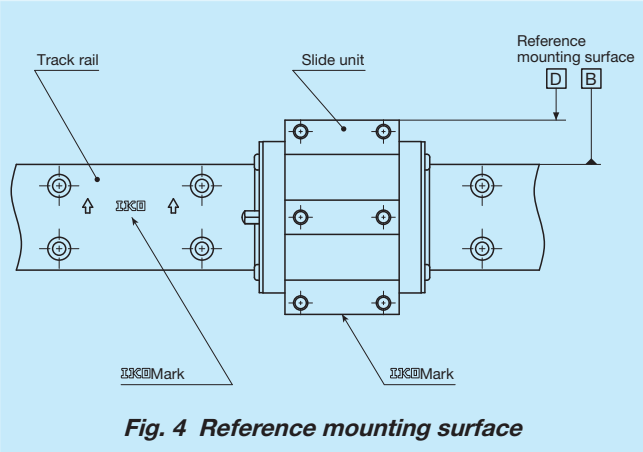


Fig. 4 Reference mounting surface

② Corner radius and shoulder height of reference mounting surfaces

For the opposite corner of the mating reference mounting, it is recommended to have relieved fillet as indicated in Fig. 5. Table 17.1 and Table 17.2 shows recommended shoulder heights and corner radius of the mating reference mounting surfaces.

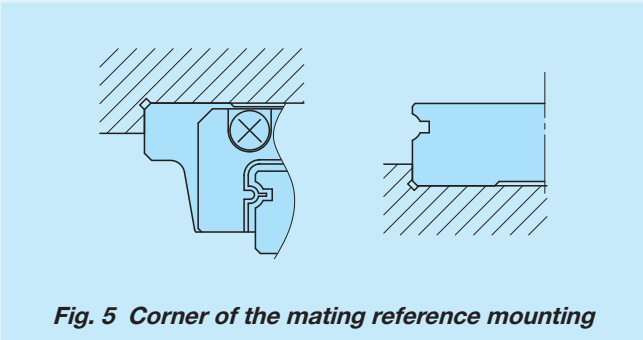


Fig. 5 Corner of the mating reference mounting

③ Tightening torque for fixing screw

Typical tightening torque for mounting of the LWF series to the steel mating member material is indicated in Table 16. When vibration and shock of the machine or device are large, fluctuating load is large, or moment load is applied, fix it by using the torque 1.2 to 1.5 times larger than the value indicated in the table as necessary. If the mating member material is cast iron or aluminum, reduce the tightening torque depending on the strength characteristic of the mating member material.

Table 16 Tightening torque for fixing screw

| Bolt size | Tightening torque N · m      |                            |
|-----------|------------------------------|----------------------------|
|           | High carbon steel-made screw | Stainless steel-made screw |
| M 3×0.5   | 1.7                          | —                          |
| M 4×0.7   | 4.0                          | 2.5                        |
| M 5×0.8   | 7.9                          | 5.0                        |
| M 6×1     | 13.3                         | 8.5                        |
| M 8×1.25  | 32.0                         | —                          |
| M10×1.5   | 62.7                         | —                          |

Remark: The calculation is based on the tightening torque, strength division 12.9 and property division A2-70.

Table 17.1 Shoulder height and corner radius of the reference mounting surface


| Size | Mounting part of slide unit |               | Mounting part of track rail |               |
|------|-----------------------------|---------------|-----------------------------|---------------|
|      | Shoulder height             | Corner radius | Shoulder height             | Corner radius |
|      | $h_1$                       | $R$ (Maximum) | $h_2$                       | $R$ (Maximum) |
| 33   | 4                           | 0.4           | 2                           | 0.4           |
| 37   | 5                           | 0.4           | 2.5                         | 0.4           |
| 42   | 5                           | 0.4           | 2.5                         | 0.4           |
| 69   | 5                           | 0.8           | 3.5                         | 0.8           |



Table 17.2 Shoulder height and corner radius of the reference mounting surface

| Size | Mounting part of slide unit |               | Mounting part of track rail | Corner radius when supplemental code "/CC" is specified |
|------|-----------------------------|---------------|-----------------------------|---------------------------------------------------------|
|      | Shoulder height             | Corner radius | Shoulder height             | Corner radius when supplemental code "/CC" is specified |
|      | $h_1$                       | $R$ (Maximum) | $h_2$                       | $R$ (Maximum)                                           |
| 40   | 4                           | 0.3           | 3                           | 1                                                       |
| 60   | 6                           | 0.5           | 4                           | 1                                                       |
| 90   | 8                           | 0.5           | 6                           | 1                                                       |



### Flange type mounting from top / bottom
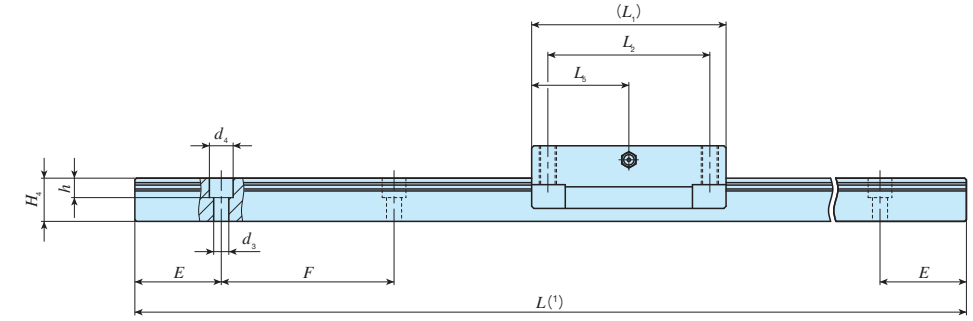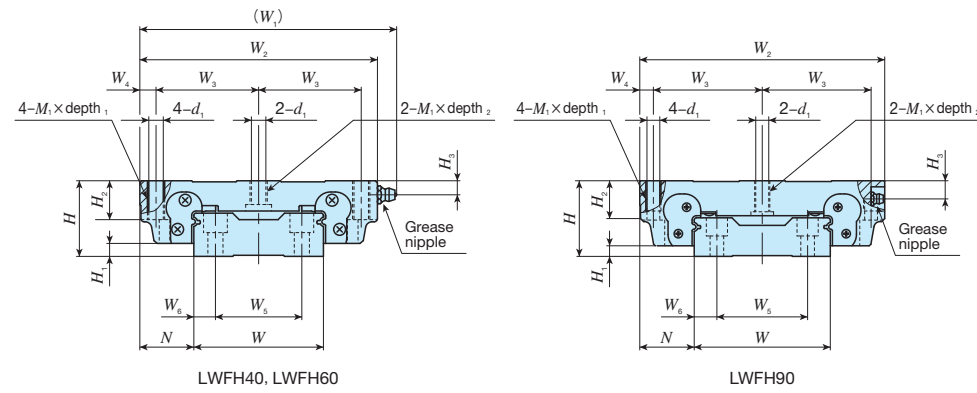
|       |                                                                                   |    |    |
|-------|-----------------------------------------------------------------------------------|----|----|
| Shape |  |    |    |
| Size  | 40                                                                                | 60 | 90 |



| Identification number     | Interchangeable | Mass(Ref.)    |                 | Dimensions of assembly<br>mm |                |    | Dimensions of slide unit |                |                |                |                |                |                |                |                                    |                    |                |  |                | Dimensions of track rail |                |                |                |                |                |    |    |    |             | Appended mounting bolt for track rail <sup>(2)</sup><br>mm | Basic dynamic load rating <sup>(3)</sup><br>C | Basic static load rating <sup>(3)</sup><br>C <sub>0</sub> | Static moment rating <sup>(3)</sup> |                       |  |
|---------------------------|-----------------|---------------|-----------------|------------------------------|----------------|----|--------------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|------------------------------------|--------------------|----------------|--|----------------|--------------------------|----------------|----------------|----------------|----------------|----------------|----|----|----|-------------|------------------------------------------------------------|-----------------------------------------------|-----------------------------------------------------------|-------------------------------------|-----------------------|--|
|                           |                 |               |                 |                              |                |    | mm                       |                |                |                |                |                |                |                |                                    |                    |                |  |                | mm                       |                |                |                |                |                |    |    |    |             |                                                            |                                               |                                                           |                                     |                       |  |
| LWF series<br>(No C-Lube) |                 | Slide unit kg | Track rail kg/m | H                            | H <sub>1</sub> | N  | W <sub>1</sub>           | W <sub>2</sub> | W <sub>3</sub> | W <sub>4</sub> | L <sub>1</sub> | L <sub>2</sub> | L <sub>5</sub> | d <sub>1</sub> | M <sub>1</sub> ×depth <sub>1</sub> | depth <sub>2</sub> | H <sub>2</sub> |  | H <sub>3</sub> | W                        | H <sub>4</sub> | W <sub>5</sub> | W <sub>6</sub> | d <sub>3</sub> | d <sub>4</sub> | h  | E  | F  | Bolt size×ℓ | N                                                          | N                                             | T <sub>0</sub><br>N・m                                     | T <sub>x</sub><br>N・m               | T <sub>y</sub><br>N・m |  |
| LWFH 40                   | ○               | 0.58          | 4.60            | 27                           | 5              | 21 | 91                       | 82             | 37             | 4              | 70             | 60             | 27.5           | 4.3            | M 5×14                             | 8                  | 14             |  | 6.5            | 40                       | 16             | 24             | 8              | 4.5            | 7.2            | 6  | 30 | 60 | M4×16       | 12 600                                                     | 16 600                                        | 280                                                       | 108<br>612                          | 99.3<br>563           |  |
| LWFH 60                   | ○               | 1.29          | 8.60            | 35                           | 6              | 25 | 119                      | 110            | 47.5           | 7.5            | 90             | 75             | 45             | 6.7            | M 8×18                             | 11                 | 18             |  | 6.5            | 60                       | 20             | 40             | 10             | 7              | 11             | 9  | 40 | 80 | M6×22       | 16 100                                                     | 23 500                                        | 600                                                       | 210<br>1 090                        | 193<br>998            |  |
| LWFH 90                   | ○               | 4.06          | 16.5            | 50                           | 7              | 36 | —                        | 162            | 72             | 9              | 120            | 100            | 60             | 8.6            | M10×20                             | 20.5               | 26             |  | 12             | 90                       | 25.5           | 60             | 15             | 9              | 14             | 12 | 40 | 80 | M8×28       | 31 600                                                     | 43 300                                        | 1 650                                                     | 513<br>2 680                        | 470<br>2 460          |  |

Notes (1) Track rail lengths  $L$  are shown in Table 2.1 on page II -116.

(2) The appended track rail mounting bolts are hexagon socket head bolts equivalent to JIS B 1176.

(3) Basic dynamic load rating ( $C$ ), Basic static load rating ( $C_0$ ), static moment rating ( $T_0$ ,  $T_x$ , and  $T_y$ ) are values for the direction indicated in the following figure.

The upper values of  $T_x$  and  $T_y$  are for one slide unit and the lower values are for two slide units in close contact.

Remark: For the specification of grease nipple, see Table 15 on page II -124.

LWF

### Example of identification number of assembled set

| Model code  | Dimensions | Part code |             | Prelod symbol        | Classification symbol | Interchangeable code | Special specification |
|-------------|------------|-----------|-------------|----------------------|-----------------------|----------------------|-----------------------|
| <u>LWFH</u> | <u>60</u>  | <u>C2</u> | <u>R800</u> | <u>T<sub>1</sub></u> | <u>P</u>              | <u>S1</u>            | <u>/U</u>             |
| 1           | 2          | 3         | 4           | 5                    | 6                     | 7                    | 8                     |

- ① Model  
LWFH Flange type mounting from top / bottom
- ② Size  
40, 60, 90
- ③ Number of slide unit (2)
- ④ Length of track rail (800 mm)

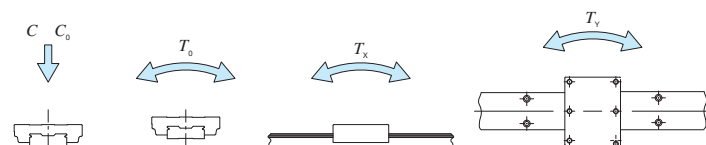
| ⑤ Preload amount |                |
|------------------|----------------|
| No symbol        | Standard       |
| T1               | Light preload  |
| T2               | Medium preload |

| ⑥ Accuracy class |                 |
|------------------|-----------------|
| H                | High            |
| P                | Precision       |
| SP               | Super precision |



|                   |                                   |
|-------------------|-----------------------------------|
| ⑦ Interchangeable |                                   |
| S1                | S1 specification                  |
| S2                | S2 specification                  |
| No symbol         | Non-interchangeable specification |

⑧ Special specification  
A, C, D, E, F, I, J, L, LF  
MN, N, Q, U, W, Y, Z




Flange type mounting from top / bottom

|       |      |    |    |    |
|-------|------|----|----|----|
| Shape | LWFF |    |    |    |
|       |      |    |    |    |
| Size  | 33   | 37 | 42 | 69 |

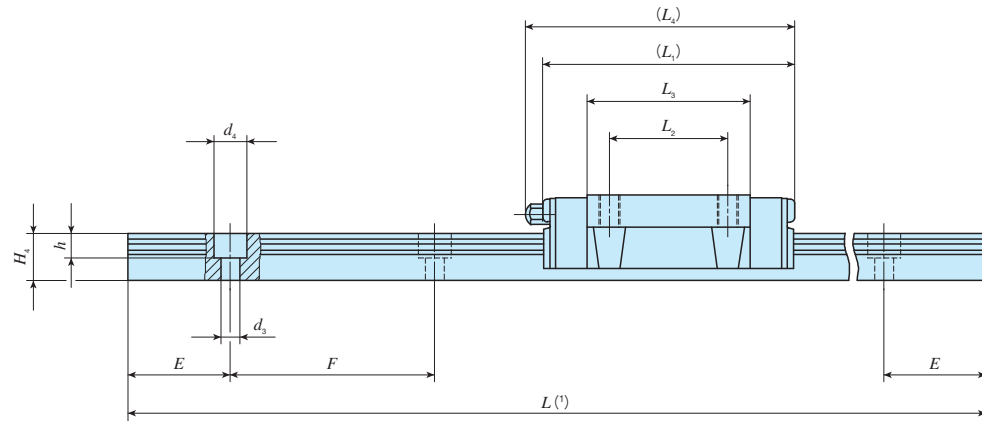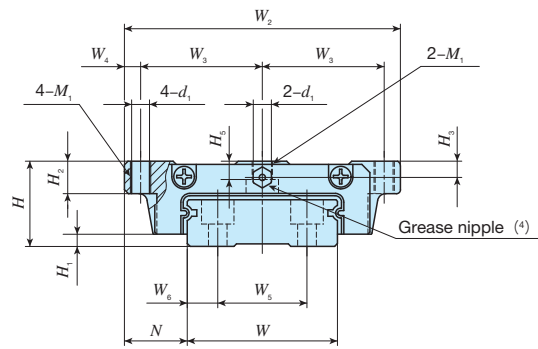

| Identification number | Interchangeable | Mass(Ref.)    |                 | Dimensions of assembly |                |      | Dimensions of slide unit |                |                |                |                |                |                |                |                |                |                |                |  | Dimensions of track rail |                |                |                |                |                |   |    | Appended mounting bolt for track rail <sup>(2)</sup><br>mm | Basic dynamic load rating <sup>(3)</sup> | Basic static load rating <sup>(3)</sup> | Static moment rating <sup>(3)</sup> |             |              |                     |                       |
|-----------------------|-----------------|---------------|-----------------|------------------------|----------------|------|--------------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|--|--------------------------|----------------|----------------|----------------|----------------|----------------|---|----|------------------------------------------------------------|------------------------------------------|-----------------------------------------|-------------------------------------|-------------|--------------|---------------------|-----------------------|
|                       |                 | Slide unit kg | Track rail kg/m | H                      | H <sub>1</sub> | N    | W <sub>2</sub>           | W <sub>3</sub> | W <sub>4</sub> | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | L <sub>4</sub> | d <sub>1</sub> | M <sub>1</sub> | H <sub>2</sub> | H <sub>3</sub> | H <sub>5</sub> |  | W                        | H <sub>4</sub> | W <sub>5</sub> | W <sub>6</sub> | d <sub>3</sub> | d <sub>4</sub> | h | E  |                                                            |                                          |                                         | F                                   | Bolt size×ℓ | C<br>N       | C <sub>0</sub><br>N | T <sub>0</sub><br>N·m |
| LWFF 33               | ○               | 0.14          | 2.41            | 17                     | 2.5            | 13.5 | 60                       | 26.5           | 3.5            | 54             | 26             | 35.3           | 56             | 3.3            | M4             | 6              | 3.2            | 3.7            |  | 33                       | 10             | 18             | 7.5            | 4.6            | 8              | 6 | 20 | 40                                                         | M4×10                                    | 6 530                                   | 8 610                               | 146         | 49.0<br>292  | 49.0<br>292         | 49.0<br>292           |
| LWFF 37               | ○               | 0.23          | 3.05            | 21                     | 3              | 15.5 | 68                       | 30             | 4              | 62             | 29             | 40             | 66             | 4.4            | M5             | 8              | 4              | 4.5            |  | 37                       | 11.5           | 22             | 7.5            | 4.6            | 8              | 6 | 25 | 50                                                         | M4×12                                    | 9 840                                   | 12 200                              | 235         | 80.0<br>480  | 80.0<br>480         | 80.0<br>480           |
| LWFF 42               | ○               | 0.49          | 4.30            | 27                     | 3              | 19   | 80                       | 35             | 5              | 75             | 40             | 52.2           | 86             | 5.3            | M6             | 10             | 6              | 7              |  | 42                       | 14             | 24             | 9              | 4.6            | 8              | 6 | 30 | 60                                                         | M4×16                                    | 15 500                                  | 19 400                              | 424         | 165<br>904   | 165<br>904          | 165<br>904            |
| LWFF 69               | ○               | 1.40          | 9.51            | 35                     | 4              | 25.5 | 120                      | 53.5           | 6.5            | 109            | 60             | 79.5           | 120            | 7              | M8             | 14             | 8              | 8              |  | 69                       | 19.5           | 40             | 14.5           | 7              | 11             | 9 | 40 | 80                                                         | M6×22                                    | 34 900                                  | 44 100                              | 1 560       | 581<br>2 940 | 488<br>2 460        | 488<br>2 460          |

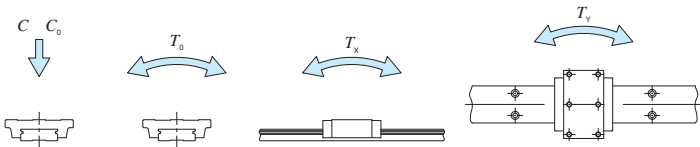Notes (1) Track rail lengths  $L$  are shown in Table 2.1 on page II-116.  
(2) The appended track rail mounting bolts are hexagon socket head bolts equivalent to JIS B 1176.  
(3) Basic dynamic load rating ( $C$ ), Basic static load rating ( $C_0$ ), static moment rating ( $T_0$ ,  $T_x$ , and  $T_y$ ) are values for the direction indicated in the following figure.  
The upper values of  $T_x$  and  $T_y$  are for one slide unit and the lower values are for two slide units in close contact.  
(4) The shapes of grease nipple vary by size. For details of the specifications, see Table 15 on page II-124.






Example of identification number of assembled set

| Model code  | Dimensions | Part code |             | Preload symbol       | Classification symbol | Interchangeable code | Special specification |
|-------------|------------|-----------|-------------|----------------------|-----------------------|----------------------|-----------------------|
| <u>LWFF</u> | <u>37</u>  | <u>C2</u> | <u>R800</u> | <u>T<sub>1</sub></u> | <u>P</u>              | <u>S1</u>            | <u>/U</u>             |
| 1           | 2          | 3         | 4           | 5                    | 6                     | 7                    | 8                     |

|                                                           |                                                                                 |                                                                                                                |
|-----------------------------------------------------------|---------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|
| ① Model<br>LWFF<br>Flange type mounting from top / bottom | ⑤ Preload amount<br>No symbol Standard<br>T1 Light preload<br>T2 Medium preload | ⑦ Interchangeable<br>S1 S1 specification<br>S2 S2 specification<br>No symbol Non-interchangeable specification |
| ② Size<br>33, 37, 42, 69                                  | ⑥ Accuracy class<br>H High<br>P Precision<br>SP Super precision                 | ⑧ Special specification<br>A, D, E, F, I, J, L, LF<br>MN, N, Q, U, V, W, Y, Z                                  |
| ③ Number of slide unit (2)                                |                                                                                 |                                                                                                                |
| ④ Length of track rail (800 mm)                           |                                                                                 |                                                                                                                |


Block type mounting from top

|       |                                                                                   |    |    |
|-------|-----------------------------------------------------------------------------------|----|----|
| Shape |  |    |    |
| Size  | 33                                                                                | 37 | 42 |

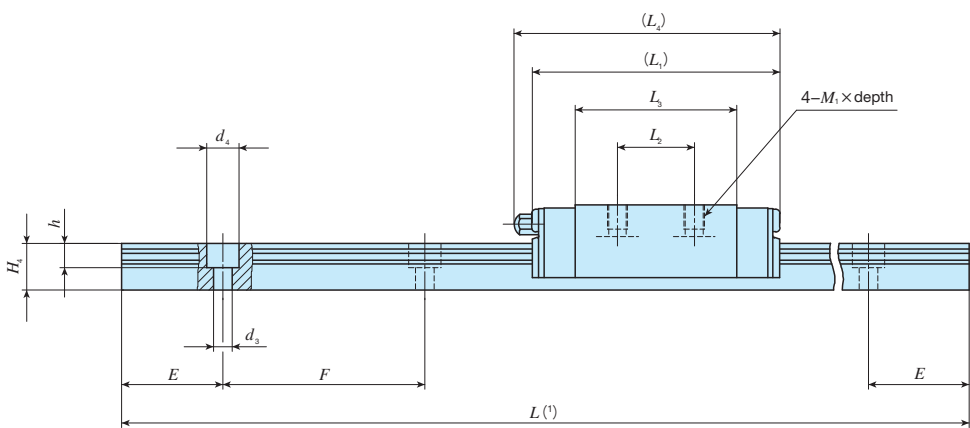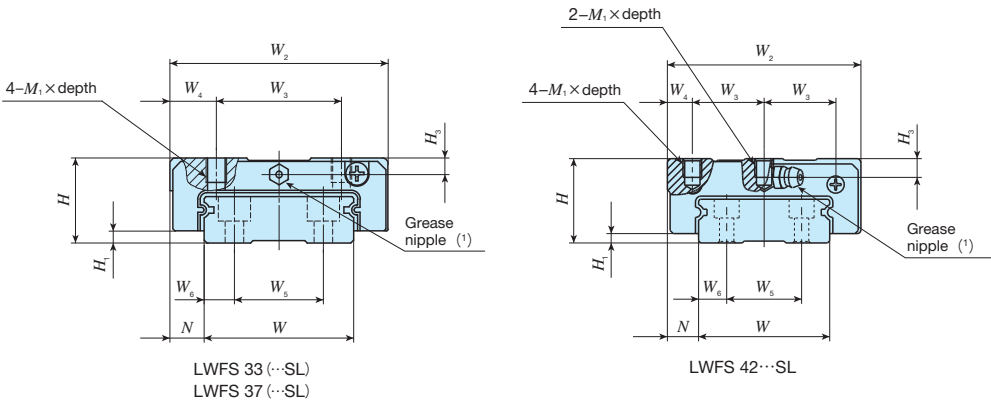

| Identification number     | Interchangeable | Mass(Ref.)    |                 | Dimensions of assembly |                |     | Dimensions of slide unit |                |                |                |                |                |                |                       |                |  | Dimensions of track rail |                |                |                |                |                |   |    |    |             | Appended mounting bolt for track rail <sup>(2)</sup><br>mm | Basic dynamic load rating <sup>(3)</sup> | Basic static load rating <sup>(3)</sup> | Static moment rating <sup>(3)</sup> |                     |                       |
|---------------------------|-----------------|---------------|-----------------|------------------------|----------------|-----|--------------------------|----------------|----------------|----------------|----------------|----------------|----------------|-----------------------|----------------|--|--------------------------|----------------|----------------|----------------|----------------|----------------|---|----|----|-------------|------------------------------------------------------------|------------------------------------------|-----------------------------------------|-------------------------------------|---------------------|-----------------------|
|                           |                 | Slide unit kg | Track rail kg/m | H                      | H <sub>1</sub> | N   | W <sub>2</sub>           | W <sub>3</sub> | W <sub>4</sub> | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | L <sub>4</sub> | M <sub>1</sub> ×depth | H <sub>3</sub> |  | W                        | H <sub>4</sub> | W <sub>5</sub> | W <sub>6</sub> | d <sub>3</sub> | d <sub>4</sub> | h | E  | F  | Bolt size×ℓ |                                                            |                                          |                                         | C<br>N                              | C <sub>0</sub><br>N | T <sub>0</sub><br>N・m |
| LWF series<br>(No C-Lube) |                 |               |                 |                        |                |     |                          |                |                |                |                |                |                |                       |                |  |                          |                |                |                |                |                |   |    |    |             |                                                            |                                          |                                         |                                     |                     |                       |
| LWFS 33                   | ○               | 0.13          | 2.41            | 17                     | 2.5            | 8.5 | 50                       | 29             | 10.5           | 54             | 15             | 35.3           | 56             | M4×5                  | 3.2            |  | 33                       | 10             | 18             | 7.5            | 4.6            | 8              | 6 | 20 | 40 | M4×10       | 6 530                                                      | 8 610                                    | 146                                     | 49.0<br>292                         | 49.0<br>292         |                       |
| LWFS 33…SL                | ○               |               |                 |                        |                |     |                          |                |                |                |                |                |                |                       |                |  |                          |                |                |                |                |                |   |    |    |             |                                                            |                                          |                                         |                                     |                     |                       |
| LWFS 37                   | ○               | 0.20          | 3.05            | 21                     | 3              | 8.5 | 54                       | 31             | 11.5           | 62             | 19             | 40             | 66             | M5×6                  | 4              |  | 37                       | 11.5           | 22             | 7.5            | 4.6            | 8              | 6 | 25 | 50 | M4×12       | 9 840                                                      | 12 200                                   | 235                                     | 80.0<br>480                         | 80.0<br>480         |                       |
| LWFS 37…SL                | ○               |               |                 |                        |                |     |                          |                |                |                |                |                |                |                       |                |  |                          |                |                |                |                |                |   |    |    |             |                                                            |                                          |                                         |                                     |                     |                       |
| LWFS 42…SL                | ○               | 0.40          | 4.30            | 27                     | 3              | 10  | 62                       | 23             | 8              | 75             | 32             | 52.2           | 86             | M6×6                  | 6              |  | 42                       | 14             | 24             | 9              | 4.6            | 8              | 6 | 30 | 60 | M4×16       | 15 500                                                     | 19 400                                   | 424                                     | 165<br>904                          | 165<br>904          |                       |

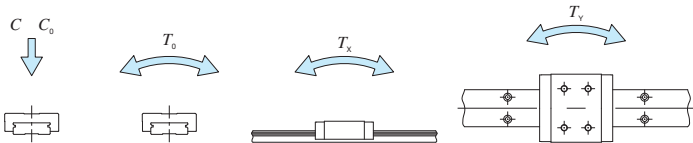Notes (1) Track rail lengths  $L$  are shown in Tables 2.1 and 2.2 on page II-116.  
(2) The appended track rail mounting bolts are hexagon socket head bolts equivalent to JIS B 1176. For stainless steel model, stainless steel bolts are appended.  
(3) Basic dynamic load rating ( $C$ ), Basic static load rating ( $C_0$ ), static moment rating ( $T_0$ ,  $T_x$ , and  $T_y$ ) are values for the direction indicated in the following figure.  
The upper values of  $T_x$  and  $T_y$  are for one slide unit and the lower values are for two slide units in close contact.  
(4) The shapes of grease nipple vary by size. For details of the specifications, see Table 15 on page II-124.



Example of identification number of assembled set

| Model code | Dimensions | Part code | Material code | Preload symbol | Classification symbol | Interchangeable code | Special specification |
|------------|------------|-----------|---------------|----------------|-----------------------|----------------------|-----------------------|
| LWFS       | 37         | C2 R800   |               | T1             | P                     | S1                   | /U                    |
| 1          | 2          | 3         | 4             | 5              | 6                     | 7                    | 8                     |

|                                              |                                 |                                                                                 |                                                                                                                |
|----------------------------------------------|---------------------------------|---------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|
| ① Model<br>LWFS Block type mounting from top | ③ Number of slide unit (2)      | ⑥ Preload amount<br>No symbol Standard<br>T1 Light preload<br>T2 Medium preload | ⑧ Interchangeable<br>S1 S1 specification<br>S2 S2 specification<br>No symbol Non-interchangeable specification |
| ② Size<br>33, 37, 42                         | ④ Length of track rail (800 mm) | ⑦ Accuracy class<br>H High<br>P Precision<br>SP Super precision                 | ⑨ Special specification<br>A, D, E, F, I, J, L, LF<br>MN, N, Q, U, V, W, Y, Z                                  |



## C-Lube Linear Way MUL Linear Way U

MUL • LWU



C-Lube Linear Way MUL

MUL



The aquamarine end plate is the symbol of maintenance free.

Track rail

Slide unit

Casing

C-Lube

Ball

End plate

Ball retaining band

End seal

Oil hole

Linear Way U  
LWU

Points

1 ● Original U-shaped track rail

MUL and LWU series are the linear motion rolling guides adopting the U-shaped track rail to greatly increase rigidity of track rail under moment load and torsion.

2 ● Expanded freedom of design for use as a structure beam

Because of the high rigidity of the track rail, the track rail can be used as a structure beam, such as a cantilever or both-end support in the machine and equipment. Therefore, freedom of design is expanded for user.

3 ● Additional machining available for corresponding to needs

High carbon steel track rail can be machined additionally to fix mechanical components such as a driving mechanism on the track rail directly at user.

4 ● Stainless steels superior in corrosion resistance are listed on lineup.

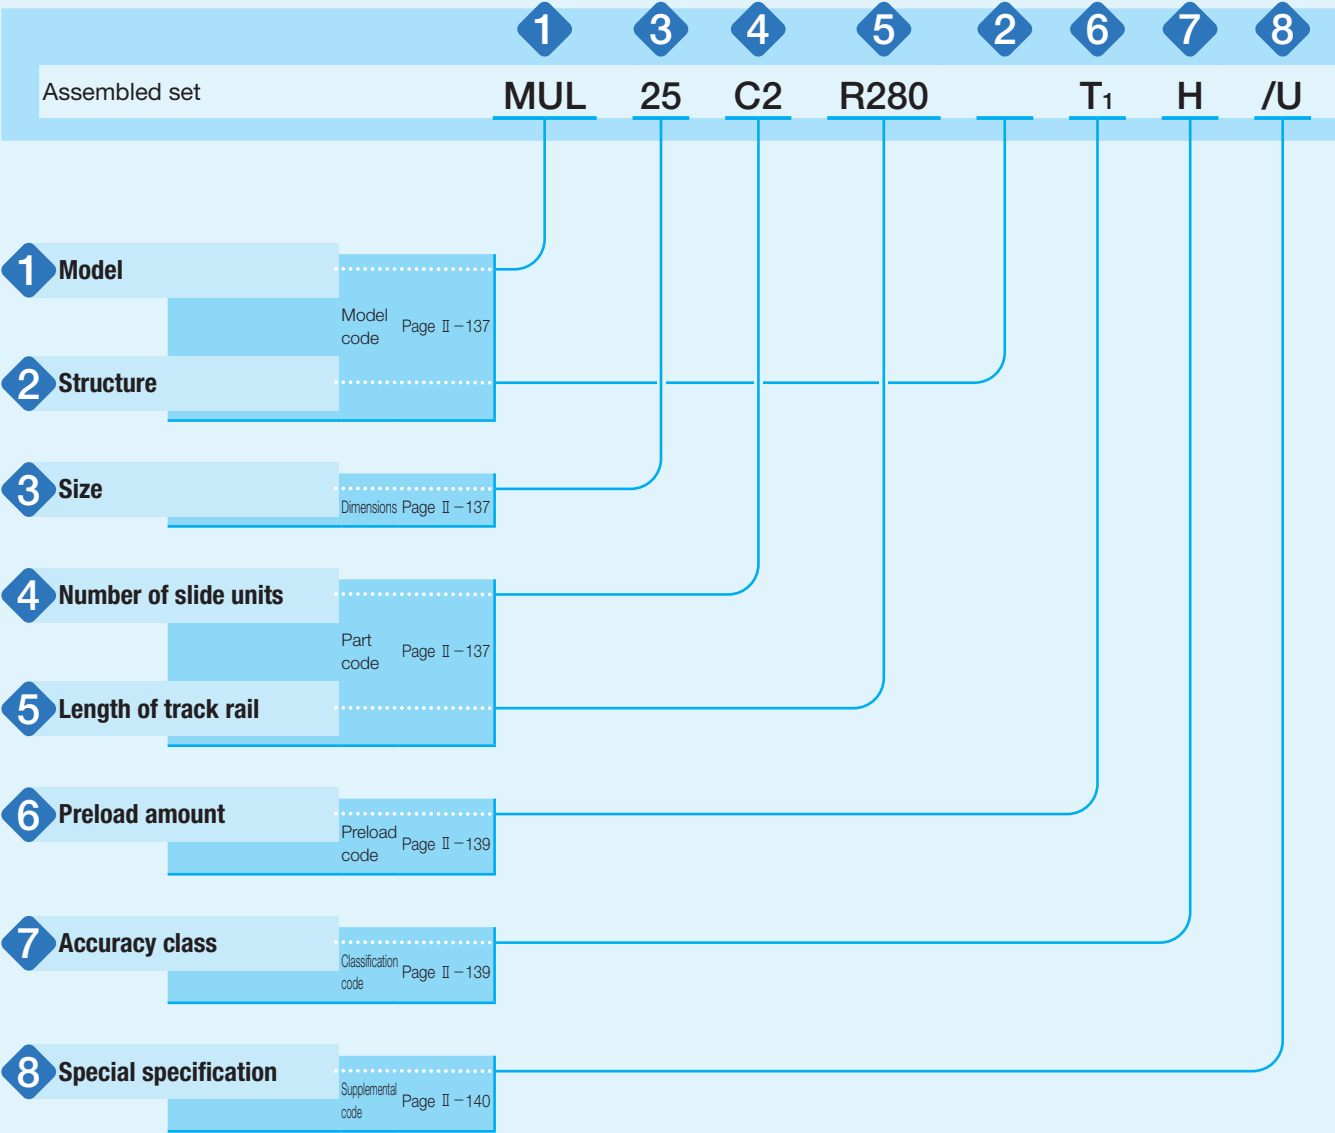
For details ➡ P.I-41

The main metal components made of corrosion-resistant stainless steel are available for small size of 25 mm and 30 mm of track rail width. They are suitable for applications where rust prevention oil is not preferred, such as in a cleanroom environment.

Identification Number and Specification

Example of an identification number

The specifications of MUL and LWU series are indicated by the identification number. Indicate the identification number, consisting of a model code, dimensions, a part code, a preload symbol, a classification symbol, and a supplemental code for each specification to apply.




MUL • LWU

Identification Number and Specification — Model · Structure · Size · Number of Slide unit ·

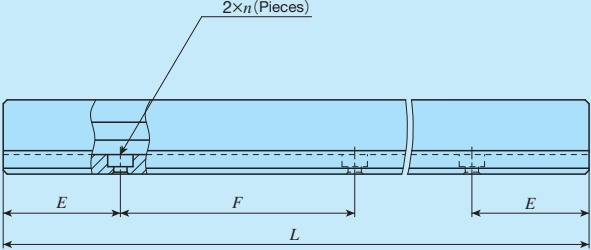
|   |                       |                                                        |                                                                                            |                                               |
|---|-----------------------|--------------------------------------------------------|--------------------------------------------------------------------------------------------|-----------------------------------------------|
| 1 | Model                 | C-Lube Linear Way MUL (MUL series)                     | Small type                                                                                 | : MUL                                         |
|   |                       | Linear Way U <sup>(1)</sup> (LWU series)               | Small type                                                                                 | : LWUL                                        |
|   |                       |                                                        | Standard type                                                                              | : LWU                                         |
|   |                       | For applicable models and sizes, see Table 1.          |                                                                                            |                                               |
|   |                       | Note <sup>(1)</sup> This model has no built-in C-Lube. |                                                                                            |                                               |
| 2 | Structure             | Ball retained type                                     | : B                                                                                        | For applicable models and sizes, see Table 1. |
|   |                       | Ball non-retained type                                 | : No symbol                                                                                |                                               |
| 3 | Size                  | 25,30,40,50,60,86,100,130                              | For applicable models and sizes, see Table 1.                                              |                                               |
| 4 | Number of slide units | : C○                                                   | Indicates the number of slide units assembled on a track rail.                             |                                               |
| 5 | Length of track rail  | : R○                                                   | Indicate the length of track rail in mm.<br>For standard and maximum lengths, see Table 2. |                                               |

Table 1 Models and sizes of MUL and LWU series

| Shape                                                                                                | Material               | Model    | Size |    |    |    |    |    |     |     |
|------------------------------------------------------------------------------------------------------|------------------------|----------|------|----|----|----|----|----|-----|-----|
|                                                                                                      |                        |          | 25   | 30 | 40 | 50 | 60 | 86 | 100 | 130 |
| Small type<br>    | Stainless steel made   | MUL      | ○    | ○  | —  | —  | —  | —  | —   | —   |
|                                                                                                      |                        | LWUL···B | ○    | ○  | —  | —  | —  | —  | —   | —   |
| Standard type<br> | High carbon steel made | LWU···B  | —    | —  | ○  | ○  | ○  | ○  | —   | —   |
|                                                                                                      |                        | LWU      | —    | —  | ○  | ○  | ○  | ○  | ○   | ○   |

Length of Track Rail —

Table 2 Standard and maximum lengths of track rail

|  |                     |                     |                    |                    |
|-------------------------------------------------------------------------------------|---------------------|---------------------|--------------------|--------------------|
| unit: mm                                                                            |                     |                     |                    |                    |
| Identification number                                                               | MUL25<br>LWUL25···B | MUL30<br>LWUL30···B | LWU40···B<br>LWU40 | LWU50···B<br>LWU50 |
| Item                                                                                |                     |                     |                    |                    |
| Standard length <i>L</i> ( <i>n</i> )                                               | 105 (3)             | 120 (3)             | 180 (3)            | 240 (3)            |
|                                                                                     | 140 (4)             | 160 (4)             | 240 (4)            | 320 (4)            |
|                                                                                     | 175 (5)             | 200 (5)             | 300 (5)            | 400 (5)            |
|                                                                                     | 210 (6)             | 240 (6)             | 360 (6)            | 480 (6)            |
|                                                                                     | 245 (7)             | 280 (7)             | 420 (7)            | 560 (7)            |
|                                                                                     | 280 (8)             | 320 (8)             | 480 (8)            | 640 (8)            |
| Pitch of mounting holes <i>F</i>                                                    | 35                  | 40                  | 60                 | 80                 |
| <i>E</i>                                                                            | 17.5                | 20                  | 30                 | 40                 |
| Standard <i>E</i> dimensions                                                        | or higher           | 4.5                 | —                  | —                  |
|                                                                                     | below               | 22                  | —                  | —                  |
| Maximum length <sup>(1)</sup>                                                       | 420 (840)           | 480 (960)           | 720                | 800                |
| Identification number                                                               | LWU60···B<br>LWU60  | LWU86···B<br>LWU86  | LWU100             | LWU130             |
| Item                                                                                |                     |                     |                    |                    |
| Standard length <i>L</i> ( <i>n</i> )                                               | 300 (3)             | 300 (3)             | 450 (3)            | 450 (3)            |
|                                                                                     | 400 (4)             | 400 (4)             | 600 (4)            | 600 (4)            |
|                                                                                     | 500 (5)             | 500 (5)             | 750 (5)            | 750 (5)            |
|                                                                                     | 600 (6)             | 600 (6)             | 900 (6)            | 900 (6)            |
|                                                                                     | 700 (7)             | 700 (7)             | 1 050 (7)          | 1 050 (7)          |
|                                                                                     | 800 (8)             | 800 (8)             | 1 200 (8)          | 1 200 (8)          |
| Pitch of mounting holes <i>F</i>                                                    | 100                 | 100                 | 150                | 150                |
| <i>E</i>                                                                            | 50                  | 50                  | 75                 | 75                 |
| Maximum length <sup>(1)</sup>                                                       | 1 000               | 1 200               | 1 500              | 1 500              |

Note <sup>(1)</sup> Track rails with the maximum lengths shown in ( ) can also be manufactured. Consult **IKO** for further information.

Remarks 1. M8 female threads for hanging bolt are provided on the track rail of size 100 model. And M10 female threads for hanging bolt are provided on the track rail of size 130 model.

2. If not directed, E dimensions for both ends will be the same within the range of standard E dimensions. To change the dimensions, indicate the specified rail mounting hole positions "/E" of special specification. For more information, see page III-29.



|   |                |               |                  |                                                 |
|---|----------------|---------------|------------------|-------------------------------------------------|
| 6 | Preload amount | Standard      | : No symbol      | For details of the preload amount, see Table 3. |
|   |                | Light preload | : T <sub>1</sub> |                                                 |


Table 3 Preload amount

| Item          | Preload symbol | Preload amount N   | Operational conditions                                                            |
|---------------|----------------|--------------------|-----------------------------------------------------------------------------------|
| Standard      | (No symbol)    | 0 <sup>(1)</sup>   | · Light and precise motion                                                        |
| Light preload | T <sub>1</sub> | 0.02C <sub>0</sub> | · Almost no vibrations<br>· Load is evenly balanced<br>· Light and precise motion |

Note <sup>(1)</sup> Indicates zero or minimal amount of preload.  
Remark: C<sub>0</sub> indicates the basic static load rating.

|   |                |          |             |                                             |
|---|----------------|----------|-------------|---------------------------------------------|
| 7 | Accuracy class | Ordinary | : No symbol | For details of accuracy class, see Table 4. |
|   |                | High     | : H         |                                             |

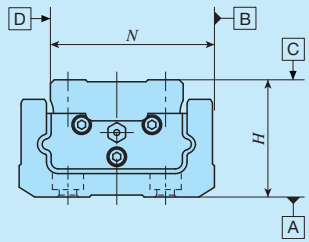Table 4 Tolerance and allowance



unit: mm

| Item                                                              | Class (classification symbol) | Ordinary (No symbol) | High (H) |
|-------------------------------------------------------------------|-------------------------------|----------------------|----------|
| Dim. H tolerance                                                  |                               | ±0.100               | ±0.050   |
| Dim. N tolerance                                                  |                               | ±0.100               | ±0.050   |
| Dim. variation of H <sup>(1)</sup>                                |                               | 0.050                | 0.040    |
| Dim. variation of N <sup>(1)</sup>                                |                               | 0.050                | 0.040    |
| Parallelism in operation of the slide unit C surface to A surface |                               | Based on Fig. 1      |          |
| Parallelism in operation of the slide unit D surface to B surface |                               | Based on Fig. 1      |          |

Note <sup>(1)</sup> The value shows variation of slide units incorporated in the same track rail.

|   |                       |                                 |                                                                                                                                                                                    |
|---|-----------------------|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 8 | Special specification | /E, /LO, /MA, /MN, /Q, /UO, /WO | For applicable special specifications, see Table 5.<br>For combination of multiple special specifications, see Table 6.<br>For details of special specifications, see page III-28. |
|   |                       |                                 |                                                                                                                                                                                    |

Table 5 Application of special specifications

| Special specification                           | Supplemental code | Size             |                  |    |    |    |    |     |     |
|-------------------------------------------------|-------------------|------------------|------------------|----|----|----|----|-----|-----|
|                                                 |                   | 25               | 30               | 40 | 50 | 60 | 86 | 100 | 130 |
| Specified rail mounting hole positions          | /E                | ○                | ○                | ×  | ×  | ×  | ×  | ×   | ×   |
| Black chrome surface treatment                  | /LO               | ○ <sup>(1)</sup> | ○ <sup>(1)</sup> | ○  | ○  | ○  | ○  | ○   | ○   |
| With track rail mounting bolt                   | /MA               | ○ <sup>(2)</sup> | ○ <sup>(2)</sup> | ○  | ○  | ○  | ○  | ○   | ○   |
| Without track rail mounting bolt <sup>(3)</sup> | /MN               | ○                | ○                | ×  | ×  | ×  | ×  | ×   | ×   |
| With C-Lube plate <sup>(3)</sup>                | /Q                | ×                | ×                | ○  | ○  | ○  | ○  | ○   | ○   |
| Upper seal                                      | /U                | ○                | ○                | ×  | ×  | ×  | ×  | ×   | ×   |
| A group of multiple assembled sets              | /WO               | ○                | ○                | ○  | ○  | ○  | ○  | ○   | ○   |

Notes <sup>(1)</sup> Applicable only to "/LR".  
<sup>(2)</sup> Applicable to MUL series.  
<sup>(3)</sup> Applicable to LWU series.

Table 6 Combination of supplemental codes

|    |   |   |    |    |   |   |
|----|---|---|----|----|---|---|
| L  | ○ |   |    |    |   |   |
| MA | ○ | ○ |    |    |   |   |
| MN | ○ | ○ | —  |    |   |   |
| Q  | — | ○ | ○  | ○  |   |   |
| U  | ○ | ○ | ○  | ○  | — |   |
| W  | — | ○ | ○  | ○  | ○ | ○ |
|    | E | L | MA | MN | Q | U |

Remarks 1. The combination of "—" shown in the table is not available.  
2. When using multiple types for combination, indicate the symbols in alphabetical order.


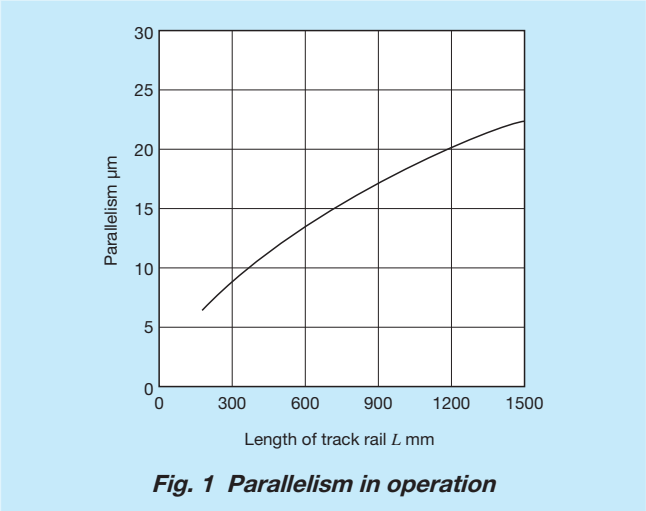


Table 7 Dimension of slide unit with C-Lube plate  
(Supplemental code /Q)

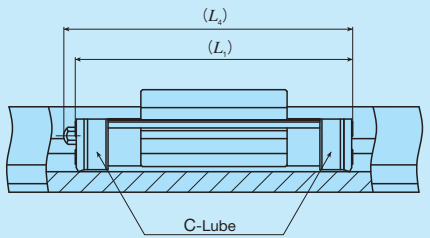


unit: mm

| Size | $L_1$ | $L_4$ |
|------|-------|-------|
| 40   | 67    | 68    |
| 50   | 82    | 83    |
| 60   | 95    | 100   |
| 86   | 142   | 146   |
| 100  | 166   | 170   |
| 130  | 190   | 194   |

Remark: The dimensions of the slide unit with C-Lube at both ends are indicated.

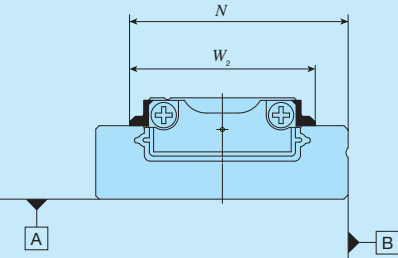Table 8 Dimension of slide unit with upper seal  
(Supplemental code /U)




unit: mm

| Size | $N$  | $W_2$ |
|------|------|-------|
| 25   | 21.4 | 18    |
| 30   | 25.9 | 22    |

Moment of Inertia of Sectional Area

High rigidity design of C-Lube linear way MUL and LWU are achieved by adopting a U-shaped track rail. The moment of inertia of sectional area of track rails are shown in Table 9.

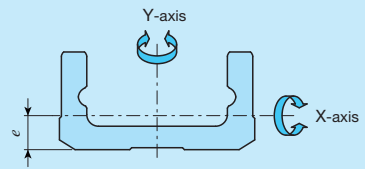Table 9 Moment of inertia of sectional area of track rails




| Identification number |             | Moment of inertia of sectional area<br>$\text{mm}^4$ |                   | Center of gravity<br>$e$<br>mm |
|-----------------------|-------------|------------------------------------------------------|-------------------|--------------------------------|
|                       |             | $I_x$                                                | $I_y$             |                                |
| MUL 25                | LWUL 25...B | $3.7 \times 10^2$                                    | $7.5 \times 10^3$ | 2.6                            |
| MUL 30                | LWUL 30...B | $9.3 \times 10^2$                                    | $1.7 \times 10^4$ | 3.3                            |
| —                     | LWU 40...B  | $1.0 \times 10^4$                                    | $6.8 \times 10^4$ | 6.6                            |
| —                     | LWU 40      |                                                      | $6.9 \times 10^4$ |                                |
| —                     | LWU 50...B  | $2.8 \times 10^4$                                    | $1.7 \times 10^5$ | 8.7                            |
| —                     | LWU 50      |                                                      |                   |                                |
| —                     | LWU 60...B  | $6.3 \times 10^4$                                    | $3.9 \times 10^5$ | 10.7                           |
| —                     | LWU 60      |                                                      |                   | 10.8                           |
| —                     | LWU 86...B  | $2.4 \times 10^5$                                    | $1.6 \times 10^6$ | 14.6                           |
| —                     | LWU 86      |                                                      |                   |                                |
| —                     | LWU 100     | $5.9 \times 10^5$                                    | $3.3 \times 10^6$ | 18.8                           |
| —                     | LWU 130     | $1.4 \times 10^6$                                    | $8.8 \times 10^6$ | 23.0                           |

Lubrication

In the series of size 25 and 30 of MUL series and LWU series, lithium-soap base grease (MULTEMP PS No.2, KYODO YUSHI) is pre-packed, and in the series of size 40 to 130, lithium-soap base grease containing extreme-pressure additive (Alvania EP grease 2, SHOWA SHELL SEKIYU K. K.) is pre-packed. Additionally, MUL series has C-Lube placed in the recirculation part of balls, so that the interval for reapplying lubricant can be extended and maintenance works such as grease job can be reduced significantly.

The MUL series and LWU series have grease nipple or oil hole as indicated in Table 11. Supply nozzles fit to each shapes of grease nipple and dedicated supplying equipment (miniature greasers) fit to oil holes are also available. For these parts for lubrication, refer to Table 14 and Table 15.1 on page Ⅲ-22, and Table 16 on page Ⅲ-23 if required.

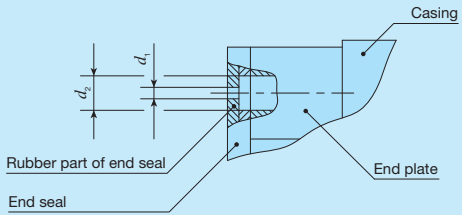
Table 10 Oil hole specifications



unit: mm

| Size | $d_1$ | $d_2$ |
|------|-------|-------|
| 25   | 0.5   | 1.2   |
| 30   |       | 1.5   |

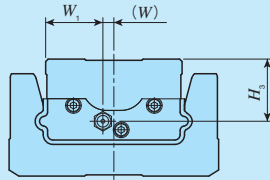Table 11 Lubrication parts and position of grease nipple



| Size | Grease nipple type <sup>(1)</sup> | Applicable supply nozzle type      | Bolt size of female threads for piping | Grease nipple position<br>mm |     |       |
|------|-----------------------------------|------------------------------------|----------------------------------------|------------------------------|-----|-------|
|      |                                   |                                    |                                        | $W_1$                        | $W$ | $H_3$ |
| 25   | Oil hole                          | Miniature greaser                  | —                                      | 7                            | 0   | 2.9   |
| 30   |                                   |                                    |                                        | 9                            | 0   | 3.75  |
| 40   | A-M4                              | A-5120V A-5240V                    | M4                                     | 13                           | 0   | 10.5  |
| 50   |                                   | B-5120V B-5240V                    |                                        | 17                           | 0   | 13.5  |
| 60   | JIS type 1                        | Grease gun available on the market | M6                                     | 19                           | 0   | 14.5  |
| 86   |                                   |                                    |                                        | 23.5                         | 4.5 | 25.5  |
| 100  |                                   |                                    |                                        | 28.5                         | 4   | 29    |
| 130  |                                   |                                    |                                        | 44                           | 0   | 35.5  |

Note <sup>(1)</sup> For specifications of grease nipple, refer to Tables 15.1 and 15.2 on page Ⅲ-22.

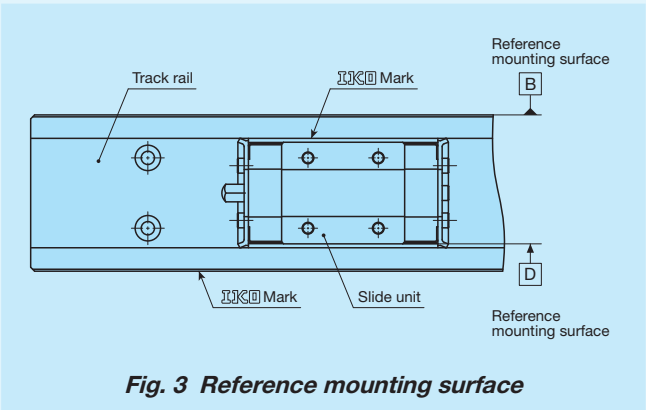
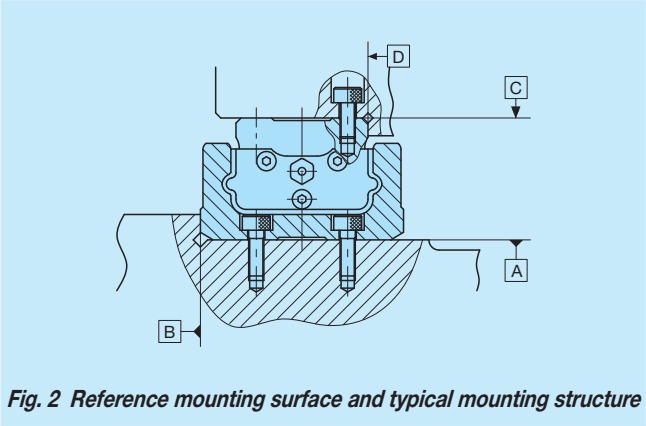
Dust Protection

The slide units of MUL series and LWU series are dust protected by end seals and upper seals as standard. However, if large amount of contaminant or dust are floating, or if large particles of foreign substances such as chips or sand may adhere to the track rail, it is recommended to attach a protective cover to the linear motion mechanism.

Precaution for Use


① Mounting surface, reference mounting surface and typical mounting structure

When mounting the MUL series and LWU series, properly align the reference mounting surfaces B and D of the track rail and slide unit with the reference mounting surface of the table and bed and fix them. (See Fig. 2)  
The reference mounting surfaces B and D and mounting surfaces A and C are precisely ground. Machining the mounting surface of the table and bed, such as machine or device, to high accuracy and mounting them properly will ensure stable linear motion with high accuracy.  
Reference mounting surfaces of slide unit and track rail of the MUL series and LWU series are the opposite side of the **IKO** mark. (See Fig. 3)



② Corner radius and shoulder height of reference mounting surfaces

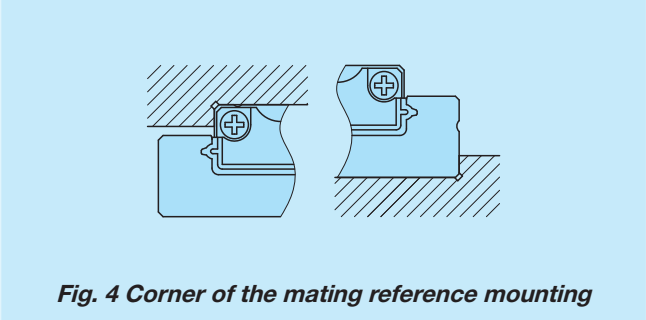For the opposite corner of the mating reference mounting, it is recommended to have relieved fillet as indicated in Fig. 4. Recommended value for the shoulder height on the mating side is indicated in Table 13.



③ Tightening torque for fixing screw

Typical tightening torques for mounting of the MUL series and LWU series to the steel mating member material are indicated in Table 12. When vibration and shock of the machine or device are large, fluctuating load is large, or moment load is applied, fix it by using the torque 1.2 to 1.5 times larger than the value indicated in the table as necessary. If the mating member material is cast iron or aluminum, reduce the tightening torque depending on the strength characteristic of the mating member material.

Table 12 Tightening torque for fixing screw

| Bolt size  | Tightening torque N · m    |                              |
|------------|----------------------------|------------------------------|
|            | Stainless steel-made screw | High carbon steel-made screw |
| M 2.5×0.45 | 0.62                       | —                            |
| M 3 ×0.5   | 1.1                        | 1.7                          |
| M 4 ×0.7   | 2.5                        | 4.0                          |
| M 5 ×0.8   | —                          | 7.9                          |
| M 6 ×1     | —                          | 13.3                         |
| M 8 ×1.25  | —                          | 32.0                         |
| M10 ×1.5   | —                          | 62.7                         |


Note (1) The calculation is based on the tightening torque, strength division 12.9 and property division A2-70.

Table 13 Shoulder height and corner radius of the reference mounting surface


| Size | Mounting part of slide unit |                               | Mounting part of track rail |                                   |
|------|-----------------------------|-------------------------------|-----------------------------|-----------------------------------|
|      | Shoulder height $h_1$       | Corner radius $R_1$ (Maximum) | Shoulder height $h_2$       | Corner radius $R_2$ (Maximum) (1) |
| 25   | 1.5                         | 0.2                           | 2.5                         | —                                 |
| 30   | 2.5                         | 0.2                           | 3                           | —                                 |
| 40   | 3                           | 0.5                           | 5                           | 1                                 |
| 50   | 3                           | 0.5                           | 7                           | 2                                 |
| 60   | 3                           | 0.5                           | 9                           | 2                                 |
| 86   | 4                           | 0.5                           | 11                          | 2                                 |
| 100  | 4                           | 0.5                           | 13                          | 1                                 |
| 130  | 5                           | 1                             | 14                          | 2                                 |



Note (1) In sizes 25 and 30, provide a relieved fillet as shown in Fig. 4.



| Small type |                                                                                                     |    |  |
|------------|-----------------------------------------------------------------------------------------------------|----|--|
| Shape      | <b>MUL · LWUL</b>  |    |  |
| Size       | 25                                                                                                  | 30 |  |

| Standard type |                                                                                                     |           |           |
|---------------|-----------------------------------------------------------------------------------------------------|-----------|-----------|
| Shape         | <b>LWU (···B)</b>  |           |           |
| Size          | 40<br>86                                                                                            | 50<br>100 | 60<br>130 |


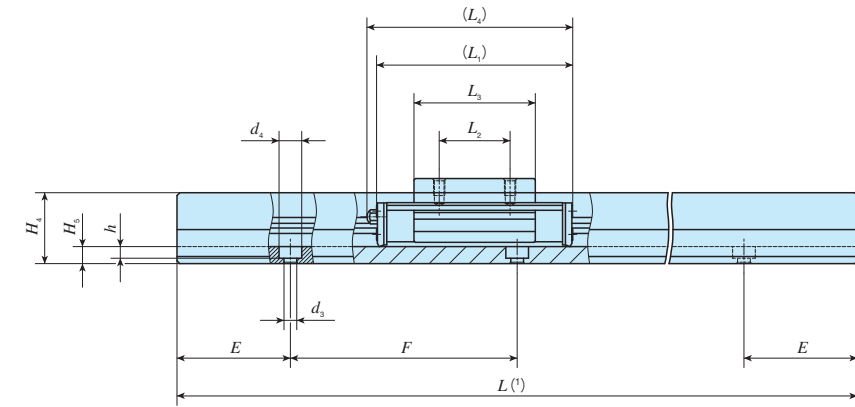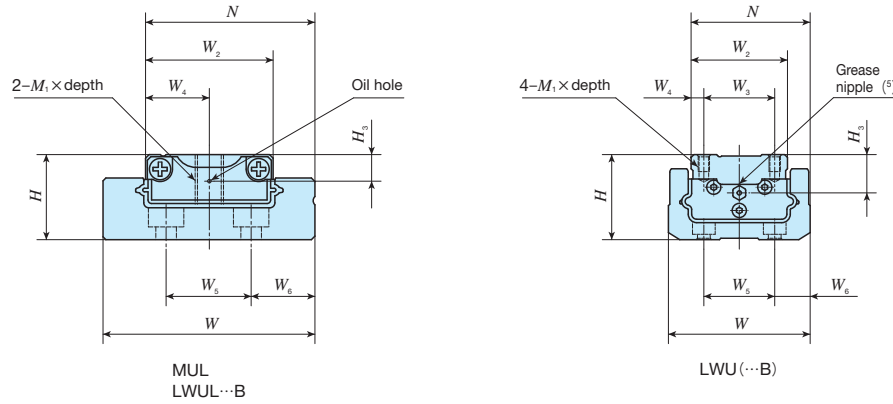
| Identification number |                        | Interchangeable | Mass(Ref.)    |                 | Dimensions of assembly mm |      | Dimensions of slide unit mm |                |                |                |                |                |                |                        | Dimensions of track rail mm |      |  |                |                |                |                |                |                |      | Appended mounting bolt for track rail <sup>(3)</sup> mm | Basic dynamic load rating <sup>(4)</sup> | Basic static load rating <sup>(4)</sup>                     | Static moment rating <sup>(4)</sup> |                     |                         |                         |                         |
|-----------------------|------------------------|-----------------|---------------|-----------------|---------------------------|------|-----------------------------|----------------|----------------|----------------|----------------|----------------|----------------|------------------------|-----------------------------|------|--|----------------|----------------|----------------|----------------|----------------|----------------|------|---------------------------------------------------------|------------------------------------------|-------------------------------------------------------------|-------------------------------------|---------------------|-------------------------|-------------------------|-------------------------|
| MUL series            | LWU series (No C-Lube) |                 | Slide unit kg | Track rail kg/m | H                         | N    | W <sub>2</sub>              | W <sub>3</sub> | W <sub>4</sub> | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | L <sub>4</sub> | M <sub>1</sub> × depth | H <sub>3</sub>              | W    |  | H <sub>4</sub> | H <sub>5</sub> | W <sub>5</sub> | W <sub>6</sub> | d <sub>3</sub> | d <sub>4</sub> | h    | E                                                       | F                                        | Bolt size× ℓ                                                | C<br>N                              | C <sub>0</sub><br>N | T <sub>0</sub><br>N · m | T <sub>x</sub><br>N · m | T <sub>y</sub><br>N · m |
| MUL 25                | LWUL 25…B              | —               | 0.013         | 0.87            | 9                         | 19.4 | 14                          | —              | 7              | 31             | 12             | 22             | —              | M 3× 5                 | 2.9                         | 24.9 |  | 6.7            | 3.2            | 9              | 8              | 2.9            | 4.8            | 1.6  | 17.5                                                    | 35                                       | Cross-recessed head screw for precision equipment M 2.5 × 6 | 1 770                               | 2 840               | 20.3                    | 10.1<br>53.7            | 8.4<br>45.0             |
| MUL 30                | LWUL 30…B              | —               | 0.028         | 1.39            | 12                        | 23.9 | 18                          | —              | 9              | 38             | 14             | 28.6           | —              | M 4× 7                 | 3.75                        | 29.9 |  | 8.7            | 4.5            | 12             | 9              | 2.9            | 5              | 2.7  | 20                                                      | 40                                       | M 2.5× 6                                                    | 2 280                               | 3 810               | 34.9                    | 16.9<br>87.5            | 14.2<br>73.4            |
| —                     | LWU 40…B               | —               | 0.12          | 2.65            | 24                        | 33   | 26                          | 18             | 4              | 55             | 18             | 31.5           | 59             | M 3× 5                 | 10.5                        | 40   |  | 19             | 5              | 18             | 11             | 3.4            | 6.5            | 3.1  | 30                                                      | 60                                       | M 3 × 8<br>(Not appended)                                   | 8 410                               | 9 780               | 134                     | 53.0<br>351             | 53.0<br>351             |
| —                     | LWU 40 <sup>(2)</sup>  | —               |               | 2.66            |                           |      |                             |                |                |                |                |                |                |                        |                             |      |  |                |                |                |                |                |                |      |                                                         |                                          |                                                             |                                     |                     |                         |                         |                         |
| —                     | LWU 50…B               | —               | 0.27          | 4.06            | 30                        | 42   | 34                          | 25             | 4.5            | 70             | 25             | 42.8           | 73             | M 4× 6                 | 13.5                        | 50   |  | 25             | 6              | 25             | 12.5           | 4.5            | 8              | 4.1  | 40                                                      | 80                                       | M 4 ×10<br>(Not appended)                                   | 13 500                              | 15 800              | 280                     | 114<br>711              | 114<br>711              |
| —                     | LWU 50 <sup>(2)</sup>  | —               |               | 4.08            |                           |      |                             |                |                |                |                |                |                |                        |                             |      |  |                |                |                |                |                |                |      |                                                         |                                          |                                                             |                                     |                     |                         |                         |                         |
| —                     | LWU 60…B               | —               | 0.40          | 6.66            | 35                        | 49   | 38                          | 28             | 5              | 83             | 28             | 52.4           | 88             | M 5× 8                 | 14.5                        | 60   |  | 30             | 8              | 28             | 16             | 5.5            | 9.5            | 5.4  | 50                                                      | 100                                      | M 5 ×12<br>(Not appended)                                   | 18 800                              | 21 600              | 425                     | 181<br>1 150            | 181<br>1 150            |
| —                     | LWU 60 <sup>(2)</sup>  | —               |               | 6.69            |                           |      |                             |                |                |                |                |                |                |                        |                             |      |  |                |                |                |                |                |                |      |                                                         |                                          |                                                             |                                     |                     |                         |                         |                         |
| —                     | LWU 86…B               | —               | 1.32          | 14.1            | 48                        | 71   | 56                          | 46             | 5              | 130            | 46             | 93             | 134            | M 6×12                 | 25.5                        | 86   |  | 42             | 13             | 46             | 20             | 7              | 11             | 7    | 50                                                      | 100                                      | M 6 ×16<br>(Not appended)                                   | 41 400                              | 51 500              | 1 470                   | 764<br>4 120            | 764<br>4 120            |
| —                     | LWU 86 <sup>(2)</sup>  | —               |               |                 |                           |      |                             |                |                |                |                |                |                |                        |                             |      |  |                |                |                |                |                |                |      |                                                         |                                          |                                                             |                                     |                     |                         |                         |                         |
| —                     | LWU 100 <sup>(2)</sup> | —               | 2.20          | 21.5            | 58                        | 82   | 65                          | 50             | 7.5            | 154            | 50             | 111            | 158            | M 8×15                 | 29                          | 99.5 |  | 52             | 17             | 50             | 24.5           | 9              | 14             | 9    | 75                                                      | 150                                      | M 8 ×20<br>(Not appended)                                   | 54 600                              | 68 500              | 2 230                   | 1 210<br>6 460          | 1 210<br>6 460          |
| —                     | LWU 130 <sup>(2)</sup> | —               | 4.49          | 33.0            | 72                        | 109  | 88                          | 70             | 9              | 178            | 70             | 132            | 182            | M10×20                 | 35.5                        | 130  |  | 65             | 20             | 70             | 30             | 11             | 17.5           | 10.6 | 75                                                      | 150                                      | M10 ×25<br>(Not appended)                                   | 70 300                              | 88 800              | 3 920                   | 1 830<br>9 630          | 1 830<br>9 630          |

Notes (1) Track rail lengths  $L$  are shown in Table 2 on page II -138.

(2) The steel ball is not retained.

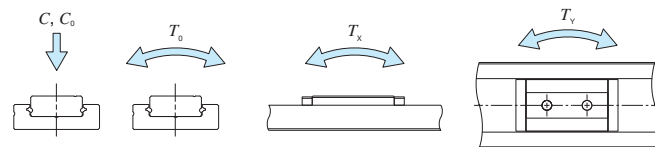
<sup>(3)</sup> The appended track rail mounting bolts are hexagon socket head bolts equivalent to JIS B 1176 or cross-recessed head screw for precision equipment. For the size 25 and 30 series, stainless steel bolts are appended.  
Track rail mounting bolts are not appended for MUL series.

(4) Basic dynamic load rating ( $C$ ), Basic static load rating ( $C_0$ ), static moment rating ( $T_0$ ,  $T_x$ , and  $T_y$ ) are values for the direction indicated in the following figure.

The upper values of  $T_x$  and  $T_y$  are for one slide unit and the lower values are for two slide units in close contact.

(5) The shapes of grease nipple vary with size. For details of specifications, see Table 11 on page II-142.

Remark: For the specification of oil hole, see Table 10 on page II-142.



### Example of identification number of assembled set

| Model code | Dimensions | Part code |             | Model code | Preload symbol       | Classification symbol | Special specification |
|------------|------------|-----------|-------------|------------|----------------------|-----------------------|-----------------------|
| <u>MUL</u> | <u>25</u>  | <u>C2</u> | <u>R280</u> | <u>  </u>  | <u>T<sub>1</sub></u> | <u>H</u>              | <u>/Q</u>             |
| 1          | 2          | 3         | 4           | 5          | 6                    | 7                     | 8                     |

| ① Model   |               |
|-----------|---------------|
| MUL       | Small type    |
| LWUL...B  |               |
| LWU(...B) | Standard type |

④ Length of track rail (280 mm)

| ⑥ Preload amount |               |
|------------------|---------------|
| No symbol        | Standard      |
| T <sub>1</sub>   | Light preload |

⑧ Special specification  
E, LR, MA, MN, Q, U, W

|        |                                  |
|--------|----------------------------------|
| ② Size | 25, 30, 40, 50, 60, 86, 100, 130 |
|--------|----------------------------------|

|           |                        |
|-----------|------------------------|
| B         | Ball retained type     |
| No symbol | Ball non-retained type |

| ④ Accuracy class |          |
|------------------|----------|
| No symbol        | Ordinary |
| H                | High     |

## C-Lube Linear Roller Way Super MX Linear Roller Way Super X



C-Lube Linear Roller Way Super MX

MX



long term maintenance free supported!

The aquamarine end plate is the symbol of maintenance free.

Track rail

Slide unit

End plate

Casing

Cylindrical rollers

Retaining plate

Grease nipple

Under seal

C-Lube

End seal

Linear Roller  
Way Super X  
LRX

Points

Roller type linear motion rolling guides having the highest level of rolling guide performance

For details P.I-21

Linear motion rolling guide that has achieved the highest level of performance in all characteristics, including load capacity, rigidity, friction characteristics and accuracy, brought about by utilizing the roller's excellent characteristic.

Wide range of variations for your needs

For details P.I-28

A wide variety of products, including five types of different slide unit shape such as the flange type, low section flange type with low cross sectional height and low section block type, etc., and four types of different slide unit length with varying lengths with same section are available. You can select an optimal product for the specifications of your machine and device.

Extra long unit

For details P.I-29

Extra long slide unit series having the length 1.4 to 1.5 times of standard type is now available. With more rollers built into the slide units, the new series not only have the enhanced load capacity and rigidity but also exhibit super accuracy running performance.

Stainless steels superior in corrosion resistance are listed on lineup.

For details P.I-41

A series of stainless steel products is available from the miniature size of track rail width 10 mm. They are highly corrosion-resistant and suitable for applications where rust prevention oil is not preferred, such as in cleanroom environment.

Easy replacement from ball type

For details P.I-24

Mounting dimensions are compatible with MH / LWH series of ball type. Therefore, replacement to roller type is possible without major design changes of machine and device.

Identification Number and Specification

Example of an identification number

The specifications of MX and LRX series are indicated by the identification number. Indicate the identification number, consisting of a model code, dimensions, a part code, a material code, a preload symbol, a classification symbol, an interchangeable code, and a supplemental code for each specification to apply.

| Interchangeable specification     |     |   |    |    |      |                |                |    |       |
|-----------------------------------|-----|---|----|----|------|----------------|----------------|----|-------|
| 1                                 | 2   | 3 | 4  | 5  | 6    | 7              | 8              | 9  | 10    |
| Single slide unit                 | MX  | G | 15 | C1 |      | T <sub>1</sub> | P              | S1 | /Z    |
| Single track rail <sup>(1)</sup>  | LRX |   | 15 |    | R240 |                | P              | S1 |       |
| Assembled set                     | MX  | G | 15 | C2 | R240 |                | T <sub>1</sub> | P  | S1 /Z |
| Non-interchangeable specification |     |   |    |    |      |                |                |    |       |
| Assembled set                     | MX  | G | 15 | C2 | R240 |                | T <sub>1</sub> | P  | /Z    |

1 Model

Model code

Page II - 151

2 Length of slide unit

3 Size

Dimensions Page II - 151

4 Number of slide units

Part code Page II - 152

5 Length of track rail

6 Material type

Material code Page II - 152

7 Preload amount

Preload code Page II - 155

8 Accuracy class

Classification code Page II - 156

9 Interchangeable

Interchangeable code Page II - 157

10 Special specification

Supplemental code Page II - 157

Note <sup>(1)</sup> Indicate "LRX" for the model code of single track rail regardless of the series and the slide unit model to be combined.

MX・LRX



Identification Number and Specification - Model · Length of Slide Unit · Size-

1

Model

C-Lube Linear Roller Way Super MX (MX series)

Flange type mounting from top / bottom : MX <sup>(2)</sup>  
Block type mounting from top : MXD  
Compact block type mounting from top : MXS  
Low section flange type mounting from top : MXN  
Low section block type mounting from top : MXNS

Linear Roller Way Super X <sup>(1)</sup> (LRX series)

Flange type mounting from top / bottom : LRX <sup>(2)</sup>  
Block type mounting from top : LRXD  
Compact block type mounting from top : LRXS

For applicable models and sizes, see Table 1.1 and Table 1.2.  
Indicate "LRX" for the model code of the single track rail regardless of the series and the combination of slide unit models.

Notes <sup>(1)</sup> This model has no built-in C-Lube.  
<sup>(2)</sup> Series of size 20 can only be mounted by the bolts from top. The models with the same dimensions allowing mounting from bottom are "MXH" and "LRXH."

2

Length of slide unit

Short : C  
Standard : No symbol  
Long : G  
Extra long : L

For applicable models and sizes, see Table 1.1 and Table 1.2.











3

Size

10, 12, 15, 20, 25, 30, 35, 45, 55, 65, 85, 100

For applicable models and sizes, see Table 1.1 and Table 1.2.

Table 1.1 Models and sizes of MX and LRX series

| Material               | Shape                                                                               | Slide unit Length                                                                   | Model | Size |    |    |                  |    |    |    |    |    |    |    |     |
|------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------|------|----|----|------------------|----|----|----|----|----|----|----|-----|
|                        |                                                                                     |                                                                                     |       | 10   | 12 | 15 | 20               | 25 | 30 | 35 | 45 | 55 | 65 | 85 | 100 |
| High carbon steel made |  |  | MXC   | —    | ○  | ○  | ○ <sup>(1)</sup> | ○  | ○  | ○  | ○  | ○  | ○  | —  | —   |
|                        |                                                                                     |                                                                                     | LRXC  | —    | ○  | ○  | ○ <sup>(1)</sup> | ○  | ○  | ○  | ○  | ○  | ○  | —  | —   |
|                        |                                                                                     |  | MX    | —    | ○  | ○  | ○ <sup>(1)</sup> | ○  | ○  | ○  | ○  | ○  | ○  | —  | —   |
|                        |                                                                                     |                                                                                     | LRX   | —    | ○  | ○  | ○ <sup>(1)</sup> | ○  | ○  | ○  | ○  | ○  | ○  | ○  | —   |
|                        |                                                                                     |  | MXG   | —    | ○  | ○  | ○ <sup>(1)</sup> | ○  | ○  | ○  | ○  | ○  | ○  | —  | —   |
|                        |                                                                                     |                                                                                     | LRXG  | —    | ○  | ○  | ○ <sup>(1)</sup> | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○   |
|                        |                                                                                     |  | MXL   | —    | —  | —  | ○ <sup>(1)</sup> | ○  | ○  | ○  | ○  | ○  | ○  | —  | —   |
|                        |                                                                                     |                                                                                     | LRXL  | —    | —  | —  | —                | —  | —  | —  | —  | —  | —  | ○  | —   |
|                        |  |  | MXDC  | —    | ○  | ○  | ○                | ○  | ○  | ○  | ○  | ○  | ○  | —  | —   |
|                        |                                                                                     |                                                                                     | LRXDC | —    | ○  | ○  | ○                | ○  | ○  | ○  | ○  | ○  | ○  | —  | —   |
|                        |                                                                                     |  | MXD   | —    | ○  | ○  | ○                | ○  | ○  | ○  | ○  | ○  | ○  | —  | —   |
|                        |                                                                                     |                                                                                     | LRXD  | —    | ○  | ○  | ○                | ○  | ○  | ○  | ○  | ○  | ○  | —  | —   |
|                        |                                                                                     |  | MXDG  | —    | ○  | ○  | ○                | ○  | ○  | ○  | ○  | ○  | ○  | —  | —   |
|                        |                                                                                     |                                                                                     | LRXDG | —    | ○  | ○  | ○                | ○  | ○  | ○  | ○  | ○  | ○  | —  | —   |
|                        |                                                                                     |  | MXDL  | —    | —  | —  | ○                | ○  | ○  | ○  | ○  | ○  | ○  | —  | —   |

Note <sup>(1)</sup> MXC20, MX20, MXG20, MXL20, LRXC20, LRX20 and LRXG20 can only be mounted by the bolts from top.  
The models with the same dimensions allowing mounting from bottom are MXHC20, MXH20, MXHG20, MXHL20, LRXHC20, LRXH20 and LRXHG20.  
Remark: For the models indicated in  , the interchangeable specification is available.

- Number of Slide Unit · Length of Track Rail · Material Type -

4

Number of slide units

: C○

For an assembled set, indicates the number of slide units assembled on a track rail. For a single slide unit, only "C1" is specified.

5

Length of track rail

: R○

Indicate the length of track rail in mm.  
For the standard and maximum lengths, see Table 2.1, Table 2.2, Table 2.3 and Table 2.4.

















6

Material type

High carbon steel made : No symbol  
Stainless steel made : SL


For applicable models and sizes, see Table 1.1 and Table 1.2.

Table 1.2 Models and sizes of MX and LRX series

| Material               | Shape                                                                                 | Slide unit Length                                                                                | Model      | Size |    |    |    |    |    |    |    |    |    |    |     |
|------------------------|---------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|------------|------|----|----|----|----|----|----|----|----|----|----|-----|
|                        |                                                                                       |                                                                                                  |            | 10   | 12 | 15 | 20 | 25 | 30 | 35 | 45 | 55 | 65 | 85 | 100 |
| High carbon steel made |    | Short         | MXSC       | -    | -  | ○  | ○  | ○  | ○  | -  | -  | -  | -  | -  | -   |
|                        |                                                                                       |                                                                                                  | LRXSC      | -    | -  | ○  | ○  | ○  | ○  | -  | -  | -  | -  | -  | -   |
|                        |                                                                                       | Standard      | MXS        | -    | -  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | -  | -  | -   |
|                        |                                                                                       |                                                                                                  | LRXS       | -    | -  | ○  | ○  | ○  | ○  | -  | -  | -  | -  | -  | -   |
|                        |                                                                                       | Long          | MXSG       | -    | -  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | -  | -  | -   |
|                        |                                                                                       |                                                                                                  | LRXSG      | -    | -  | ○  | ○  | ○  | ○  | -  | -  | -  | -  | -  | -   |
|                        |  | Extra long   | MXSL       | -    | -  | -  | ○  | ○  | ○  | -  | -  | -  | -  | -  | -   |
|                        |                                                                                       |                                                                                                  |            |      |    |    |    |    |    |    |    |    |    |    |     |
|                        |                                                                                       | Standard    | MXN        | -    | -  | -  | -  | -  | ○  | ○  | ○  | ○  | -  | -  | -   |
|                        |                                                                                       |                                                                                                  |            |      |    |    |    |    |    |    |    |    |    |    |     |
|                        |                                                                                       | Long        | MXNG       | -    | -  | -  | -  | -  | ○  | ○  | ○  | ○  | -  | -  | -   |
|                        |                                                                                       |                                                                                                  |            |      |    |    |    |    |    |    |    |    |    |    |     |
|                        |  | Extra long  | MXNL       | -    | -  | -  | -  | -  | ○  | ○  | ○  | ○  | -  | -  | -   |
|                        |                                                                                       |                                                                                                  |            |      |    |    |    |    |    |    |    |    |    |    |     |
|                        |                                                                                       | Standard    | MXNS       | -    | -  | -  | -  | -  | ○  | ○  | ○  | ○  | -  | -  | -   |
|                        |                                                                                       |                                                                                                  |            |      |    |    |    |    |    |    |    |    |    |    |     |
|                        |                                                                                       | Long        | MXNSG      | -    | -  | -  | -  | -  | ○  | ○  | ○  | ○  | -  | -  | -   |
|                        |                                                                                       |                                                                                                  |            |      |    |    |    |    |    |    |    |    |    |    |     |
| Stainless steel made   |  | Extra long  | MXNSL      | -    | -  | -  | -  | -  | ○  | ○  | ○  | ○  | -  | -  | -   |
|                        |                                                                                       |                                                                                                  |            |      |    |    |    |    |    |    |    |    |    |    |     |
|                        |                                                                                       | Standard    | MXDC...SL  | -    | ○  | ○  | ○  | ○  | ○  | -  | -  | -  | -  | -  | -   |
|                        |                                                                                       |                                                                                                  | MXD...SL   | ○    | ○  | ○  | ○  | ○  | ○  | -  | -  | -  | -  | -  | -   |
|                        |                                                                                       | Long        | LRXD...SL  | ○    | ○  | ○  | ○  | ○  | ○  | -  | -  | -  | -  | -  | -   |
|                        |                                                                                       |                                                                                                  | LRXDG...SL | -    | ○  | ○  | ○  | ○  | ○  | -  | -  | -  | -  | -  | -   |

Remark: For the models indicated in  , the interchangeable specification is available.

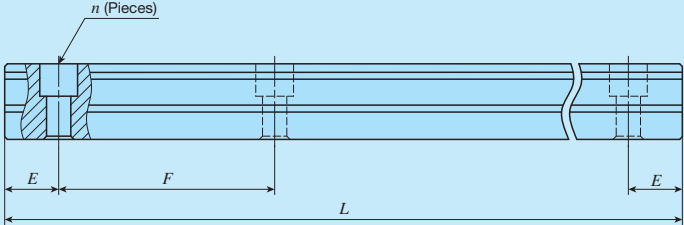Table 2.1 Standard and maximum length of high carbon steel track rail




| Identification number                                       | MX 12<br>LRX12                                                                                                        | MX 15<br>LRX15                                                            | MX 20<br>LRX20                                                                                     | MX 25<br>LRX25                                                                                     | MX 30<br>LRX30                                                                       | MX 35<br>LRX35                                                                       |
|-------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| Standard length $L$ ( $n$ )                                 | 80 ( 2 )<br>160 ( 4 )<br>240 ( 6 )<br>320 ( 8 )<br>400 ( 10 )<br>480 ( 12 )<br>560 ( 14 )<br>640 ( 16 )<br>720 ( 18 ) | 180 ( 3 )<br>240 ( 4 )<br>360 ( 6 )<br>480 ( 8 )<br>660 ( 11 )            | 240 ( 4 )<br>480 ( 8 )<br>660 ( 11 )<br>840 ( 14 )<br>1 020 ( 17 )<br>1 200 ( 20 )<br>1 500 ( 25 ) | 240 ( 4 )<br>480 ( 8 )<br>660 ( 11 )<br>840 ( 14 )<br>1 020 ( 17 )<br>1 200 ( 20 )<br>1 500 ( 25 ) | 480 ( 6 )<br>640 ( 8 )<br>800 ( 10 )<br>1 040 ( 13 )<br>1 200 ( 15 )<br>1 520 ( 19 ) | 480 ( 6 )<br>640 ( 8 )<br>800 ( 10 )<br>1 040 ( 13 )<br>1 200 ( 15 )<br>1 520 ( 19 ) |
| Pitch of mounting holes $F$                                 | 40                                                                                                                    | 60                                                                        | 60                                                                                                 | 60                                                                                                 | 80                                                                                   | 80                                                                                   |
| $E$                                                         | 20                                                                                                                    | 30                                                                        | 30                                                                                                 | 30                                                                                                 | 40                                                                                   | 40                                                                                   |
| Standard $E$ or higher<br>dimensions ( <sup>1</sup> ) below | 5.5<br>25.5                                                                                                           | 7<br>37                                                                   | 8<br>38                                                                                            | 9<br>39                                                                                            | 10<br>50                                                                             | 10<br>50                                                                             |
| Maximum length ( <sup>2</sup> )                             | 1 480                                                                                                                 | 1 500<br>( 1 980 )                                                        | 1 980<br>( 3 000 )                                                                                 | 3 000<br>( 3 960 )                                                                                 | 2 960<br>( 4 000 )                                                                   | 2 960<br>( 4 000 )                                                                   |
| Identification number                                       | MX 45<br>LRX45                                                                                                        | MX 55<br>LRX55                                                            | MX 65<br>LRX65                                                                                     | LRX85                                                                                              | LRXG100                                                                              |                                                                                      |
| Standard length $L$ ( $n$ )                                 | 840 ( 8 )<br>1 050 ( 10 )<br>1 260 ( 12 )<br>1 470 ( 14 )<br>1 995 ( 19 )                                             | 840 ( 7 )<br>1 200 ( 10 )<br>1 560 ( 13 )<br>1 920 ( 16 )<br>3 000 ( 25 ) | 1 500 ( 10 )<br>1 950 ( 13 )<br>3 000 ( 20 )                                                       | 1 620 ( 9 )<br>1 980 ( 11 )<br>2 340 ( 13 )<br>2 700 ( 15 )                                        | 1 500 ( 10 )<br>1 950 ( 13 )<br>3 000 ( 20 )                                         |                                                                                      |
| Pitch of mounting holes $F$                                 | 105                                                                                                                   | 120                                                                       | 150                                                                                                | 180                                                                                                | 150                                                                                  |                                                                                      |
| $E$                                                         | 52.5                                                                                                                  | 60                                                                        | 75                                                                                                 | 90                                                                                                 | 75                                                                                   |                                                                                      |
| Standard $E$ or higher<br>dimensions ( <sup>1</sup> ) below | 12.5<br>65                                                                                                            | 15<br>75                                                                  | 17<br>92                                                                                           | 23<br>113                                                                                          | 29<br>104                                                                            |                                                                                      |
| Maximum length ( <sup>2</sup> )                             | 2 940<br>( 3 990 )                                                                                                    | 3 000<br>( 3 960 )                                                        | 3 000<br>( 3 900 )                                                                                 | 2 880                                                                                              | 3 000                                                                                |                                                                                      |

Notes ( <sup>1</sup> ) This does not apply to female threads for bellows (Supplemental code "/J").  
( <sup>2</sup> ) Length up to the value in (   ) can be produced. If needed, please contact **IKO**.

Remarks 1. A typical identification number is indicated, but is applied to all models of the same size.  
2. Indicate "LRX" for the model code of the single track rail regardless of the series and the combination of slide unit models.  
3. In the case where track rail mounting hole is half pitch specification (Supplemental code "/HP"), see Table 2.3.  
4. If not directed, E dimensions for both ends will be the same within the range of standard E dimensions. To change the dimensions, indicate the specified rail mounting hole positions "/E" of special specification. For more information, see page III-29.

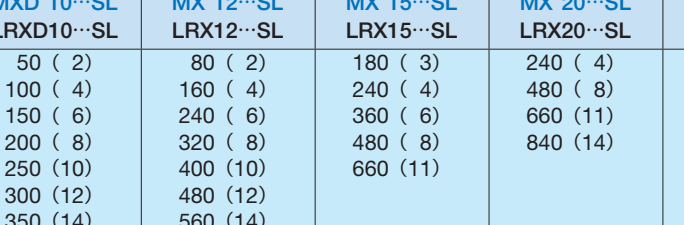Table 2.2 Standard and maximum length of stainless steel track rail




| Identification number                                       | MXD 10...SL<br>LRXD10...SL                                                                                                          | MX 12...SL<br>LRX12...SL                                                                                              | MX 15...SL<br>LRX15...SL                                       | MX 20...SL<br>LRX20...SL                           | MX 25...SL<br>LRX25...SL                           | MX 30...SL<br>LRX30...SL                             |
|-------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|----------------------------------------------------|----------------------------------------------------|------------------------------------------------------|
| Standard length $L$ ( $n$ )                                 | 50 ( 2 )<br>100 ( 4 )<br>150 ( 6 )<br>200 ( 8 )<br>250 ( 10 )<br>300 ( 12 )<br>350 ( 14 )<br>400 ( 16 )<br>450 ( 18 )<br>500 ( 20 ) | 80 ( 2 )<br>160 ( 4 )<br>240 ( 6 )<br>320 ( 8 )<br>400 ( 10 )<br>480 ( 12 )<br>560 ( 14 )<br>640 ( 16 )<br>720 ( 18 ) | 180 ( 3 )<br>240 ( 4 )<br>360 ( 6 )<br>480 ( 8 )<br>660 ( 11 ) | 240 ( 4 )<br>480 ( 8 )<br>660 ( 11 )<br>840 ( 14 ) | 240 ( 4 )<br>480 ( 8 )<br>660 ( 11 )<br>840 ( 14 ) | 480 ( 6 )<br>640 ( 8 )<br>800 ( 10 )<br>1 040 ( 13 ) |
| Pitch of mounting holes $F$                                 | 25                                                                                                                                  | 40                                                                                                                    | 60                                                             | 60                                                 | 60                                                 | 80                                                   |
| $E$                                                         | 12.5                                                                                                                                | 20                                                                                                                    | 30                                                             | 30                                                 | 30                                                 | 40                                                   |
| Standard $E$ or higher<br>dimensions ( <sup>1</sup> ) below | 5<br>17.5                                                                                                                           | 5.5<br>25.5                                                                                                           | 7<br>37                                                        | 8<br>38                                            | 9<br>39                                            | 10<br>50                                             |
| Maximum length ( <sup>2</sup> )                             | 850<br>( 1 000 )                                                                                                                    | 1 000<br>( 1 480 )                                                                                                    | 1 200<br>( 1 980 )                                             | 1 200<br>( 1 980 )                                 | 1 200<br>( 1 980 )                                 | 1 200<br>( 2 000 )                                   |

Notes ( <sup>1</sup> ) This does not apply to female threads for bellows (Supplemental code "/J").  
( <sup>2</sup> ) Length up to the value in (   ) can be produced. If needed, please contact **IKO**.

Remarks 1. A typical identification number is indicated, but is applied to all models of the same size.  
2. Indicate "LRX" for the model code of the single track rail regardless of the series and the combination of slide unit models.  
3. In the case where track rail mounting hole is half pitch specification (Supplemental code "/HP"), see Table 2.4.  
4. If not directed, E dimensions for both ends will be the same within the range of standard E dimensions. To change the dimensions, indicate the specified rail mounting hole positions "/E" of special specification. For more information, see page III-29.

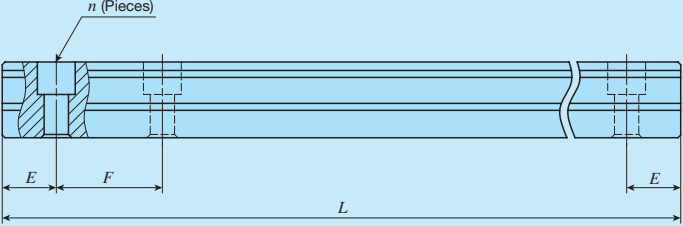Table 2.3 Standard and maximum length of high carbon steel track rail (Half pitch mounting holes specification supplemental code /HP)




| Identification number                                       | MX 12.../HP<br>LRX12.../HP                                                                                              | MX 15.../HP<br>LRX15.../HP                                                 | MX 20.../HP<br>LRX20.../HP                                                                          | MX 25.../HP<br>LRX25.../HP                                                             | MX 30.../HP<br>LRX30.../HP                                                             | MX 35.../HP<br>LRX35.../HP                                                             |
|-------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|
| Standard length $L$ ( $n$ )                                 | 80 ( 4 )<br>160 ( 8 )<br>240 ( 12 )<br>320 ( 16 )<br>400 ( 20 )<br>480 ( 24 )<br>560 ( 28 )<br>640 ( 32 )<br>720 ( 36 ) | 180 ( 6 )<br>240 ( 8 )<br>360 ( 12 )<br>480 ( 16 )<br>660 ( 22 )           | 240 ( 8 )<br>480 ( 16 )<br>660 ( 22 )<br>840 ( 28 )<br>1 020 ( 34 )<br>1 200 ( 40 )<br>1 500 ( 50 ) | 480 ( 16 )<br>660 ( 22 )<br>840 ( 28 )<br>1 020 ( 34 )<br>1 200 ( 40 )<br>1 500 ( 50 ) | 480 ( 12 )<br>640 ( 16 )<br>800 ( 20 )<br>1 040 ( 26 )<br>1 200 ( 30 )<br>1 520 ( 38 ) | 480 ( 12 )<br>640 ( 16 )<br>800 ( 20 )<br>1 040 ( 26 )<br>1 200 ( 30 )<br>1 520 ( 38 ) |
| Pitch of mounting holes $F$                                 | 20                                                                                                                      | 30                                                                         | 30                                                                                                  | 30                                                                                     | 40                                                                                     | 40                                                                                     |
| $E$                                                         | 10                                                                                                                      | 15                                                                         | 15                                                                                                  | 15                                                                                     | 20                                                                                     | 20                                                                                     |
| Standard $E$ or higher<br>dimensions ( <sup>1</sup> ) below | 5.5<br>15.5                                                                                                             | 7<br>22                                                                    | 8<br>23                                                                                             | 9<br>24                                                                                | 10<br>30                                                                               | 10<br>30                                                                               |
| Maximum length ( <sup>2</sup> )                             | 1 480                                                                                                                   | 1 500<br>( 1 980 )                                                         | 1 980<br>( 3 000 )                                                                                  | 3 000<br>( 3 960 )                                                                     | 2 960<br>( 4 000 )                                                                     | 2 960<br>( 4 000 )                                                                     |
| Identification number                                       | MX 45.../HP<br>LRX45.../HP                                                                                              | MX 55.../HP<br>LRX55.../HP                                                 | MX 65.../HP<br>LRX65.../HP                                                                          | LRX85.../HP                                                                            |                                                                                        |                                                                                        |
| Standard length $L$ ( $n$ )                                 | 840 ( 16 )<br>1 050 ( 20 )<br>1 260 ( 24 )<br>1 470 ( 28 )<br>1 995 ( 38 )                                              | 840 ( 14 )<br>1 200 ( 20 )<br>1 560 ( 26 )<br>1 920 ( 32 )<br>3 000 ( 50 ) | 1 500 ( 20 )<br>1 950 ( 26 )<br>3 000 ( 40 )                                                        | 1 620 ( 18 )<br>1 980 ( 22 )<br>2 340 ( 26 )<br>2 700 ( 30 )                           |                                                                                        |                                                                                        |
| Pitch of mounting holes $F$                                 | 52.5                                                                                                                    | 60                                                                         | 75                                                                                                  | 90                                                                                     |                                                                                        |                                                                                        |
| $E$                                                         | 26.25                                                                                                                   | 30                                                                         | 37.5                                                                                                | 45                                                                                     |                                                                                        |                                                                                        |
| Standard $E$ or higher<br>dimensions ( <sup>1</sup> ) below | 12.5<br>38.75                                                                                                           | 15<br>45                                                                   | 17<br>54.5                                                                                          | 23<br>68                                                                               |                                                                                        |                                                                                        |
| Maximum length ( <sup>2</sup> )                             | 2 940<br>( 3 990 )                                                                                                      | 3 000<br>( 3 960 )                                                         | 3 000<br>( 3 900 )                                                                                  | 2 970                                                                                  |                                                                                        |                                                                                        |

Notes ( <sup>1</sup> ) This does not apply to female threads for bellows (Supplemental code "/J").  
( <sup>2</sup> ) Length up to the value in (   ) can be produced. If needed, please contact **IKO**.

Remarks 1. A typical identification number is indicated, but is applied to all models of the same size.  
2. Indicate "LRX" for the model code of the single track rail regardless of the series and the combination of slide unit models.  
3. If not directed, E dimensions for both ends will be the same within the range of standard E dimensions. To change the dimensions, indicate the specified rail mounting hole positions "/E" of special specification. For more information, see page III-29.

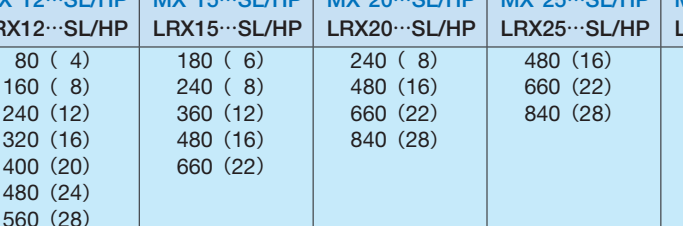Table 2.4 Standard and maximum length of stainless steel track rail (Half pitch mounting holes specification supplemental code /HP)



| Identification number                                       | MX 12...SL/HP<br>LRX12...SL/HP                                                                                          | MX 15...SL/HP<br>LRX15...SL/HP                                   | MX 20...SL/HP<br>LRX20...SL/HP                      | MX 25...SL/HP<br>LRX25...SL/HP         | MX 30...SL/HP<br>LRX30...SL/HP                         |
|-------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|-----------------------------------------------------|----------------------------------------|--------------------------------------------------------|
| Standard length $L$ ( $n$ )                                 | 80 ( 4 )<br>160 ( 8 )<br>240 ( 12 )<br>320 ( 16 )<br>400 ( 20 )<br>480 ( 24 )<br>560 ( 28 )<br>640 ( 32 )<br>720 ( 36 ) | 180 ( 6 )<br>240 ( 8 )<br>360 ( 12 )<br>480 ( 16 )<br>660 ( 22 ) | 240 ( 8 )<br>480 ( 16 )<br>660 ( 22 )<br>840 ( 28 ) | 480 ( 16 )<br>660 ( 22 )<br>840 ( 28 ) | 480 ( 12 )<br>640 ( 16 )<br>800 ( 20 )<br>1 040 ( 26 ) |
| Pitch of mounting holes $F$                                 | 20                                                                                                                      | 30                                                               | 30                                                  | 30                                     | 40                                                     |
| $E$                                                         | 10                                                                                                                      | 15                                                               | 15                                                  | 15                                     | 20                                                     |
| Standard $E$ or higher<br>dimensions ( <sup>1</sup> ) below | 5.5<br>15.5                                                                                                             | 7<br>22                                                          | 8<br>23                                             | 9<br>24                                | 10<br>30                                               |
| Maximum length ( <sup>2</sup> )                             | 1 000<br>( 1 480 )                                                                                                      | 1 200<br>( 1 980 )                                               | 1 200<br>( 1 980 )                                  | 1 200<br>( 1 980 )                     | 1 200<br>( 2 000 )                                     |

Notes ( <sup>1</sup> ) This does not apply to female threads for bellows (Supplemental code "/J").  
( <sup>2</sup> ) Length up to the value in (   ) can be produced. If needed, please contact **IKO**.

Remarks 1. A typical identification number is indicated, but is applied to all models of the same size.  
2. Indicate "LRX" for the model code of the single track rail regardless of the series and the combination of slide unit models.  
3. If not directed, E dimensions for both ends will be the same within the range of standard E dimensions. To change the dimensions, indicate the specified rail mounting hole positions "/E" of special specification. For more information, see page III-29.

|   |                |                |                  |                                                                |
|---|----------------|----------------|------------------|----------------------------------------------------------------|
| 7 | Preload amount | Standard       | : No symbol      | Specify this item for an assembled set or a single slide unit. |
|   |                | Light preload  | : T <sub>1</sub> |                                                                |
|   |                | Medium preload | : T <sub>2</sub> | For details of the preload amount, see Table 3.                |
|   |                | Heavy preload  | : T <sub>3</sub> | For applicable preload types, see Table 4.                     |
|   |                |                |                  |                                                                |

Table 3 Preload amount

| Preload type   | Item        | Preload symbol | Preload amount N    | Operational conditions                                                                   |
|----------------|-------------|----------------|---------------------|------------------------------------------------------------------------------------------|
| Standard       | (No symbol) |                | 0 <sup>(1)</sup>    | • Light and precise motion                                                               |
| Light preload  |             | T <sub>1</sub> | 0.02 C <sub>0</sub> | • Almost no vibrations<br>• Load is evenly balanced<br>• Light and precise motion        |
| Medium preload |             | T <sub>2</sub> | 0.05 C <sub>0</sub> | • Medium vibration<br>• Medium overhung load                                             |
| Heavy preload  |             | T <sub>3</sub> | 0.08 C <sub>0</sub> | • Operation with vibration and/or shock<br>• Overhanging load applied<br>• Heavy cutting |

Note <sup>(1)</sup> Indicates zero or minimal amount of preload.  
Remark: C<sub>0</sub> indicates the basic static load rating.


Table 4 Application of preload

| Size | Preload type (preload symbol) |                                    |                                     |                                    |
|------|-------------------------------|------------------------------------|-------------------------------------|------------------------------------|
|      | Standard<br>(No symbol)       | Light preload<br>(T <sub>1</sub> ) | Medium preload<br>(T <sub>2</sub> ) | Heavy preload<br>(T <sub>3</sub> ) |
| 10   | ○                             | ○                                  | —                                   | —                                  |
| 12   | ○                             | ○                                  | ○                                   | ○                                  |
| 15   | ○                             | ○                                  | ○                                   | ○                                  |
| 20   | ○                             | ○                                  | ○                                   | ○                                  |
| 25   | ○                             | ○                                  | ○                                   | ○                                  |
| 30   | ○                             | ○                                  | ○                                   | ○                                  |
| 35   | ○                             | ○                                  | ○                                   | ○                                  |
| 45   | ○                             | ○                                  | ○                                   | ○                                  |
| 55   | ○                             | ○                                  | ○                                   | ○                                  |
| 65   | ○                             | ○                                  | ○                                   | ○                                  |
| 85   | ○                             | ○                                  | ○                                   | ○                                  |
| 100  | ○                             | ○                                  | ○                                   | ○                                  |

Remark: The mark  indicates that interchangeable specification products are available.

|   |                |                 |      |                                                                                                                |
|---|----------------|-----------------|------|----------------------------------------------------------------------------------------------------------------|
| 8 | Accuracy class | High            | : H  | For interchangeable specification products, assemble a slide unit and a track rail of the same accuracy class. |
|   |                | Precision       | : P  |                                                                                                                |
|   |                | Super precision | : SP | For details of accuracy class, see Table 5.                                                                    |
|   |                | Ultra precision | : UP | For applicable accuracy class, see Table 6.                                                                    |
|   |                |                 |      |                                                                                                                |

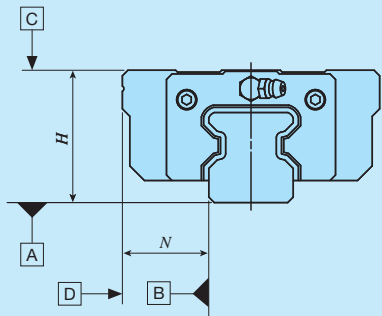Table 5 Tolerance and allowance

|  |            |               |                      |                      |
|-------------------------------------------------------------------------------------|------------|---------------|----------------------|----------------------|
| unit: mm                                                                            |            |               |                      |                      |
| Class (classification symbol)                                                       | High (H)   | Precision (P) | Super precision (SP) | Ultra precision (UP) |
| Item                                                                                |            |               |                      |                      |
| Dim. H tolerance                                                                    | ±0.040     | ±0.020        | ±0.010               | ±0.008               |
| Dim. N tolerance                                                                    | ±0.050     | ±0.025        | ±0.015               | ±0.010               |
| Dim. variation of H <sup>(1)</sup>                                                  | 0.015      | 0.007         | 0.005                | 0.003                |
| Dim. variation of N <sup>(1)</sup>                                                  | 0.020      | 0.010         | 0.007                | 0.003                |
| Dim. variation of H for multiple assembled sets <sup>(2)</sup>                      | 0.035      | 0.025         | —                    | —                    |
| Parallelism in operation of the slide unit C surface to A surface                   | See Fig. 1 |               |                      |                      |
| Parallelism in operation of the slide unit D surface to B surface                   | See Fig. 1 |               |                      |                      |

Notes <sup>(1)</sup> It means the size variation between slide units mounted on the same track rail.  
<sup>(2)</sup> Applicable to the interchangeable specification.

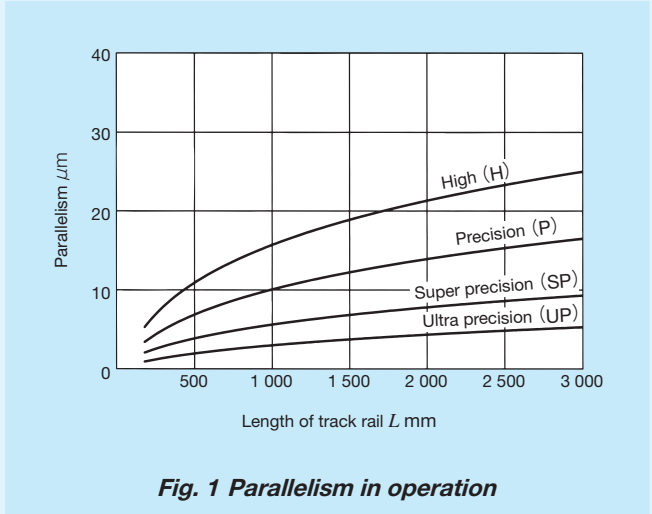


Table 6 Application of accuracy class

| Size | Class (classification symbol) |               |                      |                      |
|------|-------------------------------|---------------|----------------------|----------------------|
|      | High (H)                      | Precision (P) | Super precision (SP) | Ultra precision (UP) |
| 10   | ○                             | ○             | ○                    | ○                    |
| 12   | ○                             | ○             | ○                    | ○                    |
| 15   | ○                             | ○             | ○                    | ○                    |
| 20   | ○                             | ○             | ○                    | ○                    |
| 25   | ○                             | ○             | ○                    | ○                    |
| 30   | ○                             | ○             | ○                    | ○                    |
| 35   | ○                             | ○             | ○                    | ○                    |
| 45   | ○                             | ○             | ○                    | ○                    |
| 55   | ○                             | ○             | ○                    | ○                    |
| 65   | ○                             | ○             | ○                    | ○                    |
| 85   | ○                             | ○             | ○                    | ○                    |
| 100  | ○                             | ○             | ○                    | ○                    |

Remark: The mark  indicates that interchangeable specification products are available.



|    |                       |                                                                                                        |             |                                                                                                                                                                                                                                                                                                                            |
|----|-----------------------|--------------------------------------------------------------------------------------------------------|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 9  | Interchangeable       | S1 specification                                                                                       | : S1        | This is specified for the interchangeable specifications. Assemble a track rail and a slide unit with the same interchangeable code. Performance and accuracy of "S1" and "S2" are the same. For applicable models and sizes, see Table 1.1 and Table 1.2. "No symbol" is indicated for non-interchangeable specification. |
|    |                       | S2 specification                                                                                       | : S2        |                                                                                                                                                                                                                                                                                                                            |
|    |                       | Non-interchangeable specification                                                                      | : No symbol |                                                                                                                                                                                                                                                                                                                            |
|    |                       |                                                                                                        |             |                                                                                                                                                                                                                                                                                                                            |
| 10 | Special specification | /A, /D, /E, /F, /GE, /HP, /I, /JO, /LO, /LFO, /MA, /MN, /N, /PS, /Q, /RCO, /T, /UR, /VO, /WO, /YO, /ZO |             | For applicable special specifications, see Tables 7.1, 7.2, 7.3, and 7.4. For combination of multiple special specifications, see Table 8. For details of special specifications, see page Ⅲ-28.                                                                                                                           |
|    |                       |                                                                                                        |             |                                                                                                                                                                                                                                                                                                                            |

Table 7.1 Application of special specifications (Interchangeable specification, single slide unit)

| Special specification                                            | Supplemental code | Size |    |    |    |    |    |    |    |    |    |    |     |
|------------------------------------------------------------------|-------------------|------|----|----|----|----|----|----|----|----|----|----|-----|
|                                                                  |                   | 10   | 12 | 15 | 20 | 25 | 30 | 35 | 45 | 55 | 65 | 85 | 100 |
| Changed pitch of slide unit middle mounting holes <sup>(1)</sup> | /GE               | —    | ×  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | —  | —   |
| Female threads for bellows <sup>(2)</sup>                        | /JO               | —    | ×  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | —  | —   |
| No end seal <sup>(3)</sup>                                       | /N                | —    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ×  | ×  | —  | —   |
| With C-Lube plate <sup>(4)</sup>                                 | /Q                | —    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | —  | —   |
| Double end seals                                                 | /VO               | —    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | —  | —   |
| Scrapers                                                         | /ZO               | —    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | —  | —   |

Notes <sup>(1)</sup> Applicable to flange type (MX, MXG, MXH20, MXHG20, LRX, LRXG, LRXH20, LRXH20).  
<sup>(2)</sup> Not applicable to stainless steel made products.  
<sup>(3)</sup> Not applicable to low section flange type (MXN, MXNG, MXNL) or low section block type (MXNS, MXNSG, MXNSL).  
<sup>(4)</sup> Applicable to LRX series.

Table 7.2 Application of special specifications (Interchangeable specification, single track rail)

| Special specification                     | Supplemental code | Size |    |    |    |    |    |    |    |    |    |    |     |
|-------------------------------------------|-------------------|------|----|----|----|----|----|----|----|----|----|----|-----|
|                                           |                   | 10   | 12 | 15 | 20 | 25 | 30 | 35 | 45 | 55 | 65 | 85 | 100 |
| Specified rail mounting hole positions    | /E                | —    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | —  | —   |
| Caps for rail mounting holes              | /F                | —    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | —  | —   |
| Half pitch mounting holes for track rail  | /HP               | —    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | —  | —   |
| Female threads for bellows <sup>(1)</sup> | /JO               | —    | ×  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | —  | —   |
| Black chrome surface treatment            | /LR               | —    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | —  | —   |
| Without track rail mounting bolt          | /MN               | —    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | —  | —   |
| Butt-jointing track rails                 | /T                | —    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | —  | —   |

Note <sup>(1)</sup> Not applicable to stainless steel made products.

Table 7.3 Application of special specifications (Interchangeable specification, assembled set)

| Special specification                                            | Supplemental code | Size |    |    |    |    |    |    |    |    |    |    |     |
|------------------------------------------------------------------|-------------------|------|----|----|----|----|----|----|----|----|----|----|-----|
|                                                                  |                   | 10   | 12 | 15 | 20 | 25 | 30 | 35 | 45 | 55 | 65 | 85 | 100 |
| Opposite reference surfaces arrangement                          | /D                | —    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | —  | —   |
| Specified rail mounting hole positions                           | /E                | —    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | —  | —   |
| Caps for rail mounting holes                                     | /F                | —    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | —  | —   |
| Changed pitch of slide unit middle mounting holes <sup>(1)</sup> | /GE               | —    | ×  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | —  | —   |
| Half pitch mounting holes for track rail                         | /HP               | —    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | —  | —   |
| Female threads for bellows <sup>(2)</sup>                        | /JO               | —    | ×  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | —  | —   |
| Black chrome surface treatment                                   | /LO               | —    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | —  | —   |
| Fluorine black chrome surface treatment                          | /LFO              | —    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | —  | —   |
| With track rail mounting bolt <sup>(3)</sup>                     | /MA               | —    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | —  | —   |
| Without track rail mounting bolt <sup>(4)</sup>                  | /MN               | —    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | —  | —   |
| No end seal <sup>(5)</sup>                                       | /N                | —    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ×  | ×  | —  | —   |
| With C-Lube plate <sup>(4)</sup>                                 | /Q                | —    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | —  | —   |
| Butt-jointing track rails                                        | /T                | —    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | —  | —   |
| Double end seals                                                 | /VO               | —    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | —  | —   |
| Specified grease <sup>(6)</sup>                                  | /YO               | —    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | —  | —   |
| Scrapers                                                         | /ZO               | —    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | —  | —   |

Notes <sup>(1)</sup> Applicable to flange type (MX, MXG, MXH20, MXHG20, LRX, LRXG, LRXH20, LRXH20).  
<sup>(2)</sup> Not applicable to stainless steel made products.  
<sup>(3)</sup> Applicable to MX series.  
<sup>(4)</sup> Applicable to LRX series. / YCG is applicable to MX series.  
<sup>(5)</sup> Not applicable to low section flange type (MXN, MXNG, MXNL) or low section block type (MXNS, MXNSG, MXNSL).  
<sup>(6)</sup> MX series is applicable only to /YCG.


Table 7.4 Application of special specifications (Non-interchangeable specification)

| Special specification                                            | Supplemental code | Size |    |    |    |    |    |    |    |    |    |    |     |
|------------------------------------------------------------------|-------------------|------|----|----|----|----|----|----|----|----|----|----|-----|
|                                                                  |                   | 10   | 12 | 15 | 20 | 25 | 30 | 35 | 45 | 55 | 65 | 85 | 100 |
| Butt-jointing track rails                                        | /A                | ○    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○   |
| Opposite reference surfaces arrangement                          | /D                | ○    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○   |
| Specified rail mounting hole positions                           | /E                | ○    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○   |
| Caps for rail mounting holes                                     | /F                | ×    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○   |
| Changed pitch of slide unit middle mounting holes <sup>(1)</sup> | /GE               | ×    | ×  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ×  | ○   |
| Half pitch mounting holes for track rail                         | /HP               | ×    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ×   |
| Inspection sheet                                                 | /I                | ○    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○   |
| Female threads for bellows                                       | /JO               | ×    | ×  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ×   |
| Black chrome surface treatment                                   | /LO               | ×    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ×  | ×   |
| Fluorine black chrome surface treatment                          | /LFO              | ×    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ×  | ×   |
| With track rail mounting bolt <sup>(2)</sup>                     | /MA               | ○    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ×  | ×   |
| Without track rail mounting bolt <sup>(3)</sup>                  | /MN               | ○    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○   |
| No end seal <sup>(4)</sup>                                       | /N                | ○    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ×  | ×  | ×  | ×   |
| Rail cover plate for track rail <sup>(3)</sup>                   | /PS               | ×    | ×  | ×  | ×  | ×  | ×  | ○  | ○  | ○  | ×  | ×  | ×   |
| With C-Lube plate <sup>(3)</sup>                                 | /Q                | ○    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ×   |
| C-Wiper <sup>(2) (5)</sup>                                       | /RCO              | ×    | ×  | ×  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ×  | ×   |
| Inner seal <sup>(2)</sup>                                        | /UR               | ×    | ×  | ×  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ×  | ×   |
| Double end seals                                                 | /VO               | ×    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○   |
| A group of multiple assembled sets                               | /WO               | ○    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ×  | ×   |
| Specified grease <sup>(6)</sup>                                  | /YO               | ○    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○   |
| Scrapers                                                         | /ZO               | ×    | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○  | ○   |

Notes <sup>(1)</sup> Applicable to flange type (MX, MXG, MXH20, MXHG20, LRX, LRXG, LRXH20, LRXH20).  
<sup>(2)</sup> Applicable to MX series.  
<sup>(3)</sup> Applicable to LRX series. / YCG is applicable to MX series.  
<sup>(4)</sup> Not applicable to low section flange type (MXN, MXNG, MXNL) or low section block type (MXNS, MXNSG, MXNSL).  
<sup>(5)</sup> Since inner seal and scraper are mounted simultaneously, indication of "/UR" or "/Z" is not necessary.  
<sup>(6)</sup> MX series is applicable only to /YCG.

[illegible]

**Table 9 Pitch of slide unit middle mounting holes  
(Supplemental code /GE)**



| Size | $L_2$ | $L_6$ |
|------|-------|-------|
| 15   | 30    | 26    |
| 20   | 40    | 35    |
| 25   | 45    | 40    |
| 30   | 52    | 44    |
| 35   | 62    | 52    |
| 45   | 80    | 60    |
| 55   | 95    | 70    |
| 65   | 110   | 82    |
| 100  | 200   | 150   |

Size 15, 20, 25 and 30

Flange type

Block type

Compact block type

unit: mm

| Identification number |                        | Slide unit |       |       |                           |             | Track rail |       |       |                           |     |      |   |    |      |
|-----------------------|------------------------|------------|-------|-------|---------------------------|-------------|------------|-------|-------|---------------------------|-----|------|---|----|------|
|                       |                        | $a_1$      | $b_1$ | $b_2$ | $M_1 \times \text{depth}$ | $L_1^{(2)}$ | $H_3$      | $a_3$ | $a_4$ | $M_2 \times \text{depth}$ |     |      |   |    |      |
| MXC 15                | LRXC 15                | 10.5       | 10.5  | 26    | M3×6                      | 67          | 1          | 4     | 8     | M3×6                      |     |      |   |    |      |
| MX 15                 | LRX 15                 |            |       |       |                           | 83          |            |       |       |                           |     |      |   |    |      |
| MXG 15                | LRXG 15                |            |       |       |                           | 99          |            |       |       |                           |     |      |   |    |      |
| MXDC 15               | LRXDC 15               | 14.5       | 4     |       |                           | 67          | 5          |       |       |                           |     |      |   |    |      |
| MXD 15                | LRXD 15                |            |       |       |                           | 83          |            |       |       |                           |     |      |   |    |      |
| MXDG 15               | LRXDG 15               |            |       |       |                           | 99          |            |       |       |                           |     |      |   |    |      |
| MXSC 15               | LRXSC 15               |            |       |       |                           | 67          | 1          |       |       |                           |     |      |   |    |      |
| MXS 15                | LRXS 15                |            |       |       |                           | 83          |            |       |       |                           |     |      |   |    |      |
| MXSG 15               | LRXSG 15               |            |       |       |                           | 99          |            |       |       |                           |     |      |   |    |      |
| MXC 20 <sup>(3)</sup> | LRXC 20 <sup>(3)</sup> | 12         | 13.5  | 36    | M3×6                      | 81          | 2          | 5     | 10    | M4×8                      |     |      |   |    |      |
| MX 20 <sup>(3)</sup>  | LRX 20 <sup>(3)</sup>  |            |       |       |                           | 101         |            |       |       |                           |     |      |   |    |      |
| MXG 20 <sup>(3)</sup> | LRXG 20 <sup>(3)</sup> |            |       |       |                           | 121         |            |       |       |                           |     |      |   |    |      |
| MXL 20 <sup>(3)</sup> | —                      |            |       |       |                           | 143         |            |       |       |                           |     |      |   |    |      |
| MXDC 20               | LRXDC 20               | 16         | 4     |       |                           | 81          | 6          |       |       |                           |     |      |   |    |      |
| MXD 20                | LRXD 20                |            |       |       |                           | 101         |            |       |       |                           |     |      |   |    |      |
| MXDG 20               | LRXDG 20               |            |       |       |                           | 121         |            |       |       |                           |     |      |   |    |      |
| MXDL 20               | —                      |            |       |       |                           | 143         |            |       |       |                           |     |      |   |    |      |
| MXSC 20               | LRXSC 20               | 12         |       |       |                           | 81          | 2          |       |       |                           |     |      |   |    |      |
| MXS 20                | LRXS 20                |            |       |       |                           | 101         |            |       |       |                           |     |      |   |    |      |
| MXSG 20               | LRXSG 20               |            |       |       |                           | 121         |            |       |       |                           |     |      |   |    |      |
| MXSL 20               | —                      |            |       |       |                           | 143         |            |       |       |                           |     |      |   |    |      |
| MXC 25                | LRXC 25                | 15.5       | 15    |       |                           | 40          | M3×6       |       |       |                           | 89  | 4    | 6 | 12 | M4×8 |
| MX 25                 | LRX 25                 |            |       |       |                           |             |            |       |       |                           | 113 |      |   |    |      |
| MXG 25                | LRXG 25                |            |       |       |                           |             |            |       |       |                           | 128 |      |   |    |      |
| MXL 25                | —                      |            |       |       |                           |             |            |       |       |                           | 152 |      |   |    |      |
| MXDC 25               | LRXDC 25               | 19.5       | 4     | 89    | 8                         |             |            |       |       |                           |     |      |   |    |      |
| MXD 25                | LRXD 25                |            |       | 113   |                           |             |            |       |       |                           |     |      |   |    |      |
| MXDG 25               | LRXDG 25               |            |       | 128   |                           |             |            |       |       |                           |     |      |   |    |      |
| MXDL 25               | —                      |            |       | 152   |                           |             |            |       |       |                           |     |      |   |    |      |
| MXSC 25               | LRXSC 25               | 15.5       |       | 89    | 4                         |             |            |       |       |                           |     |      |   |    |      |
| MXS 25                | LRXS 25                |            |       | 113   |                           |             |            |       |       |                           |     |      |   |    |      |
| MXSG 25               | LRXSG 25               |            |       | 128   |                           |             |            |       |       |                           |     |      |   |    |      |
| MXSL 25               | —                      |            |       | 152   |                           |             |            |       |       |                           |     |      |   |    |      |
| MXC 30                | LRXC 30                | 18.5       | 20    | 50    | M3×6                      |             |            | 100   | 4.8   | 7                         | 14  | M4×8 |   |    |      |
| MX 30                 | LRX 30                 |            |       |       |                           |             |            | 128   |       |                           |     |      |   |    |      |
| MXG 30                | LRXG 30                |            |       |       |                           |             |            | 149   |       |                           |     |      |   |    |      |
| MXL 30                | —                      |            |       |       |                           |             |            | 177   |       |                           |     |      |   |    |      |
| MXDC 30               | LRXDC 30               | 21.5       | 5     |       |                           | 100         | 7.8        |       |       |                           |     |      |   |    |      |
| MXD 30                | LRXD 30                |            |       |       |                           | 128         |            |       |       |                           |     |      |   |    |      |
| MXDG 30               | LRXDG 30               |            |       |       |                           | 149         |            |       |       |                           |     |      |   |    |      |
| MXDL 30               | —                      |            |       |       |                           | 177         |            |       |       |                           |     |      |   |    |      |
| MXSC 30               | LRXSC 30               | 18.5       |       |       |                           | 100         | 4.8        |       |       |                           |     |      |   |    |      |
| MXS 30                | LRXS 30                |            |       |       |                           | 128         |            |       |       |                           |     |      |   |    |      |
| MXSG 30               | LRXSG 30               |            |       |       |                           | 149         |            |       |       |                           |     |      |   |    |      |
| MXSL 30               | —                      |            |       |       |                           | 177         |            |       |       |                           |     |      |   |    |      |

2. This is applicable to stainless steel type models of the same size.

[illegible]

II - 161

Technical drawings of MXN series slide units, showing various views and dimensions for sizes 30, 35, 45, and 55.

**Low section flange type**

**Low section block type**

**Side views and Grease nipple detail:**

- Size 30: Shows a grease nipple (A-M4) and dimension  $L_1$ .
- Sizes 35, 45, 55: Shows dimension  $L_1$ .

**Table of Dimensions (unit: mm)**


| Identification number | Slide unit  |       |       |       |       |       |                           |             |       | Track rail |       |                           |
|-----------------------|-------------|-------|-------|-------|-------|-------|---------------------------|-------------|-------|------------|-------|---------------------------|
|                       | $a_1^{(1)}$ | $a_2$ | $b_1$ | $b_2$ | $b_3$ | $b_4$ | $M_1 \times \text{depth}$ | $L_1^{(2)}$ | $H_3$ | $a_3$      | $a_4$ | $M_2 \times \text{depth}$ |
| MXN 30                | 14.5        | —     | 20    | 50    | —     | —     | M3×6                      | 128         | 0.8   | 7          | 14    | M4× 8                     |
| MXNG 30               |             |       |       |       |       |       |                           | 149         |       |            |       |                           |
| MXNL 30               |             |       | 177   |       |       |       |                           |             |       |            |       |                           |
| MXNS 30               |             |       | 128   |       |       |       |                           |             |       |            |       |                           |
| MXNSG 30              |             |       | 149   |       |       |       |                           |             |       |            |       |                           |
| MXNSL 30              |             |       | 177   |       |       |       |                           |             |       |            |       |                           |
| MXN 35                | 2           | 16    | 30    | 40    | 20    | 60    | M3×6                      | 131         | —     | 8          | 16    | M4× 8                     |
| MXNG 35               |             |       |       |       |       |       |                           | 159         |       |            |       |                           |
| MXNL 35               |             |       | 191   |       |       |       |                           |             |       |            |       |                           |
| MXNS 35               |             |       | 131   |       |       |       |                           |             |       |            |       |                           |
| MXNSG 35              |             |       | 159   |       |       |       |                           |             |       |            |       |                           |
| MXNSL 35              |             |       | 191   |       |       |       |                           |             |       |            |       |                           |
| MXN 45                | 1           | 21    | 35    | 50    | 23    | 74    | M4×8                      | 163         | —     | 10         | 19    | M5×10                     |
| MXNG 45               |             |       |       |       |       |       |                           | 203         |       |            |       |                           |
| MXNL 45               |             |       | 243   |       |       |       |                           |             |       |            |       |                           |
| MXNS 45               |             |       | 163   |       |       |       |                           |             |       |            |       |                           |
| MXNSG 45              |             |       | 203   |       |       |       |                           |             |       |            |       |                           |
| MXNSL 45              |             |       | 243   |       |       |       |                           |             |       |            |       |                           |
| MXN 55                | 0           | 27    | 40    | 60    | 26    | 88    | M4×8                      | 193         | —     | 10         | 24    | M5×10                     |
| MXNG 55               |             |       |       |       |       |       |                           | 247         |       |            |       |                           |
| MXNL 55               |             |       | 301   |       |       |       |                           |             |       |            |       |                           |
| MXNS 55               |             |       | 193   |       |       |       |                           |             |       |            |       |                           |
| MXNSG 55              |             |       | 247   |       |       |       |                           |             |       |            |       |                           |
| MXNSL 55              |             |       | 301   |       |       |       |                           |             |       |            |       |                           |

II - 162



Table 11.1 Dimensions of slide unit with C-Lube plate  
(Supplemental code /Q)

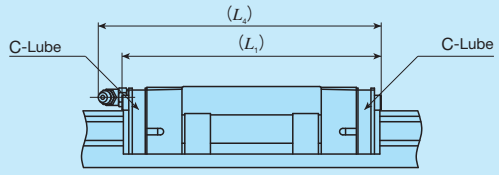Size: 10, 12, 15, 20, 25, 30




unit: mm

| Identification number | $L_1$ | $L_4$ |
|-----------------------|-------|-------|
| LRXD 10...SL          | 44    | —     |
| LRXC 12               | 47    | 50    |
| LRX 12                | 57    | 60    |
| LRXG 12               | 68    | 71    |
| LRXC 15               | 63    | 64    |
| LRX 15                | 79    | 80    |
| LRXG 15               | 95    | 96    |
| LRXC 20               | 76    | 84    |
| LRX 20                | 96    | 104   |
| LRXG 20               | 116   | 124   |
| LRXC 25               | 85    | 93    |
| LRX 25                | 109   | 117   |
| LRXG 25               | 124   | 132   |
| LRXC 30               | 96    | 107   |
| LRX 30                | 124   | 135   |
| LRXG 30               | 145   | 156   |

Remarks 1. The dimensions of the slide unit with C-Lube at both ends are indicated.  
2. A typical identification number is indicated, but is applied to all LRX series models of the same type.

Table 11.2 Dimensions of slide unit with C-Lube plate  
(Supplemental code /Q)

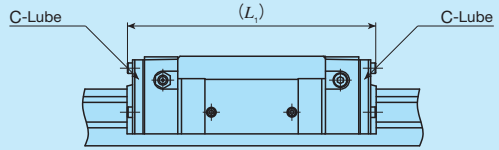Size: 35, 45, 55, 65, 85




unit: mm

| Identification number | $L_1$ |
|-----------------------|-------|
| LRXC 35               | 103   |
| LRX 35                | 135   |
| LRXG 35               | 163   |
| LRXC 45               | 127   |
| LRX 45                | 167   |
| LRXG 45               | 207   |
| LRXC 55               | 149   |
| LRX 55                | 197   |
| LRXG 55               | 251   |
| LRXC 65               | 198   |
| LRX 65                | 262   |
| LRXG 65               | 326   |
| LRX 85                | 341   |
| LRXG 85               | 413   |
| LRXL 85               | 512   |

Remarks 1. The dimensions of the slide unit with C-Lube at both ends are indicated.  
2. A typical identification number is indicated, but is applied to all LRX series models of the same type.

Table 12.1 Dimensions of slide unit with C-Wiper  
(Supplemental code Assembled set: /RC /RCC)

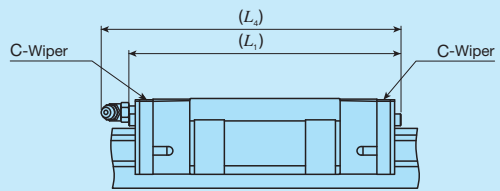Size: 20, 25, 30




unit: mm

| Identification number | $L_1$ | $L_4$ |
|-----------------------|-------|-------|
| MXC 20                | 80    | 90    |
| MX 20                 | 100   | 110   |
| MXG 20                | 120   | 130   |
| MXL 20                | 142   | 153   |
| MXC 25                | 89    | 99    |
| MX 25                 | 113   | 123   |
| MXG 25                | 128   | 138   |
| MXL 25                | 152   | 162   |
| MXC 30                | 100   | 113   |
| MX 30                 | 128   | 141   |
| MXN 30                | —     | 138   |
| MXG 30                | 149   | 162   |
| MXNG 30               | —     | 159   |
| MXL 30                | 177   | 190   |
| MXNL 30               | —     | 187   |

Remarks 1. The dimensions of the slide unit with C-Wiper at both ends are indicated.  
2. A typical identification number is indicated, but is applied to all MX series models of the same size.

Table 12.2 Dimensions of slide unit with C-Wiper  
(Supplemental code Assembled set: /RC /RCC)

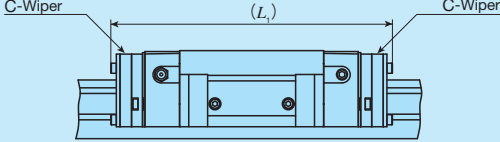Size: 35, 45, 55, 65




unit: mm

| Identification number | $L_1$ |
|-----------------------|-------|
| MXC 35                | 123   |
| MX 35                 | 155   |
| MXG 35                | 183   |
| MXL 35                | 215   |
| MXC 45                | 149   |
| MX 45                 | 189   |
| MXG 45                | 229   |
| MXL 45                | 269   |
| MXC 55                | 172   |
| MX 55                 | 220   |
| MXG 55                | 274   |
| MXL 55                | 328   |
| MXC 65                | 223   |
| MX 65                 | 287   |
| MXG 65                | 351   |
| MXL 65                | 423   |

Remarks 1. The dimensions of the slide unit with C-Wiper at both ends are indicated.  
2. A typical identification number is indicated, but is applied to all MX series models of the same size.

Table 13.1 Dimensions of slide unit with double end seals  
(Supplemental code Single unit: /V  
Assembled set: /V /VV)

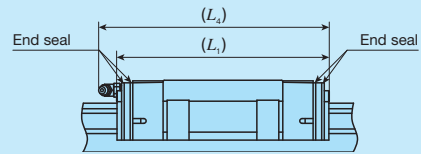Size: 12, 15, 20, 25, 30




unit: mm

| Identification number | $L_1$   | $L_4$ |
|-----------------------|---------|-------|
| MXC 12                | —       | 49    |
| —                     | LRXC 12 | 44    |
| MX 12                 | —       | 58    |
| —                     | LRX 12  | 54    |
| MXG 12                | —       | 70    |
| —                     | LRXG 12 | 65    |
| MXC 15                | LRXC 15 | 58    |
| MX 15                 | LRX 15  | 74    |
| MXG 15                | LRXG 15 | 90    |
| MXC 20                | LRXC 20 | 73    |
| MX 20                 | LRX 20  | 93    |
| MXG 20                | LRXG 20 | 113   |
| MXL 20                | —       | 135   |
| MXC 25                | LRXC 25 | 83    |
| MX 25                 | LRX 25  | 107   |
| MXG 25                | LRXG 25 | 122   |
| MXL 25                | —       | 146   |
| MXC 30                | LRXC 30 | 93    |
| MX 30                 | LRX 30  | 121   |
| MXN 30                | —       | 131   |
| MXG 30                | LRXG 30 | 142   |
| MXNG 30               | —       | 152   |
| MXL 30                | —       | 170   |
| MXNL 30               | —       | 180   |

Remarks 1. The dimensions of the slide unit with double end seals at both ends are indicated.  
2. A typical identification number is indicated, but is applied to all models of the same size.

Table 13.2 Dimensions of slide unit with double end seals  
(Supplemental code Single unit: /V  
Assembled set: /V /VV)

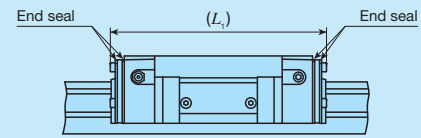Size: 35, 45, 55, 65, 85, 100




unit: mm

| Identification number | $L_1$    |
|-----------------------|----------|
| MXC 35                | LRXC 35  |
| MX 35                 | LRX 35   |
| MXG 35                | LRXG 35  |
| MXL 35                | —        |
| MXC 45                | LRXC 45  |
| MX 45                 | LRX 45   |
| MXG 45                | LRXG 45  |
| MXL 45                | —        |
| MXC 55                | LRXC 55  |
| MX 55                 | LRX 55   |
| MXG 55                | LRXG 55  |
| MXL 55                | —        |
| MXC 65                | —        |
| —                     | LRXC 65  |
| MX 65                 | —        |
| —                     | LRX 65   |
| MXG 65                | —        |
| —                     | LRXG 65  |
| MXL 65                | —        |
| —                     | LRX 85   |
| —                     | LRXG 85  |
| —                     | LRXL 85  |
| —                     | LRXG 100 |

Remarks 1. The dimensions of the slide unit with double end seals at both ends are indicated.  
2. A typical identification number is indicated, but is applied to all models of the same size.

Table 14.1 Dimensions of slide unit with scrapers  
(Supplemental code Single unit: /Z  
Assembled set: /Z /ZZ)

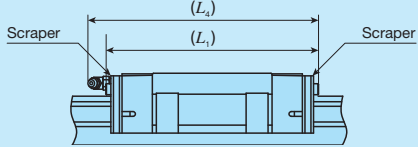Size: 12, 15, 20, 25, 30




unit: mm

| Identification number |         | L <sub>1</sub> | L <sub>4</sub> |
|-----------------------|---------|----------------|----------------|
| MXC 12                | —       | 50             | 53             |
| —                     | LRXC 12 | 45             | 48             |
| MX 12                 | —       | 60             | 63             |
| —                     | LRX 12  | 56             | 58             |
| MXG 12                | —       | 71             | 74             |
| —                     | LRXG 12 | 66             | 69             |
| MXC 15                | LRXC 15 | 60             | 61             |
| MX 15                 | LRX 15  | 76             | 77             |
| MXG 15                | LRXG 15 | 92             | 93             |
| MXC 20                | LRXC 20 | 74             | 83             |
| MX 20                 | LRX 20  | 94             | 103            |
| MXG 20                | LRXG 20 | 114            | 123            |
| MXL 20                | —       | 137            | 146            |
| MXC 25                | LRXC 25 | 85             | 93             |
| MX 25                 | LRX 25  | 109            | 117            |
| MXG 25                | LRXG 25 | 124            | 132            |
| MXL 25                | —       | 148            | 156            |
| MXC 30                | LRXC 30 | 96             | 107            |
| MX 30                 | LRX 30  | 124            | 135            |
| MXN 30                | —       |                | 132            |
| MXG 30                | LRXG 30 | 145            | 156            |
| MXNG 30               | —       |                | 153            |
| MXL 30                | —       | 173            | 184            |
| MXNL 30               | —       |                | 181            |

Remarks 1. The dimensions of the slide unit with scrapers at both ends are indicated.  
2. A typical identification number is indicated, but is applied to all models of the same size.

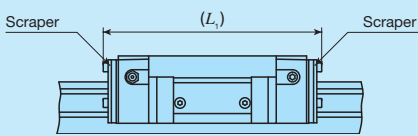Size: 35, 45, 55, 65, 85, 100



unit: mm


| Identification number |          | L <sub>1</sub> |
|-----------------------|----------|----------------|
| MXC 35                | LRXC 35  | 103            |
| MX 35                 | LRX 35   | 135            |
| MXG 35                | LRXG 35  | 163            |
| MXL 35                | —        | 195            |
| MXC 45                | LRXC 45  | 129            |
| MX 45                 | LRX 45   | 169            |
| MXG 45                | LRXG 45  | 209            |
| MXL 45                | —        | 249            |
| MXC 55                | LRXC 55  | 151            |
| MX 55                 | LRX 55   | 199            |
| MXG 55                | LRXG 55  | 253            |
| MXL 55                | —        | 307            |
| MXC 65                | LRXC 65  | 194            |
| MX 65                 | LRX 65   | 258            |
| MXG 65                | LRXG 65  | 322            |
| MXL 65                | —        | 394            |
| —                     | LRX 85   | 339            |
| —                     | LRXG 85  | 411            |
| —                     | LRXL 85  | 510            |
| —                     | LRXG 100 | 378            |

Remarks 1. The dimensions of the slide unit with scrapers at both ends are indicated.  
2. A typical identification number is indicated, but is applied to all models of the same size.

Lubrication

Lithium-soap base grease with extreme-pressure additive (Alvania EP grease 2 [SHOWA SHELL SEKIYU K. K.]) is pre-packed in MX series and LRX series. Additionally, MX series has C-Lube placed in the recirculation part of cylindrical roller, so that the interval for reapplying lubricant can be extended and maintenance works such as grease job can be reduced significantly.

The MX series and LRX series have grease nipple or oil hole as indicated in Table 15. Supply nozzles fit to each shapes of grease nipple and dedicated supplying equipment (miniature greasers) fit to oil holes are also available. When these parts are desired, refer to Table 14 and Table 15.1 in III-22 and Table 16 of page III-23 to order.

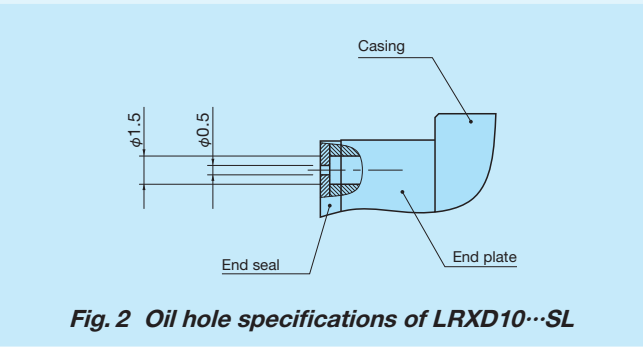



**Table 15 Parts for lubrication**

| Size                  | Grease nipple type <sup>(1)</sup> | Applicable supply nozzle type      | Bolt size of female threads for piping |
|-----------------------|-----------------------------------|------------------------------------|----------------------------------------|
| 10                    | Oil hole                          | Miniature greaser                  | —                                      |
| 12                    | A-M3                              | A-5120V    A-5240V                 | —                                      |
| 15 <sup>(2)</sup>     | A-M4                              | B-5120V    B-5240V                 | M4                                     |
| 20 <sup>(2)</sup>     | B-M4                              | A-8120V                            |                                        |
| 25 <sup>(2)</sup>     |                                   | B-8120V                            |                                        |
| 30 <sup>(3) (4)</sup> | B-M6                              | Grease gun available on the market | M6                                     |
| 35 <sup>(5)</sup>     | JIS1 type                         |                                    | PT1/8                                  |
| 45 <sup>(6)</sup>     | JIS2 type                         |                                    |                                        |
| 55                    |                                   |                                    |                                        |
| 65                    |                                   |                                    |                                        |
| 85                    |                                   |                                    |                                        |
| 100                   | A-PT1/4                           | PT1/4                              |                                        |

Notes <sup>(1)</sup> For grease nipple specification, see Table 15.1 and Table 15.2 in page III-22.  
<sup>(2)</sup> The grease nipple when female threads for bellows (supplemental code "J") is specified is A-M3.  
<sup>(3)</sup> The grease nipple when female threads for bellows (supplemental code "J") is specified is A-M4.  
<sup>(4)</sup> The grease nipple for MXN30 is B-M4. The grease nipple when female threads for bellows (supplemental code "J") is specified is A-M4.  
<sup>(5)</sup> The grease nipple mounting screw for MXN35 is made smaller along the movement direction of the slide unit than the right / left direction. When the grease nipple is mounted along the movement direction, contact **IKO**.  
<sup>(6)</sup> The grease nipple for MXN45 is JIS type1.

Dust Protection

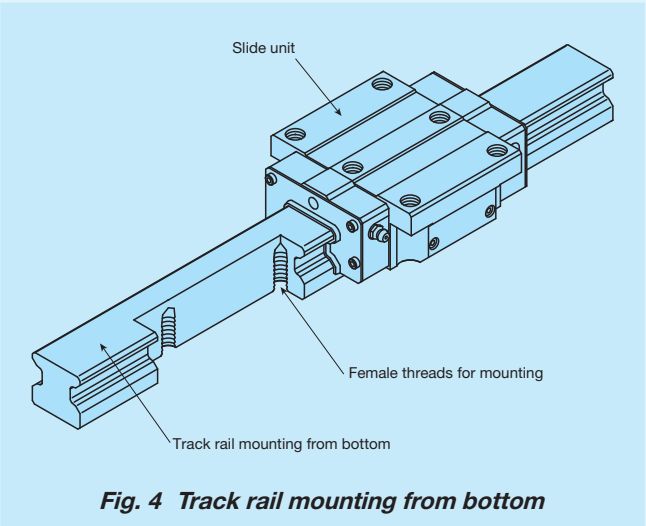
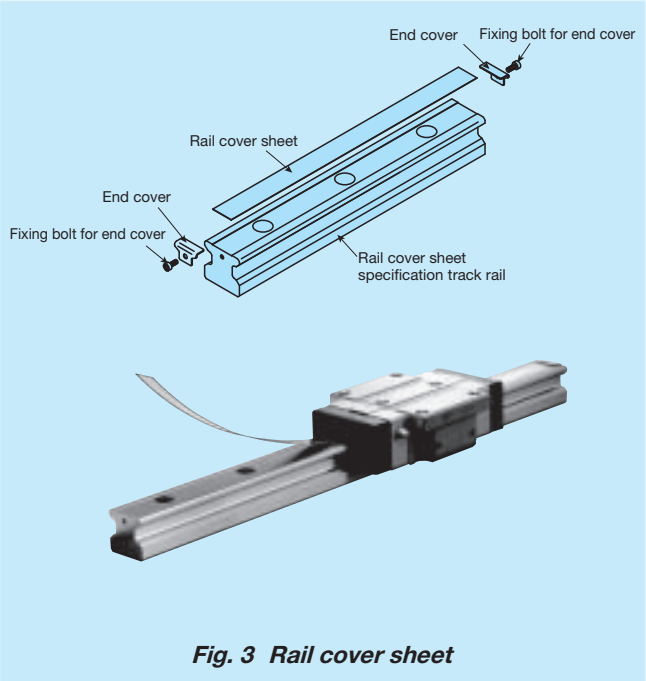
The slide units of MX series and LRX series are equipped with end seals and under seals as standard for dust protection. However, if large amount of contaminant or dust are floating, or if large particles of foreign substances such as chips or sand may adhere to the track rail, it is recommended to cover the entire unit with bellows, telescopic shields, etc. MX series and LRX series are provided with specific bellows. The bellows are easy to mount and provide excellent dust protection. If you need these units, please refer to III -25 for ordering. Also the cover end tape to cover the mounting hole of track rail (Fig. 3) and track rail mounting from bottom with no mounting hole on the upper surface (Fig.4) are available. If needed, please contact IKO.



Precaution for Use

① Mounting surface, reference mounting surface and typical mounting structure

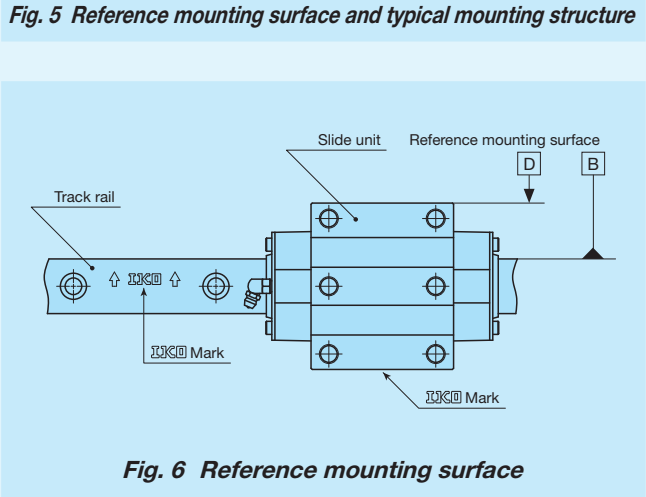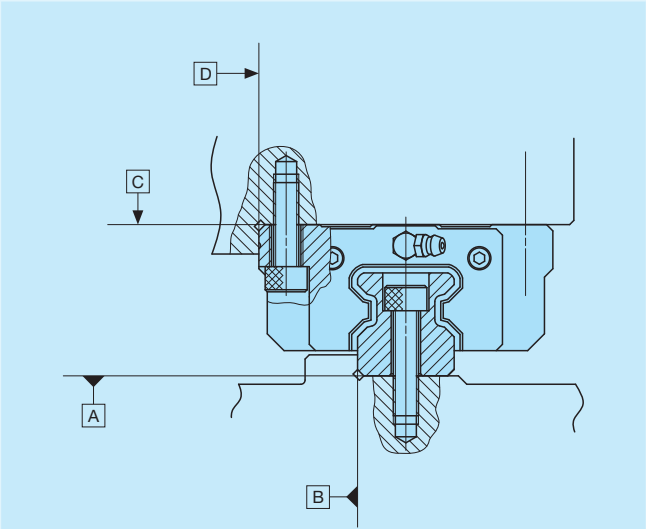When mounting the MX series and LRX series, properly align the reference mounting surfaces B and D of the track rail and slide unit with the reference mounting surface of the table and bed and fix them. (See Fig. 5.) The reference mounting surfaces B and D and mounting surfaces A and C are precisely ground. Machining the mounting surface of the table and bed, such as machine or device, to high accuracy and mounting them properly will ensure stable linear motion with high accuracy. Reference mounting surface of the slide unit is the opposite side of the IKO mark. The track rail reference mounting surface is identified by locating the IKO mark on the top surface of the track rail. It is the side surface above the mark (in the direction of the arrow). (See Fig. 6.)



② Fixing the slide unit

Slide unit is also provided with mounting screws in the middle of width direction (see Fig.7) and some products has the arrangement to receive the applied load in a good balance. When ordering machines or equipment, consider the arrangement so that the mounting holes in the middle of slide unit can also be used to fix the units, to use the highest performance out of the product. To fix the slide unit of compact block type or low section block type, we recommend to secure the fixing thread depth of Table 16.1and Table 16.2. Also, with the low section flange type and low section block type, make sure that the fixing thread depth for the mounting screw in the middle of slide unit width direction is less than the maximum fixing thread depth of the dimension table.

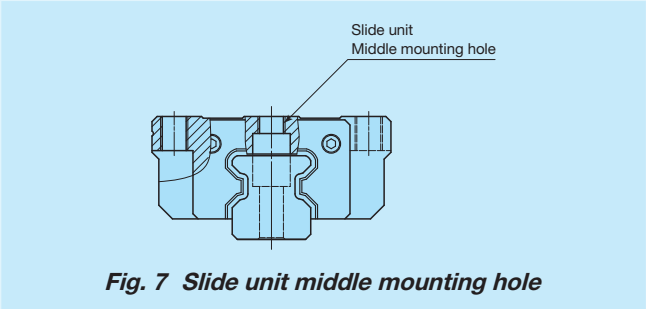


Table 16.1 Fixing thread depth for slide unit mounting hole of compact block type unit: mm

| Identification number |         | Recommended minimum fixing thread depth |
|-----------------------|---------|-----------------------------------------|
| MXS 15                | LRXS 15 | 4.5                                     |
| MXS 20                | LRXS 20 | 5.5                                     |
| MXS 25                | LRXS 25 | 7                                       |
| MXS 30                | LRXS 30 | 9                                       |

Remark: A typical identification number is indicated, but is applied to all compact block types of the same size.

Table 16.2 Fixing thread depth for slide unit mounting hole of low section block type unit: mm

| Identification number |  | Recommended minimum fixing thread depth |
|-----------------------|--|-----------------------------------------|
| MXNS 30               |  | 8                                       |
| MXNS 35               |  | 8.5                                     |
| MXNS 45               |  | 10.5                                    |
| MXNS 55               |  | 14                                      |

Remark: A typical identification number is indicated, but is applied to all low section block types of the same size.

③ Shoulder height and corner radius of the reference mounting surface

For the opposite corner of the mating reference mounting, it is recommended to have relieved fillet as indicated in Fig. 8, but you may also use it with providing radius R at the corner as shown in Table 17. Recommended value for the shoulder height on the mating side is indicated in Table 17.

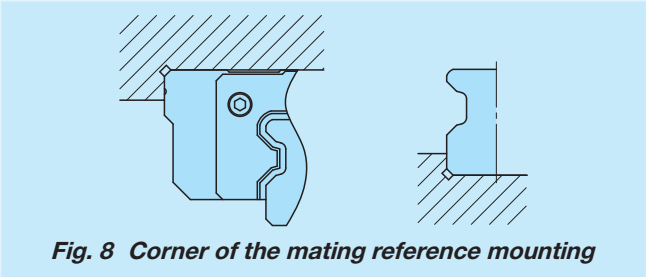


Table 17 Shoulder height and corner radius of the reference mounting surface

| unit: mm |                                                   |                                                   |                                      |
|----------|---------------------------------------------------|---------------------------------------------------|--------------------------------------|
| Size     | Shoulder height of slide unit mounting part $h_1$ | Shoulder height of track rail mounting part $h_2$ | Corner radius $R$ (Maximum)          |
| 10       | 4                                                 | 1                                                 | 0.3                                  |
| 12       | 4                                                 | 2                                                 | 0.5                                  |
| 15       | 4                                                 | 3                                                 | 0.5                                  |
| 20       | 5                                                 | 4                                                 | 0.5                                  |
| 25       | 6                                                 | 5                                                 | 1                                    |
| 30       | 8                                                 | 5.5                                               | 1                                    |
| 35       | 8                                                 | 5.5                                               | 1                                    |
| 45       | 8                                                 | 7                                                 | 1.5                                  |
| 55       | 10                                                | 8                                                 | 1.5                                  |
| 65       | 10                                                | 10                                                | 1.5                                  |
| 85       | 14                                                | 14                                                | 2.5 (Slide unit)<br>1.5 (Track rail) |
| 100      | 14                                                | 13                                                | 2.5                                  |

④ Tightening torque for mounting bolts

Typical tightening torques for mounting of the MX series and LRX series to the steel mating member material are indicated in Table 18. When vibration and shock of the machine or device are large, fluctuating load is large, or moment load is applied, fix it by using the torque 1.2 to 1.5 times larger than the value indicated in the table as necessary. If the mating member material is cast iron or aluminum, reduce the tightening torque depending on the strength characteristic of the mating member material.

Table 18 Tightening torque for fixing screw


| Bolt size  | Tightening torque N · m      |                            |
|------------|------------------------------|----------------------------|
|            | High carbon steel-made screw | Stainless steel-made screw |
| M 2.6×0.45 | —                            | 0.70                       |
| M 3 ×0.5   | 1.7                          | 1.1                        |
| M 4 ×0.7   | 4.0                          | 2.5                        |
| M 5 ×0.8   | 7.9                          | 5.0                        |
| M 6 ×1     | 13.3                         | 8.5                        |
| M 8 ×1.25  | 32.0                         | 20.4                       |
| M10 ×1.5   | 62.7                         | —                          |
| M12 ×1.75  | 108                          | —                          |
| M14 ×2     | 172                          | —                          |
| M16 ×2     | 263                          | —                          |
| M20 ×2.5   | 512                          | —                          |
| M24 ×3     | 882                          | —                          |
| M30 ×3.5   | 1 750                        | —                          |

Remarks 1. The calculation is based on the tightening torque, strength division 12.9 and property division A2-70.  
2. It is recommended that the tightening torque of slide unit middle mounting holes for size 15, 20, 25, 30, 35 of flange type (MXC, MX, MXG, MXL, LRXC, LRX, LRXG) is to be 70 to 80 % of the values in the table.



## MX • LRX


|    |    |    |    |    |     |
|----|----|----|----|----|-----|
| 12 | 15 | 20 | 25 | 30 |     |
| 35 | 45 | 55 | 65 | 85 | 100 |



Remark: A grease nipple mounting screw is provided on the right and left end plates respectively.

### Flange type mounting from top / bottom



MX • LRX



Shape

Size

|    |    |    |    |    |     |
|----|----|----|----|----|-----|
| 12 | 15 | 20 | 25 | 30 |     |
| 35 | 45 | 55 | 65 | 85 | 100 |

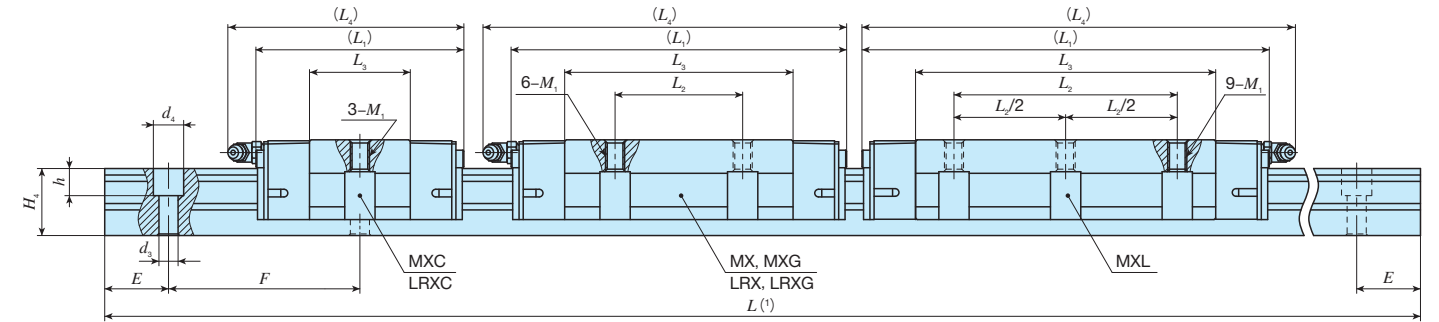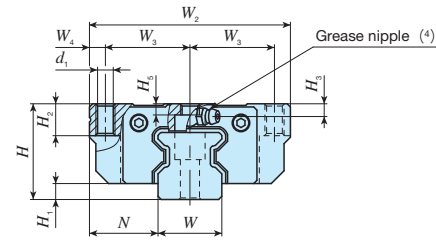

| Identification number  |                           | Interchangeable | Mass (Ref.)      |                    | Dimensions of assembly<br>mm |                |      | Dimensions of slide unit<br>mm |                |                |                |                |                |                |                |                |  |                | Dimensions of track rail<br>mm |                |    |                |                |                |    |    | Appended mounting<br>bolt for track rail <sup>(2)</sup> | Basic dynamic<br>load rating <sup>(3)</sup> | Basic static<br>load rating <sup>(3)</sup> | Static moment rating <sup>(3)</sup> |                |                 |                     |
|------------------------|---------------------------|-----------------|------------------|--------------------|------------------------------|----------------|------|--------------------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|--|----------------|--------------------------------|----------------|----|----------------|----------------|----------------|----|----|---------------------------------------------------------|---------------------------------------------|--------------------------------------------|-------------------------------------|----------------|-----------------|---------------------|
| MX series              | LRX series<br>(No C-Lube) |                 | Slide unit<br>kg | Track rail<br>kg/m | H                            | H <sub>1</sub> | N    | W <sub>2</sub>                 | W <sub>3</sub> | W <sub>4</sub> | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | L <sub>4</sub> | d <sub>1</sub> | M <sub>1</sub> |  | H <sub>2</sub> | H <sub>3</sub>                 | H <sub>5</sub> | W  | H <sub>4</sub> | d <sub>3</sub> | d <sub>4</sub> | h  | E  |                                                         |                                             |                                            | F                                   | Bolt size× ℓ   | C<br>N          | C <sub>0</sub><br>N |
| <a href="#">MXC 25</a> | <a href="#">LRXC 25</a>   | ○               | 0.44             | 3.59               | 36                           | 6              | 23.5 | 70                             | 28.5           | 6.5            | 74             | —              | 36             | 83             | 7              | M 8            |  | 10             | 5                              | 5              | 23 | 24.5           | 7              | 11             | 9  | 30 | 60                                                      | M6×25                                       | 21 600                                     | 33 800                              | 500            | 213<br>1 810    | 213<br>1 810        |
| <a href="#">MX 25</a>  | <a href="#">LRX 25</a>    | ○               | 0.67             |                    |                              |                |      |                                |                |                | 98             | 45             | 60             | 107            |                |                |  |                |                                |                |    |                |                |                |    |    |                                                         |                                             | 32 100                                     | 56 300                              | 833            | 573<br>3 800    | 573<br>3 800        |
| <a href="#">MXG 25</a> | <a href="#">LRXG 25</a>   | ○               | 0.84             |                    |                              |                |      |                                |                |                | 113            | 75             | 122            | 38 200         |                |                |  |                |                                |                |    |                |                |                |    |    |                                                         |                                             | 70 300                                     | 1 040                               | 885<br>5 380   | 885<br>5 380    |                     |
| <a href="#">MXL 25</a> | —                         | —               | 1.08             |                    |                              |                |      |                                |                |                | 137            | 70             | 99             | 146            |                |                |  |                |                                |                |    |                |                |                |    |    |                                                         |                                             | 47 400                                     | 92 800                              | 1 370          | 1 530<br>8 480  | 1 530<br>8 480      |
| <a href="#">MXC 30</a> | <a href="#">LRXC 30</a>   | ○               | 0.78             | 5.01               | 42                           | 6.5            | 31   | 90                             | 36             | 9              | 85             | —              | 42.4           | 95             | 8.5            | M10            |  | 10             | 6.5                            | 5.5            | 28 | 28             | 9              | 14             | 12 | 40 | 80                                                      | M8×28                                       | 29 200                                     | 44 600                              | 808            | 329<br>2 740    | 329<br>2 740        |
| <a href="#">MX 30</a>  | <a href="#">LRX 30</a>    | ○               | 1.20             |                    |                              |                |      |                                |                |                | 113            | 52             | 70.4           | 123            |                |                |  |                |                                |                |    |                |                |                |    |    |                                                         |                                             | 43 400                                     | 74 400                              | 1 350          | 883<br>5 780    | 883<br>5 780        |
| <a href="#">MXG 30</a> | <a href="#">LRXG 30</a>   | ○               | 1.58             |                    |                              |                |      |                                |                |                | 134            | 91.4           | 144            | 53 200         |                |                |  |                |                                |                |    |                |                |                |    |    |                                                         |                                             | 96 700                                     | 1 750                               | 1 470<br>8 740 | 1 470<br>8 740  |                     |
| <a href="#">MXL 30</a> | —                         | —               | 2.03             |                    |                              |                |      |                                |                |                | 162            | 80             | 119.4          | 172            |                |                |  |                |                                |                |    |                |                |                |    |    |                                                         |                                             | 65 600                                     | 126 000                             | 2 290          | 2 500<br>13 600 | 2 500<br>13 600     |

Notes (1) Length of track rail  $L$  is shown in Table 2.1 on page II-153 and Table 2.3 on page II-154.

(2) The appended track rail mounting bolts are hexagon socket head bolts equivalent to JIS B 1176. In an assembled set of MX series, track rail mounting bolts are not appended.

(3) Basic dynamic load rating ( $C$ ), basic static load rating ( $C_0$ ), basic dynamic load rating ( $T_0$ ,  $T_X$ , and  $T_Y$ ) are values for the direction indicated in the following figure.

The upper values of  $T_x$  and  $T_y$  are for one slide unit and the lower values are for two slide units in close contact.

(4) The shapes of grease nipple vary by size. For details of the specifications, see Table 15 on page II-166.

Remark: A grease nipple mounting screw is provided on the right and left end plates respectively.

### Example of identification number of assembled set

| Model code |          | Dimensions | Part code |             | Preload symbol       | Classification symbol | Interchangeable code | Special specification |
|------------|----------|------------|-----------|-------------|----------------------|-----------------------|----------------------|-----------------------|
| <u>MX</u>  | <u>G</u> | <u>25</u>  | <u>C2</u> | <u>R840</u> | <u>T<sub>1</sub></u> | <u>P</u>              | <u>S1</u>            | <u>/F</u>             |
| 1          | 2        | 3          | 4         | 5           | 6                    | 7                     | 8                    | 9                     |

| ① Model |                      |
|---------|----------------------|
| MX      | Flange type mounting |
| L RX    | from top / bottom    |

|        |        |
|--------|--------|
| ③ Size | 25, 30 |
|--------|--------|

| ⑥ Preload amount |                |
|------------------|----------------|
| No symbol        | Standard       |
| T <sub>1</sub>   | Light preload  |
| T <sub>2</sub>   | Medium preload |
| T <sub>3</sub>   | Heavy preload  |

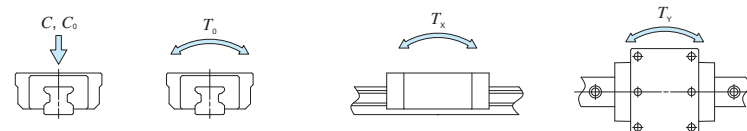
| ⑧ Interchangeable |                                   |
|-------------------|-----------------------------------|
| S1                | S1 specification                  |
| S2                | S2 specification                  |
| No symbol         | Non-interchangeable specification |

| ② Length of slide unit |            |
|------------------------|------------|
| C                      | Short      |
| No symbol              | Standard   |
| G                      | Long       |
| L                      | Extra long |

⑤ Length of track rail (840 mm)

| ⑦ Accuracy class |                 |
|------------------|-----------------|
| H                | High            |
| P                | Precision       |
| SP               | Super precision |
| UP               | Ultra precision |



⑨ Special specification  
A, D, E, F, GE, HP, I, J, L  
LF, MA, MN, N, Q, RC, T  
UR, V, W, Y, Z



IKO C-Lube Linear Roller Way Super MX


Flange type mounting from top / bottom

|       |          |    |    |    |    |     |
|-------|----------|----|----|----|----|-----|
| Shape | MX • LRX |    |    |    |    |     |
|       |          |    |    |    |    |     |
| Size  | 12       | 15 | 20 | 25 | 30 |     |
|       | 35       | 45 | 55 | 65 | 85 | 100 |

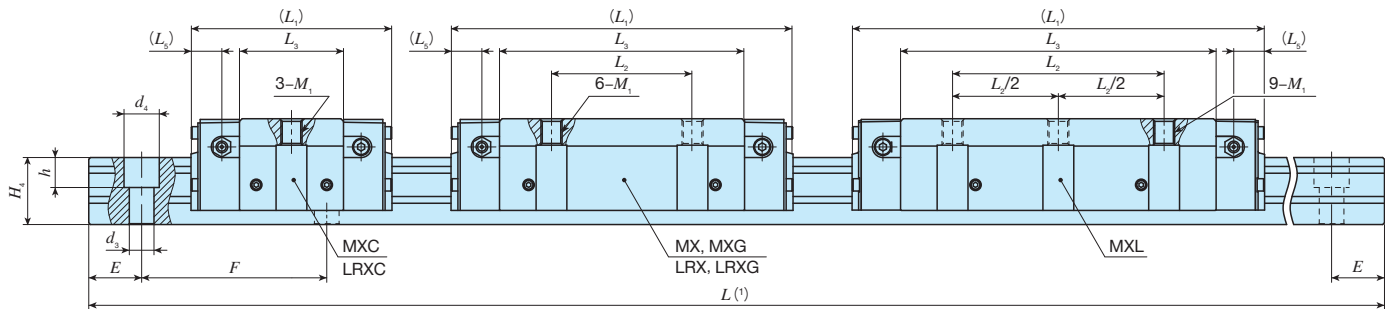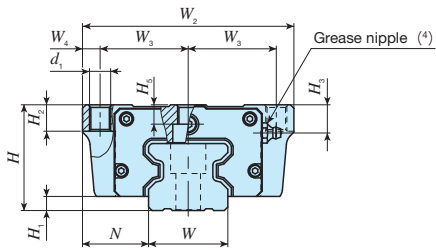

| Identification number |                        | Interchangeable | Mass (Ref.)   |                 | Dimensions of assembly mm |                |    | Dimensions of slide unit mm |                |                |                |                |                |                |                |                |  |                |                |                | Dimensions of track rail mm |                |                |                |    |    |    | Appended mounting bolt for track rail <sup>(2)</sup> | Basic dynamic load rating <sup>(3)</sup> | Basic static load rating <sup>(3)</sup> | Static moment rating <sup>(3)</sup> |              |                     |                       |                       |                       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|-----------------------|------------------------|-----------------|---------------|-----------------|---------------------------|----------------|----|-----------------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|--|----------------|----------------|----------------|-----------------------------|----------------|----------------|----------------|----|----|----|------------------------------------------------------|------------------------------------------|-----------------------------------------|-------------------------------------|--------------|---------------------|-----------------------|-----------------------|-----------------------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| MX series             | LRX series (No C-Lube) |                 | Slide unit kg | Track rail kg/m | H                         | H <sub>1</sub> | N  | W <sub>2</sub>              | W <sub>3</sub> | W <sub>4</sub> | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | L <sub>5</sub> | d <sub>1</sub> | M <sub>1</sub> |  | H <sub>2</sub> | H <sub>3</sub> | H <sub>5</sub> | W                           | H <sub>4</sub> | d <sub>3</sub> | d <sub>4</sub> | h  | E  | F  |                                                      |                                          |                                         | Bolt size× ℓ                        | C<br>N       | C <sub>0</sub><br>N | T <sub>0</sub><br>N・m | T <sub>x</sub><br>N・m | T <sub>y</sub><br>N・m |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| MXC 35                |                        | ○               | 1.13          | 6.88            | 48                        | 6.5            | 33 | 100                         | 41             | 9              | 92             | —              | 46.6           | 12.7           | 8.5            | M10            |  | 13             | 13             | 7              | 34                          | 32             | 9              | 14             | 12 | 40 | 80 | M 8×35                                               | 39 500                                   | 60 000                                  | 1 300                               | 506<br>3 950 | 506<br>3 950        |                       |                       |                       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| LRXC 35               | ○                      |                 |               |                 |                           |                |    |                             |                |                |                |                |                |                |                |                |  |                |                |                |                             |                |                |                |    |    |    |                                                      |                                          |                                         |                                     |              |                     |                       |                       |                       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |

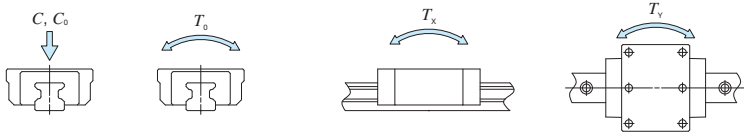Notes (1) Length of track rail  $L$  is shown in Table 2.1 on page II -153 and Table 2.3 on page II -154 .  
(2) The appended track rail mounting bolts are hexagon socket head bolts equivalent to JIS B 1176. In an assembled set of MX series, track rail mounting bolts are not appended.  
(3) Basic dynamic load rating ( $C$ ), basic static load rating ( $C_0$ ), static moment rating ( $T_0$ ,  $T_x$ , and  $T_y$ ) are values for the direction indicated in the following figure.  
The upper values of  $T_x$  and  $T_y$  are for one slide unit and the lower values are for two slide units in close contact.  
(4) The shapes of grease nipple vary by size. For details of the specifications, see Table 15 on page II -166.  
Remark: Three grease nipple mounting screws are provided on the right and left end plates respectively.



Example of identification number of assembled set

| Model code | Dimensions | Part code |           | Preload symbol | Classification symbol | Interchangeable code | Special specification |           |
|------------|------------|-----------|-----------|----------------|-----------------------|----------------------|-----------------------|-----------|
| <u>MX</u>  | <u>G</u>   | <u>35</u> | <u>C2</u> | <u>R1200</u>   | <u>T<sub>2</sub></u>  | <u>P</u>             | <u>S1</u>             | <u>/F</u> |
| ①          | ②          | ③         | ④         | ⑤              | ⑥                     | ⑦                    | ⑧                     | ⑨         |



|                        |                      |                            |  |                  |                 |                             |                                   |
|------------------------|----------------------|----------------------------|--|------------------|-----------------|-----------------------------|-----------------------------------|
| ① Model                |                      | ③ Size                     |  | ⑥ Preload amount |                 | ⑧ Interchangeable           |                                   |
| MX                     | Flange type mounting | 35, 45                     |  | No symbol        | Standard        | S1                          | S1 specification                  |
| LRX                    | from top / bottom    |                            |  | T1               | Light preload   | S2                          | S2 specification                  |
|                        |                      |                            |  | T2               | Medium preload  | No symbol                   | Non-interchangeable specification |
|                        |                      |                            |  | T3               | Heavy preload   |                             |                                   |
| ② Length of slide unit |                      | ④ Number of slide unit (2) |  | ⑦ Accuracy class |                 | ⑨ Special specification     |                                   |
| C                      | Short                |                            |  | H                | High            | A, D, E, F, GE, HP, I, J, L |                                   |
| No symbol              | Standard             |                            |  | P                | Precision       | LF, MA, MN, N, PS, Q        |                                   |
| G                      | Long                 |                            |  | SP               | Super precision | RC, T, UR, V, W, Y, Z       |                                   |
| L                      | Extra long           |                            |  | UP               | Ultra precision |                             |                                   |



IKO C-Lube Linear Roller Way Super MX


Flange type mounting from top / bottom

|       |          |    |    |    |    |     |
|-------|----------|----|----|----|----|-----|
| Shape | MX • LRX |    |    |    |    |     |
|       |          |    |    |    |    |     |
| Size  | 12       | 15 | 20 | 25 | 30 |     |
|       | 35       | 45 | 55 | 65 | 85 | 100 |

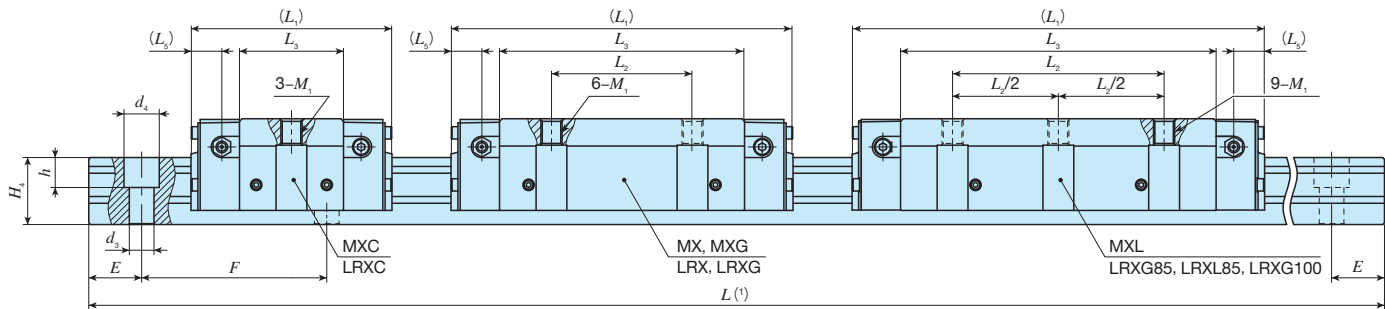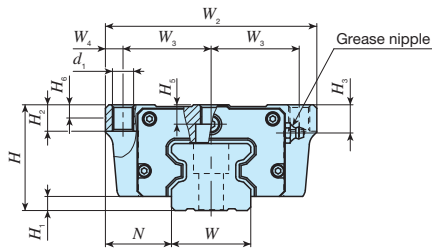

| Identification number |                        | Interchangeable | Mass (Ref.)   |                 | Dimensions of assembly mm |                |      | Dimensions of slide unit mm |                |                |                |                |                |                 |                |                |  | Dimensions of track rail mm |                |                |                |     |                |                | Appended mounting bolt for track rail <sup>(2)</sup> | Basic dynamic load rating <sup>(3)</sup> | Basic static load rating <sup>(3)</sup> | Static moment rating <sup>(3)</sup> |              |                   |                     |                         |                         |                         |
|-----------------------|------------------------|-----------------|---------------|-----------------|---------------------------|----------------|------|-----------------------------|----------------|----------------|----------------|----------------|----------------|-----------------|----------------|----------------|--|-----------------------------|----------------|----------------|----------------|-----|----------------|----------------|------------------------------------------------------|------------------------------------------|-----------------------------------------|-------------------------------------|--------------|-------------------|---------------------|-------------------------|-------------------------|-------------------------|
| MX series             | LRX series (No C-Lube) |                 | Slide unit kg | Track rail kg/m | H                         | H <sub>1</sub> | N    | W <sub>2</sub>              | W <sub>3</sub> | W <sub>4</sub> | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | L <sub>5</sub>  | d <sub>1</sub> | M <sub>1</sub> |  | H <sub>2</sub>              | H <sub>3</sub> | H <sub>5</sub> | H <sub>6</sub> | W   | H <sub>4</sub> | d <sub>3</sub> | d <sub>4</sub>                                       | h                                        | E                                       | F                                   | Bolt size× ℓ | C<br>N            | C <sub>0</sub><br>N | T <sub>0</sub><br>N · m | T <sub>x</sub><br>N · m | T <sub>y</sub><br>N · m |
| MXC 55                | LRXC 55                | ○               | 3.49          | 14.1            | 70                        | 9              | 43.5 | 140                         | 58             | 12             | 136            | —              | 72             | 20              | 12.5           | M14            |  | 17                          | 16             | 14             | —              | 53  | 43             | 16             | 23                                                   | 20                                       | 60                                      | 120                                 | M14×45       | 99 700            | 149 000             | 4 830                   | 1 880<br>14 400         | 1 880<br>14 400         |
| MX 55                 | LRX 55                 | ○               | 5.42          |                 |                           |                |      |                             |                |                | 184            | 95             | 120            |                 |                |                |  |                             |                |                |                |     |                |                |                                                      |                                          |                                         |                                     |              | 5 040<br>31 100   | 5 040<br>31 100     |                         |                         |                         |
| MXG 55                | LRXG 55                | ○               | 7.93          |                 |                           |                |      |                             |                |                | 238            |                | 174            |                 |                |                |  |                             |                |                |                |     |                |                |                                                      |                                          |                                         |                                     |              | 10 400<br>57 000  | 10 400<br>57 000    |                         |                         |                         |
| MXL 55                | —                      | —               | 10.1          |                 |                           |                |      |                             |                |                | 292            | 150            | 228            |                 |                |                |  |                             |                |                |                |     |                |                |                                                      |                                          |                                         |                                     |              | 17 700<br>90 700  | 17 700<br>90 700    |                         |                         |                         |
| MXC 65                | LRXC 65                | ○               | 7.18          | 22.6            | 90                        | 12             | 53.5 | 170                         | 71             | 14             | 180            | —              | 95             | 26.3<br>26.6    | 14.5           | M16            |  | 23                          | 18             | 18.5           | —              | 63  | 56             | 18             | 26                                                   | 22                                       | 75                                      | 150                                 | M16×60       | 174 000           | 249 000             | 9 790                   | 4 200<br>32 000         | 4 200<br>32 000         |
| MX 65                 | LRX 65                 | ○               | 11.5          |                 |                           |                |      |                             |                |                | 181            |                | 95             | 4 200<br>32 200 |                |                |  |                             |                |                |                |     |                |                |                                                      |                                          |                                         |                                     |              | 4 200<br>32 200   |                     |                         |                         |                         |
| MXG 65                | LRXG 65                | ○               | 16.0          |                 |                           |                |      |                             |                |                | 244            | 110            | 159            | 26.3<br>26.6    |                |                |  |                             |                |                |                |     |                |                |                                                      |                                          |                                         |                                     |              | 11 300<br>69 000  | 11 300<br>69 000    |                         |                         |                         |
| MXL 65                | —                      | —               | 20.8          |                 |                           |                |      |                             |                |                | 308            |                | 223            | 26.3<br>26.6    |                |                |  |                             |                |                |                |     |                |                |                                                      |                                          |                                         |                                     |              | 21 800<br>120 000 | 21 800<br>120 000   |                         |                         |                         |
| —                     | LRX 85                 | —               | 25.4          | 36.7            | 110                       | 16             | 65   | 215                         | 92.5           | 15             | 323            | 140            | 232            | 27.5            | 17.8           | M20            |  | 35                          | 22             | 25.5           | 20             | 85  | 67             | 26.5           | 39                                                   | 30                                       | 90                                      | 180                                 | M24×70       | 440 000           | 753 000             | 38 900                  | 29 500<br>163 000       | 29 500<br>163 000       |
| —                     | LRXG 85                | —               | 32.7          |                 |                           |                |      |                             |                |                | 395            | 200            | 304            |                 |                |                |  |                             |                |                |                |     |                |                |                                                      |                                          |                                         |                                     |              | 50 000<br>257 000 | 50 000<br>257 000   |                         |                         |                         |
| —                     | LRXL 85                | —               | 44.0          |                 |                           |                |      |                             |                |                | 494            | 280            | 403            |                 |                |                |  |                             |                |                |                |     |                |                |                                                      |                                          |                                         |                                     |              | 87 000<br>422 000 | 87 000<br>422 000   |                         |                         |                         |
| —                     | LRXG 100*              | —               | 43.0          |                 |                           |                |      |                             |                |                | 362            | 200            | 262            |                 |                |                |  |                             |                |                |                |     |                |                |                                                      |                                          |                                         |                                     |              | 35 800<br>199 000 | 35 800<br>199 000   |                         |                         |                         |
| —                     | —                      | —               | 43.2          | 43.2            | 120                       | 15             | 75   | 250                         | 110            | 15             | 362            | 200            | 262            | 29.7            | 17.8           | M20            |  | 35                          | 30             | 30.5           | —              | 100 | 70             | 33             | 48                                                   | 36                                       | 75                                      | 150                                 | M30×80       | 498 000           | 821 000             | 49 700                  | 35 800<br>199 000       | 35 800<br>199 000       |

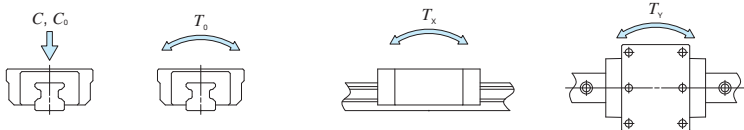Notes (1) Length of track rail  $L$  is shown in Table 2.1 on page II-153 and Table 2.3 on page II-154 .  
(2) The appended track rail mounting bolts are hexagon socket head bolts equivalent to JIS B 1176. In an assembled set of MX series, track rail mounting bolts are not appended.  
(3) Basic dynamic load rating ( $C$ ), basic static load rating ( $C_0$ ), static moment rating ( $T_0$ ,  $T_x$ , and  $T_y$ ) are values for the direction indicated in the following figure.  
The upper values of  $T_x$  and  $T_y$  are for one slide unit and the lower values are for two slide units in close contact.  
Remarks 1. For the specification of grease nipple, see Table 15 on page II-166.  
2. Three grease nipple mounting screws are provided on the right and left end plates respectively.  
3. The identification numbers with \* are our semi-standard items.





Example of identification number of assembled set

| Model code             |                                           | Dimensions                        | Part code | Preload symbol | Classification symbol | Interchangeable code | Special specification       |                                   |
|------------------------|-------------------------------------------|-----------------------------------|-----------|----------------|-----------------------|----------------------|-----------------------------|-----------------------------------|
| <u>MX</u>              | <u>G</u>                                  | <u>55</u>                         | <u>C2</u> | <u>R3000</u>   | <u>T<sub>2</sub></u>  | <u>P</u>             | <u>S1</u>                   | <u>/F</u>                         |
| ①                      | ②                                         | ③                                 | ④         | ⑤              | ⑥                     | ⑦                    | ⑧                           | ⑨                                 |
| ① Model                |                                           | ③ Size                            |           |                | ⑥ Preload amount      |                      | ⑧ Interchangeable           |                                   |
| MX                     | Flange type mounting<br>from top / bottom | 55, 65, 85, 100                   |           |                | No symbol             | Standard             | S1                          | S1 specification                  |
| LRX                    |                                           |                                   |           |                | T1                    | Light preload        | S2                          | S2 specification                  |
|                        |                                           | ④ Number of slide unit (2)        |           |                | T2                    | Medium preload       | No symbol                   | Non-interchangeable specification |
|                        |                                           |                                   |           |                | T3                    | Heavy preload        |                             |                                   |
| ② Length of slide unit |                                           | ⑤ Length of track rail (3,000 mm) |           |                | ⑦ Accuracy class      |                      | ⑨ Special specification     |                                   |
| C                      | Short                                     |                                   |           |                | H                     | High                 | A, D, E, F, GE, HP, I, J, L |                                   |
| No symbol              | Standard                                  |                                   |           |                | P                     | Precision            | LF, MA, MN, PS, Q, RC       |                                   |
| G                      | Long                                      |                                   |           |                | SP                    | Super precision      | T, UR, V, W, Y, Z           |                                   |
| L                      | Extra long                                |                                   |           |                | UP                    | Ultra precision      |                             |                                   |


Block type mounting from top

|       |            |    |    |    |    |
|-------|------------|----|----|----|----|
| Shape | MXD • LRXD |    |    |    |    |
|       |            |    |    |    |    |
| Size  | 10         | 12 | 15 | 20 | 25 |
|       | 30         | 35 | 45 | 55 | 65 |

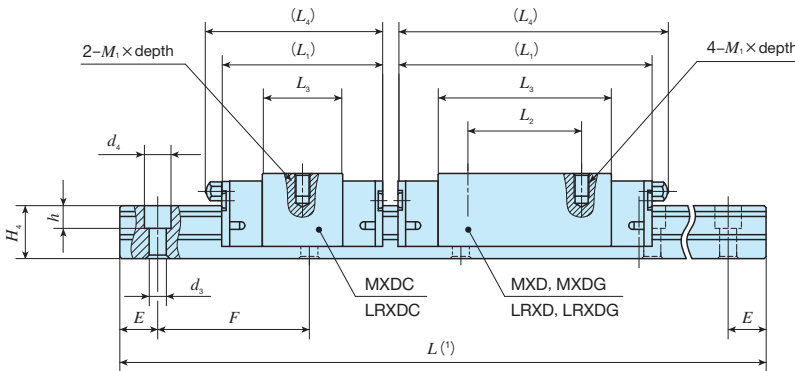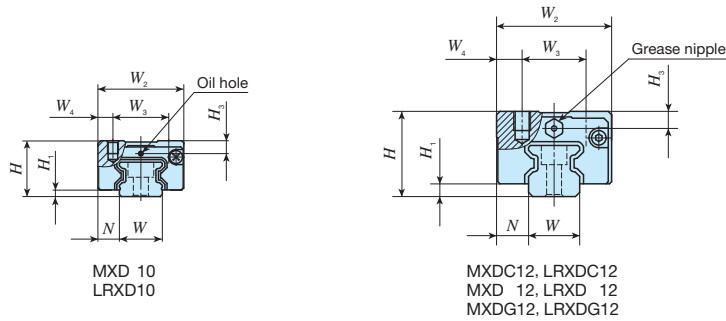

| Identification number |                        | Interchangeable | Mass (Ref.)   |                 | Dimensions of assembly mm |     |     | Dimensions of slide unit mm |    |     |    |    |      |    |            |    |    | Dimensions of track rail mm |     |    |     |      |    | Appended mounting bolt for track rail (2) | Basic dynamic load rating (3) C N | Basic static load rating (3) C0 N | Static moment rating (3) |          |          |
|-----------------------|------------------------|-----------------|---------------|-----------------|---------------------------|-----|-----|-----------------------------|----|-----|----|----|------|----|------------|----|----|-----------------------------|-----|----|-----|------|----|-------------------------------------------|-----------------------------------|-----------------------------------|--------------------------|----------|----------|
| MX series             | LRX series (No C-Lube) |                 | Slide unit kg | Track rail kg/m | H                         | H1  | N   | W2                          | W3 | W4  | L1 | L2 | L3   | L4 | M1 x depth | H3 | W  | H4                          | d3  | d4 | h   | E    | F  |                                           |                                   |                                   | T0 N · m                 | Tx N · m | Ty N · m |
| MXD 10...SL           |                        | —               | 0.028         | 0.48            | 13                        | 1.5 | 5   | 20                          | 13 | 3.5 | 36 | 12 | 20.8 | —  | M2.6 x 3   | 3  | 10 | 8                           | 3.5 | 6  | 3.5 | 12.5 | 25 | M3 x 10                                   | 3 200                             | 5 880                             | 37.9                     | 20.9 147 | 20.9 147 |
|                       | LRXD 10...SL           | —               |               |                 |                           |     |     |                             |    |     | 35 |    |      |    |            |    |    |                             |     |    |     |      |    |                                           |                                   |                                   |                          | 20.9 142 | 20.9 142 |
| MXDC 12               |                        | ○               | 0.045         |                 |                           |     |     |                             |    |     | 40 |    | 15.8 | 44 |            |    |    |                             |     |    |     |      |    |                                           | 4 250                             | 6 500                             | 49.4                     | 18.6 196 | 18.6 196 |
|                       | LRXDC 12               | ○               |               |                 |                           |     |     |                             |    |     | 37 |    | 14.8 | 40 |            |    |    |                             |     |    |     |      |    |                                           |                                   |                                   |                          | 16.3 170 | 16.3 170 |
| —                     | LRXDC 12...SL          | ○               | 0.072         | 0.92            | 20                        | 3   | 7.5 | 27                          | 15 | 6   | 50 |    | 25.4 | 53 | M4 x 4.5   | 4  | 12 | 12                          | 3.5 | 6  | 4.5 | 20   | 40 | M3 x 12                                   | 6 120                             | 10 400                            | 79.1                     | 45.8 371 | 45.8 371 |
| MXD 12                |                        | ○               |               |                 |                           |     |     |                             |    |     | 47 |    | 25.3 | 50 |            |    |    |                             |     |    |     |      |    |                                           |                                   |                                   |                          | 45.2 343 | 45.2 343 |
|                       | LRXD 12                | ○               | 0.097         |                 |                           |     |     |                             |    |     | 50 |    | 25.4 | 53 |            |    |    |                             |     |    |     |      |    |                                           |                                   |                                   |                          | 45.8 371 | 45.8 371 |
| MXD 12...SL           |                        | ○               |               |                 |                           |     |     |                             |    |     | 47 | 15 | 25.3 | 50 |            |    |    |                             |     |    |     |      |    |                                           |                                   |                                   |                          | 45.2 343 | 45.2 343 |
|                       | LRXD 12...SL           | ○               | 0.097         |                 |                           |     |     |                             |    |     | 61 |    | 36.6 | 64 |            |    |    |                             |     |    |     |      |    |                                           |                                   |                                   |                          | 92.7 628 | 92.7 628 |
| MXDG 12               |                        | ○               |               |                 |                           |     |     |                             |    |     | 58 |    | 35.8 | 61 |            |    |    |                             |     |    |     |      |    |                                           |                                   |                                   |                          | 88.6 581 | 88.6 581 |
|                       | LRXDG 12               | ○               |               |                 |                           |     |     |                             |    |     |    |    |      |    |            |    |    |                             |     |    |     |      |    |                                           |                                   |                                   |                          |          |          |
| —                     | LRXDG 12...SL          | ○               |               |                 |                           |     |     |                             |    |     |    |    |      |    |            |    |    |                             |     |    |     |      |    |                                           |                                   |                                   |                          |          |          |

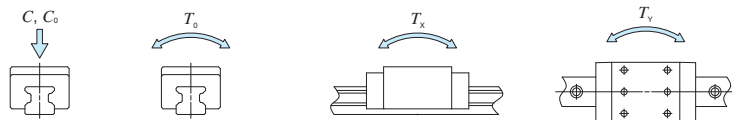Notes (1) Length of track rail  $L$  is shown in Tables 2.1 and 2.2 on page II-153 and Tables 2.3 and 2.4 on page II-154.  
(2) The appended track rail mounting bolts are hexagon socket head bolts equivalent to JIS B 1176. For stainless steel model, stainless steel bolts are appended.  
In an assembled set of MX series, track rail mounting bolts are not appended.  
(3) Basic dynamic load rating ( $C$ ), basic static load rating ( $C_0$ ), static moment rating ( $T_0$ ,  $T_x$ , and  $T_y$ ) are values for the direction indicated in the following figure.  
The upper values of  $T_x$  and  $T_y$  are for one slide unit and the lower values are for two slide units in close contact.  
Remarks 1. For the specification of oil hole, see Fig. 2 on page II-166.  
2. For the specification of grease nipple, see Table 15 on page II-166.  
3. For size 12 series, a grease nipple mounting screw is provided on the right and left end plates respectively.




Example of identification number of assembled set

| Model code | Dimensions | Part code | Material code | Preload symbol | Classification symbol | Interchangeable code | Special specification |
|------------|------------|-----------|---------------|----------------|-----------------------|----------------------|-----------------------|
| MXD        | G          | 12        | C2            | R560           | T1                    | P                    | S1 /F                 |
| 1          | 2          | 3         | 4             | 5              | 6                     | 7                    | 8                     |

|                                                                   |                                                                                |                                                                                                     |                                                                                                                |
|-------------------------------------------------------------------|--------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|
| ① Model<br>MXD<br>LRXD<br>Block type mounting from top            | ④ Number of slide unit (2)                                                     | ⑦ Preload amount<br>No symbol Standard<br>T1 Light preload<br>T2 Medium preload<br>T3 Heavy preload | ⑩ Interchangeable<br>S1 S1 specification<br>S2 S2 specification<br>No symbol Non-interchangeable specification |
| ② Length of slide unit<br>C Short<br>No symbol Standard<br>G Long | ⑥ Length of track rail (560 mm)                                                | ⑧ Accuracy class<br>H High<br>P Precision<br>SP Super precision<br>UP Ultra precision               | ⑨ Special specification<br>A, D, E, F, HP, I, L, LF<br>MA, MN, N, Q, T, V, W<br>Y, Z                           |
| ③ Size<br>10, 12                                                  | ⑥ Material type<br>No symbol High carbon steel made<br>SL Stainless steel made |                                                                                                     |                                                                                                                |



### Block type mounting from top

## Shape



Size

|    |    |    |    |    |
|----|----|----|----|----|
| 10 | 12 | 15 | 20 | 25 |
| 30 | 35 | 45 | 55 | 65 |

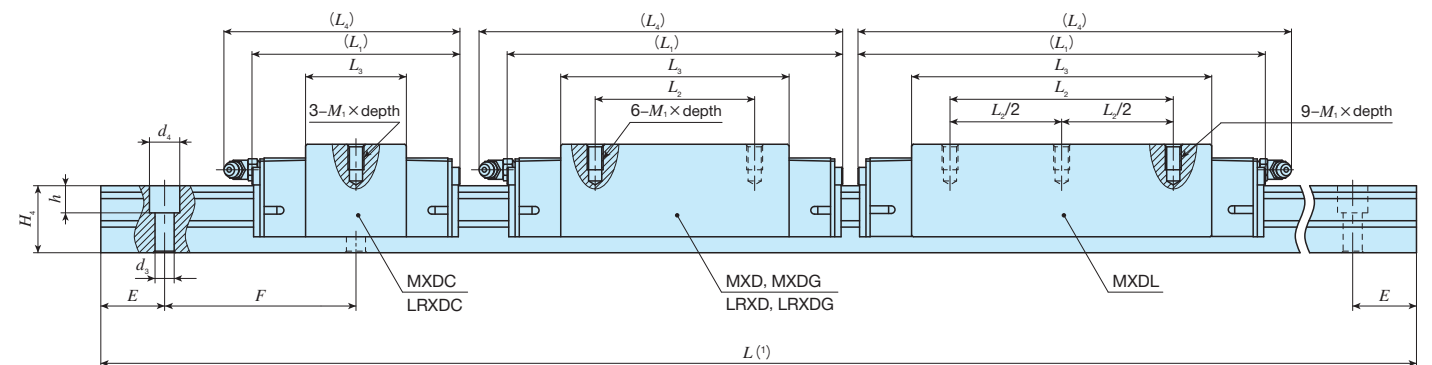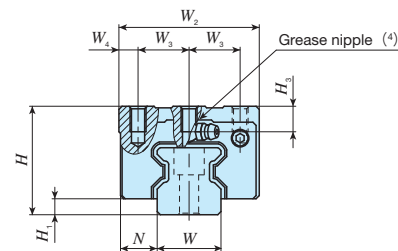

| Identification number |                           | Interchangeable | Mass (Ref.)      |                    | Dimensions of assembly<br>mm |                |     | Dimensions of slide unit<br>mm |                |                |                |                |                |                |                       |    |                | Dimensions of track rail<br>mm |                |                |                |                                   |                                   | Appended mounting<br>bolt for track rail <sup>(2)</sup> | Basic dynamic<br>load rating <sup>(3)</sup> | Basic static<br>load rating <sup>(3)</sup> | Static moment rating <sup>(3)</sup> |                       |                                |                                |    |     |    |      |      |        |        |     |                                   |                                   |    |   |     |     |    |    |       |        |        |      |                                 |                                 |        |     |        |     |                                   |                                   |                                   |                                   |     |                                 |                                 |
|-----------------------|---------------------------|-----------------|------------------|--------------------|------------------------------|----------------|-----|--------------------------------|----------------|----------------|----------------|----------------|----------------|----------------|-----------------------|----|----------------|--------------------------------|----------------|----------------|----------------|-----------------------------------|-----------------------------------|---------------------------------------------------------|---------------------------------------------|--------------------------------------------|-------------------------------------|-----------------------|--------------------------------|--------------------------------|----|-----|----|------|------|--------|--------|-----|-----------------------------------|-----------------------------------|----|---|-----|-----|----|----|-------|--------|--------|------|---------------------------------|---------------------------------|--------|-----|--------|-----|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----|---------------------------------|---------------------------------|
| MX series             | LRX series<br>(No C-Lube) |                 | Slide unit<br>kg | Track rail<br>kg/m | H                            | H <sub>1</sub> | N   | W <sub>2</sub>                 | W <sub>3</sub> | W <sub>4</sub> | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | L <sub>4</sub> | M <sub>1</sub> ×depth |    | H <sub>3</sub> | W                              | H <sub>4</sub> | d <sub>3</sub> | d <sub>4</sub> | h                                 | E                                 | F                                                       | Bolt size×ℓ                                 | C<br>N                                     | C <sub>0</sub><br>N                 | T <sub>0</sub><br>N・m | T <sub>x</sub><br>N・m          | T <sub>y</sub><br>N・m          |    |     |    |      |      |        |        |     |                                   |                                   |    |   |     |     |    |    |       |        |        |      |                                 |                                 |        |     |        |     |                                   |                                   |                                   |                                   |     |                                 |                                 |
| MXDC 15               | LRXDC 15                  | ○               | 0.13             | 1.65               | 28                           | 4              | 9.5 | 34                             | 13             | 4              | 52             | —              | 24             | 55             | M4×8                  |    | 7.5            | 15                             | 16.5           | 4.5            | 8              | 6                                 | 30                                | 60                                                      | M4×16                                       | 7 730                                      | 12 000                              | 113                   | <sup>50.6</sup> <sub>457</sub> | <sup>50.6</sup> <sub>457</sub> |    |     |    |      |      |        |        |     |                                   |                                   |    |   |     |     |    |    |       |        |        |      |                                 |                                 |        |     |        |     |                                   |                                   |                                   |                                   |     |                                 |                                 |
| —                     | LRXDC 15…SL               | ○               |                  |                    |                              |                |     |                                |                |                | 68             | 26             | 40             | 71             |                       |    |                |                                |                |                |                |                                   |                                   |                                                         |                                             | 11 500                                     | 20 000                              | 188                   | <sup>136</sup> <sub>942</sub>  | <sup>136</sup> <sub>942</sub>  |    |     |    |      |      |        |        |     |                                   |                                   |    |   |     |     |    |    |       |        |        |      |                                 |                                 |        |     |        |     |                                   |                                   |                                   |                                   |     |                                 |                                 |
| MXD 15                | LRXD 15                   | ○               |                  |                    |                              |                |     |                                |                |                |                |                |                |                |                       |    |                |                                |                |                |                |                                   |                                   |                                                         |                                             |                                            |                                     |                       |                                |                                |    |     |    |      |      |        |        |     |                                   |                                   |    |   |     |     |    |    |       |        |        |      |                                 |                                 |        |     |        |     |                                   |                                   |                                   |                                   |     |                                 |                                 |
| MXD 15…SL             | LRXD 15…SL                | ○               | 0.19             |                    |                              |                |     |                                |                |                | 2.73           | 34             | 5              | 12             |                       |    |                |                                |                |                |                |                                   |                                   |                                                         |                                             |                                            |                                     |                       |                                |                                | 44 | 16  | 6  | 84   | 56   | 87     | M5×8   |     | 8                                 | 20                                | 21 | 6 | 9.5 | 8.5 | 30 | 60 | M5×20 | 14 900 | 28 000 | 263  | <sup>262</sup> <sub>1 590</sub> | <sup>262</sup> <sub>1 590</sub> |        |     |        |     |                                   |                                   |                                   |                                   |     |                                 |                                 |
| MXDG 15               | LRXDG 15                  | ○               |                  |                    |                              |                |     |                                |                |                |                |                |                |                |                       |    |                |                                |                |                |                |                                   |                                   |                                                         |                                             |                                            |                                     |                       |                                |                                |    |     |    |      |      |        |        |     |                                   |                                   |    |   |     |     |    |    |       | 0.26   | 34     | 5    | 12                              | 44                              | 16     | 6   | 66     | —   | 31.6                              | 74                                | 23 400                            | 42 700                            | 550 | <sup>379</sup> <sub>2 520</sub> | <sup>379</sup> <sub>2 520</sub> |
| —                     | LRXDG 15…SL               | ○               | 86               |                    |                              |                |     |                                |                |                |                |                |                |                |                       |    |                |                                |                |                |                |                                   |                                   |                                                         |                                             |                                            |                                     |                       |                                |                                |    |     |    | 36   | 51.6 | 94     |        |     |                                   |                                   |    |   |     |     |    |    |       |        |        |      |                                 |                                 |        |     |        |     |                                   |                                   |                                   |                                   |     |                                 |                                 |
| MXD 20                | LRXD 20                   | ○               |                  | 0.38               | 34                           | 5              | 12  | 44                             | 16             | 6              |                |                |                |                | 106                   | 50 | 71.6           | 114                            | 37 200         | 77 200         | 996            | <sup>1 210</sup> <sub>6 560</sub> | <sup>1 210</sup> <sub>6 560</sub> |                                                         |                                             |                                            |                                     |                       |                                |                                |    |     |    |      |      |        |        |     |                                   |                                   |    |   |     |     |    |    |       |        |        |      |                                 |                                 |        |     |        |     |                                   |                                   |                                   |                                   |     |                                 |                                 |
| MXD 20…SL             | LRXD 20…SL                | ○               | 0.52             |                    |                              |                |     |                                |                |                |                |                |                |                |                       |    |                |                                |                |                |                |                                   |                                   | 34                                                      | 5                                           | 12                                         | 44                                  | 16                    | 6                              | 128                            |    |     |    | 70   | 94.1 | 137    |        |     |                                   |                                   |    |   |     |     |    |    |       | 37 200 |        |      |                                 |                                 |        |     | 77 200 | 996 | <sup>1 210</sup> <sub>6 560</sub> | <sup>1 210</sup> <sub>6 560</sub> |                                   |                                   |     |                                 |                                 |
| MXDG 20               | LRXDG 20                  | ○               |                  | 0.67               |                              |                |     |                                |                |                |                |                |                |                | 34                    | 5  | 12             | 44                             |                |                |                |                                   |                                   |                                                         |                                             |                                            |                                     |                       |                                |                                |    |     |    |      |      |        |        |     |                                   |                                   |    |   |     |     |    |    |       |        |        |      |                                 |                                 |        |     |        |     |                                   |                                   |                                   |                                   |     |                                 |                                 |
| —                     | LRXDG 20…SL               | ○               | 0.67             |                    |                              |                |     |                                |                |                | 34             | 5              | 12             | 44             |                       |    |                |                                |                |                |                |                                   |                                   |                                                         |                                             |                                            |                                     |                       |                                | 16                             | 6  | 128 | 70 | 94.1 | 137  | 37 200 | 77 200 | 996 | <sup>1 210</sup> <sub>6 560</sub> | <sup>1 210</sup> <sub>6 560</sub> |    |   |     |     |    |    |       |        |        |      |                                 |                                 |        |     |        |     |                                   |                                   |                                   |                                   |     |                                 |                                 |
| MXDL 20               | —                         | —               |                  | 0.67               |                              |                |     |                                |                |                |                |                |                |                |                       |    |                |                                |                |                |                |                                   |                                   |                                                         |                                             |                                            |                                     |                       |                                |                                |    |     |    |      |      |        |        |     |                                   |                                   | 34 | 5 | 12  | 44  | 16 | 6  | 128   |        | 70     | 94.1 | 137                             | 37 200                          | 77 200 | 996 |        |     |                                   |                                   | <sup>1 210</sup> <sub>6 560</sub> | <sup>1 210</sup> <sub>6 560</sub> |     |                                 |                                 |
|                       |                           |                 | 0.67             |                    |                              |                |     |                                |                |                |                |                |                |                |                       |    |                |                                |                |                |                |                                   |                                   |                                                         |                                             |                                            |                                     |                       |                                |                                |    | 34  | 5  | 12   | 44   |        |        |     |                                   |                                   |    |   |     |     |    |    |       |        |        |      |                                 |                                 |        |     |        |     |                                   |                                   |                                   |                                   | 16  | 6                               | 128                             |

Notes (1) Length of track rail  $L$  is shown in Tables 2.1 and 2.2 on page II-153 and Tables 2.3 and 2.4 on page II-154.

(2) The appended track rail mounting bolts are hexagon socket head bolts equivalent to JIS B 1176. For stainless steel model, stainless steel bolts are appended.  
In an assembled set of MX series, track rail mounting bolts are not appended.

(3) Basic dynamic load rating ( $C$ ), basic static load rating ( $C_0$ ), static moment rating ( $T_0$ ,  $T_x$ , and  $T_y$ ) are values for the direction indicated in the following figure.  
The upper values of  $T_x$  and  $T_y$  are for one slide unit and the lower values are for two slide units in close contact.


(4) The shapes of grease nipple vary by size. For details of the specifications, see Table 15 on page II-166.

Remark: A grease nipple mounting screw is provided on the right and left end plates respectively.

### Example of identification number of assembled set

| Model code |          | Dimensions | Part code |             | Material code | Preload symbol       | Classification symbol | Interchangeable code | Special specification |
|------------|----------|------------|-----------|-------------|---------------|----------------------|-----------------------|----------------------|-----------------------|
| <u>MXD</u> | <u>G</u> | <u>20</u>  | <u>C2</u> | <u>R840</u> | <u>—</u>      | <u>T<sub>1</sub></u> | <u>P</u>              | <u>S1</u>            | <u>/F</u>             |
| 1          | 2        | 3          | 4         | 5           | 6             | 7                    | 8                     | 9                    | 10                    |


|                        |                              |                                 |                        |                  |                 |                                                                      |                                   |
|------------------------|------------------------------|---------------------------------|------------------------|------------------|-----------------|----------------------------------------------------------------------|-----------------------------------|
| ① Model                |                              | ③ Size                          |                        | ⑦ Preload amount |                 | ⑨ Interchangeable                                                    |                                   |
| MXD                    | Block type mounting from top | 15, 20                          |                        | No symbol        | Standard        | S1                                                                   | S1 specification                  |
| LRXD                   |                              | ④ Number of slide unit (2)      |                        | T1               | Light preload   | S2                                                                   | S2 specification                  |
| ② Length of slide unit |                              | ⑤ Length of track rail (840 mm) |                        | T2               | Medium preload  | No symbol                                                            | Non-interchangeable specification |
| C                      | Short                        | ⑥ Material type                 |                        | T3               | Heavy preload   | ⑩ Special specification                                              |                                   |
| No symbol              | Standard                     | No symbol                       | High carbon steel made | H                | High            | A, D, E, F, HP, I, J, L, LF<br>MA, MN, N, Q, RC, T, UR<br>V, W, Y, Z |                                   |
| G                      | Long                         | SL                              | Stainless steel made   | P                | Precision       |                                                                      |                                   |
| L                      | Extra long                   |                                 |                        | SP               | Super precision |                                                                      |                                   |
|                        |                              |                                 |                        | UP               | Ultra precision |                                                                      |                                   |






IKO C-Lube Linear Roller Way Super MX

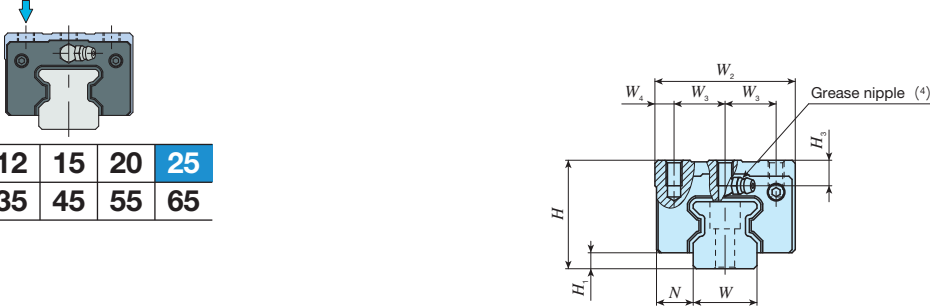
Block type mounting from top

|       |                                                                                    |    |    |    |    |
|-------|------------------------------------------------------------------------------------|----|----|----|----|
| Shape | MXD • LRXD                                                                         |    |    |    |    |
|       |  |    |    |    |    |
| Size  | 10                                                                                 | 12 | 15 | 20 | 25 |
|       | 30                                                                                 | 35 | 45 | 55 | 65 |

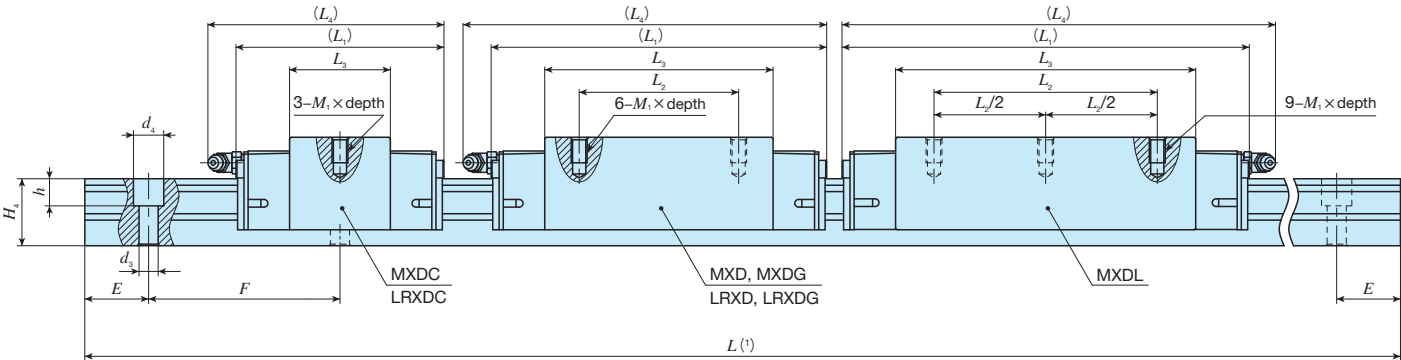

| Identification number |                        | Interchangeable | Mass (Ref.)   |                 | Dimensions of assembly mm |                |      | Dimensions of slide unit mm |                |                |                |                |                |                |                       |       |                | Dimensions of track rail mm |                |                |                |            |     | Appended mounting bolt for track rail <sup>(2)</sup> | Basic dynamic load rating <sup>(3)</sup> | Basic static load rating <sup>(3)</sup> | Static moment rating <sup>(3)</sup> |                       |                       |                       |       |  |     |    |    |   |    |    |    |    |       |        |        |     |          |          |
|-----------------------|------------------------|-----------------|---------------|-----------------|---------------------------|----------------|------|-----------------------------|----------------|----------------|----------------|----------------|----------------|----------------|-----------------------|-------|----------------|-----------------------------|----------------|----------------|----------------|------------|-----|------------------------------------------------------|------------------------------------------|-----------------------------------------|-------------------------------------|-----------------------|-----------------------|-----------------------|-------|--|-----|----|----|---|----|----|----|----|-------|--------|--------|-----|----------|----------|
| MX series             | LRX series (No C-Lube) |                 | Slide unit kg | Track rail kg/m | H                         | H <sub>1</sub> | N    | W <sub>2</sub>              | W <sub>3</sub> | W <sub>4</sub> | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | L <sub>4</sub> | M <sub>1</sub> ×depth |       | H <sub>3</sub> | W                           | H <sub>4</sub> | d <sub>3</sub> | d <sub>4</sub> | h          | E   | F                                                    | Bolt size×ℓ                              | C<br>N                                  | C <sub>0</sub><br>N                 | T <sub>0</sub><br>N・m | T <sub>x</sub><br>N・m | T <sub>y</sub><br>N・m |       |  |     |    |    |   |    |    |    |    |       |        |        |     |          |          |
| MXDC 25               | LRXDC 25               | ○               | 0.36          | 3.59            | 40                        | 6              | 12.5 | 48                          | 17.5           | 6.5            | 74             | —              | 36             | 83             | M6×12                 |       | 9              | 23                          | 24.5           | 7              | 11             | 9          | 30  | 60                                                   | M6×25                                    | 21 600                                  | 33 800                              | 500                   | 213 1810              | 213 1810              |       |  |     |    |    |   |    |    |    |    |       |        |        |     |          |          |
| —                     | LRXDC 25…SL            | ○               |               |                 |                           |                |      |                             |                |                | 98             | 35             | 60             | 107            |                       |       |                |                             |                |                |                |            |     |                                                      |                                          | 32 100                                  | 56 300                              | 833                   | 573 3800              | 573 3800              |       |  |     |    |    |   |    |    |    |    |       |        |        |     |          |          |
| MXD 25                | LRXD 25                | ○               | 0.55          |                 |                           |                |      |                             |                |                |                |                |                |                |                       |       |                |                             |                |                |                |            |     |                                                      |                                          |                                         |                                     |                       |                       |                       |       |  |     |    |    |   |    |    |    |    |       |        |        |     |          |          |
| MXD 25…SL             | LRXD 25…SL             | ○               |               |                 |                           |                |      |                             |                |                |                |                |                |                |                       |       |                |                             |                |                |                |            |     |                                                      |                                          |                                         |                                     |                       |                       |                       |       |  |     |    |    |   |    |    |    |    |       |        |        |     |          |          |
| MXDG 25               | LRXDG 25               | ○               | 0.68          |                 |                           |                |      |                             |                |                | 113            | 50             | 75             | 122            |                       |       |                |                             |                |                |                |            |     |                                                      |                                          |                                         |                                     |                       |                       |                       | M8×12 |  | 9.5 | 28 | 28 | 9 | 14 | 12 | 40 | 80 | M8×28 | 29 200 | 44 600 | 808 | 883 5780 | 883 5780 |
| —                     | LRXDG 25…SL            | ○               |               |                 |                           |                |      |                             |                |                |                |                |                |                |                       |       |                |                             |                |                |                |            |     |                                                      |                                          |                                         |                                     |                       |                       |                       |       |  |     |    |    |   |    |    |    |    |       |        |        |     |          |          |
| MXDL 25               | —                      | —               | 85            |                 |                           |                |      |                             |                |                |                |                |                |                | —                     | 42.4  | 95             | 43 400                      | 74 400         | 1 350          | 1 470 8740     | 1 470 8740 |     |                                                      |                                          |                                         |                                     |                       |                       |                       |       |  |     |    |    |   |    |    |    |    |       |        |        |     |          |          |
| MXDC 30               | LRXDC 30               | ○               |               |                 |                           |                |      |                             |                |                | 0.60           |                |                |                |                       |       |                |                             |                |                |                |            |     |                                                      |                                          |                                         |                                     |                       |                       |                       |       |  |     |    |    |   |    |    |    |    |       |        |        |     |          |          |
| —                     | LRXDC 30…SL            | ○               |               |                 |                           |                |      |                             |                |                |                | 0.92           |                |                |                       |       |                |                             |                |                |                |            |     |                                                      |                                          |                                         |                                     |                       |                       |                       |       |  |     |    |    |   |    |    |    |    |       |        |        |     |          |          |
| MXD 30                | LRXD 30                | ○               | 1.18          |                 |                           |                |      |                             |                |                | 134            |                | 60             | 91.4           | 144                   | M8×12 |                |                             |                |                |                |            | 9.5 | 28                                                   | 28                                       | 9                                       | 14                                  | 12                    | 40                    | 80                    |       |  |     |    |    |   |    |    |    |    |       |        |        |     |          |          |
| MXD 30…SL             | LRXD 30…SL             | ○               |               |                 |                           |                |      |                             |                |                |                | 1.52           |                |                |                       |       |                |                             |                |                |                |            |     |                                                      |                                          |                                         |                                     |                       |                       |                       |       |  |     |    |    |   |    |    |    |    |       |        |        |     |          |          |
| MXDG 30               | LRXDG 30               | ○               | 1.52          |                 |                           |                |      |                             |                |                |                |                |                |                |                       |       |                |                             |                |                |                |            |     |                                                      |                                          |                                         |                                     |                       |                       |                       |       |  |     |    |    |   |    |    |    |    |       |        |        |     |          |          |
| —                     | LRXDG 30…SL            | ○               |               |                 |                           |                |      |                             |                |                | 1.52           |                |                |                |                       |       |                |                             |                |                |                |            |     |                                                      |                                          |                                         |                                     |                       |                       |                       |       |  |     |    |    |   |    |    |    |    |       |        |        |     |          |          |
| MXDL 30               | —                      | —               | 1.52          |                 |                           |                |      |                             |                |                |                |                |                |                |                       |       |                |                             |                |                |                |            |     |                                                      |                                          |                                         |                                     |                       |                       |                       |       |  |     |    |    |   |    |    |    |    |       |        |        |     |          |          |

Notes <sup>(1)</sup> Length of track rail  $L$  is shown in Tables 2.1 and 2.2 on page II-153 and Tables 2.3 and 2.4 on page II-154.  
<sup>(2)</sup> The appended track rail mounting bolts are hexagon socket head bolts equivalent to JIS B 1176. For stainless steel model, stainless steel bolts are appended.  
In an assembled set of MX series, track rail mounting bolts are not appended.  
<sup>(3)</sup> Basic dynamic load rating ( $C$ ), basic static load rating ( $C_0$ ), static moment rating ( $T_0$ ,  $T_x$ , and  $T_y$ ) are values for the direction indicated in the following figure.  
The upper values of  $T_x$  and  $T_y$  are for one slide unit and the lower values are for two slide units in close contact.  
<sup>(4)</sup> The shapes of grease nipple vary by size. For details of the specifications, see Table 15 on page II-166.  
Remark: A grease nipple mounting screw is provided on the right and left end plates respectively.




Example of identification number of assembled set

| Model code             | Dimensions                   | Part code                       | Material code          | Preload symbol   | Classification symbol | Interchangeable code        | Special specification             |           |           |
|------------------------|------------------------------|---------------------------------|------------------------|------------------|-----------------------|-----------------------------|-----------------------------------|-----------|-----------|
| <u>MXD</u>             | <u>G</u>                     | <u>25</u>                       | <u>C2</u>              | <u>R840</u>      | <u>—</u>              | <u>T<sub>1</sub></u>        | <u>P</u>                          | <u>S1</u> | <u>/F</u> |
| ①                      | ②                            | ③                               | ④                      | ⑤                | ⑥                     | ⑦                           | ⑧                                 | ⑨         | ⑩         |
| ① Model                |                              | ③ Size                          |                        | ⑦ Preload amount |                       | ⑨ Interchangeable           |                                   |           |           |
| MXD                    | Block type mounting from top | 25, 30                          |                        | T <sub>1</sub>   | Standard              | S1                          | S1 specification                  |           |           |
| LRXD                   |                              |                                 |                        | T <sub>2</sub>   | Light preload         | S2                          | S2 specification                  |           |           |
| ② Length of slide unit |                              | ④ Number of slide unit (2)      |                        | T <sub>3</sub>   | Medium preload        | No symbol                   | Non-interchangeable specification |           |           |
| C                      | Short                        | ⑤ Length of track rail (840 mm) |                        | ⑧ Accuracy class |                       | ⑩ Special specification     |                                   |           |           |
| No symbol              | Standard                     | ⑥ Material type                 |                        | H                | High                  | A, D, E, F, HP, I, J, L, LF |                                   |           |           |
| G                      | Long                         | No symbol                       | High carbon steel made | P                | Precision             | MA, MN, N, Q, RC, T, UR     |                                   |           |           |
| L                      | Extra long                   | SL                              | Stainless steel made   | SP               | Super precision       | V, W, Y, Z                  |                                   |           |           |
|                        |                              |                                 |                        | UP               | Ultra precision       |                             |                                   |           |           |

### Block type mounting from top



MXD • LRXD



## Shape

Size
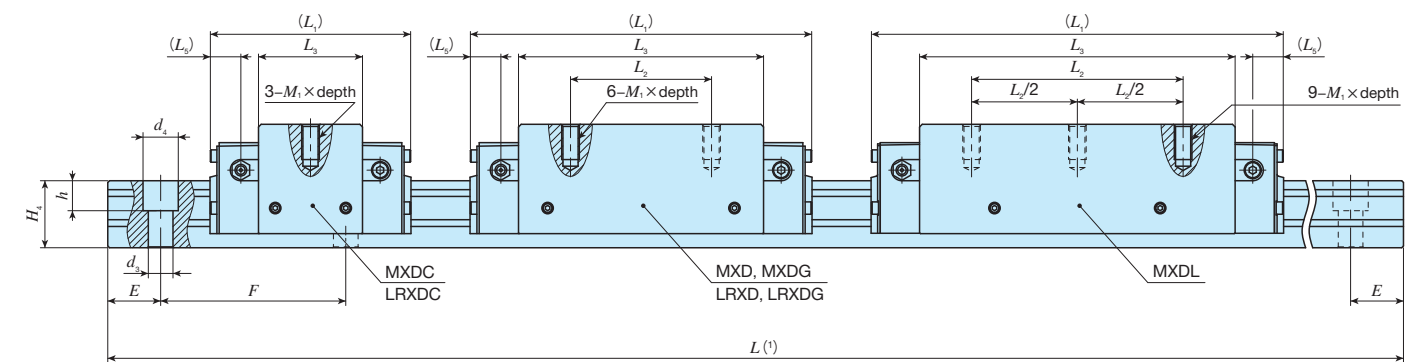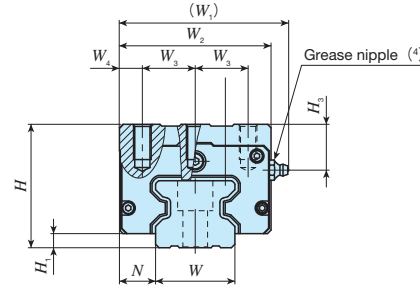
|    |    |    |    |    |
|----|----|----|----|----|
| 10 | 12 | 15 | 20 | 25 |
| 30 | 35 | 45 | 55 | 65 |

[illegible]

Notes (1) Length of track rail  $L$  is shown in Table 2.1 on page II-153 and Table 2.3 on page II-154.

(2) The appended track rail mounting bolts are hexagon socket head bolts equivalent to JIS B 1176. In an assembled set of MX series, track rail mounting bolts are not appended.

(3) Basic dynamic load rating ( $C$ ), basic static load rating ( $C_0$ ), static moment rating ( $T_0$ ,  $T_x$ , and  $T_y$ ) are values for the direction indicated in the following figure.

The upper values of  $T_x$  and  $T_y$  are for one slide unit and the lower values are for two slide units in close contact.

(4) The shapes of grease nipple vary by size. For details of the specifications, see Table 15 on page II -166.

Remark: Three grease nipple mounting screws are provided on the right and left end plates respectively.

MX • LRX

### Example of identification number of assembled set

| Model code |          | Dimensions | Part code |              | Preload symbol       | Classification symbol | Interchangeable code | Special specification |
|------------|----------|------------|-----------|--------------|----------------------|-----------------------|----------------------|-----------------------|
| <u>MXD</u> | <u>G</u> | <u>35</u>  | <u>C2</u> | <u>R1200</u> | <u>T<sub>2</sub></u> | <u>P</u>              | <u>S1</u>            | <u>/F</u>             |
| 1          | 2        | 3          | 4         | 5            | 6                    | 7                     | 8                    | 9                     |

| ① Model |                              |
|---------|------------------------------|
| MXD     | Block type mounting from top |
| LXPD    |                              |

|        |        |
|--------|--------|
| ③ Size | 35, 45 |
|--------|--------|

| ⑥ Preload amount |                |
|------------------|----------------|
| No symbol        | Standard       |
| T <sub>1</sub>   | Light preload  |
| T <sub>2</sub>   | Medium preload |
| T <sub>3</sub>   | Heavy preload  |


| ⑧ Interchangeable |                                   |
|-------------------|-----------------------------------|
| S1                | S1 specification                  |
| S2                | S2 specification                  |
| No symbol         | Non-interchangeable specification |

| ② Length of slide unit |            |
|------------------------|------------|
| C                      | Short      |
| No symbol              | Standard   |
| G                      | Long       |
| L                      | Extra long |

⑤ Length of track rail (1,200 mm)

| ⑦ Accuracy class |                 |
|------------------|-----------------|
| H                | High            |
| P                | Precision       |
| SP               | Super precision |
| UP               | Ultra precision |

**⑨ Special specification**  
A, D, E, F, HP, I, J, L, LF  
MA, MN, N, PS, Q, RC, T  
UR, V, W, Y, Z



### Block type mounting from top

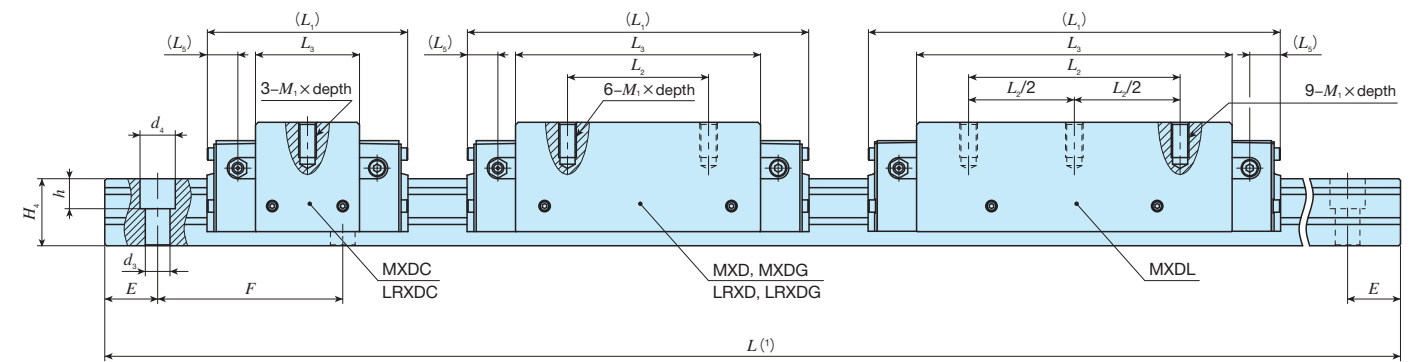
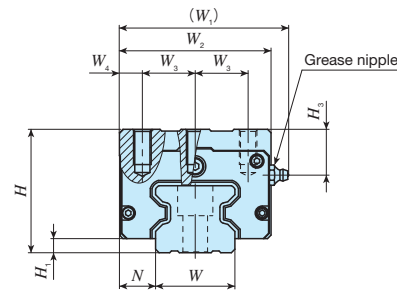
MXD • LRXD



## Shape

Size

|    |    |    |    |    |
|----|----|----|----|----|
| 10 | 12 | 15 | 20 | 25 |
| 30 | 35 | 45 | 55 | 65 |



| Identification number |                        | Interchangeable | Mass (Ref.)   |                 | Dimensions of assembly mm |                |      | Dimensions of slide unit mm |                |                |                |                |                |                |                |                       |  |                | Dimensions of track rail mm |                |                |                |    |    |        | Appended mounting bolt for track rail <sup>(2)</sup> | Basic dynamic load rating <sup>(3)</sup> | Basic static load rating <sup>(3)</sup> | Static moment rating <sup>(3)</sup> |                       |                       |
|-----------------------|------------------------|-----------------|---------------|-----------------|---------------------------|----------------|------|-----------------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|-----------------------|--|----------------|-----------------------------|----------------|----------------|----------------|----|----|--------|------------------------------------------------------|------------------------------------------|-----------------------------------------|-------------------------------------|-----------------------|-----------------------|
| MX series             | LRX series (No C-Lube) |                 | Slide unit kg | Track rail kg/m | H                         | H <sub>1</sub> | N    | W <sub>1</sub>              | W <sub>2</sub> | W <sub>3</sub> | W <sub>4</sub> | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | L <sub>5</sub> | M <sub>1</sub> ×depth |  | H <sub>3</sub> | W                           | H <sub>4</sub> | d <sub>3</sub> | d <sub>4</sub> | h  | E  | F      | Bolt size×ℓ                                          | C<br>N                                   | C <sub>0</sub><br>N                     | T <sub>0</sub><br>N・m               | T <sub>x</sub><br>N・m | T <sub>y</sub><br>N・m |
| MXDC 55               | LRXDC 55               | ○               | 3.17          | 14.1            | 80                        | 9              | 23.5 | 110                         | 100            | 37.5           | 12.5           | 136            | —              | 72             | 20             | M12×25                |  | 26             | 53                          | 43             | 16             | 23             | 20 | 60 | 120    | M14×45                                               | 99 700                                   | 149 000                                 | 4 830                               | 1 880<br>14 400       | 1 880<br>14 400       |
| MXD 55                | LRXD 55                | ○               | 4.97          |                 |                           |                |      |                             |                |                |                | 184            | 75             | 120            |                |                       |  |                |                             |                |                |                |    |    |        |                                                      | 5 040<br>31 100                          | 5 040<br>31 100                         |                                     |                       |                       |
| MXDG 55               | LRXDG 55               | ○               | 7.06          |                 |                           |                |      |                             |                |                |                | 238            | 95             | 174            |                |                       |  |                |                             |                |                |                |    |    |        |                                                      | 10 400<br>57 000                         | 10 400<br>57 000                        |                                     |                       |                       |
| MXDL 55               | —                      | —               | 9.08          |                 |                           |                |      |                             |                |                |                | 292            | 150            | 228            |                |                       |  |                |                             |                |                |                |    |    |        |                                                      | 17 700<br>90 700                         | 17 700<br>90 700                        |                                     |                       |                       |
| MXDC 65               | LRXDC 65               | ○               | 5.52          | 22.6            | 90                        | 12             | 31.5 | 135                         | 126            | 38             | 25             | 180            | —              | 95             | 26.3           | M16×25                |  | 18             | 63                          | 56             | 18             | 26             | 22 | 75 | 150    | M16×60                                               | 174 000                                  | 249 000                                 | 9 790                               | 4 200<br>32 000       | 4 200<br>32 000       |
|                       | LRXDC 65               | ○               |               |                 |                           |                |      |                             |                |                |                | 181            |                | 95             | 26.6           |                       |  |                |                             |                |                |                |    |    |        |                                                      | 4 200<br>32 200                          | 4 200<br>32 200                         |                                     |                       |                       |
| MXD 65                | LRXD 65                | ○               | 8.70          |                 |                           |                |      |                             |                |                |                | 244            | 70             | 159            | 26.3           |                       |  |                |                             |                |                |                |    |    |        |                                                      | 11 300<br>69 000                         | 11 300<br>69 000                        |                                     |                       |                       |
|                       | LRXD 65                | ○               |               |                 |                           |                |      |                             |                |                |                | 245            |                | 159            | 26.6           |                       |  |                |                             |                |                |                |    |    |        |                                                      | 11 300<br>69 300                         | 11 300<br>69 300                        |                                     |                       |                       |
| MXDG 65               | LRXDG 65               | ○               | 12.1          |                 |                           |                |      |                             |                |                |                | 308            | 120            | 223            | 26.3           |                       |  |                |                             |                |                |                |    |    |        |                                                      | 21 800<br>120 000                        | 21 800<br>120 000                       |                                     |                       |                       |
|                       | LRXDG 65               | ○               |               |                 |                           |                |      |                             |                |                |                | 309            |                | 223            | 26.6           |                       |  |                |                             |                |                |                |    |    |        |                                                      | 21 800<br>120 000                        | 21 800<br>120 000                       |                                     |                       |                       |
| MXDL 65               | —                      | —               | 15.5          |                 |                           |                |      |                             |                |                |                | 380            | 200            | 295            | 26.3           |                       |  |                |                             |                |                |                |    |    | M16×60 | 419 000                                              | 768 000                                  | 30 200                                  | 37 600<br>193 000                   | 37 600<br>193 000     |                       |

Notes (1) Length of track rail  $L$  is shown in Table 2.1 on page II-153 and Table 2.3 on page II-154.


(2) The appended track rail mounting bolts are hexagon socket head bolts equivalent to JIS B 1176. In an assembled set of MX series, track rail mounting bolts are not appended.

(3) Basic dynamic load rating ( $C$ ), basic static load rating ( $C_0$ ), static moment rating ( $T_0$ ,  $T_x$ , and  $T_y$ ) are values for the direction indicated in the following figure.

The upper values of  $T_x$  and  $T_y$  are for one slide unit and the lower values are for two slide units in close contact.

Remarks 1. For the specification of grease nipple, see Table 15 on page II-166.

2. Three grease nipple mounting screws are provided on the right and left end plates respectively.



### Example of identification number of assembled set

| Model code |          | Dimensions | Part code |              | Preload symbol       | Classification symbol | Interchangeable code | Special specification |
|------------|----------|------------|-----------|--------------|----------------------|-----------------------|----------------------|-----------------------|
| <u>MXD</u> | <u>G</u> | <u>55</u>  | <u>C2</u> | <u>R3000</u> | <u>T<sub>2</sub></u> | <u>P</u>              | <u>S1</u>            | <u>/F</u>             |
| ①          | ②        | ③          | ④         | ⑤            | ⑥                    | ⑦                     | ⑧                    | ⑨                     |

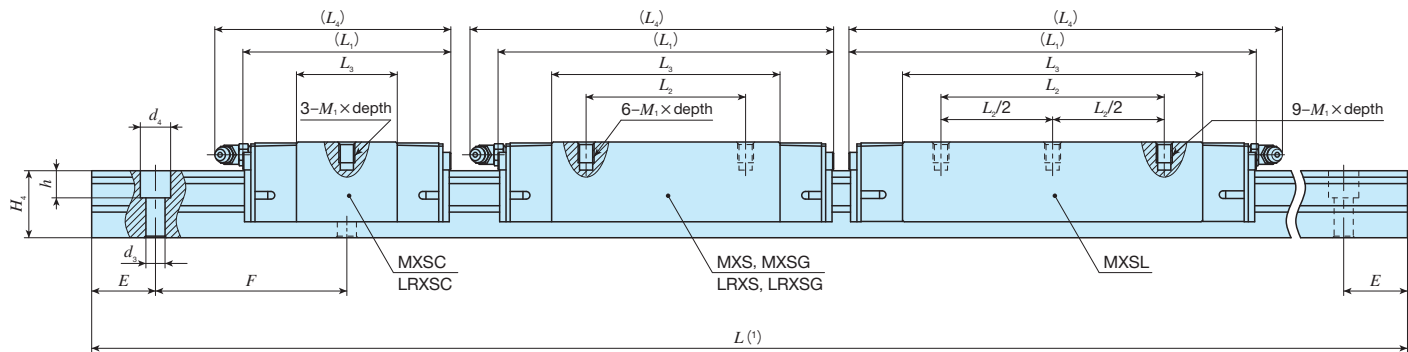
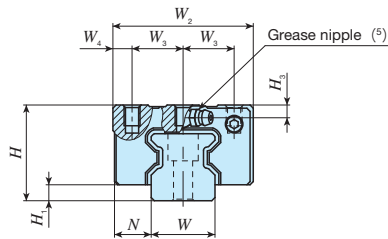
|                        |                              |                                   |  |                  |                 |                                                                       |                                   |
|------------------------|------------------------------|-----------------------------------|--|------------------|-----------------|-----------------------------------------------------------------------|-----------------------------------|
| ① Model                |                              | ③ Size                            |  | ⑥ Preload amount |                 | ⑧ Interchangeable                                                     |                                   |
| MXD                    | Block type mounting from top | 55, 65                            |  | No symbol        | Standard        | S1                                                                    | S1 specification                  |
| LRXD                   |                              |                                   |  | T <sub>1</sub>   | Light preload   | S2                                                                    | S2 specification                  |
|                        |                              |                                   |  | T <sub>2</sub>   | Medium preload  | No symbol                                                             | Non-interchangeable specification |
|                        |                              |                                   |  | T <sub>3</sub>   | Heavy preload   |                                                                       |                                   |
| ② Length of slide unit |                              | ④ Number of slide unit (2)        |  | ⑦ Accuracy class |                 | ⑨ Special specification                                               |                                   |
| C                      | Short                        |                                   |  | H                | High            | A, D, E, F, HP, I, J, L, LF<br>MA, MN, PS, Q, RC, T<br>UR, V, W, Y, Z |                                   |
| No symbol              | Standard                     |                                   |  | P                | Precision       |                                                                       |                                   |
| G                      | Long                         |                                   |  | SP               | Super precision |                                                                       |                                   |
| L                      | Extra long                   |                                   |  | UP               | Ultra precision |                                                                       |                                   |
|                        |                              | ⑤ Length of track rail (3,000 mm) |  |                  |                 |                                                                       |                                   |



IKO C-Lube Linear Roller Way Super MX


Compact block type mounting from top

|       |            |    |    |    |
|-------|------------|----|----|----|
| Shape | MXS • LRXS |    |    |    |
|       |            |    |    |    |
| Size  | 15         | 20 | 25 | 30 |
|       | 35         | 45 | 55 |    |



| Identification number |                        | Interchangeable | Mass (Ref.)   |                 | Dimensions of assembly mm |                |      | Dimensions of slide unit mm |                |                |                |                |                |                |                                      |  |                | Dimensions of track rail mm |                |                |                |     |    |    |             | Appended mounting bolt for track rail <sup>(3)</sup> | Basic dynamic load rating <sup>(4)</sup><br>C<br>N | Basic static load rating <sup>(4)</sup><br>C <sub>0</sub><br>N | Static moment rating <sup>(4)</sup> |                       |                       |
|-----------------------|------------------------|-----------------|---------------|-----------------|---------------------------|----------------|------|-----------------------------|----------------|----------------|----------------|----------------|----------------|----------------|--------------------------------------|--|----------------|-----------------------------|----------------|----------------|----------------|-----|----|----|-------------|------------------------------------------------------|----------------------------------------------------|----------------------------------------------------------------|-------------------------------------|-----------------------|-----------------------|
| MX series             | LRX series (No C-Lube) |                 | Slide unit kg | Track rail kg/m | H                         | H <sub>1</sub> | N    | W <sub>2</sub>              | W <sub>3</sub> | W <sub>4</sub> | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | L <sub>4</sub> | M <sub>1</sub> ×depth <sup>(2)</sup> |  | H <sub>3</sub> | W                           | H <sub>4</sub> | d <sub>3</sub> | d <sub>4</sub> | h   | E  | F  | Bolt size×ℓ |                                                      |                                                    |                                                                | T <sub>0</sub><br>N·m               | T <sub>x</sub><br>N·m | T <sub>Y</sub><br>N·m |
| MXSC 15               | LRXSC 15               | ○               | 0.099         | 1.65            | 24                        | 4              | 9.5  | 34                          | 13             | 4              | 52             | —              | 24             | 55             | M4× 5.5                              |  | 3.5            | 15                          | 16.5           | 4.5            | 8              | 6   | 30 | 60 | M4×16       | 7 730                                                | 12 000                                             | 113                                                            | 50.6<br>457                         | 50.6<br>457           |                       |
| MXS 15                | LRXS 15                | ○               | 0.15          |                 |                           |                |      |                             |                |                | 68             | 26             | 40             | 71             |                                      |  |                |                             |                |                |                |     |    |    |             | 11 500                                               | 20 000                                             | 188                                                            | 136<br>942                          | 136<br>942            |                       |
| MXSG 15               | LRXSG 15               | ○               | 0.21          |                 |                           |                |      |                             |                |                | 84             |                | 56             | 87             |                                      |  |                |                             |                |                |                |     |    |    |             | 14 900                                               | 28 000                                             | 263                                                            | 262<br>1 590                        | 262<br>1 590          |                       |
| MXSC 20               | LRXSC 20               | ○               | 0.21          | 2.73            | 30                        | 5              | 12   | 44                          | 16             | 6              | 66             | —              | 31.6           | 74             | M5× 6.5                              |  | 4              | 20                          | 21             | 6              | 9.5            | 8.5 | 30 | 60 | M5×20       | 16 100                                               | 26 400                                             | 341                                                            | 150<br>1 260                        | 150<br>1 260          |                       |
| MXS 20                | LRXS 20                | ○               | 0.31          |                 |                           |                |      |                             |                |                | 86             | 36             | 51.6           | 94             |                                      |  |                |                             |                |                |                |     |    |    |             | 23 400                                               | 42 700                                             | 550                                                            | 379<br>2 520                        | 379<br>2 520          |                       |
| MXSG 20               | LRXSG 20               | ○               | 0.42          |                 |                           |                |      |                             |                |                | 106            | 50             | 71.6           | 114            |                                      |  |                |                             |                |                |                |     |    |    |             | 30 100                                               | 58 900                                             | 760                                                            | 713<br>4 200                        | 713<br>4 200          |                       |
| MXSL 20               | —                      | —               | 0.55          |                 |                           |                |      |                             |                |                | 128            | 70             | 94.1           | 137            |                                      |  |                |                             |                |                |                |     |    |    |             | 37 200                                               | 77 200                                             | 996                                                            | 1 210<br>6 560                      | 1 210<br>6 560        |                       |
| MXSC 25               | LRXSC 25               | ○               | 0.30          | 3.59            | 36                        | 6              | 12.5 | 48                          | 17.5           | 6.5            | 74             | —              | 36             | 83             | M6× 9                                |  | 5              | 23                          | 24.5           | 7              | 11             | 9   | 30 | 60 | M6×25       | 21 600                                               | 33 800                                             | 500                                                            | 213<br>1 810                        | 213<br>1 810          |                       |
| MXS 25                | LRXS 25                | ○               | 0.47          |                 |                           |                |      |                             |                |                | 98             | 35             | 60             | 107            |                                      |  |                |                             |                |                |                |     |    |    |             | 32 100                                               | 56 300                                             | 833                                                            | 573<br>3 800                        | 573<br>3 800          |                       |
| MXSG 25               | LRXSG 25               | ○               | 0.57          |                 |                           |                |      |                             |                |                | 113            | 50             | 75             | 122            |                                      |  |                |                             |                |                |                |     |    |    |             | 38 200                                               | 70 300                                             | 1 040                                                          | 885<br>5 380                        | 885<br>5 380          |                       |
| MXSL 25               | —                      | —               | 0.74          |                 |                           |                |      |                             |                |                | 137            | 70             | 99             | 146            |                                      |  |                |                             |                |                |                |     |    |    |             | 47 400                                               | 92 800                                             | 1 370                                                          | 1 530<br>8 480                      | 1 530<br>8 480        |                       |
| MXSC 30               | LRXSC 30               | ○               | 0.54          | 5.01            | 42                        | 6.5            | 16   | 60                          | 20             | 10             | 85             | —              | 42.4           | 95             | M8×11                                |  | 6.5            | 28                          | 28             | 9              | 14             | 12  | 40 | 80 | M8×28       | 29 200                                               | 44 600                                             | 808                                                            | 329<br>2 740                        | 329<br>2 740          |                       |
| MXS 30                | LRXS 30                | ○               | 0.83          |                 |                           |                |      |                             |                |                | 113            | 40             | 70.4           | 123            |                                      |  |                |                             |                |                |                |     |    |    |             | 43 400                                               | 74 400                                             | 1 350                                                          | 883<br>5 780                        | 883<br>5 780          |                       |
| MXSG 30               | LRXSG 30               | ○               | 1.05          |                 |                           |                |      |                             |                |                | 134            | 60             | 91.4           | 144            |                                      |  |                |                             |                |                |                |     |    |    |             | 53 200                                               | 96 700                                             | 1 750                                                          | 1 470<br>8 740                      | 1 470<br>8 740        |                       |
| MXSL 30               | —                      | —               | 1.37          |                 |                           |                |      |                             |                |                | 162            | 80             | 119.4          | 172            |                                      |  |                |                             |                |                |                |     |    |    |             | 65 600                                               | 126 000                                            | 2 290                                                          | 2 500<br>13 600                     | 2 500<br>13 600       |                       |



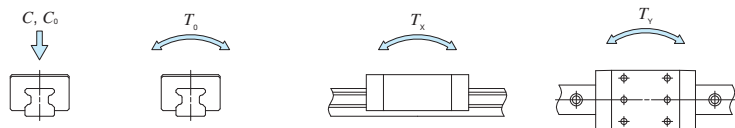
Notes (1) Length of track rail  $L$  is shown in Table 2.1 on page II-153 and Table 2.3 on page II-154 .  
(2) For the fixing thread depth of the slide unit mounting hole, the value indicated in Table 16.1 on page II-168 is recommended.  
(3) The appended track rail mounting bolts are hexagon socket head bolts equivalent to JIS B 1176. In an assembled set of MX series, track rail mounting bolts are not appended.  
(4) Basic dynamic load rating ( $C$ ), basic static load rating ( $C_0$ ), static moment rating ( $T_0$ ,  $T_x$ , and  $T_y$ ) are values for the direction indicated in the following figure.  
The upper values of  $T_x$  and  $T_y$  are for one slide unit and the lower values are for two slide units in close contact.  
(5) The shapes of grease nipple vary by size. For details of the specifications, see Table 15 on page II-166.  
Remark: A grease nipple mounting screw is provided on the right and left end plates respectively.



Example of identification number of assembled set

| Model code             | Dimensions         | Part code                       | Preload symbol | Classification symbol | Interchangeable code | Special specification |                             |                                   |
|------------------------|--------------------|---------------------------------|----------------|-----------------------|----------------------|-----------------------|-----------------------------|-----------------------------------|
| <u>MXS</u>             | <u>G</u>           | <u>25</u>                       | <u>C2</u>      | <u>R840</u>           | <u>T<sub>1</sub></u> | <u>P</u>              | <u>S1</u>                   | <u>/F</u>                         |
| ①                      | ②                  | ③                               | ④              | ⑤                     | ⑥                    | ⑦                     | ⑧                           | ⑨                                 |
| ① Model                |                    | ③ Size                          |                |                       | ⑥ Preload amount     |                       | ⑧ Interchangeable           |                                   |
| MXS                    | Compact block type | 15, 20, 25, 30                  |                |                       | No symbol            | Standard              | S1                          | S1 specification                  |
| LRXS                   | mounting from top  |                                 |                |                       | T <sub>1</sub>       | Light preload         | S2                          | S2 specification                  |
|                        |                    | ④ Number of slide unit (2)      |                |                       | T <sub>2</sub>       | Medium preload        | No symbol                   | Non-interchangeable specification |
|                        |                    |                                 |                |                       | T <sub>3</sub>       | Heavy preload         |                             |                                   |
| ② Length of slide unit |                    | ⑤ Length of track rail (840 mm) |                |                       | ⑦ Accuracy class     |                       | ⑨ Special specification     |                                   |
| C                      | Short              |                                 |                |                       | H                    | High                  | A, D, E, F, HP, I, J, L, LF |                                   |
| No symbol              | Standard           |                                 |                |                       | P                    | Precision             | MA, MN, N, Q, RC, T, UR     |                                   |
| G                      | Long               |                                 |                |                       | SP                   | Super precision       | V, W, Y, Z                  |                                   |
| L                      | Extra long         |                                 |                |                       | UP                   | Ultra precision       |                             |                                   |

### Compact block type mounting from top

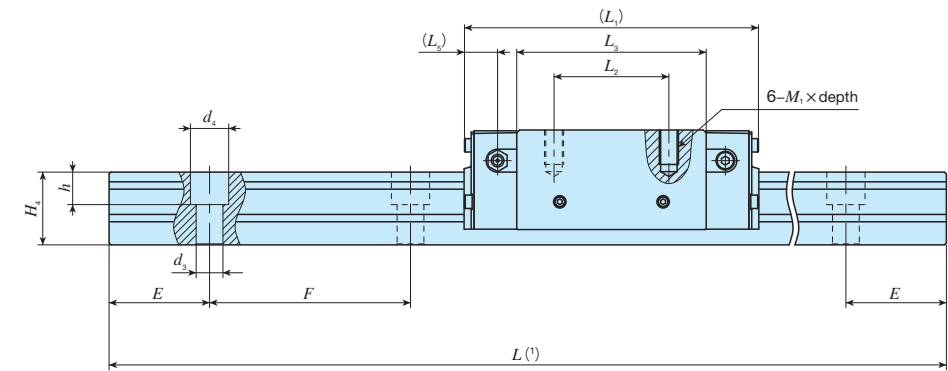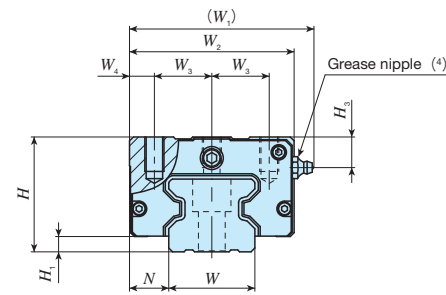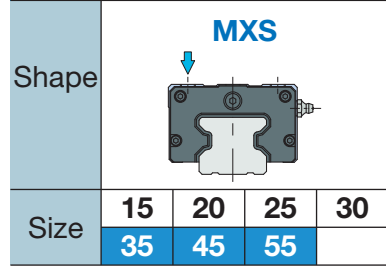

| Identification number |                           |                  | Interchangeable | Mass (Ref.)        |    | Dimensions of assembly<br>mm |      |                | Dimensions of slide unit<br>mm |                |                |                |                |                |                |                           |                |    | Dimensions of track rail<br>mm |                |                |    |    |      |             |        | Appended mounting<br>bolt for track rail <sup>(2)</sup> | Basic dynamic<br>load rating <sup>(3)</sup> | Basic static<br>load rating <sup>(3)</sup> | Static moment rating <sup>(3)</sup> |                       |                       |
|-----------------------|---------------------------|------------------|-----------------|--------------------|----|------------------------------|------|----------------|--------------------------------|----------------|----------------|----------------|----------------|----------------|----------------|---------------------------|----------------|----|--------------------------------|----------------|----------------|----|----|------|-------------|--------|---------------------------------------------------------|---------------------------------------------|--------------------------------------------|-------------------------------------|-----------------------|-----------------------|
| MX series             | LRX series<br>(No C-Lube) | Slide unit<br>kg |                 | Track rail<br>kg/m | H  | H <sub>1</sub>               | N    | W <sub>1</sub> | W <sub>2</sub>                 | W <sub>3</sub> | W <sub>4</sub> | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | L <sub>6</sub> | M <sub>1</sub> ×<br>depth | H <sub>3</sub> | W  | H <sub>4</sub>                 | d <sub>3</sub> | d <sub>4</sub> | h  | E  | F    | Bolt size×ℓ | C<br>N |                                                         |                                             |                                            | C <sub>0</sub><br>N                 | T <sub>0</sub><br>N・m | T <sub>x</sub><br>N・m |
| MXS 35                | —                         | ○                | 1.22            | 6.88               | 48 | 6.5                          | 18   | 78             | 70                             | 25             | 10             | 124            | 50             | 78.6           | 12.7           | M 8×12                    |                | 13 | 34                             | 32             | 9              | 14 | 12 | 40   | 80          | M 8×35 | 58 700                                                  | 100 000                                     | 2 170                                      | 1 360<br>8 470                      | 1 360<br>8 470        |                       |
| MXSG 35               | —                         | ○                | 1.61            |                    |    |                              |      |                |                                |                |                | 152            | 72             | 106.6          |                |                           |                |    |                                |                |                |    |    |      |             |        | 2 440<br>13 800                                         | 2 440<br>13 800                             |                                            |                                     |                       |                       |
| MXS 45                | —                         | ○                | 2.37            | 10.8               | 60 | 8                            | 20.5 | 96             | 86                             | 30             | 13             | 154            | 60             | 99             | 17.5           | M10×18                    |                | 16 | 45                             | 38             | 14             | 20 | 17 | 52.5 | 105         | M12×40 | 95 400                                                  | 159 000                                     | 4 430                                      | 2 700<br>16 800                     | 2 700<br>16 800       |                       |
| MXSG 45               | —                         | ○                | 3.27            |                    |    |                              |      |                |                                |                |                | 194            | 80             | 139            |                |                           |                |    |                                |                |                |    |    |      |             |        | 5 220<br>29 000                                         | 5 220<br>29 000                             |                                            |                                     |                       |                       |
| MXS 55                | —                         | ○                | 3.96            | 14.1               | 70 | 9                            | 23.5 | 110            | 100                            | 37.5           | 12.5           | 184            | 75             | 120            | 20             | M12×20                    |                | 16 | 53                             | 43             | 16             | 23 | 20 | 60   | 120         | M14×45 | 148 000                                                 | 248 000                                     | 8 040                                      | 5 040<br>31 100                     | 5 040<br>31 100       |                       |
| MXSG 55               | —                         | ○                | 5.63            |                    |    |                              |      |                |                                |                |                | 238            | 95             | 174            |                |                           |                |    |                                |                |                |    |    |      |             |        | 10 400<br>57 000                                        | 10 400<br>57 000                            |                                            |                                     |                       |                       |

Notes (1) Length of track rail  $L$  is shown in Table 2.1 on page II -153 and Table 2.3 on page II -154 .

(2) Track rail mounting bolts are not appended.

<sup>(3)</sup> Basic dynamic load rating ( $C$ ), basic static load rating ( $C_0$ ), static moment rating ( $T_0$ ,  $T_x$ , and  $T_y$ ) are values for the direction indicated in the following figure.

The upper values of  $T_x$  and  $T_y$  are for one slide unit and the lower values are for two slide units in close contact.

(4) The shapes of grease nipple vary by size. For details of the specifications, see Table 15 on page II-166.

Remark: Three grease nipple mounting screws are provided on the right and left end plates respectively.

### Example of identification number of assembled set

| Model code |          | Dimensions | Part code |              | Preload symbol       | Classification symbol | Interchangeable code | Special specification |
|------------|----------|------------|-----------|--------------|----------------------|-----------------------|----------------------|-----------------------|
| <b>MXS</b> | <b>G</b> | <b>45</b>  | <b>C2</b> | <b>R1470</b> | <b>T<sub>1</sub></b> | <b>P</b>              | <b>S1</b>            | <b>/F</b>             |
| 1          | 2        | 3          | 4         | 5            | 6                    | 7                     | 8                    | 9                     |

| ① Model |                                      |
|---------|--------------------------------------|
| MXS     | Compact block type mounting from top |

|        |            |
|--------|------------|
| ③ Size | 35, 45, 55 |
|--------|------------|

| ⑥ Preload amount |                |
|------------------|----------------|
| No symbol        | Standard       |
| T <sub>1</sub>   | Light preload  |
| T <sub>2</sub>   | Medium preload |
| T <sub>3</sub>   | Heavy preload  |

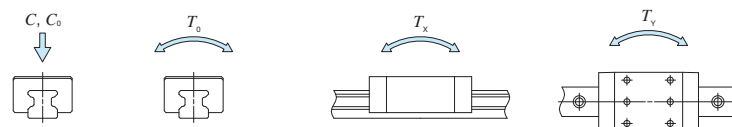
| ⑧ Interchangeable |                                   |
|-------------------|-----------------------------------|
| S1                | S1 specification                  |
| S2                | S2 specification                  |
| No symbol         | Non-interchangeable specification |

| ② Length of slide unit |          |
|------------------------|----------|
| No symbol              | Standard |
| G                      | Long     |

⑤ Length of track rail (1,470 mm)


| ⑦ Accuracy class |                 |
|------------------|-----------------|
| H                | High            |
| P                | Precision       |
| SP               | Super precision |
| UP               | Ultra precision |

⑨ Special specification  
A, D, E, F, HP, I, J, L, LF  
MA, N, RC, T, UB, V, W, Z





IKO C-Lube Linear Roller Way Super MX



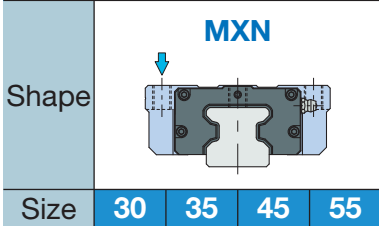
Low section flange type mounting from top



MXN 30  
MXNG 30  
MXNL 30

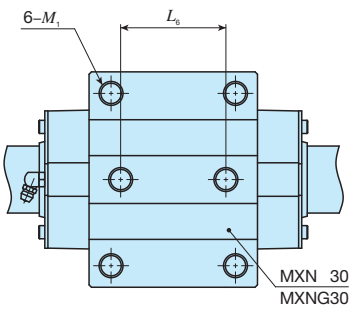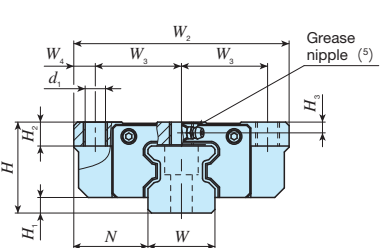

MXN  
MXNG  
MXNL

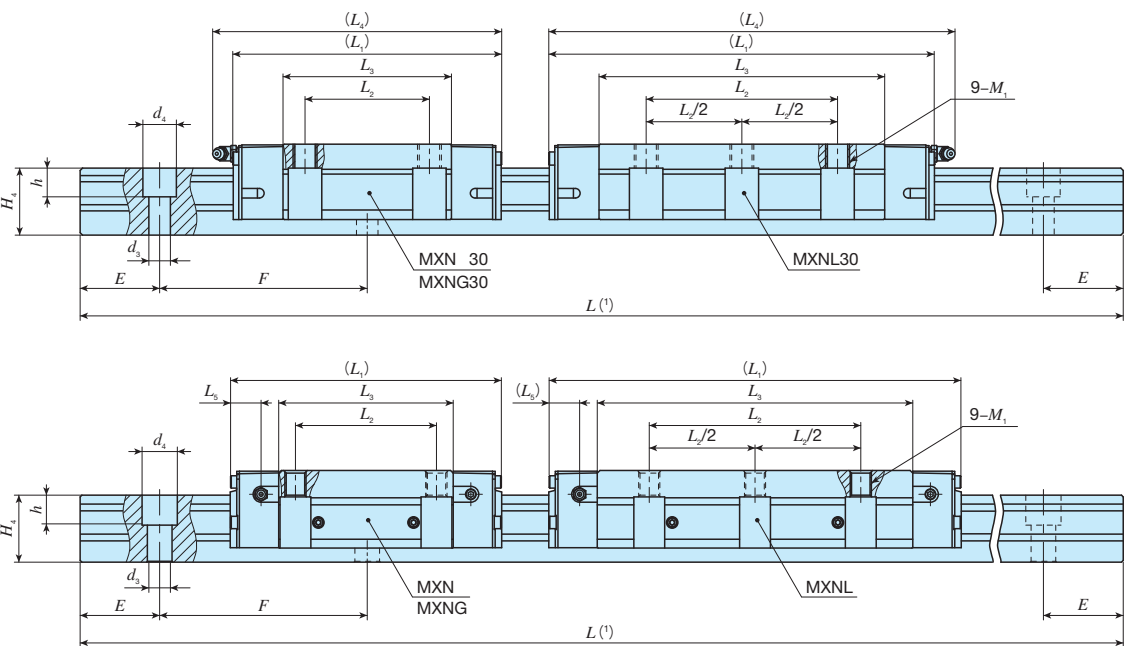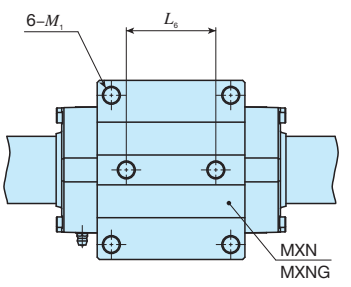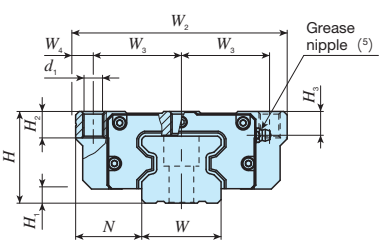

| Identification number |                        | Interchangeable | Mass (Ref.)   |                 | Dimensions of assembly mm |                |      | Dimensions of slide unit mm |                |                |                |                |                |                |                |                |                |                |                                 |                |                |    | Dimensions of track rail mm |                |                |    |      |     | Appended mounting bolt for track rail (3) | Basic dynamic load rating (4)<br>C<br>N | Basic static load rating (4)<br>C <sub>0</sub><br>N | Static moment rating (4) |                         |                         |
|-----------------------|------------------------|-----------------|---------------|-----------------|---------------------------|----------------|------|-----------------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|---------------------------------|----------------|----------------|----|-----------------------------|----------------|----------------|----|------|-----|-------------------------------------------|-----------------------------------------|-----------------------------------------------------|--------------------------|-------------------------|-------------------------|
| MX series             | LRX series (No C-Lube) |                 | Slide unit kg | Track rail kg/m | H                         | H <sub>1</sub> | N    | W <sub>2</sub>              | W <sub>3</sub> | W <sub>4</sub> | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | L <sub>4</sub> | L <sub>5</sub> | L <sub>6</sub> | d <sub>1</sub> | M <sub>1</sub> | Maximum fixing thread depth (2) | H <sub>2</sub> | H <sub>3</sub> | W  | H <sub>4</sub>              | d <sub>3</sub> | d <sub>4</sub> | h  | E    | F   |                                           |                                         |                                                     | T <sub>0</sub><br>N · m  | T <sub>x</sub><br>N · m | T <sub>y</sub><br>N · m |
| MXN 30                | —                      | ○               | 1.05          | 5.01            | 38                        | 6.5            | 31   | 90                          | 36             | 9              | 113            | 52             | 70.4           | 121            | —              | 44             | 8.5            | M10            | 9                               | 10             | 4.5            | 28 | 28                          | 9              | 14             | 12 | 40   | 80  | M 8×28                                    | 43 400                                  | 74 400                                              | 1 350                    | 883<br>5 780            | 883<br>5 780            |
| MXNG 30               | —                      | ○               | 1.38          |                 |                           |                |      |                             |                |                | 134            | 52             | 91.4           | 142            |                |                |                |                |                                 |                |                |    |                             |                |                |    |      |     |                                           |                                         |                                                     | 1 750                    | 1 470<br>8 740          | 1 470<br>8 740          |
| MXNL 30               | —                      | —               | 1.75          |                 |                           |                |      |                             |                |                | 162            | 80             | 119.4          | 170            |                |                |                |                |                                 |                |                |    |                             |                |                |    |      |     |                                           |                                         |                                                     | 2 290                    | 2 500<br>13 600         | 2 500<br>13 600         |
| MXN 35                | —                      | ○               | 1.55          | 6.88            | 44                        | 6.5            | 33   | 100                         | 41             | 9              | 124            | 62             | 78.6           | —              | 12.7           | 52             | 8.5            | M10            | 11                              | 13             | 11             | 34 | 32                          | 9              | 14             | 12 | 40   | 80  | M 8×35                                    | 58 700                                  | 100 000                                             | 2 170                    | 1 360<br>8 470          | 1 360<br>8 470          |
| MXNG 35               | —                      | ○               | 2.13          |                 |                           |                |      |                             |                |                | 152            | 62             | 106.6          |                |                |                |                |                |                                 |                |                |    |                             |                |                |    |      |     |                                           |                                         |                                                     | 2 930                    | 2 440<br>13 800         | 2 440<br>13 800         |
| MXNL 35               | —                      | —               | 2.71          |                 |                           |                |      |                             |                |                | 184            | 100            | 138.6          |                |                |                |                |                |                                 |                |                |    |                             |                |                |    |      |     |                                           |                                         |                                                     | 3 800                    | 4 060<br>21 300         | 4 060<br>21 300         |
| MXN 45                | —                      | ○               | 2.58          | 10.8            | 52                        | 8              | 37.5 | 120                         | 50             | 10             | 154            | 80             | 99             | —              | 17.5           | 60             | 10.5           | M12            | 13                              | 15             | 13.5           | 45 | 38                          | 14             | 20             | 17 | 52.5 | 105 | M12×40                                    | 95 400                                  | 159 000                                             | 4 430                    | 2 700<br>16 800         | 2 700<br>16 800         |
| MXNG 45               | —                      | ○               | 3.73          |                 |                           |                |      |                             |                |                | 194            | 80             | 139            |                |                |                |                |                |                                 |                |                |    |                             |                |                |    |      |     |                                           |                                         |                                                     | 6 200                    | 5 220<br>29 000         | 5 220<br>29 000         |
| MXNL 45               | —                      | —               | 4.72          |                 |                           |                |      |                             |                |                | 234            | 120            | 179            |                |                |                |                |                |                                 |                |                |    |                             |                |                |    |      |     |                                           |                                         |                                                     | 7 980                    | 8 560<br>44 400         | 8 560<br>44 400         |
| MXN 55                | —                      | ○               | 4.61          | 14.1            | 63                        | 9              | 43.5 | 140                         | 58             | 12             | 184            | 95             | 120            | —              | 20             | 70             | 12.5           | M14            | 19                              | 17             | 16             | 53 | 43                          | 16             | 23             | 20 | 60   | 120 | M14×45                                    | 148 000                                 | 248 000                                             | 8 040                    | 5 040<br>31 100         | 5 040<br>31 100         |
| MXNG 55               | —                      | ○               | 6.94          |                 |                           |                |      |                             |                |                | 238            | 95             | 174            |                |                |                |                |                |                                 |                |                |    |                             |                |                |    |      |     |                                           |                                         |                                                     | 11 700                   | 10 400<br>57 000        | 10 400<br>57 000        |
| MXNL 55               | —                      | —               | 8.87          |                 |                           |                |      |                             |                |                | 292            | 150            | 228            |                |                |                |                |                |                                 |                |                |    |                             |                |                |    |      |     |                                           |                                         |                                                     | 15 300                   | 17 700<br>90 700        | 17 700<br>90 700        |

Notes (1) Length of track rail  $L$  is shown in Table 2.1 on page II-153 and Table 2.3 on page II-154.

(2) The fixing thread depth of mounting screw in the middle of the way in the slide unit width direction should be less than the maximum fixing thread depth.

(3) Track rail mounting bolts are not appended.

(4) Basic dynamic load rating ( $C$ ), basic static load rating ( $C_0$ ), static moment rating ( $T_0$ ,  $T_x$ , and  $T_y$ ) are values for the direction indicated in the following figure.


The upper values of  $T_x$  and  $T_y$  are for one slide unit and the lower values are for two slide units in close contact.

(5) The shapes of grease nipple vary by size. For details of the specifications, see Table 15 on page II-166.

Remarks 1. For size 30 series, a grease nipple mounting screw is provided on the right and left end plates respectively.

2. For size 35, 45, and 55 series, three grease nipple mounting screws are provided on the right and left end plates respectively. However, the size of screw for size 35 in the slide unit travelling direction is smaller than that of the crosswise direction.

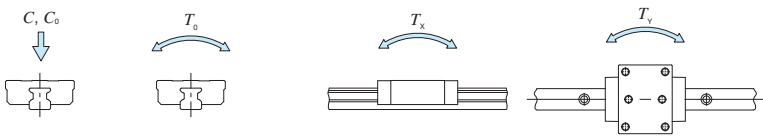When the grease nipple is mounted along the movement direction, contact IKO.



Example of identification number of assembled set


| Model code             | Dimensions                                | Part code                         | Preload symbol | Classification symbol | Interchangeable code | Special specification |                             |                                   |
|------------------------|-------------------------------------------|-----------------------------------|----------------|-----------------------|----------------------|-----------------------|-----------------------------|-----------------------------------|
| <u>MXN</u>             | <u>G</u>                                  | <u>55</u>                         | <u>C2</u>      | <u>R3000</u>          | <u>T<sub>2</sub></u> | <u>P</u>              | <u>S1</u>                   | <u>/F</u>                         |
| ①                      | ②                                         | ③                                 | ④              | ⑤                     | ⑥                    | ⑦                     | ⑧                           | ⑨                                 |
| ① Model                |                                           | ③ Size                            |                |                       | ⑥ Preload amount     |                       | ⑧ Interchangeable           |                                   |
| MXN                    | Low section flange type mounting from top | 30, 35, 45, 55                    |                |                       | No symbol            | Standard              | S1                          | S1 specification                  |
|                        |                                           |                                   |                |                       | T <sub>1</sub>       | Light preload         | S2                          | S2 specification                  |
|                        |                                           | ④ Number of slide unit (2)        |                |                       | T <sub>2</sub>       | Medium preload        | No symbol                   | Non-interchangeable specification |
|                        |                                           |                                   |                |                       | T <sub>3</sub>       | Heavy preload         |                             |                                   |
| ② Length of slide unit |                                           | ⑤ Length of track rail (3,000 mm) |                |                       | ⑦ Accuracy class     |                       | ⑨ Special specification     |                                   |
| No symbol              | Standard                                  |                                   |                |                       | H                    | High                  | A, D, E, F, HP, I, J, L, LF |                                   |
| G                      | Long                                      |                                   |                |                       | P                    | Precision             | MA, RC, T, UR, V, W, Z      |                                   |
| L                      | Extra long                                |                                   |                |                       | SP                   | Super precision       |                             |                                   |
|                        |                                           |                                   |                |                       | UP                   | Ultra precision       |                             |                                   |



### Low section block type mounting from top


## Shape

**MXNS**





| Size | 30 | 35 | 45 | 55 |
|------|----|----|----|----|
|------|----|----|----|----|

|       |    |
|-------|----|
| MXNS  | 30 |
| MXNSG | 30 |
| MXNSL | 30 |

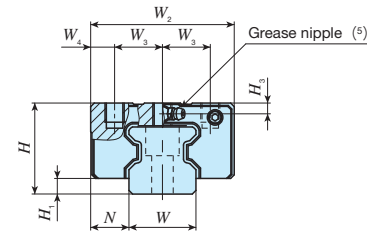

MXNS  
MXNSG  
MXNSL

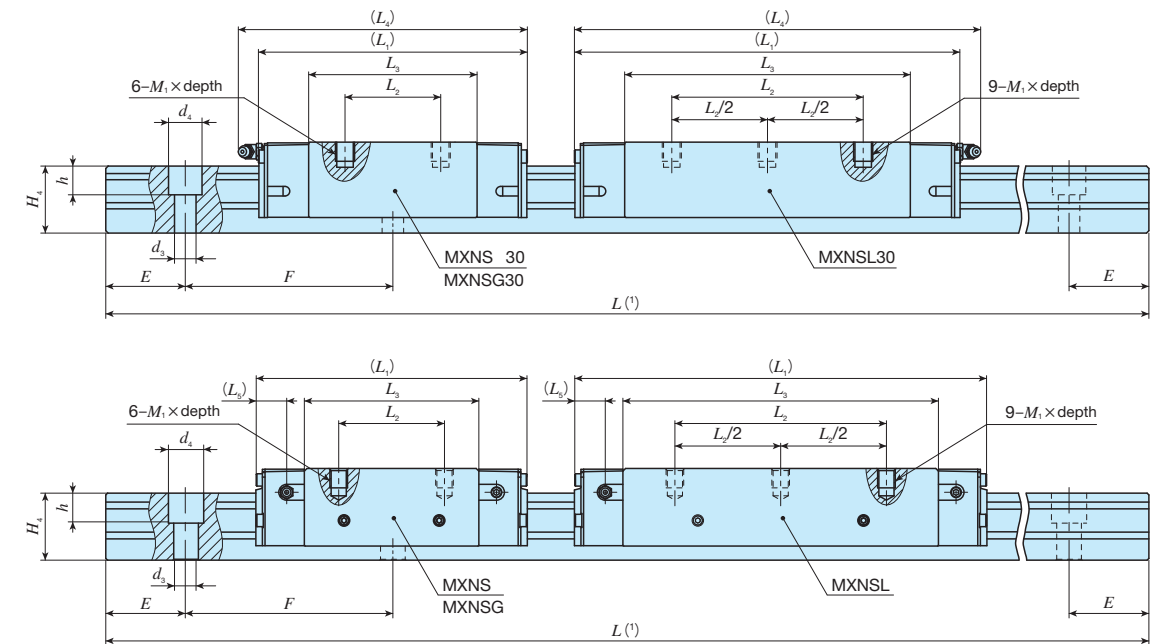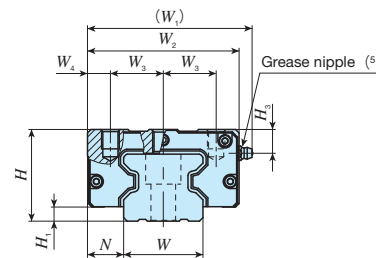

| Identification number |                        | Interchangeable | Mass (Ref.)   |                 | Dimensions of assembly mm |                |      | Dimensions of slide unit mm |                |                |                |                |                |                |                |                |                                      |  |                                            |                | Dimensions of track rail mm |                |                |                |    |      |     |              | Appended mounting bolt for track rail <sup>(3)</sup> | Basic dynamic load rating <sup>(4)</sup> | Basic static load rating <sup>(4)</sup> | Static moment rating <sup>(4)</sup> |                     |                         |
|-----------------------|------------------------|-----------------|---------------|-----------------|---------------------------|----------------|------|-----------------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|--------------------------------------|--|--------------------------------------------|----------------|-----------------------------|----------------|----------------|----------------|----|------|-----|--------------|------------------------------------------------------|------------------------------------------|-----------------------------------------|-------------------------------------|---------------------|-------------------------|
| MX series             | LRX series (No C-Lube) |                 | Slide unit kg | Track rail kg/m | H                         | H <sub>1</sub> | N    | W <sub>1</sub>              | W <sub>2</sub> | W <sub>3</sub> | W <sub>4</sub> | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | L <sub>4</sub> | L <sub>5</sub> | M <sub>1</sub> ×depth <sup>(2)</sup> |  | Maximum fixing thread depth <sup>(2)</sup> | H <sub>3</sub> | W                           | H <sub>4</sub> | d <sub>3</sub> | d <sub>4</sub> | h  | E    | F   | Bolt size× ℓ |                                                      |                                          |                                         | C<br>N                              | C <sub>0</sub><br>N | T <sub>0</sub><br>N · m |
| MXNS 30               | —                      | ○               | 0.70          | 5.01            | 38                        | 6.5            | 16   | —                           | 60             | 20             | 10             | 113            | 40             | 70.4           | 121            | —              | M 8× 8                               |  | 9                                          | 4.5            | 28                          | 28             | 9              | 14             | 12 | 40   | 80  | M 8×28       | 43 400                                               | 74 400                                   | 1 350                                   | 883<br>5 780                        | 883<br>5 780        |                         |
| MXNSG 30              | —                      | ○               | 0.90          |                 |                           |                |      |                             |                |                |                | 134            | 60             | 91.4           | 142            |                |                                      |  |                                            |                |                             |                |                |                |    |      |     |              | 53 200                                               | 96 700                                   | 1 750                                   | 1 470<br>8 740                      | 1 470<br>8 740      |                         |
| MXNSL 30              | —                      | —               | 1.14          |                 |                           |                |      |                             |                |                |                | 162            | 80             | 119.4          | 170            |                |                                      |  |                                            |                |                             |                |                |                |    |      |     |              | 65 600                                               | 126 000                                  | 2 290                                   | 2 500<br>13 600                     | 2 500<br>13 600     |                         |
| MXNS 35               | —                      | ○               | 1.08          | 6.88            | 44                        | 6.5            | 18   | 78                          | 70             | 25             | 10             | 124            | 50             | 78.6           | —              | 12.7           | M 8× 9                               |  | 11                                         | 11             | 34                          | 32             | 9              | 14             | 12 | 40   | 80  | M 8×35       | 58 700                                               | 100 000                                  | 2 170                                   | 1 360<br>8 470                      | 1 360<br>8 470      |                         |
| MXNSG 35              | —                      | ○               | 1.42          |                 |                           |                |      |                             |                |                |                | 152            | 72             | 106.6          |                |                |                                      |  |                                            |                |                             |                |                |                |    |      |     |              | 74 200                                               | 135 000                                  | 2 930                                   | 2 440<br>13 800                     | 2 440<br>13 800     |                         |
| MXNSL 35              | —                      | —               | 1.81          |                 |                           |                |      |                             |                |                |                | 184            | 100            | 138.6          |                |                |                                      |  |                                            |                |                             |                |                |                |    |      |     |              | 90 800                                               | 175 000                                  | 3 800                                   | 4 060<br>21 300                     | 4 060<br>21 300     |                         |
| MXNS 45               | —                      | ○               | 1.84          | 10.8            | 52                        | 8              | 20.5 | 94                          | 86             | 30             | 13             | 154            | 60             | 99             | —              | 17.5           | M10×11                               |  | 13                                         | 13.5           | 45                          | 38             | 14             | 20             | 17 | 52.5 | 105 | M12×40       | 95 400                                               | 159 000                                  | 4 430                                   | 2 700<br>16 800                     | 2 700<br>16 800     |                         |
| MXNSG 45              | —                      | ○               | 2.58          |                 |                           |                |      |                             |                |                |                | 194            | 80             | 139            |                |                |                                      |  |                                            |                |                             |                |                |                |    |      |     |              | 124 000                                              | 223 000                                  | 6 200                                   | 5 220<br>29 000                     | 5 220<br>29 000     |                         |
| MXNSL 45              | —                      | —               | 3.29          |                 |                           |                |      |                             |                |                |                | 234            | 120            | 179            |                |                |                                      |  |                                            |                |                             |                |                |                |    |      |     |              | 151 000                                              | 287 000                                  | 7 980                                   | 8 560<br>44 400                     | 8 560<br>44 400     |                         |
| MXNS 55               | —                      | ○               | 3.31          | 14.1            | 63                        | 9              | 23.5 | 110                         | 100            | 37.5           | 12.5           | 184            | 75             | 120            | —              | 20             | M12×15                               |  | 19                                         | 16             | 53                          | 43             | 16             | 23             | 20 | 60   | 120 | M14×45       | 148 000                                              | 248 000                                  | 8 040                                   | 5 040<br>31 100                     | 5 040<br>31 100     |                         |
| MXNSG 55              | —                      | ○               | 4.83          |                 |                           |                |      |                             |                |                |                | 238            | 95             | 174            |                |                |                                      |  |                                            |                |                             |                |                |                |    |      |     |              | 198 000                                              | 359 000                                  | 11 700                                  | 10 400<br>57 000                    | 10 400<br>57 000    |                         |
| MXNSL 55              | —                      | —               | 6.28          |                 |                           |                |      |                             |                |                |                | 292            | 150            | 228            |                |                |                                      |  |                                            |                |                             |                |                |                |    |      |     |              | 244 000                                              | 470 000                                  | 15 300                                  | 17 700<br>90 700                    | 17 700<br>90 700    |                         |

Notes (1) Length of track rail  $L$  is shown in Table 2.1 on page II-153 and Table 2.3 on page II-154.

(2) For the fixing thread depth of the slide unit mounting hole, the value indicated in Table 16.2 on page II-168 is recommended.

The fixing thread depth of mounting screw in the middle of the way in the slide unit width direction should be less than the maximum fixing thread depth.

(3) Track rail mounting bolts are not appended.

(4) Basic dynamic load rating ( $C$ ), basic static load rating ( $C_0$ ), static moment rating ( $T_0$ ,  $T_x$ , and  $T_y$ ) are values for the direction indicated in the following figure.

The upper values of  $T_y$  and  $T_z$  are for one slide unit and the lower values are for two slide units in close contact.


(5) The shapes of grease nipple vary by size. For details of the specifications, see Table 15 on page II -166.

Remarks 1. For size 30 series, a grease nipple mounting screw is provided on the right and left end plates respectively.

- For size 35 series, a grease nipple mounting screw is provided on the right and left end plates respectively.
- For size 45, and 55 series, three grease nipple mounting screws are provided on the right and left end plates respectively.

However, the size of screw for size 35 in the slide unit travelling direction is smaller than that of the crosswise direction.

When the grease nipple is mounted along the movement direction, contact **IKO**.




### Example of identification number of assembled set

| Model code         |                 | Dimensions       | Part code        |                     | Preload symbol              | Classification symbol | Interchangeable code | Special specification |
|--------------------|-----------------|------------------|------------------|---------------------|-----------------------------|-----------------------|----------------------|-----------------------|
| <b><u>MXNS</u></b> | <b><u>G</u></b> | <b><u>55</u></b> | <b><u>C2</u></b> | <b><u>R3000</u></b> | <b><u>T<sub>2</sub></u></b> | <b><u>P</u></b>       | <b><u>S1</u></b>     | <b><u>/F</u></b>      |
| <b>1</b>           | <b>2</b>        | <b>3</b>         | <b>4</b>         | <b>5</b>            | <b>6</b>                    | <b>7</b>              | <b>8</b>             | <b>9</b>              |


|                                               |                                   |                    |                                             |
|-----------------------------------------------|-----------------------------------|--------------------|---------------------------------------------|
| ① Model                                       | ③ Size                            | ⑥ Preload amount   | ⑧ Interchangeable                           |
| MXNS Low section block type mounting from top | 30, 35, 45, 55                    | No symbol Standard | S1 S1 specification                         |
| ② Length of slide unit                        | ④ Number of slide unit (2)        | T1 Light preload   | S2 S2 specification                         |
| No symbol Standard                            | ⑤ Length of track rail (3,000 mm) | T2 Medium preload  | No symbol Non-interchangeable specification |
| G Long                                        |                                   | T3 Heavy preload   |                                             |
| L Extra long                                  |                                   | ⑦ Accuracy class   | ⑨ Special specification                     |
|                                               |                                   | H High             | A, D, E, F, HP, I, J, L, LF                 |
|                                               |                                   | P Precision        | MA, RC, T, UR, V, W, Z                      |
|                                               |                                   | SP Super precision |                                             |
|                                               |                                   | UP Ultra precision |                                             |
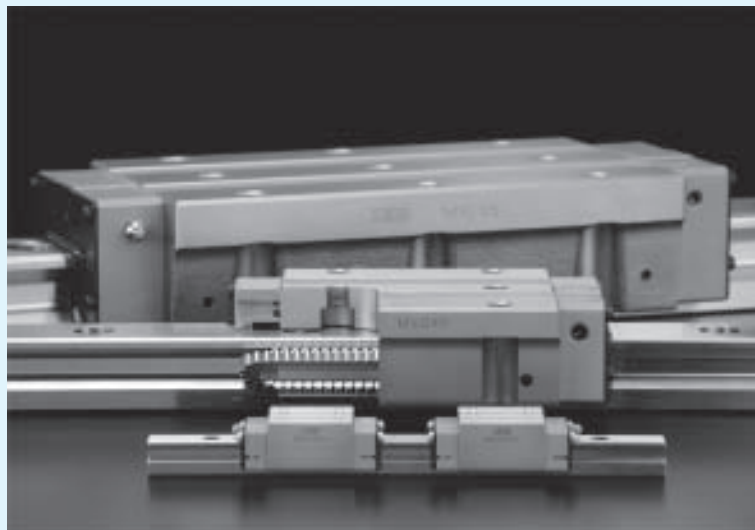
## Linear Roller Way X



Linear Roller Way X

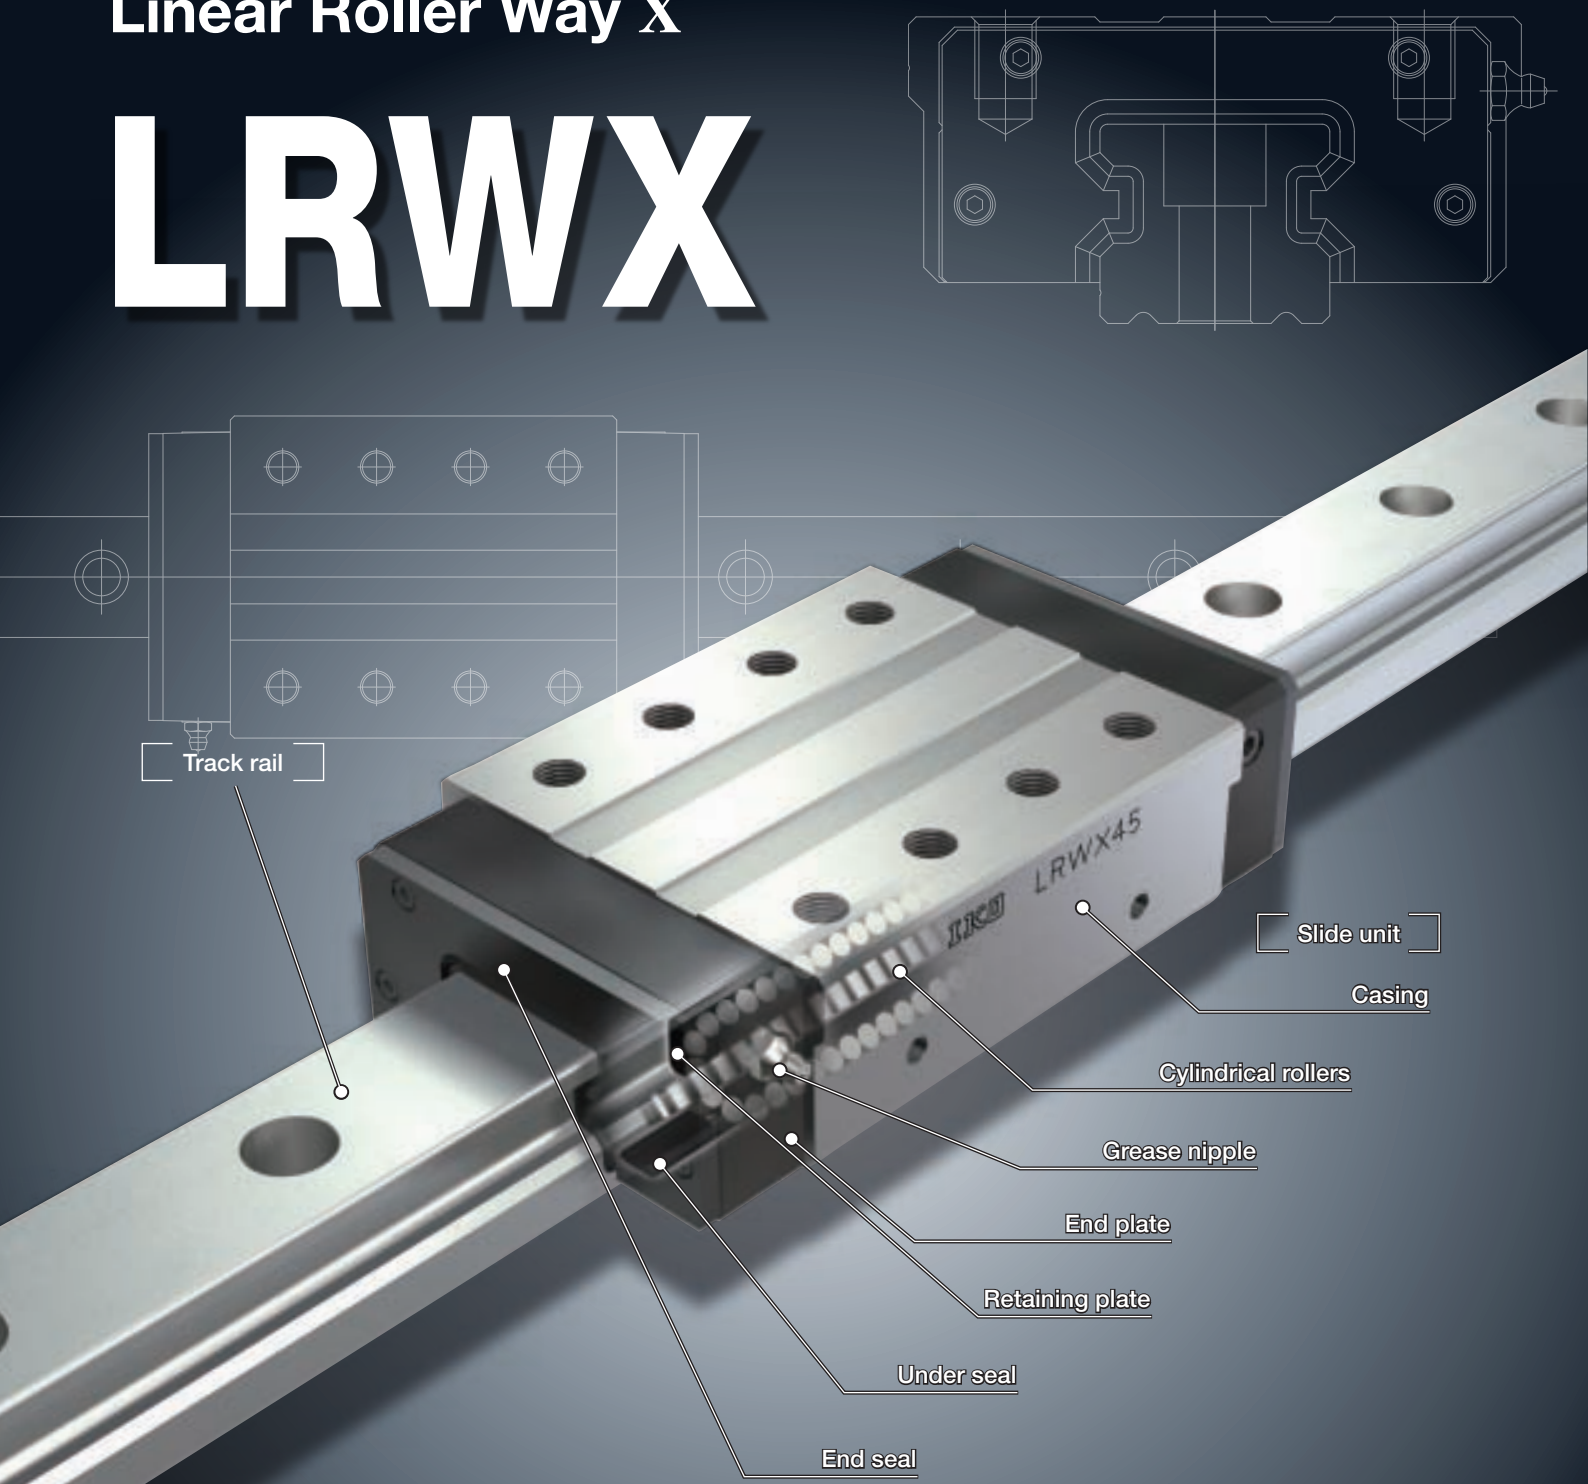LRWX



*Roller type linear motion rolling guide  
with cylindrical rollers in four-rows!*

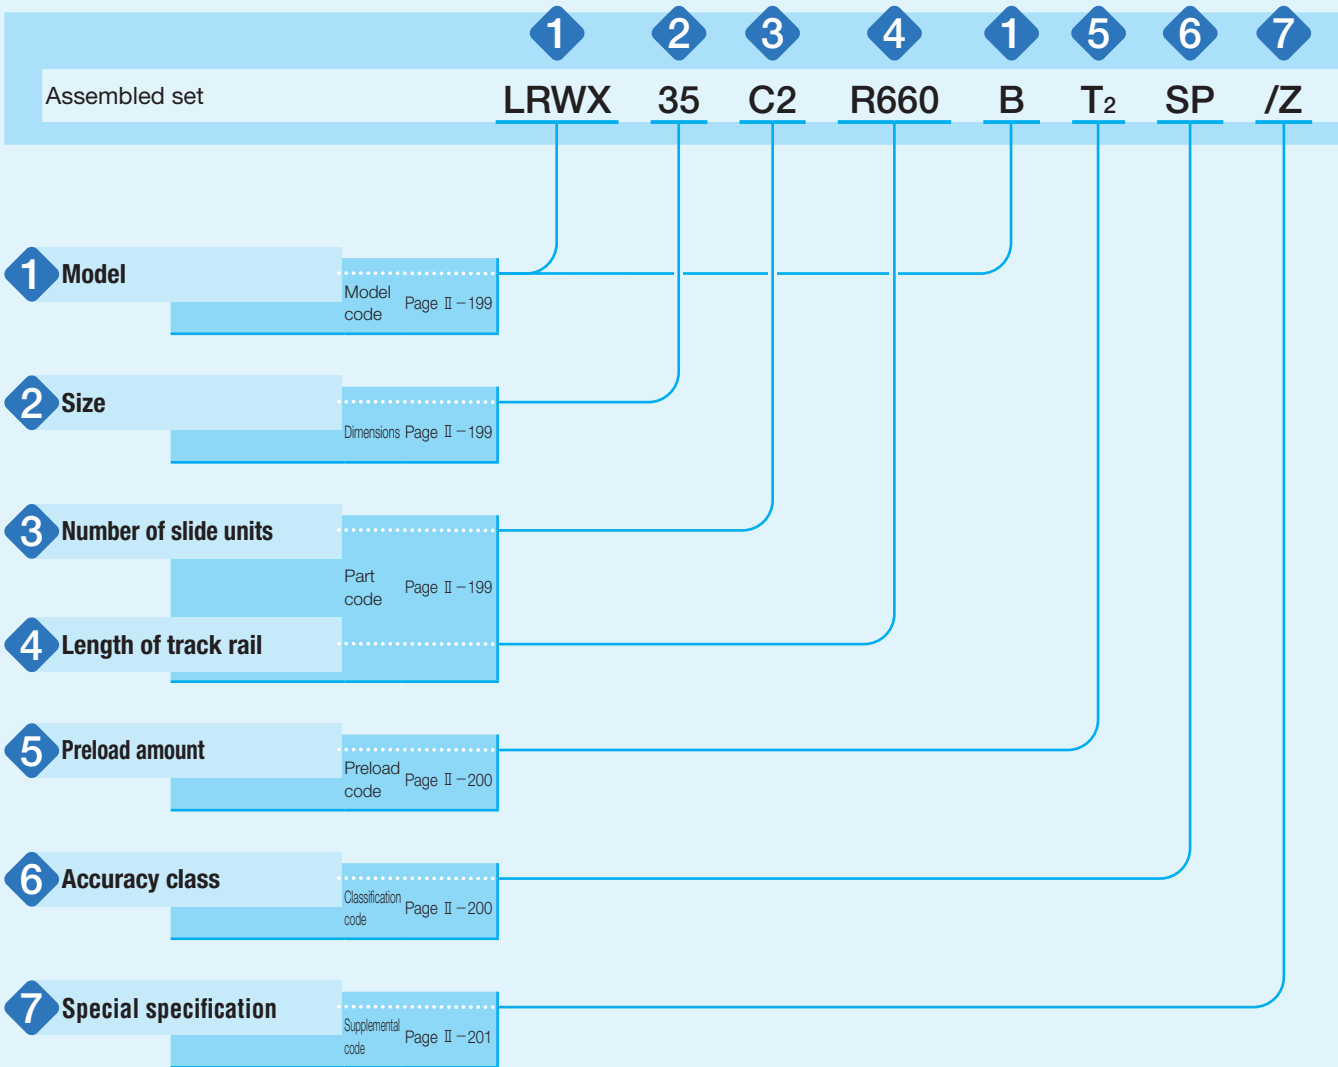
*Well-balanced roller arrangement  
enabling equal resistance to all direction loads!*

*Slide unit shape block type and flange type are available  
and can be selected according to the application!*

Identification Number and Specification

Example of an identification number

The specification of LRWX series is indicated by the identification number. Indicate the identification number, consisting of a model code, dimensions, a part code, a preload symbol, a classification symbol, and a supplemental code for each specification to apply.





# Identification Number and Specification

—Model · Size · Number of Slide Unit · Length of Track Rail—

|                         |                                                                                                         |                                               |                                                                                            |
|-------------------------|---------------------------------------------------------------------------------------------------------|-----------------------------------------------|--------------------------------------------------------------------------------------------|
| 1 Model                 | Linear Roller Way X <sup>(1)</sup><br>(LRWX series)                                                     |                                               | Block type mounting from top : LRWX···B<br>Flange type mounting from bottom : LRWXH        |
|                         | For applicable models and sizes, see Table 1.<br>Note <sup>(1)</sup> This model has no built-in C-Lube. |                                               |                                                                                            |
| 2 Size                  | 25,35,45,55,75                                                                                          | For applicable models and sizes, see Table 1. |                                                                                            |
| 3 Number of slide units |                                                                                                         | : C○                                          | Indicates the number of slide units assembled on a track rail.                             |
| 4 Length of track rail  |                                                                                                         | : R○                                          | Indicate the length of track rail in mm.<br>For standard and maximum lengths, see Table 2. |

Table 1 Models and sizes of LRWX series



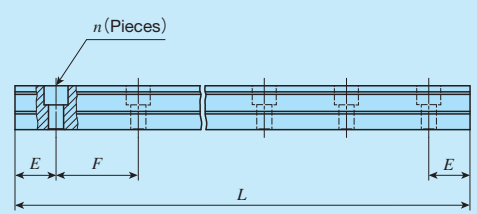
| Shape                                                                                                                   | Model    | Size |    |    |    |    |
|-------------------------------------------------------------------------------------------------------------------------|----------|------|----|----|----|----|
|                                                                                                                         |          | 25   | 35 | 45 | 55 | 75 |
| Block type mounting from top<br>       | LRWX···B | ○    | ○  | ○  | ○  | ○  |
| Flange type mounting from bottom<br> | LRWXH    | —    | ○  | ○  | ○  | ○  |

Table 2 Standard and maximum lengths of track rail

|  |                |                              |                        |                        |                        |                        |
|-------------------------------------------------------------------------------------|----------------|------------------------------|------------------------|------------------------|------------------------|------------------------|
| unit: mm                                                                            |                |                              |                        |                        |                        |                        |
| Identification number                                                               | LRWX25···B     | LRWX25···B/HP <sup>(3)</sup> | LRWX 35···B<br>LRWXH35 | LRWX 45···B<br>LRWXH45 | LRWX 55···B<br>LRWXH55 | LRWX 75···B<br>LRWXH75 |
| Standard length L <sup>(n)</sup>                                                    | 480 ( 8)       | 480 (16)                     | 480 ( 8)               | 800 (10)               | 800 ( 8)               | 840 ( 7)               |
|                                                                                     | 660 (11)       | 660 (22)                     | 660 (11)               | 1040 (13)              | 1000 (10)              | 1200 (10)              |
|                                                                                     | 840 (14)       | 840 (28)                     | 840 (14)               | 1200 (15)              | 1200 (12)              | 1560 (13)              |
|                                                                                     | 1020 (17)      | 1020 (34)                    | 1020 (17)              | 1520 (19)              | 1500 (15)              | 1920 (16)              |
|                                                                                     | 1200 (20)      | 1200 (40)                    | 1200 (20)              | 1920 (24)              | 2000 (20)              | 3000 (25)              |
|                                                                                     | 1500 (25)      | 1500 (50)                    | 1500 (25)              |                        | 3000 (30)              |                        |
| Pitch of mounting holes F                                                           | 60             | 30                           | 60                     | 80                     | 100                    | 120                    |
| E                                                                                   | 30             | 15                           | 30                     | 40                     | 50                     | 60                     |
| Standard E or higher<br>dimensions <sup>(1)</sup> below                             | 9              | 9                            | 12                     | 15                     | 18                     | 23                     |
|                                                                                     | 39             | 24                           | 42                     | 55                     | 68                     | 83                     |
| Maximum length <sup>(2)</sup>                                                       | 1980<br>(3000) | 1980<br>(3000)               | 3000<br>(3960)         | 2960<br>(4000)         | 3000<br>(4000)         | 3000<br>(3960)         |

Notes <sup>(1)</sup> Not applicable to female threads for bellows (supplemental code "J").

<sup>(2)</sup> Track rails with the maximum lengths shown in ( ) can also be manufactured. Consult **IKO** for further information.

<sup>(3)</sup> This indicates the dimension for the half pitch mounting holes specification of track rail.

Remark: If not directed, E dimensions for both ends will be the same within the range of standard E dimensions. To change the dimensions, indicate the specified rail mounting hole positions "/E" of special specification. For more information, see page III-29.

# Preload Amount · Accuracy Class

|                  |                                                                                                                             |                                                 |
|------------------|-----------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|
| 5 Preload amount | Standard : No symbol<br>Light preload : T <sub>1</sub><br>Medium preload : T <sub>2</sub><br>Heavy preload : T <sub>3</sub> | For details of the preload amount, see Table 3. |
| 6 Accuracy class | High : H<br>Precision : P<br>Super precision : SP<br>Ultra precision : UP                                                   | For details of accuracy class, see Table 4.     |


Table 3 Preload amount

| Item           | Preload symbol | Preload amount N    | Operational conditions                                                                     |
|----------------|----------------|---------------------|--------------------------------------------------------------------------------------------|
| Standard       | (No symbol)    | 0 <sup>(1)</sup>    | · Light and precise motion                                                                 |
| Light preload  | T <sub>1</sub> | 0.02 C <sub>0</sub> | · Almost no vibrations<br>· Load is evenly balanced<br>· Light and precise motion          |
| Medium preload | T <sub>2</sub> | 0.05 C <sub>0</sub> | · Medium vibration<br>· Medium overhung load                                               |
| Heavy preload  | T <sub>3</sub> | 0.08 C <sub>0</sub> | · Operation with vibration and / or shock<br>· Overhanging load applied<br>· Heavy cutting |

Note <sup>(1)</sup> Indicates zero or minimal amount of preload.

Remark: C<sub>0</sub> indicates the basic static load rating.

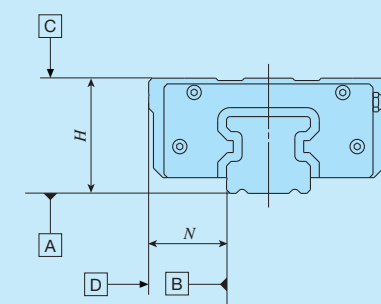Table 4 Tolerance and allowance

|  |                 |               |                      |                      |
|---------------------------------------------------------------------------------------|-----------------|---------------|----------------------|----------------------|
| unit: mm                                                                              |                 |               |                      |                      |
| Class (classification symbol)                                                         | High (H)        | Precision (P) | Super precision (SP) | Ultra precision (UP) |
| Item                                                                                  |                 |               |                      |                      |
| Dim. H tolerance                                                                      | ±0.040          | ±0.020        | ±0.010               | ±0.008               |
| Dim. N tolerance                                                                      | ±0.050          | ±0.025        | ±0.015               | ±0.010               |
| Dim. variation of H <sup>(1)</sup>                                                    | 0.015           | 0.007         | 0.005                | 0.003                |
| Dim. variation of N <sup>(1)</sup>                                                    | 0.020           | 0.010         | 0.007                | 0.003                |
| Dim. variation of H for multiple assembled sets                                       | 0.035           | 0.025         | —                    | —                    |
| Parallelism in operation of the slide unit C surface to A surface                     | Based on Fig. 1 |               |                      |                      |
| Parallelism in operation of the slide unit D surface to B surface                     | Based on Fig. 1 |               |                      |                      |

Note <sup>(1)</sup> It means the size variation between slide units mounted on the same track rail.

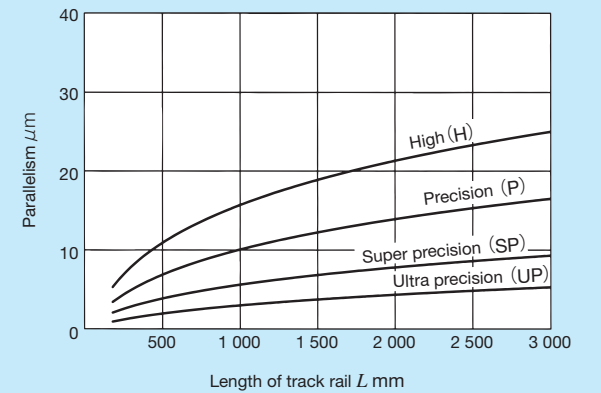


Fig. 1 Parallelism in operation

## 7 Special specification

/A, /D, /E, /F, /HP, /I,  
/JO, /LO, /LFO, /Q,  
/NO, /WO, /YO, /ZO

For applicable special specifications, see Table 5.  
For combination of multiple special specifications, see Table 6.  
For details of special specifications, see page III-28.

Table 5 Application of special specifications

| Special specification                    | Supplemental code | Size |    |    |    |    |
|------------------------------------------|-------------------|------|----|----|----|----|
|                                          |                   | 25   | 35 | 45 | 55 | 75 |
| Butt-jointing track rails                | /A                | ○    | ○  | ○  | ○  | ○  |
| Opposite reference surfaces arrangement  | /D                | ○    | ○  | ○  | ○  | ○  |
| Specified rail mounting hole positions   | /E                | ○    | ○  | ○  | ○  | ○  |
| Caps for rail mounting holes             | /F                | ○    | ○  | ○  | ○  | ○  |
| Half pitch mounting holes for track rail | /HP               | ○    | ×  | ×  | ×  | ×  |
| Inspection sheet                         | /I                | ○    | ○  | ○  | ○  | ○  |
| Female threads for bellows               | /J○               | ○    | ○  | ○  | ○  | ○  |
| Black chrome surface treatment           | /L○               | ○    | ○  | ○  | ○  | ○  |
| Fluorine black chrome surface treatment  | /LF○              | ○    | ○  | ○  | ○  | ○  |
| With C-Lube plate                        | /Q                | ○    | ○  | ○  | ○  | ○  |
| Double seals                             | /V○               | ○    | ×  | ×  | ×  | ×  |
| A group of multiple assembled sets       | /W○               | ○    | ○  | ○  | ○  | ○  |
| Specified grease                         | /Y○               | ○    | ○  | ○  | ○  | ○  |
| Scrapers                                 | /Z○               | ○    | ○  | ○  | ○  | ○  |


**Table 6** Combination of supplemental codes

[illegible]

Remarks 1. The combination of "-" shown in the table is not available.

2. When using multiple types for combination, please indicate by arranging the symbols in alphabetical order.

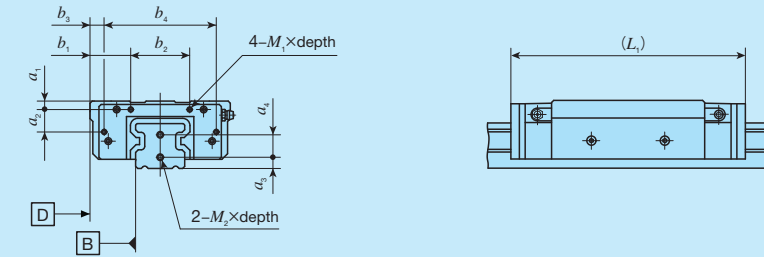**Table 7** Dimensions of female threads for bellows (Supplemental code: /J /JJ)




Unit: mm

| Identification number | Slide unit |       |       |       |       |       |                           |             | Track rail |       |                           |
|-----------------------|------------|-------|-------|-------|-------|-------|---------------------------|-------------|------------|-------|---------------------------|
|                       | $a_1$      | $a_2$ | $b_1$ | $b_2$ | $b_3$ | $b_4$ | $M_1 \times \text{depth}$ | $L_1^{(1)}$ | $a_3$      | $a_4$ | $M_2 \times \text{depth}$ |
| LRWX 25...B           | 5          | 12    | 15    | 33    | 7     | 49    | M3× 6                     | 116         | 7          | 12    | M4× 8                     |
| LRWX 35...B           | 6          | 16    | 29    | 42    | 10    | 80    | M3× 6                     | 166         | 8          | 16    | M4× 8                     |
| LRWXH 35              |            |       | 31    |       | 12    |       |                           |             |            |       |                           |
| LRWX 45...B           | 8          | 20    | 34    | 52    | 12    | 96    | M4× 8                     | 221         | 10         | 19    | M5×10                     |
| LRWXH 45              |            |       | 38    |       | 16    |       |                           |             |            |       |                           |
| LRWX 55...B           | 9          | 24    | 36    | 68    | 15    | 110   | M5×10                     | 282         | 12         | 23    | M6×12                     |
| LRWXH 55              |            |       | 43    |       | 22    |       |                           |             |            |       |                           |
| LRWX 75...B           | 10         | 35    | 35    | 110   | 15.5  | 149   | M5×10                     | 366         | 15         | 30    | M6×12                     |
| LRWXH 75              |            |       | 42    |       | 22.5  |       |                           |             |            |       |                           |

Note (1) Dimensions of the specification where female threads for bellows are fitted to both ends of the slide unit are shown.

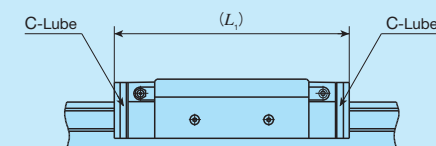**Table 8 Dimension of slide unit with C-Lube plate  
(Supplemental code /Q)**




unit: mm

| Size | $L_i$ |
|------|-------|
| 25   | 120   |
| 35   | 166   |
| 45   | 218   |
| 55   | 275   |
| 75   | 364   |

Remark: The dimensions of the slide unit with C-Lube at both ends are indicated.

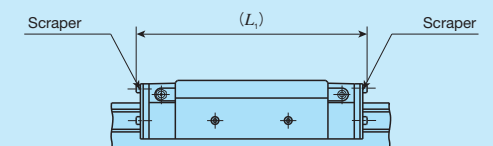
**Table 9 Dimensions of slide unit with scrapers**  
(Supplemental code: /Z /ZZ)



nit: mm

| Size | $L_1$ |
|------|-------|
| 25   | 120   |
| 35   | 164   |
| 45   | 217   |
| 55   | 275   |
| 75   | 361   |

Remark: The dimensions of the slide unit with scraper at both ends are indicated.



**Fig. 2 Dimensions of slide unit with double seals (Size 25)**  
(Supplemental code: /V/VV)

Remark: The dimensions of the slide unit with double seals at both ends are indicated.

Lubrication

Lithium-soap base grease with extreme-pressure additive (Alvania EP Grease 2 [SHOWA SHELL SEKIYU K. K.]) is pre-packed in LRWX series.

The LRWX series has grease nipple as indicated in Table 10.

Table 10 Parts for lubrication

| Size | Grease nipple type <sup>(1)</sup> | Applicable supply nozzle type      | Bolt size of female threads for piping |
|------|-----------------------------------|------------------------------------|----------------------------------------|
| 25   | JIS 1 type                        | Grease gun available on the market | M6                                     |
| 35   |                                   |                                    |                                        |
| 45   | JIS 2 type                        |                                    | PT1/8                                  |
| 55   |                                   |                                    |                                        |
| 75   |                                   |                                    |                                        |

Note <sup>(1)</sup> For specifications of grease nipple, refer to Table 15.2 on page III-22.

Dust Protection

The slide unit of LRWX series are equipped with end seals and under seal as standard for dust protection. However, if large amount of contaminant or dust are floating, or if large particles of foreign substances such as chips or sand may adhere to the track rail, it is recommended to cover the whole unit with bellows or telescope type shield, etc.

LRWX series are provided with specific bellows. The bellows are easy to mount and provide excellent dust protection. If you want to get these units, please refer to III-25 for ordering.

Precaution for Use

Mounting surface, reference mounting surface and typical mounting structure

When mounting the LRWX series, properly align the reference mounting surfaces B and D of the track rail and slide unit with the reference mounting surface of the table and bed and fix them. (See Fig. 3)

Reference mounting surfaces B and D and mounting surfaces A and C are ground precisely. Machining the mounting surface of the table and bed, such as machine or device, to high accuracy and mounting them properly will ensure stable linear motion with high accuracy.

Reference mounting surface of the slide unit is the opposite side of the **IKO** mark. The track rail reference mounting surface is identified by locating the **IKO** mark on the top surface of the track rail. It is the side surface above the mark (in the direction of the arrow). (See Fig. 4)

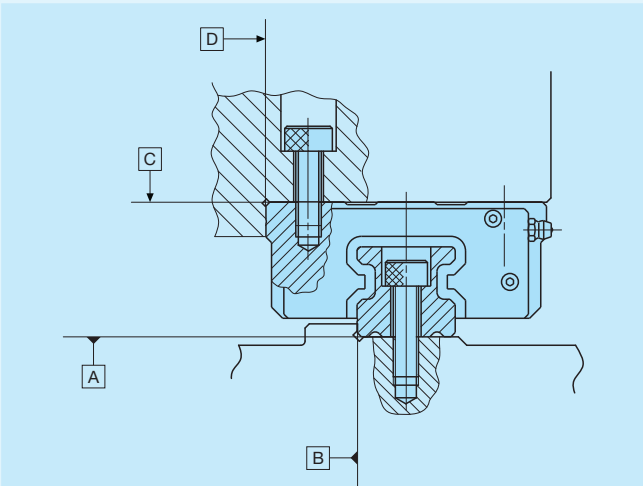


Fig. 3 Reference mounting surface and typical mounting structure

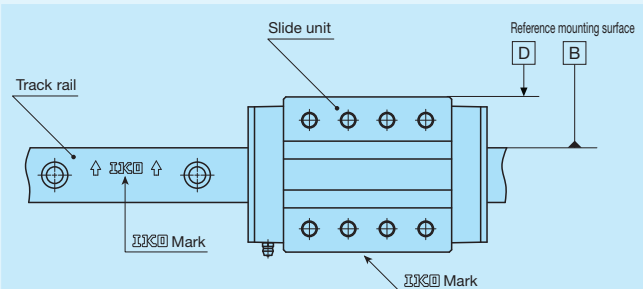


Fig. 4 Reference mounting surface

Fixing the slide unit

LRWX25...Slide unit of B and LRWXH are also provided with mounting screws in the middle of width direction (see Fig. 5) and have the arrangement to receive the applied load in a good balance. When ordering machines or equipment, consider the arrangement so that the mounting holes in the middle of slide unit can also be used to fix the units, to use the highest performance out of the product.

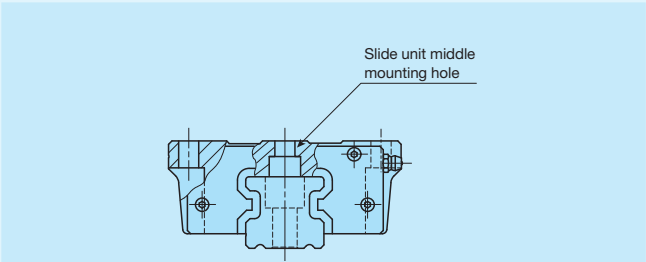


Table 5 Slide unit middle mounting hole

Shoulder height and corner radius of the reference mounting surface

For the opposite corner of the mating reference mounting, it is recommended to have relieved fillet as indicated in Fig. 6, but you may also use it by setting corner radius *R* shown in Table 11. Recommended value for the shoulder height on the mating side is indicated in Table 11.

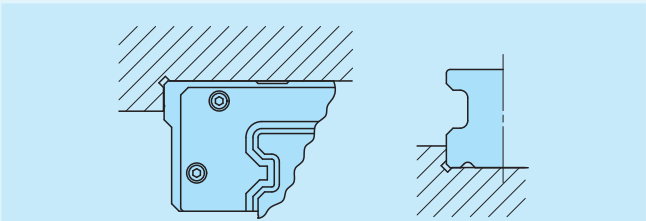


Fig. 6 Corner of the mating reference mounting

Table 11 Shoulder height and corner radius of the reference mounting surface

| Size | Shoulder height of slide unit mounting part <i>h</i> <sub>1</sub> | Shoulder height of track rail mounting part <i>h</i> <sub>2</sub> | Corner radius      |
|------|-------------------------------------------------------------------|-------------------------------------------------------------------|--------------------|
|      |                                                                   |                                                                   | <i>R</i> (Maximum) |
| 25   | 6                                                                 | 4                                                                 | 1                  |
| 35   | 8                                                                 | 5.5                                                               | 1                  |
| 45   | 8                                                                 | 6                                                                 | 1                  |
| 55   | 10                                                                | 8                                                                 | 1.5                |
| 75   | 10                                                                | 8                                                                 | 1.5                |

Tightening torque for mounting bolts

Typical tightening torque for mounting of the LRWX series to the steel mating member material is indicated in Table 12. When vibration and shock of the machine or device are large, fluctuating load is large, or moment load is applied, fix it by using the torque 1.2 to 1.5 times larger than the value indicated in the table as necessary. If the mating member material is cast iron or aluminum, reduce the tightening torque depending on the strength characteristic of the mating member material.

Table 12 Tightening torque for fixing screw



| Bolt size | Tightening torque N · m      |
|-----------|------------------------------|
|           | High carbon steel-made screw |
| M 6×1     | 13.3                         |
| M 8×1.25  | 32.0                         |
| M10×1.5   | 62.7                         |
| M12×1.75  | 108                          |
| M16×2     | 263                          |
| M24×3     | 882                          |

Remark: The tightening torque is calculated based on strength division 12.9.




Block type mounting from top

|       |          |    |    |    |    |
|-------|----------|----|----|----|----|
| Shape | LRWX···B |    |    |    |    |
| Size  | 25       | 35 | 45 | 55 | 75 |

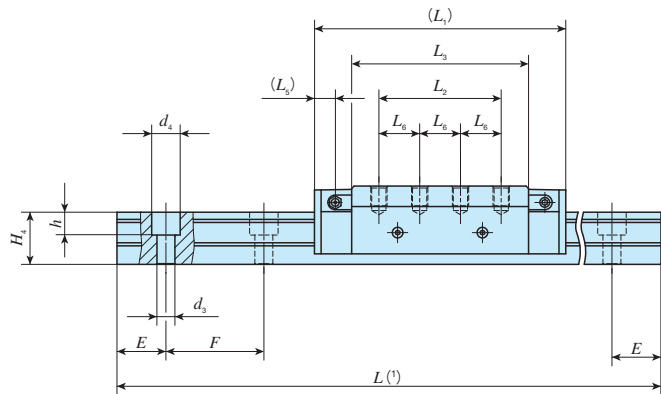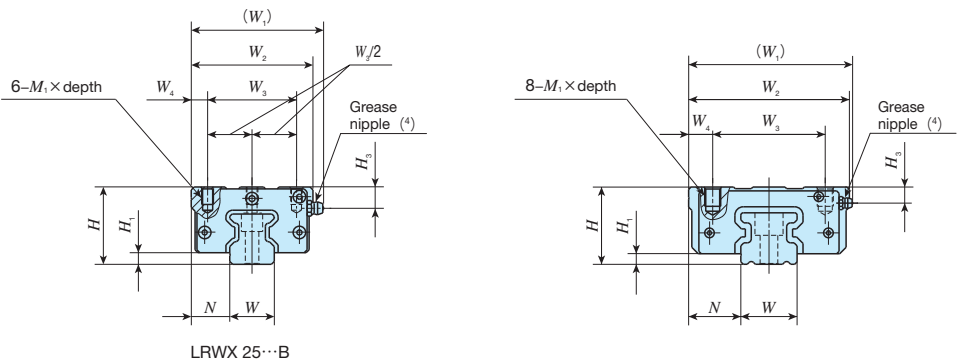

| Identification number | Mass (Ref.)   |                 | Dimensions of assembly mm |                |      | Dimensions of slide unit mm |                |                |                |                |                |                |                |                |                        |  |                |    | Dimensions of track rail mm |                |                |    |    |     |              |         | Appended mounting bolt for track rail <sup>(2)</sup> | Basic dynamic load rating <sup>(3)</sup> | Basic static load rating <sup>(3)</sup> | Static moment rating <sup>(3)</sup> |                         |                         |
|-----------------------|---------------|-----------------|---------------------------|----------------|------|-----------------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|------------------------|--|----------------|----|-----------------------------|----------------|----------------|----|----|-----|--------------|---------|------------------------------------------------------|------------------------------------------|-----------------------------------------|-------------------------------------|-------------------------|-------------------------|
|                       | Slide unit kg | Track rail kg/m | H                         | H <sub>1</sub> | N    | W <sub>1</sub>              | W <sub>2</sub> | W <sub>3</sub> | W <sub>4</sub> | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | L <sub>5</sub> | L <sub>6</sub> | M <sub>1</sub> × depth |  | H <sub>3</sub> | W  | H <sub>4</sub>              | d <sub>3</sub> | d <sub>4</sub> | h  | E  | F   | Bolt size× ℓ | C<br>N  |                                                      |                                          |                                         | C <sub>0</sub><br>N                 | T <sub>0</sub><br>N · m | T <sub>x</sub><br>N · m |
| LRWX 25···B           | 0.93          | 3.70            | 40                        | 6              | 20   | 69                          | 63             | 46             | 8.5            | 109            | 45             | 74.4           | 11             | —              | M 6 × 9                |  | 11             | 23 | 26                          | 7              | 11             | 9  | 30 | 60  | M 6×28       | 32 700  | 70 300                                               | 1 110                                    | 885<br>5 170                            | 885<br>5 170                        |                         |                         |
| LRWX 35···B           | 2.65          | 6.66            | 48                        | 6.5            | 32.5 | 103                         | 100            | 70             | 15             | 154            | 75             | 108.4          | 12.8           | 25             | M10×12                 |  | 10             | 35 | 32                          | 11             | 17.5           | 14 | 30 | 60  | M10×35       | 49 900  | 91 100                                               | 2 150                                    | 1 660<br>9 450                          | 1 660<br>9 450                      |                         |                         |
| LRWX 45···B           | 5.32          | 10.3            | 60                        | 8              | 37.5 | 125                         | 120            | 82             | 19             | 205            | 105            | 144            | 18.5           | 35             | M12×16                 |  | 14.5           | 45 | 39                          | 14             | 20             | 16 | 40 | 80  | M12×40       | 93 300  | 167 000                                              | 5 000                                    | 4 030<br>23 000                         | 4 030<br>23 000                     |                         |                         |
| LRWX 55···B           | 9.09          | 15.3            | 70                        | 9              | 42.5 | 142                         | 140            | 95             | 22.5           | 262            | 135            | 189            | 24.5           | 45             | M12×18                 |  | 16             | 55 | 47                          | 18             | 26             | 21 | 50 | 100 | M16×50       | 186 000 | 330 000                                              | 12 200                                   | 10 700<br>57 900                        | 10 700<br>57 900                    |                         |                         |
| LRWX 75···B           | 19.0          | 25.1            | 90                        | 10             | 52.5 | 190                         | 180            | 123            | 28.5           | 346            | 180            | 240            | 45             | 60             | M16×25                 |  | 20             | 75 | 57                          | 26             | 39             | 30 | 60 | 120 | M24×60       | 298 000 | 518 000                                              | 25 200                                   | 20 900<br>121 000                       | 20 900<br>121 000                   |                         |                         |

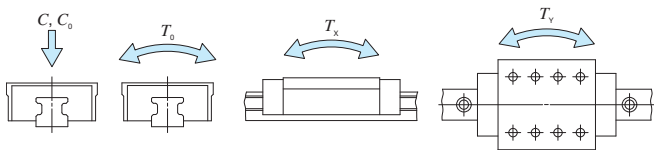Notes <sup>(1)</sup> Track rail lengths  $L$  are shown in Table 2 on page II-199.  
<sup>(2)</sup> The appended track rail mounting bolts are hexagon socket head bolts equivalent to JIS B 1176.  
<sup>(3)</sup> Basic load rating ( $C$ ), basic static load rating ( $C_0$ ), static moment rating ( $T_0$ ,  $T_x$ , and  $T_y$ ) are values for the direction indicated in the following figure.  
The upper values of  $T_x$  and  $T_y$  are for one slide unit and the lower values are for two slide units in close contact.  
<sup>(4)</sup> The shapes of grease nipple vary by size. For details of the specifications, see Table 10 on page II-203.




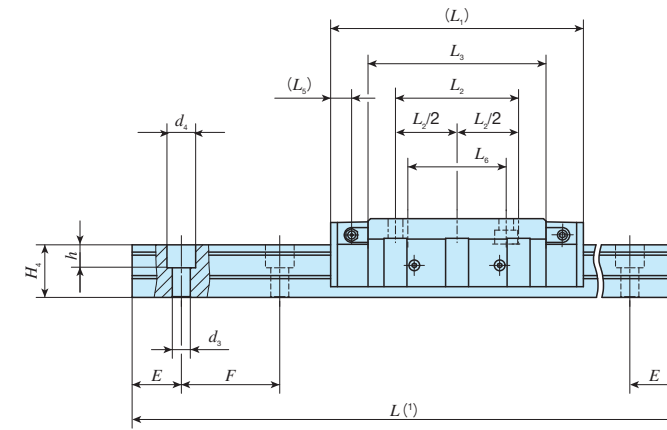
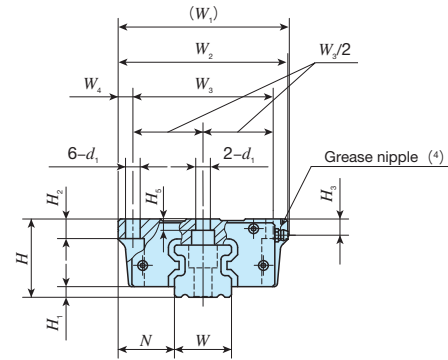
Example of identification number of assembled set

| Model code | Dimensions | Part code | Model code | Preload symbol | Classification symbol | Special specification |
|------------|------------|-----------|------------|----------------|-----------------------|-----------------------|
| LRWX       | 35         | C2        | R840       | B              | T1                    | P /W2                 |
| 1          | 2          | 3         | 4          | 1              | 5                     | 6                     |

|                                       |                                                                                 |                                              |
|---------------------------------------|---------------------------------------------------------------------------------|----------------------------------------------|
| ① Model                               | ⑤ Preload amount                                                                | ⑦ Special specification                      |
| LRWX···B Block type mounting from top | No symbol Standard<br>T1 Light preload<br>T2 Medium preload<br>T3 Heavy preload | A, D, E, F, HP, I, J<br>L, LF, Q, V, W, Y, Z |
| ② Size                                | ⑥ Accuracy class                                                                |                                              |
| 25, 35, 45, 55, 75                    | H High<br>P Precision<br>SP Super precision<br>UP Ultra precision               |                                              |
| ③ Number of slide unit (2)            |                                                                                 |                                              |
| ④ Length of track rail (840 mm)       |                                                                                 |                                              |

### Flange type mounting from bottom

|       |                                                                                   |    |    |    |
|-------|-----------------------------------------------------------------------------------|----|----|----|
| Shape | LRWXH                                                                             |    |    |    |
|       |  |    |    |    |
| Size  | 35                                                                                | 45 | 55 | 75 |



| Identification number      | Mass (Ref.)   |                 | Dimensions of assembly mm |                |      | Dimensions of slide unit mm |                |                |                |                |                |                |                |                |                |                |  |                |                | Dimensions of track rail mm |                |                |                |    |    |     |              | Appended mounting bolt for track rail <sup>(2)</sup> | Basic dynamic load rating <sup>(3)</sup> | Basic static load rating <sup>(3)</sup> | Static moment rating <sup>(3)</sup> |                     |                         |                         |                         |
|----------------------------|---------------|-----------------|---------------------------|----------------|------|-----------------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|--|----------------|----------------|-----------------------------|----------------|----------------|----------------|----|----|-----|--------------|------------------------------------------------------|------------------------------------------|-----------------------------------------|-------------------------------------|---------------------|-------------------------|-------------------------|-------------------------|
|                            | Slide unit kg | Track rail kg/m | H                         | H <sub>1</sub> | N    | W <sub>1</sub>              | W <sub>2</sub> | W <sub>3</sub> | W <sub>4</sub> | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | L <sub>5</sub> | L <sub>6</sub> | d <sub>1</sub> | H <sub>2</sub> |  | H <sub>3</sub> | H <sub>5</sub> | W                           | H <sub>4</sub> | d <sub>3</sub> | d <sub>4</sub> | h  | E  | F   | Bolt size× ℓ |                                                      |                                          |                                         | C<br>N                              | C <sub>0</sub><br>N | T <sub>0</sub><br>N · m | T <sub>x</sub><br>N · m | T <sub>y</sub><br>N · m |
| LRWX series<br>(No C-Lube) |               |                 |                           |                |      |                             |                |                |                |                |                |                |                |                |                |                |  |                |                |                             |                |                |                |    |    |     |              |                                                      |                                          |                                         |                                     |                     |                         |                         |                         |
| LRWXH 35                   | 2.51          | 6.66            | 48                        | 6.5            | 34.5 | 105                         | 104            | 86             | 9              | 154            | 75             | 108.4          | 12.8           | 60             | 9              | 12             |  | 10             | 7              | 35                          | 32             | 11             | 17.5           | 14 | 30 | 60  | M10×35       | 49 900                                               | 91 100                                   | 2 150                                   | 1 660<br>9 450                      | 1 660<br>9 450      |                         |                         |                         |
| LRWXH 45                   | 5.18          | 10.3            | 60                        | 8              | 41.5 | 129                         | 128            | 108            | 10             | 205            | 105            | 144            | 18.5           | 80             | 11             | 15             |  | 14.5           | 10             | 45                          | 39             | 14             | 20             | 16 | 40 | 80  | M12×40       | 93 300                                               | 167 000                                  | 5 000                                   | 4 030<br>23 000                     | 4 030<br>23 000     |                         |                         |                         |
| LRWXH 55                   | 9.08          | 15.3            | 70                        | 9              | 49.5 | —                           | 154            | 130            | 12             | 262            | 135            | 189            | 24.5           | 106            | 14             | 18             |  | 16             | 10             | 55                          | 47             | 18             | 26             | 21 | 50 | 100 | M16×50       | 186 000                                              | 330 000                                  | 12 200                                  | 10 700<br>57 900                    | 10 700<br>57 900    |                         |                         |                         |
| LRWXH 75                   | 19.7          | 25.1            | 90                        | 10             | 59.5 | 197                         | 194            | 164            | 15             | 346            | 180            | 240            | 45             | 134            | 18             | 24             |  | 20             | 16             | 75                          | 57             | 26             | 39             | 30 | 60 | 120 | M24×60       | 298 000                                              | 518 000                                  | 25 200                                  | 20 900<br>121 000                   | 20 900<br>121 000   |                         |                         |                         |

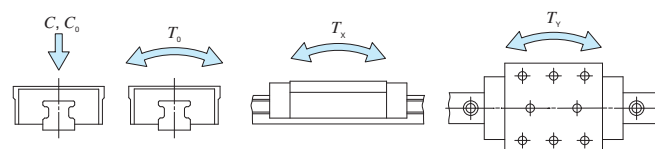
Notes (1) Track rail lengths  $L$  are shown in Table 2 on page II -199.

(<sup>2</sup>) The appended track rail mounting bolts are hexagon socket head bolts equivalent to JIS B 1176.

(3) Basic load rating ( $C$ ), basic static load rating ( $C_0$ ), static moment rating ( $T_0$ ,  $T_x$ , and  $T_y$ ) are values for the direction indicated in the following figure.

The upper values of  $T_x$  and  $T_y$  are for one slide unit and the lower values are for two slide units in close contact.

(4) The shapes of grease nipple vary by size. For details of the specifications, see Table 10 on page II-203.



### Example of identification number of assembled set

| Model code   | Dimensions | Part code |             | Preload symbol       | Classification symbol | Special specification |
|--------------|------------|-----------|-------------|----------------------|-----------------------|-----------------------|
| <u>LRWXH</u> | <u>35</u>  | <u>C2</u> | <u>R840</u> | <u>T<sub>1</sub></u> | <u>P</u>              | <u>/W2</u>            |
| ①            | ②          | ③         | ④           | ⑤                    | ⑥                     | ⑦                     |

|         |                                  |
|---------|----------------------------------|
| ① Model |                                  |
| LRWXH   | Flange type mounting from bottom |

|        |                |
|--------|----------------|
| ② Size | 35, 45, 55, 75 |
|--------|----------------|

③ Number of slide unit (2)

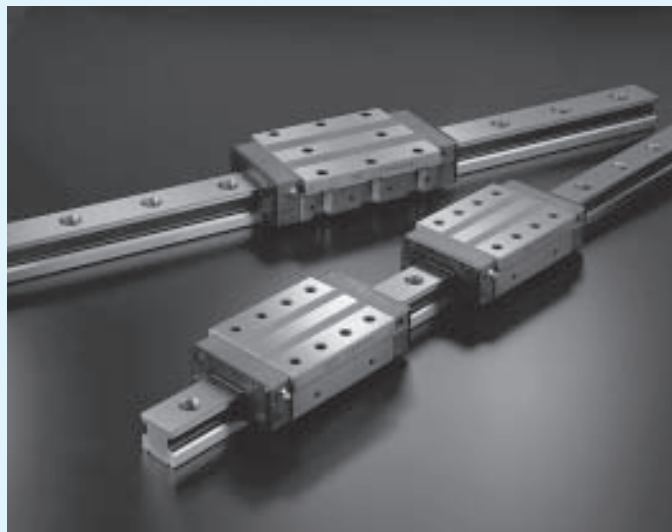
④ Length of track rail (840 mm)

| ⑤ Preload amount |                |
|------------------|----------------|
| No symbol        | Standard       |
| T <sub>1</sub>   | Light preload  |
| T <sub>2</sub>   | Medium preload |
| T <sub>3</sub>   | Heavy preload  |

| ⑥ Accuracy class |                 |
|------------------|-----------------|
| H                | High            |
| P                | Precision       |
| SP               | Super precision |
| UP               | Ultra precision |

⑦ Special specification  
A, D, E, F, HP, I, J  
L, LE, Q, V, W, Y, Z


## Linear Way Module





Linear Way Module

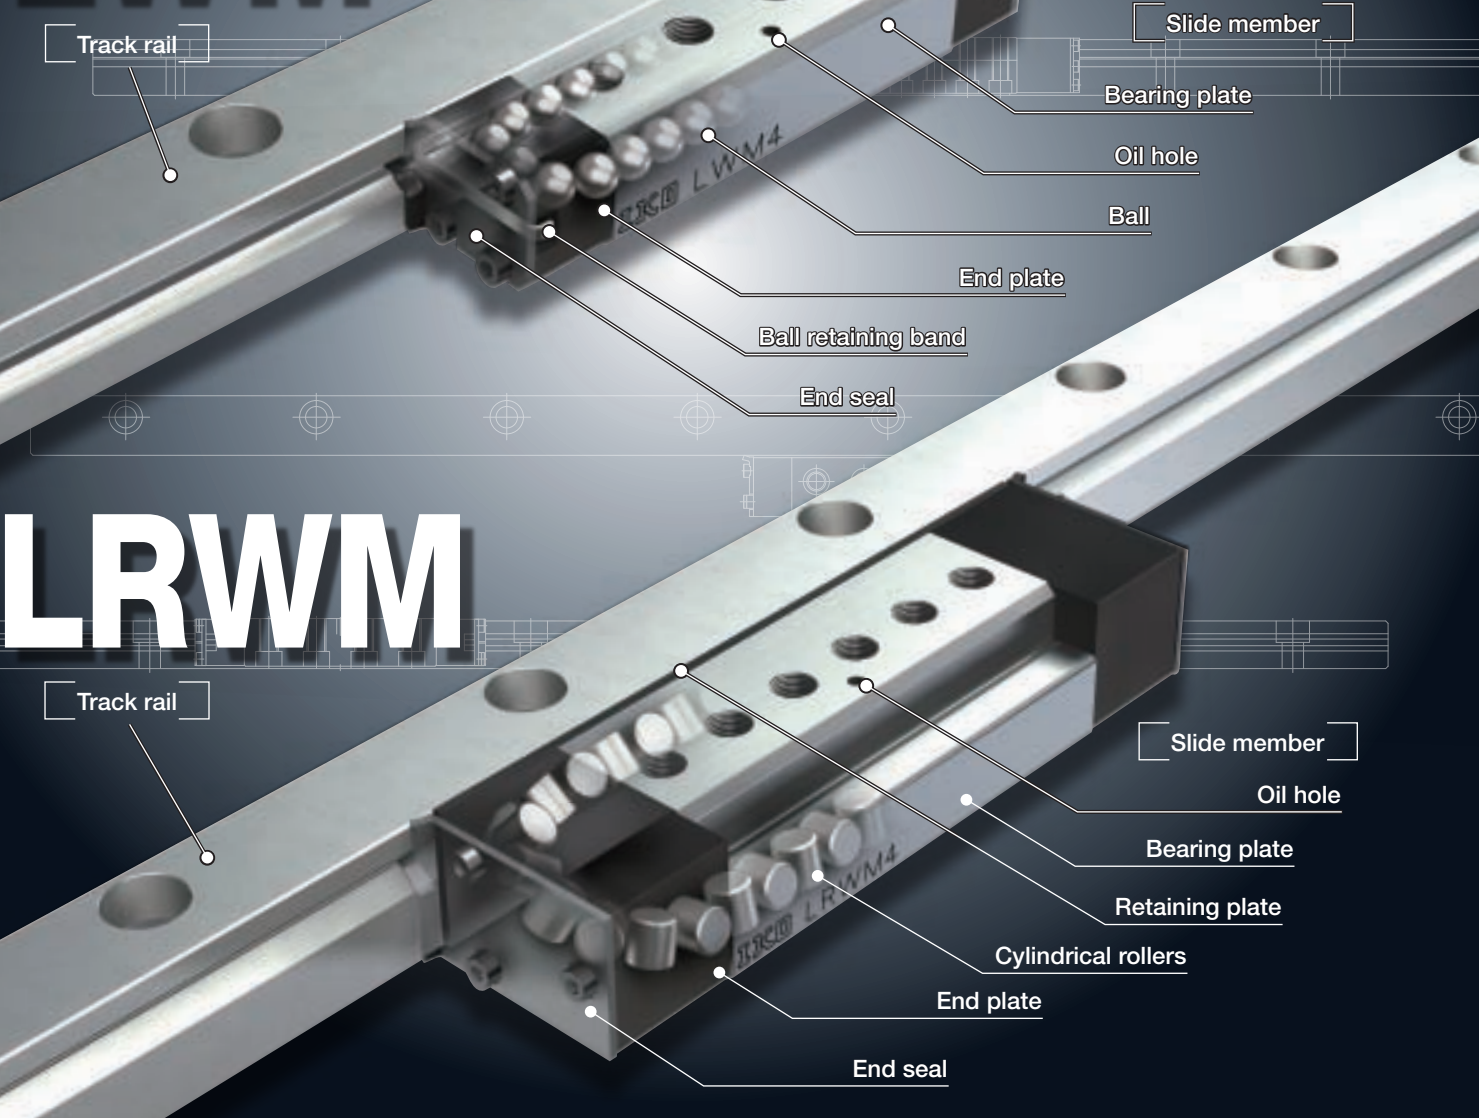LWLM  
LWM



Points

● Compact module type

Compact linear motion rolling guides consisting of a set of track rail and slide member which forms the smallest unit of linear motion mechanism.

● Models for various usage

Three models are available; LWLM and LWM using the ball for rolling elements, and LRWM using the roller.

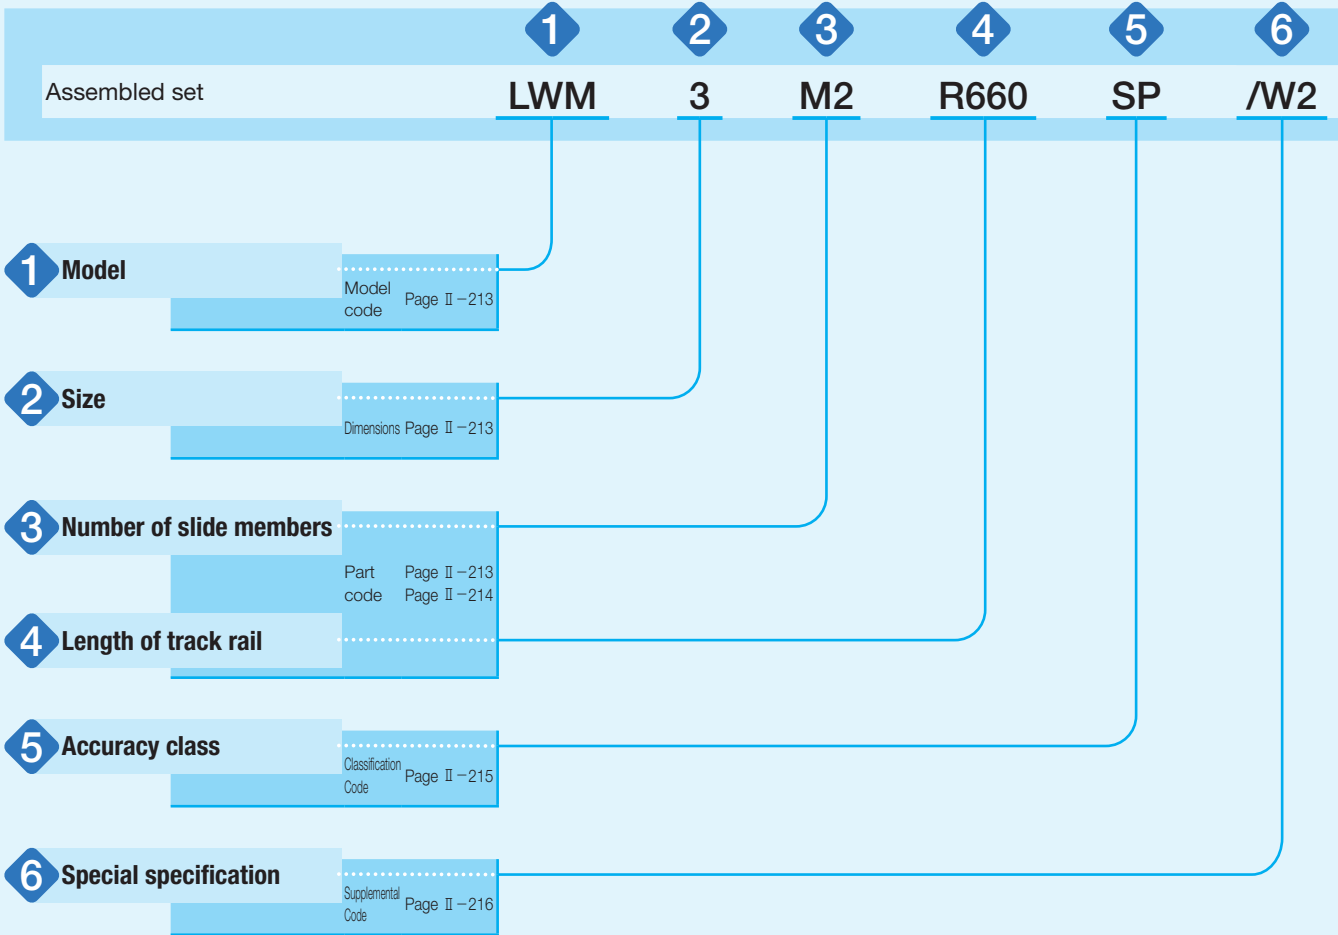
● Stainless steel selections for excellent corrosion resistance

LWLM is made of stainless steel of excellent corrosion resistance. They are suitable for applications where rust prevention oil is not preferred, such as in cleanroom environment.

Identification Number and Specification

Example of an identification number

The specification of Linear Way Module series is indicated by the identification number. Indicate the identification number, consisting of a model code, dimensions, a part code, a classification symbol, and a supplemental code for each specification to apply.



Identification Number and Specification –Model · Size · Number of Slide Member–

|                                                              |                         |                              |                                                                                                   |                                                                  |
|--------------------------------------------------------------|-------------------------|------------------------------|---------------------------------------------------------------------------------------------------|------------------------------------------------------------------|
| 1                                                            | Model                   | Linear Way Module            | Linear Way LM <sup>(1)</sup><br>Linear Way M <sup>(1)</sup><br>Linear Roller Way M <sup>(1)</sup> | : LWLM<br>: LWM<br>: LRWM                                        |
| For applicable models and sizes, see Table 1.1, 1.2 and 1.3. |                         |                              |                                                                                                   |                                                                  |
| Note <sup>(1)</sup> This model has no built-in C-Lube.       |                         |                              |                                                                                                   |                                                                  |
| 2                                                            | Size                    | 7, 9, 11<br>1, 2, 3, 4, 5, 6 | For applicable models and sizes, see Table 1.1, 1.2 and 1.3.                                      |                                                                  |
| 3                                                            | Number of slide members |                              | : M○                                                                                              | Indicates the number of slide members assembled on a track rail. |

Table 1.1 Model and sizes of LWLM series

| Shape                                                                             | Model | Size |   |    |
|-----------------------------------------------------------------------------------|-------|------|---|----|
|                                                                                   |       | 7    | 9 | 11 |
|  | LWLM  | ○    | ○ | ○  |

Table 1.2 Model and sizes of LWM series



| Shape                                                                               | Model | Size |   |   |   |   |   |
|-------------------------------------------------------------------------------------|-------|------|---|---|---|---|---|
|                                                                                     |       | 1    | 2 | 3 | 4 | 5 | 6 |
|  | LWM   | ○    | ○ | ○ | ○ | ○ | ○ |


Table 1.3 Model and sizes of LRWM series

| Shape                                                                               | Model | Size |   |   |   |   |
|-------------------------------------------------------------------------------------|-------|------|---|---|---|---|
|                                                                                     |       | 2    | 3 | 4 | 5 | 6 |
|  | LRWM  | ○    | ○ | ○ | ○ | ○ |

–Length of Track Rail–

|   |                      |  |      |                                                                                            |
|---|----------------------|--|------|--------------------------------------------------------------------------------------------|
| 4 | Length of track rail |  | : R○ | Indicate the length of track rail in mm.<br>For standard and maximum lengths, see Table 2. |
|---|----------------------|--|------|--------------------------------------------------------------------------------------------|

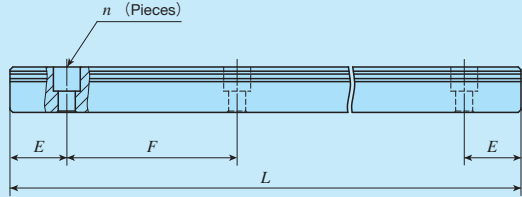Table 2 Standard and maximum lengths of track rail

|  |                                            |                                              |                                              |                                      |                                      |                                        |
|-------------------------------------------------------------------------------------|--------------------------------------------|----------------------------------------------|----------------------------------------------|--------------------------------------|--------------------------------------|----------------------------------------|
| unit: mm                                                                            |                                            |                                              |                                              |                                      |                                      |                                        |
| Identification number                                                               | LWLM7                                      | LWLM9                                        | LWLM11                                       |                                      |                                      |                                        |
| Item                                                                                |                                            |                                              |                                              |                                      |                                      |                                        |
| Standard length <i>L</i> ( <i>n</i> )                                               | 60 ( 3)<br>80 ( 4)<br>120 ( 6)<br>160 ( 8) | 100 ( 4)<br>150 ( 6)<br>200 ( 8)<br>275 (11) | 160 ( 4)<br>240 ( 6)<br>320 ( 8)<br>440 (11) |                                      |                                      |                                        |
| Pitch of mounting holes <i>F</i>                                                    | 20                                         | 25                                           | 40                                           |                                      |                                      |                                        |
| <i>E</i>                                                                            | 10                                         | 12.5                                         | 20                                           |                                      |                                      |                                        |
| Standard <i>E</i> dimensions                                                        | or higher<br>4.5<br>below 14.5             | 5<br>17.5                                    | 5.5<br>25.5                                  |                                      |                                      |                                        |
| Maximum length <sup>(1)</sup>                                                       | 240<br>(500)                               | 350<br>(900)                                 | 520<br>(1 000)                               |                                      |                                      |                                        |
| Identification number                                                               | LWM1                                       | LWM2                                         | LWM3                                         | LWM4                                 | LWM5                                 | LWM6                                   |
| Item                                                                                |                                            |                                              |                                              |                                      |                                      |                                        |
| Standard length <i>L</i> ( <i>n</i> )                                               | 240 ( 6)<br>360 ( 9)<br>480 (12)           | 240 ( 4)<br>360 ( 6)<br>480 ( 8)             | 480 ( 8)<br>660 (11)<br>840 (14)             | 800 (10)<br>1 040 (13)<br>1 200 (15) | 800 ( 8)<br>1 200 (12)<br>1 500 (15) | 1 200 (10)<br>1 920 (16)<br>2 520 (21) |
| Pitch of mounting holes <i>F</i>                                                    | 40                                         | 60                                           | 60                                           | 80                                   | 100                                  | 120                                    |
| <i>E</i>                                                                            | 20                                         | 30                                           | 30                                           | 40                                   | 50                                   | 60                                     |
| Standard <i>E</i> dimensions                                                        | or higher<br>7<br>below 27                 | 8<br>38                                      | 9<br>39                                      | 10<br>50                             | 12<br>62                             | 13<br>73                               |
| Maximum length                                                                      | 1 240                                      | 1 260                                        | 1 260                                        | 1 520                                | 1 500                                | 2 520                                  |
| Identification number                                                               | LRWM2                                      | LRWM3                                        | LRWM4                                        | LRWM5                                | LRWM6                                |                                        |
| Item                                                                                |                                            |                                              |                                              |                                      |                                      |                                        |
| Standard length <i>L</i> ( <i>n</i> )                                               | 480 ( 8)<br>660 (11)<br>840 (14)           | 480 ( 8)<br>660 (11)<br>840 (14)             | 800 (10)<br>1 040 (13)<br>1 200 (15)         | 800 ( 8)<br>1 200 (12)<br>1 500 (15) | 1 200 (10)                           |                                        |
| Pitch of mounting holes <i>F</i>                                                    | 60                                         | 60                                           | 80                                           | 100                                  | 120                                  |                                        |
| <i>E</i>                                                                            | 30                                         | 30                                           | 40                                           | 50                                   | 60                                   |                                        |
| Standard <i>E</i> dimensions                                                        | or higher<br>8<br>below 38                 | 9<br>39                                      | 10<br>50                                     | 12<br>62                             | 13<br>73                             |                                        |
| Maximum length                                                                      | 1 800                                      | 1 860                                        | 1 920                                        | 1 600                                | 1 200                                |                                        |

Note <sup>(1)</sup> Track rails with the maximum lengths shown in ( ) can also be manufactured. Consult **IKO** for further information.  
Remark: If not directed, E dimensions for both ends will be the same within the range of standard E dimensions. To change the dimensions, indicate the specified rail mounting hole positions "/E" of special specification. For more information, see page III-29.

|   |                |                 |      |                                             |
|---|----------------|-----------------|------|---------------------------------------------|
| 5 | Accuracy class | High            | : H  | For details of accuracy class, see Table 3. |
|   |                | Precision       | : P  |                                             |
|   |                | Super precision | : SP |                                             |

Table 3 Tolerance and allowance

The diagram shows a cross-section of a track rail. The total height is labeled  $H$  and the total width is labeled  $W$ . There are two circular features, A and B, each with a center mark. Feature A is located on the top surface, and feature B is located on the bottom surface. Both features have a parallelism tolerance symbol ( $\parallel$ ) and a tolerance value ( $\Delta H/L$  for A and  $\Delta W/L$  for B). The tolerance values are shown in boxes next to the features.

unit: mm

| Class (classification symbol)     | High                           | Precision   | Super precision |
|-----------------------------------|--------------------------------|-------------|-----------------|
| Item                              | (H)                            | (P)         | (SP)            |
| Dim. $H$ tolerance                | $\pm 0.040$                    | $\pm 0.020$ | $\pm 0.010$     |
| Dim. $W$ tolerance                | $\pm 0.050$                    | $\pm 0.025$ | $\pm 0.015$     |
| Dim. variation of $H^{(1)}$       | 0.015                          | 0.007       | 0.005           |
| Dim. variation of $W^{(1)}$       | 0.020                          | 0.010       | 0.007           |
| Track rail parallelism $\Delta H$ | Based on Fig. 1.1 and Fig. 1.2 |             |                 |
| Track rail parallelism $\Delta W$ | Based on Fig. 1.1 and Fig. 1.2 |             |                 |

Note <sup>(1)</sup> It means the size variation between slide members mounted on the same track rail.

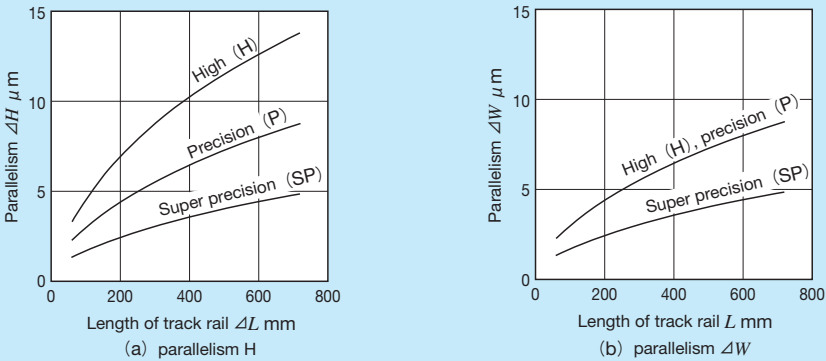


Fig.1.1 Track rail parallelism for LWLM

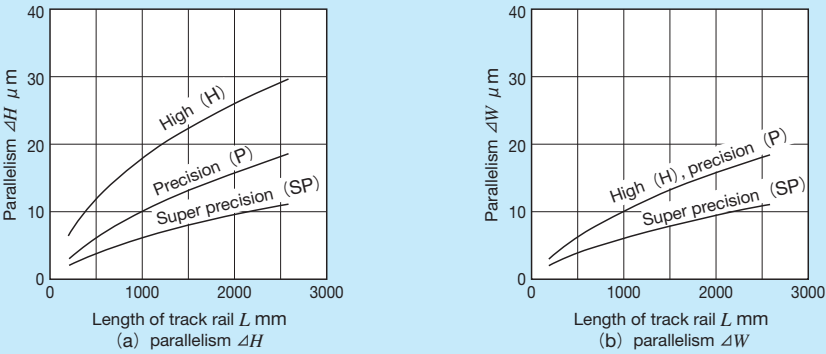


Fig.1.2 Track rail parallelism for LWM and LRWM

|   |                       |                                          |                                                                  |
|---|-----------------------|------------------------------------------|------------------------------------------------------------------|
| 6 | Special specification | /A, /E, /F, /I, /LR, /LFR, /MN, /W○, /Y○ | For applicable special specifications, see Table 4.              |
|   |                       |                                          | For combination of multiple special specifications, see Table 5. |
|   |                       |                                          | For details of special specifications, see page III -28.         |

Table 4 Application of special specifications


| Special specification                   | Supplemental code | Model and size |   |    |                  |                  |                  |                  |                  |                  |
|-----------------------------------------|-------------------|----------------|---|----|------------------|------------------|------------------|------------------|------------------|------------------|
|                                         |                   | LWLM           |   |    | LWM, LRWM        |                  |                  |                  |                  |                  |
|                                         |                   | 7              | 9 | 11 | 1                | 2                | 3                | 4                | 5                | 6                |
| Butt-jointing track rails               | /A                | ×              | × | ×  | ○                | ○                | ○                | ○                | ○                | ○                |
| Specified rail mounting hole positions  | /E                | ○              | ○ | ○  | ○                | ○                | ○                | ○                | ○                | ○                |
| Caps for rail mounting holes            | /F                | ×              | × | ×  | ○                | ○                | ○                | ○                | ○                | ○                |
| Inspection sheet                        | /I                | ○              | ○ | ○  | ○                | ○                | ○                | ○                | ○                | ○                |
| Black chrome surface treatment          | /LR               | ×              | × | ×  | ○                | ○                | ○                | ○                | ○                | ○                |
| Fluorine black chrome surface treatment | /LFR              | ×              | × | ×  | ○                | ○                | ○                | ○                | ○                | ○                |
| Without track rail mounting bolt        | /MN               | ○              | ○ | ○  | ○ <sup>(1)</sup> | ○ <sup>(1)</sup> | ○ <sup>(1)</sup> | ○ <sup>(1)</sup> | ○ <sup>(1)</sup> | ○ <sup>(1)</sup> |
| A group of multiple assembled sets      | /W○               | ○              | ○ | ○  | ○                | ○                | ○                | ○                | ○                | ○                |
| Specified grease                        | /Y○               | ○              | ○ | ○  | ○                | ○                | ○                | ○                | ○                | ○                |

Note <sup>(1)</sup> None of mounting bolts for slide member and track rail are appended.

Table 5 Combination of supplemental codes

|     |   |   |   |   |    |     |    |   |   |  |
|-----|---|---|---|---|----|-----|----|---|---|--|
| E   | — |   |   |   |    |     |    |   |   |  |
| F   | ○ | ○ |   |   |    |     |    |   |   |  |
| I   | ○ | ○ | ○ |   |    |     |    |   |   |  |
| LR  | ○ | ○ | ○ | ○ |    |     |    |   |   |  |
| LFR | ○ | ○ | ○ | ○ | —  |     |    |   |   |  |
| MN  | ○ | ○ | ○ | ○ | ○  | ○   |    |   |   |  |
| W   | ○ | — | ○ | ○ | ○  | ○   | ○  |   |   |  |
| Y   | ○ | ○ | ○ | ○ | ○  | ○   | ○  | ○ | ○ |  |
|     | A | E | F | I | LR | LFR | MN | W |   |  |

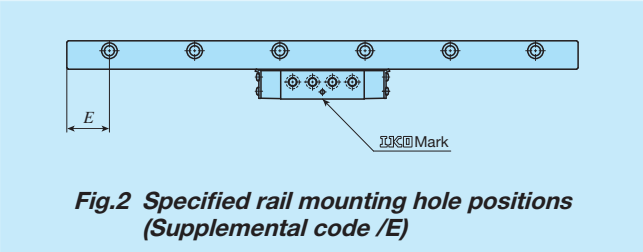Remarks 1. The combination of "—" shown in the table is not available.  
2. When using multiple types for combination, please indicate by arranging the symbols in alphabetical order.




Remark: For details of specified rail mounting hole positions (supplemental code /E), see page III -29.



Lubrication

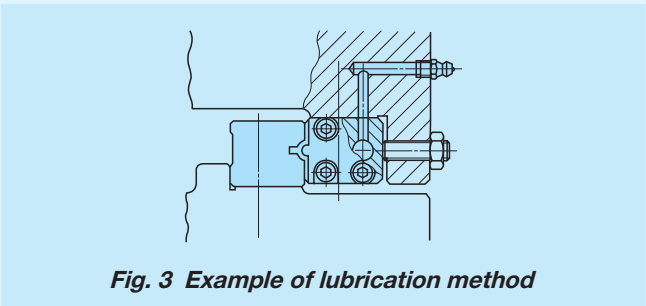Lithium-soap base grease with extreme-pressure additive (Alvania EP Grease 2 [SHOWA SHELL SEKIYU K. K.]) is pre-packed in Linear Way Module series. Though grease nipples are not appended to Linear Way Module series, oil holes are provided to slide member so that the grease or lubrication oil supplied from machines / devices is directly guided to the rolling elements recirculation route. Lubrication is easily conducted by providing the supply route in the machines / devices as shown in Fig. 3.




Dust Protection

The slide members of Linear Way Module series are equipped with end seals as standard for dust protection. However, if large amount of contaminant or dust are floating, or if large


particles of foreign substances such as chips or sand may adhere to the track rail, it is recommended to cover the whole unit with bellows or telescope type shield, etc.

Precaution for Use

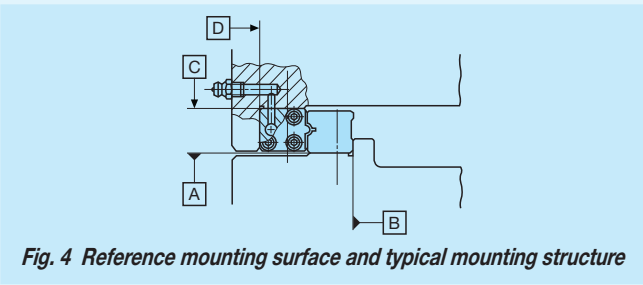**1 Mounting surface, reference mounting surface and typical mounting structure**  
When mounting the Linear Way Module series, properly align the reference mounting surfaces B and D of the track rail and slide member with the reference mounting surface of the table and bed and fix them. (See Fig. 4) The reference mounting surfaces B and D and mounting surfaces A and C are precisely ground. Machining the mounting surface of the table and bed, such as machine or device, to high accuracy and mounting them properly will ensure stable linear motion with high accuracy.




**2 Fixing the slide member**  
Typical mounting structure of Linear Way Module series is shown in Fig. 5. As a convenient means to eliminate play or to give preload, preload adjusting screws are often used in linear motion rolling mechanism. Set the preload adjusting screws at the positions of fixing bolts of slide member and in the middle of the height of slide member, and then press the slide member by tightening the screw. For mounting the slide member of Linear Way Module LWLM, it is recommended to fix the slide member from the table side, because the allowance for the preload adjustment in the bolt hole of slide member is small. In this case, the bolt hole and the counterbore in the table should be made larger to give the adjustment allowance.

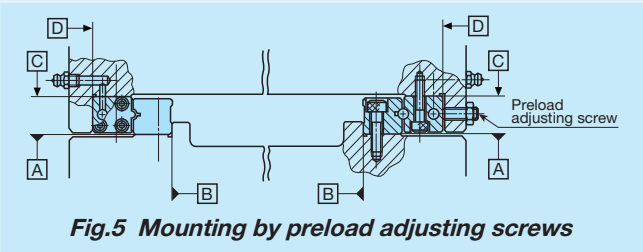

Preload amount varies depending on operational conditions of your machine and device. However, as excessive preload may lead to short life and damage on the raceway, it is typically ideal to adjust to zero clearance or slight preload state.

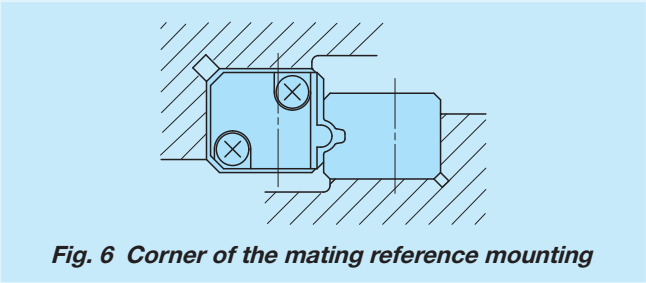**3 Shoulder height and corner radius of the reference mounting surface**  
For the opposite corner of the mating reference mounting, it is recommended to have relieved fillet as indicated in Fig. 6. Table 7.1, Table 7.2 and Table 7.3 show recommended shoulder heights and corner radius of the mating reference mounting surfaces.




**4 Tightening torque for mounting bolts**  
Typical tightening torque for mounting of Linear Way Module series to the steel mating member material is indicated in Table 6. When vibration and shock of the machine or device are large, fluctuating load is large, or moment load is applied, fix it by using the torque 1.2 to 1.5 times larger than the value indicated in the table as necessary. If the mating member material is cast iron or aluminum, reduce the tightening torque depending on the strength characteristic of the mating member material.

Table 6 Tightening torque for fixing screw

| Bolt size  | Tightening torque N · m      |                            |
|------------|------------------------------|----------------------------|
|            | High carbon steel-made screw | Stainless steel-made screw |
| M 2.6×0.45 | —                            | 0.7                        |
| M 3 ×0.5   | 1.7                          | 1.1                        |
| M 4 ×0.7   | 4.0                          | —                          |
| M 5 ×0.8   | 7.9                          | —                          |
| M 6 ×1     | 13.3                         | —                          |
| M 8 ×1.25  | 32.0                         | —                          |
| M10 ×1.5   | 62.7                         | —                          |
| M12 ×1.75  | 108                          | —                          |

Remark: The calculation is based on the tightening torque, strength division 12.9 and property division A2-70.


Table 7.1 Shoulder height of mounting reference surface for LWLM



unit: mm

| Size | Mounting part of track rail<br>shoulder height<br>$h$ |
|------|-------------------------------------------------------|
| 7    | 4                                                     |
| 9    | 5                                                     |
| 11   | 6                                                     |

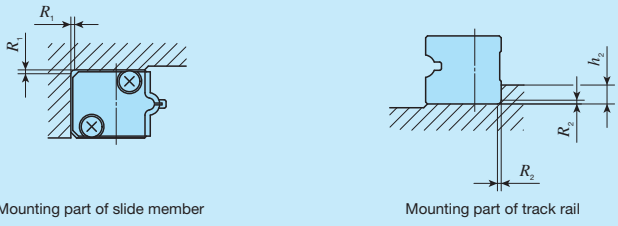
Table 7.2 Shoulder height and corner radius of the reference mounting surface for LWM



unit: mm


| Size | Mounting part of slide member<br>Corner radius<br>$R_1$ (Maximum) | Mounting part of track rail |                                  |
|------|-------------------------------------------------------------------|-----------------------------|----------------------------------|
|      |                                                                   | Shoulder height<br>$h_2$    | Corner radius<br>$R_2$ (Maximum) |
| 1    | 0.8                                                               | 4                           | 0.8                              |
| 2    | 1                                                                 | 5                           | 1                                |
| 3    | 1                                                                 | 5                           | 1                                |
| 4    | 1.5                                                               | 6                           | 1                                |
| 5    | 1.5                                                               | 6                           | 1                                |
| 6    | 1.5                                                               | 8                           | 1.5                              |



Table 7.3 Shoulder height and corner radius of the reference mounting surface for LRWM



unit: mm

| Size | Mounting part of slide member |                                  | Mounting part of track rail |                                  |
|------|-------------------------------|----------------------------------|-----------------------------|----------------------------------|
|      | Shoulder height<br>$h_1$      | Corner radius<br>$R_1$ (Maximum) | Shoulder height<br>$h_2$    | Corner radius<br>$R_2$ (Maximum) |
| 2    | 7                             | 1                                | 5                           | 1                                |
| 3    | 8.5                           | 1                                | 6                           | 1                                |
| 4    | 10.5                          | 1.5                              | 6                           | 1                                |
| 5    | 12.5                          | 1.5                              | 8                           | 1                                |
| 6    | 14.5                          | 2                                | 8                           | 1.5                              |


| Linear Way LM |                                                                                   |   |    |  |
|---------------|-----------------------------------------------------------------------------------|---|----|--|
| Shape         |  |   |    |  |
|               | LWLM                                                                              |   |    |  |
| Size          | 7                                                                                 | 9 | 11 |  |

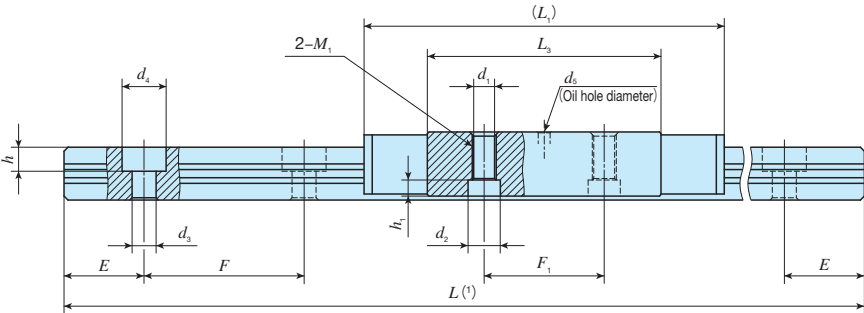

| Identification number | Mass (Ref.)                          |                | Dimensions of assembly mm |    | Dimensions of slide member mm |                |                |                |                |                |                |                |                |                |  |                |                | Dimensions of track rail mm |                |                |                |                  |                  |                  |      | Appended mounting bolt for track rail <sup>(2)</sup> | Basic dynamic load rating <sup>(3)</sup> | Basic static load rating <sup>(3)</sup> |                     |
|-----------------------|--------------------------------------|----------------|---------------------------|----|-------------------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|--|----------------|----------------|-----------------------------|----------------|----------------|----------------|------------------|------------------|------------------|------|------------------------------------------------------|------------------------------------------|-----------------------------------------|---------------------|
|                       | Linear Way Module series (No C-Lube) | Slide member g | Track rail g/m            | H  | W                             | H <sub>1</sub> | W <sub>2</sub> | W <sub>4</sub> | W <sub>6</sub> | L <sub>1</sub> | L <sub>3</sub> | F <sub>1</sub> | d <sub>1</sub> | d <sub>2</sub> |  | h <sub>1</sub> | M <sub>1</sub> | d <sub>5</sub>              | H <sub>2</sub> | W <sub>3</sub> | W <sub>5</sub> | d <sub>3</sub>   | d <sub>4</sub>   | h                | E    | F                                                    | Bolt size×ℓ                              | C<br>N                                  | C <sub>0</sub><br>N |
| LWLM 7*               | 10                                   | 210            | 7                         | 15 | 6.6                           | 7.8            | 5              | 2.5            | 38             | 24             | 12             | —              | —              |                |  | —              | M2.6           | 1                           | 4.8            | 6.8            | 3.3            | 3 <sup>(4)</sup> | — <sup>(4)</sup> | — <sup>(4)</sup> | 10   | 20                                                   | M2.6×8 <sup>(4)</sup>                    | 1 730                                   | 2 020               |
| LWLM 9*               | 16                                   | 390            | 8.5                       | 18 | 8                             | 8.6            | 5.5            | 2.2            | 45             | 29.2           | 15             | —              | —              |                |  | —              | M3             | 1.5                         | 6.6            | 9              | 3.5            | 3                | 5.5              | 3                | 12.5 | 25                                                   | M2.6×8                                   | 2 780                                   | 3 150               |
| LWLM 11*              | 32                                   | 590            | 11                        | 23 | 10                            | 11.8           | 7              | 3              | 52             | 32.8           | 15             | 2.55           | 5              |                |  | 3              | M3             | 2                           | 8              | 10.8           | 5              | 3.5              | 6                | 4.5              | 20   | 40                                                   | M3×8                                     | 4 080                                   | 4 240               |

Notes <sup>(1)</sup> Track rail length *L* is shown in Table 2 on page II-214.  
<sup>(2)</sup> The appended track rail mounting bolts are stainless steel hexagon socket head bolts equivalent to JIS B 1176.  
<sup>(3)</sup> Basic load rating (*C*) and basic static load rating (*C<sub>0</sub>*) are the values in the direction shown below.  
<sup>(4)</sup> Track rail mounting holes have no counterbore.  
When the appended track rail mounting bolts are used, the height from track rail bottom surface to bolt head is 7.4 mm.

Remarks 1. Slide member mounting bolts are not appended.  
2. The identification numbers with \* are our semi-standard items.




Example of identification number of assembled set

| Model code         | Dimensions | Part code                    | Classification symbol           | Special specification                       |
|--------------------|------------|------------------------------|---------------------------------|---------------------------------------------|
| LWLM               | 9          | M2 R200                      | P                               | /W2                                         |
| ①                  | ②          | ③                            | ④                               | ⑤                                           |
| ① Model            | ② Size     | ③ Number of slide member (2) | ④ Length of track rail (200 mm) | ⑤ Accuracy class                            |
| LWLM Linear Way LM | 7, 9, 11   |                              |                                 | H High<br>P Precision<br>SP Super precision |
|                    |            |                              |                                 | ⑥ Special specification                     |
|                    |            |                              |                                 | E, I, MN, W, Y                              |

## Linear Way M



Shape

LWM



Size

|   |   |   |   |   |   |
|---|---|---|---|---|---|
| 1 | 2 | 3 | 4 | 5 | 6 |
|---|---|---|---|---|---|

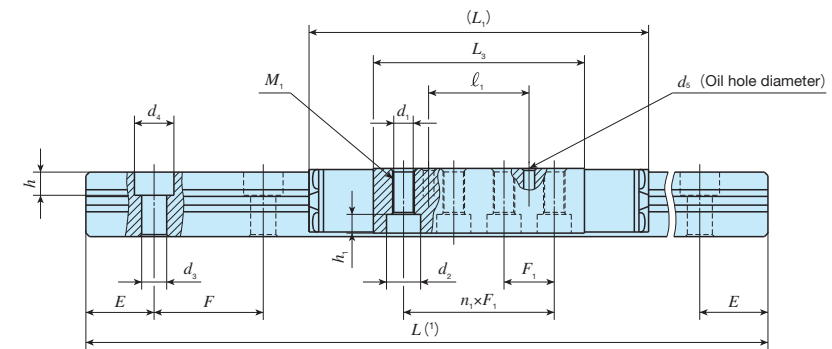


| Identification number | Mass (Ref.)     |                 | Dimensions of assembly mm |    | Dimensions of slide member mm |                |                |                |                |                |                                |                |                |                |  |                |                | Slide member mounting bolt <sup>(2)</sup> | Dimensions of track rail mm |             |                |                |                |                |                |    | Appended mounting bolt for track rail <sup>(2)</sup> | Basic dynamic load rating <sup>(3)</sup> | Basic static load rating <sup>(3)</sup> |        |
|-----------------------|-----------------|-----------------|---------------------------|----|-------------------------------|----------------|----------------|----------------|----------------|----------------|--------------------------------|----------------|----------------|----------------|--|----------------|----------------|-------------------------------------------|-----------------------------|-------------|----------------|----------------|----------------|----------------|----------------|----|------------------------------------------------------|------------------------------------------|-----------------------------------------|--------|
|                       | Slide member kg | Track rail kg/m | H                         | W  | H <sub>1</sub>                | W <sub>2</sub> | W <sub>4</sub> | W <sub>6</sub> | L <sub>1</sub> | L <sub>3</sub> | n <sub>1</sub> ×F <sub>1</sub> | d <sub>1</sub> | d <sub>2</sub> | h <sub>1</sub> |  | M <sub>1</sub> | ℓ <sub>1</sub> |                                           | d <sub>5</sub>              | Bolt size×ℓ | H <sub>2</sub> | W <sub>3</sub> | W <sub>5</sub> | d <sub>3</sub> | d <sub>4</sub> | h  |                                                      |                                          |                                         | E      |
| LWM 1*                | 0.07            | 1.20            | 14                        | 28 | 13                            | 14.6           | 9              | 4              | 64             | 41.2           | 2×13                           | 3.4            | 6.5            | 3.1            |  | M 4            | 13             | 2                                         | M3×14                       | 13          | 13             | 5.5            | 4.5            | 8              | 4.5            | 20 | 40                                                   | M 4×14                                   | 4 720                                   | 6 410  |
| LWM 2*                | 0.11            | 1.93            | 17                        | 35 | 16                            | 17             | 10             | 4              | 75             | 47.2           | 2×15                           | 4.4            | 8              | 4.1            |  | M 5            | 15             | 3                                         | M4×18                       | 16          | 17             | 6              | 6              | 9.5            | 5.4            | 30 | 60                                                   | M 5×18                                   | 7 150                                   | 9 240  |
| LWM 3*                | 0.17            | 2.71            | 19                        | 41 | 18                            | 20             | 12             | 5              | 95             | 58.8           | 3×14                           | 5.4            | 9.5            | 5.2            |  | M 6            | —              | 3                                         | M5×20                       | 18          | 20             | 7              | 7              | 11             | 6.5            | 30 | 60                                                   | M 6×20                                   | 13 700                                  | 16 600 |
| LWM 4*                | 0.32            | 3.49            | 21                        | 51 | 20                            | 25             | 15             | 6              | 122            | 80.6           | 3×20                           | 6.8            | 11             | 6.2            |  | M 8            | —              | 3                                         | M6×22                       | 20          | 25             | 9              | 9              | 14             | 9              | 40 | 80                                                   | M 8×22                                   | 23 200                                  | 27 400 |
| LWM 5*                | 0.56            | 5.25            | 25                        | 63 | 24                            | 30             | 18             | 8              | 145            | 94.8           | 4×20                           | 6.8            | 11             | 6.2            |  | M 8            | 20             | 3                                         | M6×28                       | 24          | 31             | 12             | 11             | 17.5           | 11             | 50 | 100                                                  | M10×25                                   | 35 300                                  | 41 000 |
| LWM 6*                | 1.35            | 7.56            | 31                        | 78 | 30                            | 40             | 24             | 11             | 180            | 131            | 5×22                           | 8.6            | 14             | 8.2            |  | M10            | —              | 3                                         | M8×35                       | 30          | 36             | 14             | 14             | 20             | 13             | 60 | 120                                                  | M12×35                                   | 74 100                                  | 80 900 |

Notes (1) Track rail length  $L$  is shown in Table 2 on page II-214.

(2) The appended track rail mounting bolts are hexagon socket head bolts equivalent to JIS B 1176.

(3) Basic load rating ( $C$ ) and basic static load rating ( $C_0$ ) are the values in the direction shown below.

Remark: The identification numbers with \* are our semi-standard items.



### Example of identification number of assembled set

Model code      Dimensions      Part code      Classification symbol      Special specification

**LWM**      **3**      **M2**      **R660**      **P**      **/W2**

①      ②      ③      ④      ⑤      ⑥

① Model  
LWM      Linear Way M

② Size  
1, 2, 3, 4, 5, 6

③ Number of slide member (2)


④ Length of track rail (660 mm)

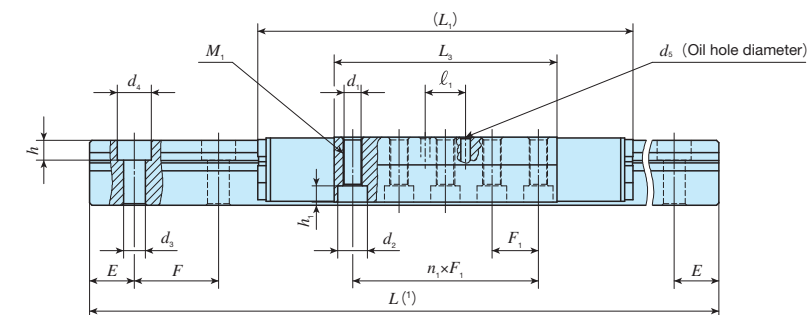

⑤ Accuracy class  
H      High  
P      Precision  
SP      Super precision

⑥ Special specification  
A, E, F, I, LR, LFR  
MN, W, Y



## Linear Roller Way M

|       |                                                                                   |   |   |   |   |
|-------|-----------------------------------------------------------------------------------|---|---|---|---|
| Shape |  |   |   |   |   |
|       | 2                                                                                 | 3 | 4 | 5 | 6 |




| Identification number | Mass (Ref.)     |                 | Dimensions of assembly mm |    |                | Dimensions of slide member mm |                |                |                |                |                |                  |                |                |                |                |  |                |                |                |             | Slide member mounting bolt <sup>(2)</sup> | Dimensions of track rail mm |                |                |                |                |    |     |        |             | Appended mounting bolt for track rail <sup>(2)</sup> | Basic dynamic load rating <sup>(3)</sup> | Basic static load rating <sup>(3)</sup> |
|-----------------------|-----------------|-----------------|---------------------------|----|----------------|-------------------------------|----------------|----------------|----------------|----------------|----------------|------------------|----------------|----------------|----------------|----------------|--|----------------|----------------|----------------|-------------|-------------------------------------------|-----------------------------|----------------|----------------|----------------|----------------|----|-----|--------|-------------|------------------------------------------------------|------------------------------------------|-----------------------------------------|
|                       | Slide member kg | Track rail kg/m | H                         | W  | W <sub>1</sub> | H <sub>1</sub>                | H <sub>3</sub> | W <sub>2</sub> | W <sub>4</sub> | L <sub>1</sub> | L <sub>3</sub> | n×F <sub>1</sub> | M <sub>1</sub> | d <sub>1</sub> | d <sub>2</sub> | h <sub>1</sub> |  | W <sub>6</sub> | ℓ <sub>1</sub> | d <sub>5</sub> | Bolt size×ℓ |                                           | H <sub>2</sub>              | W <sub>3</sub> | W <sub>5</sub> | d <sub>3</sub> | d <sub>4</sub> | h  | E   | F      | Bolt size×ℓ |                                                      |                                          |                                         |
| LRWM 2*               | 0.26            | 1.98            | 19                        | 33 | 39.6           | 18                            | 7.5            | 22.9           | 8              | 105            | 63             | 4×12             | M 5            | 4.4            | 8              | 4.1            |  | 4              | 10             | 3              | M4×20       | 18                                        | 15                          | 6              | 6              | 9.5            | 5.4            | 30 | 60  | M 5×20 | 9 700       | 10 800                                               |                                          |                                         |
| LRWM 3*               | 0.46            | 2.92            | 22                        | 42 | 50.6           | 21                            | 9              | 29.8           | 9              | 122            | 72             | 4×15             | M 6            | 5.4            | 9.5            | 5.2            |  | 5              | 13             | 3              | M5×25       | 21                                        | 19                          | 7              | 7              | 11             | 6.5            | 30 | 60  | M 6×25 | 18 500      | 20 300                                               |                                          |                                         |
| LRWM 4*               | 0.98            | 4.64            | 28                        | 56 | 65.6           | 27                            | 11             | 39.4           | 13             | 157            | 96             | 5×16             | M 8            | 6.8            | 11             | 6.2            |  | 6              | —              | 3              | M6×32       | 27                                        | 24                          | 9              | 9              | 14             | 8.6            | 40 | 80  | M 8×32 | 36 500      | 39 800                                               |                                          |                                         |
| LRWM 5*               | 2.03            | 6.85            | 33                        | 70 | 81.6           | 32                            | 13             | 49.1           | 16             | 212            | 140            | 5×24             | M10            | 8.6            | 14             | 8.2            |  | 7              | —              | 3              | M8×35       | 32                                        | 30                          | 12             | 11             | 17.5           | 10.8           | 50 | 100 | M10×35 | 67 900      | 75 500                                               |                                          |                                         |
| LRWM 6*               | 3.42            | 9.25            | 38                        | 83 | 96.6           | 37                            | 15             | 58.6           | 21             | 256            | 168            | 6×25             | M10            | 8.6            | 14             | 8.2            |  | 8              | 28             | 3              | M8×40       | 37                                        | 35                          | 14             | 14             | 20             | 13             | 60 | 120 | M12×40 | 99 800      | 109 000                                              |                                          |                                         |

Notes (1) Track rail length  $L$  is shown in Table 2 on page II-214.

(2) The appended track rail mounting bolts are hexagon socket head bolts equivalent to JIS B 1176.

(3) Basic load rating ( $C$ ) and basic static load rating ( $C_0$ ) are the values in the direction shown below.

Remark: The identification numbers with \* are our semi-standard items.



### Example of identification number of assembled set

Model code      Dimensions      Part code      Classification symbol      Special specification

**1** LRWM      **2** 3      **3** M2      **4** R660      **5** P      **6** /W2

| ① Model                     | ② Dimensions | ③ M2 | ④ R660 | ⑤ Accuracy class                                     | ⑥ Special specification         |
|-----------------------------|--------------|------|--------|------------------------------------------------------|---------------------------------|
| LRWM    Linear Roller Way M | 3, 4, 5, 6   |      |        | H    High<br>P    Precision<br>SP    Super precision | A, E, F, I, LR, LFR<br>MN, W, Y |

③ Number of slide member (2)

④ Length of track rail (660 mm)

## General Explanation



# Selection Procedure

Selection of Linear Way and Linear Roller Way should be considered from the most important required matter to details in order.  
Typical procedure is shown below.

## Example of Linear Way and Linear Roller Way selection procedure





Life of linear motion rolling guides

Even in normal operational status, a linear motion rolling guide will reach the end of its life after a certain period of operations. As repeated load is constantly applied onto a raceway and rolling elements of the linear motion rolling guide, this leads to leprous damage (scale-like wear fragments) called fatigue flaking due to rolling contact fatigue of materials, it will be unusable at the end. Total traveling distance before occurrence of this fatigue flaking on a raceway or rolling elements is called the life of linear motion rolling guide.

As the life of linear motion rolling guide may vary depending on material fatigue phenomenon, rating life based on statistic calculation is used.

Rating life

Rating life of linear motion rolling guide refers to the total traveling distance 90% of a group of the same linear motion rolling guide can operate without linear motion rolling guide material damages due to rolling contact fatigue when they are operated individually under the same conditions.

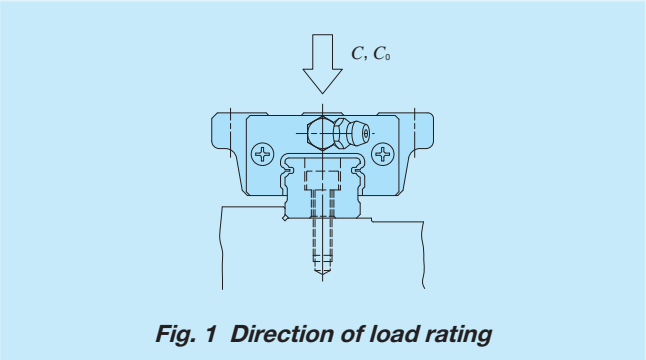


Fig. 1 Direction of load rating

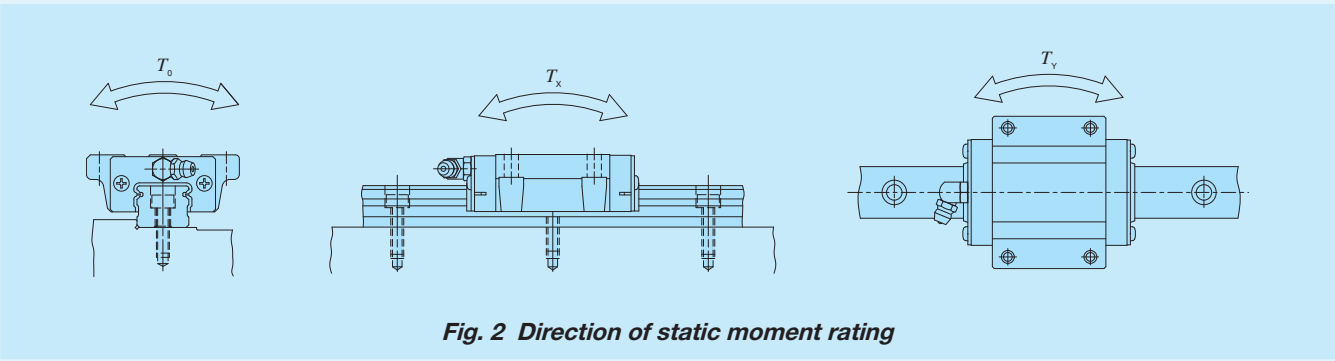


Fig. 2 Direction of static moment rating

Basic dynamic load rating C

Complying with ISO 14728-1

Basic dynamic load rating refers to load with certain direction and size that is logically endurable for rating life of  $50 \times 10^3$  m when a group of the same linear motion rolling guides is operated individually under the same conditions.

Basic static load rating C0

Complying with ISO 14728-2

Basic static load rating refers to static load generating the contact stress as shown in Table 1 at the center of contact parts of the rolling elements and a raceway under maximum load, which is the load at the allowable limit for normal rolling motion. Generally, it is used considering static safety factor.

Table 1 Maximum contact stress for each series

| Series name       | Maximum contact stress |
|-------------------|------------------------|
| Linear Way        | 4 200 MPa              |
| Linear Roller Way | 4 000 MPa              |

Static moment rating T0, Tx, Ty

Static moment rating refers to static moment load generating the contact stress as shown in Table 1 at the center of contact parts of rolling elements and a raceway under the maximum load when the moment load shown in Fig. 2 is loaded, which is the moment load at the allowable limit for normal rolling motion. Generally, it is used considering static safety factor.

Calculating formula of life

The rating life calculation formulas are shown below.

Linear Way  
$$L = 50 \left( \frac{C}{P} \right)^3 \dots\dots\dots (1)$$

Linear Roller Way  
$$L = 50 \left( \frac{C}{P} \right)^{10/3} \dots\dots\dots (2)$$

where, L: Rating life,  $10^3$  m  
C: Basic dynamic load rating, N  
P: Dynamic equivalent load, N

Life time can be calculated by applying a stroke length and a number of strokes per minute to the formula below.

$$L_h = \frac{10^6 L}{2Sn_1 \times 60} \dots\dots\dots (3)$$

where,  $L_h$ : Rating life in hours, h  
S: Stroke length, mm  
 $n_1$ : Number of strokes per minute, cpm

Load factor

Load applied to a linear motion rolling guide can be larger than theoretical load due to machine vibration or shock. Generally, the applied load is obtained by multiplying it by the load factor indicated in Table 2.

Table 2 Load factor

| Operating conditions             | $f_w$     |
|----------------------------------|-----------|
| Smooth operation free from shock | 1 ~ 1.2   |
| Normal operation                 | 1.2 ~ 1.5 |
| Operation with shock load        | 1.5 ~ 3   |

Static safety factor

Generally, basic static load rating and static moment rating is considered as load at the allowable limit for normal rolling motion. However, static safety factor must be considered according to operating conditions and required performance of the linear motion rolling guide.

Static safety factor can be obtained by the following equation and typical values are indicated in Tables 3.1 and 3.2.

Equation (6) is a representative equation for a moment load. Moment load and static moment rating in each direction is applied for the calculation.

$$f_s = \frac{C_0}{P_0} \dots\dots\dots (5)$$

$$f_s = \frac{T_0}{M_0} \dots\dots\dots (6)$$

where,  $f_s$ : Static safety factor  
 $C_0$ : Basic static load rating, N  
 $P_0$ : Static equivalent load, N  
 $T_0$ : Static moment rating, N · m

$M_0$ : Moment load in each direction, N · m  
(maximum moment load)

Table 3.1 Static safety factor for Linear Way

| Operational conditions                  | $f_s$ |
|-----------------------------------------|-------|
| Operation with vibration and / or shock | 3 ~ 5 |
| High operating performance              | 2 ~ 4 |
| Normal operating conditions             | 1 ~ 3 |

Table 3.2 Static safety factor for Linear Roller Way

| Operational conditions                  | $f_s$   |
|-----------------------------------------|---------|
| Operation with vibration and / or shock | 4 ~ 6   |
| High operating performance              | 3 ~ 5   |
| Normal operating conditions             | 2.5 ~ 3 |

Dynamic equivalent load

When a load is applied in a direction other than that of the basic dynamic load rating or a complex load is applied, the dynamic equivalent load must be calculated to obtain the basic rating life.

Obtain the downward and lateral conversion loads from the loads and moments in various directions.

$$F_{re}=k_r|F_r|+\frac{C_0}{T_0}|M_0|+\frac{C_0}{T_x}|M_x| \dots\dots\dots(7)$$

$$F_{ae}=k_a|F_a|+\frac{C_0}{T_y}|M_y| \dots\dots\dots(8)$$

where,  $F_{re}$  : Downward conversion load, N  
 $F_{ae}$  : Lateral conversion load, N  
 $F_r$  : Downward load, N  
 $F_a$  : Lateral load, N  
 $M_0$  : Moment load in the  $T_0$  direction, N · m  
 $M_x$  : Moment load in the  $T_x$  direction, N · m  
 $M_y$  : Moment load in the  $T_y$  direction, N · m  
 $k_r, k_a$  : Conversion factors for load direction  
(See Table 4)  
 $C_0$  : Basic static load rating, N  
 $T_0$  : Static moment rating in the  $T_0$  direction, N · m  
 $T_x$  : Static moment rating in the  $T_x$  direction, N · m  
 $T_y$  : Static moment rating in the  $T_y$  direction, N · m

Table 4 Conversion factor for load direction

Linear Way and Linear Roller Way

Linear Way H Side mounting type

Linear Way Module

| Series name and size              |                                 | Conversion factor    |           |              |
|-----------------------------------|---------------------------------|----------------------|-----------|--------------|
|                                   |                                 | $k_r$                | $k_a$     |              |
|                                   |                                 | $F_r \geq 0$         | $F_r < 0$ |              |
| C-Lube Linear Way ML              | Ball retained type              | 1                    | 1         | 1.19         |
| Linear Way L                      | Ball non-retained type          | 1                    | 1         | 0.84         |
| C-Lube Linear Way ME              | 15~30                           | 1                    | 1         | 1            |
| Linear Way E                      | 35~45                           | 1                    | 1.19      | 1.28         |
|                                   | Low Decibel Linear Way E        | 1                    | 1         | 1            |
| C-Lube Linear Way MH              | 8~12                            | 1                    | 1         | 1.19         |
| Linear Way H                      | 15~30                           | 1                    | 1         | 1            |
|                                   | 35~65                           | 1                    | 1.19      | 1.28         |
|                                   | 85                              | 1                    | 1.43      | 1.34         |
|                                   | Linear Way H Side mounting type | 15~30                | 1         | 1            |
|                                   |                                 | 35~65 <sup>(1)</sup> | 1         | 0.84<br>0.95 |
| Linear Way F                      | 33~42                           | 1                    | 1         | 1            |
|                                   | 69                              | 1                    | 1         | 1.19         |
|                                   | LWFH                            | 1                    | 1.19      | 1.28         |
| C-Lube Linear Way MUL             | 25,30                           | 1                    | 1         | 1.19         |
| Linear Way U                      | 40~130                          | 1                    | 1         | 1            |
| C-Lube Linear Roller Way Super MX | Linear Roller Way Super X       | 1                    | 1         | 1            |
| Linear Roller Way X               |                                 | 1                    | 1         | 1            |
| Linear Way Module                 | LWLM                            | 1                    | 1         | 0.73         |
|                                   | LWM                             | 1~5                  | 1         | 1.13         |
|                                   |                                 | 6                    | 1         | 1.28         |
|                                   | LRWM                            | 1                    | 1         | 0.58         |

Note (1) The upper value of  $k_a$  columns represents the right direction and the lower value represents the left direction.

Obtain the dynamic equivalent load from the downward and lateral conversion loads.

$$P=XF_{re}+YF_{ae} \dots\dots\dots(9)$$

where,  $P$  : Dynamic equivalent load, N  
 $X, Y$  : Dynamic equivalent load factor (See Table 5)  
 $F_{re}$  : Downward conversion load, N  
 $F_{ae}$  : Lateral conversion load, N

Table 5 Dynamic equivalent load factor

| Class                    | X   | Y   |
|--------------------------|-----|-----|
| $ F_{re}  \geq  F_{ae} $ | 1   | 0.6 |
| $ F_{re}  <  F_{ae} $    | 0.6 | 1   |

Static equivalent load

When a load is applied in a direction other than that of the basic static load rating or a complex load is applied, the static equivalent load must be calculated to obtain the static safety factor.

$$P_0=k_{or}|F_r|+k_{oa}|F_a|+\frac{C_0}{T_0}|M_0|+\frac{C_0}{T_x}|M_x|+\frac{C_0}{T_y}|M_y| \dots\dots(10)$$

where,  $P_0$  : Static equivalent load, N  
 $F_r$  : Downward load, N  
 $F_a$  : Lateral load, N  
 $M_0$  : Moment load in the  $T_0$  direction, N · m  
 $M_x$  : Moment load in the  $T_x$  direction, N · m  
 $M_y$  : Moment load in the  $T_y$  direction, N · m  
 $k_{or}, k_{oa}$  : Conversion factors for load direction  
(See Table 6)  
 $C_0$  : Basic static load rating, N  
 $T_0$  : Static moment rating in the  $T_0$  direction, N · m  
 $T_x$  : Static moment rating in the  $T_x$  direction, N · m  
 $T_y$  : Static moment rating in the  $T_y$  direction, N · m

Table 6 Conversion factor for load direction

Linear Way and Linear Roller Way

Linear Way H Side mounting type

Linear Way Module

| Series name and size                                           |                        | Conversion factor |           |              |
|----------------------------------------------------------------|------------------------|-------------------|-----------|--------------|
|                                                                |                        | $k_{Or}$          |           | $k_{Oa}$     |
|                                                                |                        | $F_r \geq 0$      | $F_r < 0$ |              |
| C-Lube Linear Way L<br>Linear Way L                            | Ball retained type     | 1                 | 1         | 1.19         |
|                                                                | Ball non-retained type | 1                 | 1         | 0.84         |
| C-Lube Linear Way ME<br>Linear Way E                           | 15~30                  | 1                 | 1         | 1            |
|                                                                | 35~45                  | 1                 | 1.19      | 1.28         |
| Low Decibel Linear Way E                                       |                        | 1                 | 1         | 1            |
| C-Lube Linear Way MH<br>Linear Way H                           | 8~12                   | 1                 | 1         | 1.19         |
|                                                                | 15~30                  | 1                 | 1         | 1            |
|                                                                | 35~65                  | 1                 | 1.19      | 1.28         |
|                                                                | 85                     | 1                 | 1.43      | 1.34         |
| Linear Way H<br>Side mounting type                             | 15~30                  | 1                 | 1         | 1            |
|                                                                | 35~65 <sup>(1)</sup>   | 1                 | 1         | 0.78<br>0.93 |
| Linear Way F                                                   | 33~42                  | 1                 | 1         | 1            |
|                                                                | 69                     | 1                 | 1         | 1.19         |
|                                                                | LWFH                   | 1                 | 1.19      | 1.28         |
| C-Lube Linear Way MUL<br>Linear Way U                          | 25,30                  | 1                 | 1         | 1.19         |
|                                                                | 40~130                 | 1                 | 1         | 1            |
| C-Lube Linear Roller Way Super MX<br>Linear Roller Way Super X |                        | 1                 | 1         | 1            |
| Linear Roller Way X                                            |                        | 1                 | 1         | 1            |
| Linear Way Module                                              | LWLM                   | 1                 | 1         | 0.60         |
|                                                                | LWM                    | 1~5               | 1         | 1.19         |
|                                                                |                        | 6                 | 1         | 1.43         |
|                                                                |                        | LRWM              | 1         | 1            |

Note (1) The upper value of  $k_{oa}$  columns represents the right direction and the lower value represents the left direction.

Calculated Load

Examples of calculation for the loads applied to Linear Way and Linear Roller Way that is incorporated in machine / equipment is shown in Table 7.1 to Table 7.6.

Table 7.1 One track rail and one slide unit

| Slide unit No. | Load applied on the slide unit |                       |                                             |                                             |                                             |
|----------------|--------------------------------|-----------------------|---------------------------------------------|---------------------------------------------|---------------------------------------------|
|                | Downward load<br>$F_r$         | Lateral load<br>$F_a$ | Moment load in the $T_0$ direction<br>$M_0$ | Moment load in the $T_x$ direction<br>$M_x$ | Moment load in the $T_y$ direction<br>$M_y$ |
| 1              | $F_z$                          | $F_y$                 | $M_r$                                       | $M_p$                                       | $M_y$                                       |

Remark: The moment loads in each direction  $M_r, M_p, M_y$  can be obtained by the following equation.

$M_r = F_y Z + F_z Y$   
 $M_p = F_x (Z - Z_d) + F_z X$   
 $M_y = -F_x (Y - Y_d) + F_y X$

Table 7.2 One track rail and two slide units

| Slide unit No. | Load applied on the slide unit  |                                 |                                             |
|----------------|---------------------------------|---------------------------------|---------------------------------------------|
|                | Downward load<br>$F_r$          | Lateral load<br>$F_a$           | Moment load in the $T_0$ direction<br>$M_0$ |
| 1              | $\frac{F_z}{2} + \frac{M_p}{l}$ | $\frac{F_y}{2} + \frac{M_r}{l}$ | $\frac{M_r}{2}$                             |
| 2              | $\frac{F_z}{2} - \frac{M_p}{l}$ | $\frac{F_y}{2} - \frac{M_r}{l}$ | $\frac{M_r}{2}$                             |

Remark: The moment loads in each direction  $M_r, M_p, M_y$  can be obtained by the following equation.

$M_r = F_y Z + F_z Y$   
 $M_p = F_x (Z - Z_d) + F_z X$   
 $M_y = -F_x (Y - Y_d) + F_y X$

Table 7.3 Two track rails and one slide unit


| Slide unit No. | Load applied on the slide unit  |                       |                                             |                                             |
|----------------|---------------------------------|-----------------------|---------------------------------------------|---------------------------------------------|
|                | Downward load<br>$F_r$          | Lateral load<br>$F_a$ | Moment load in the $T_x$ direction<br>$M_x$ | Moment load in the $T_y$ direction<br>$M_y$ |
| 1              | $\frac{F_z}{2} + \frac{M_r}{L}$ | $\frac{F_y}{2}$       | $\frac{M_p}{2}$                             | $\frac{M_y}{2}$                             |
| 2              | $\frac{F_z}{2} - \frac{M_r}{L}$ | $\frac{F_y}{2}$       | $\frac{M_p}{2}$                             | $\frac{M_y}{2}$                             |

Remark: The moment loads in each direction  $M_r, M_p, M_y$  can be obtained by the following equation.

$M_r = F_y Z + F_z Y$   
 $M_p = F_x (Z - Z_d) + F_z X$   
 $M_y = -F_x (Y - Y_d) + F_y X$



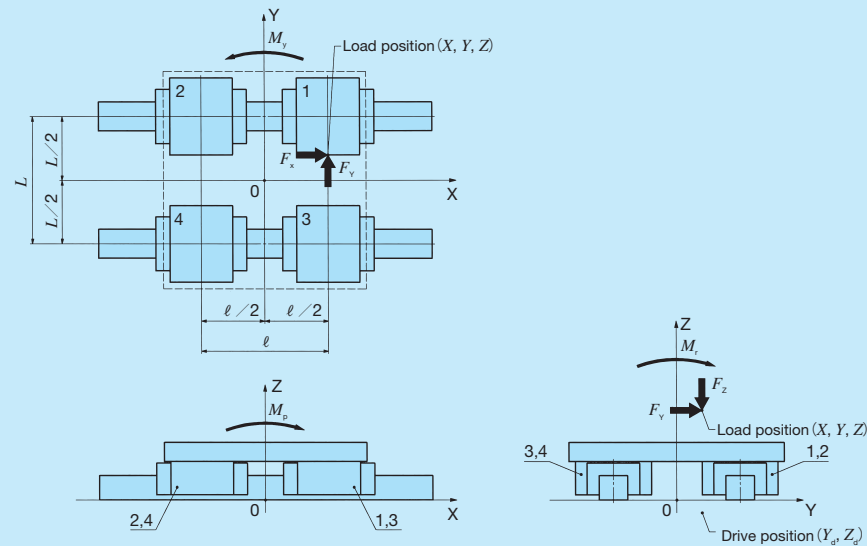Table 7.4 Two track rails and two slide units




| Slide unit No. | Load applied on the slide unit                    |                                  |
|----------------|---------------------------------------------------|----------------------------------|
|                | Downward load<br>$F_r$                            | Lateral load<br>$F_a$            |
| 1              | $\frac{F_z}{4} + \frac{M_r}{2L} + \frac{M_p}{2l}$ | $\frac{F_y}{4} + \frac{M_y}{2l}$ |
| 2              | $\frac{F_z}{4} + \frac{M_r}{2L} - \frac{M_p}{2l}$ | $\frac{F_y}{4} - \frac{M_y}{2l}$ |
| 3              | $\frac{F_z}{4} - \frac{M_r}{2L} + \frac{M_p}{2l}$ | $\frac{F_y}{4} + \frac{M_y}{2l}$ |
| 4              | $\frac{F_z}{4} - \frac{M_r}{2L} - \frac{M_p}{2l}$ | $\frac{F_y}{4} - \frac{M_y}{2l}$ |

Remark: The moment loads in each direction  $M_r$ ,  $M_p$ ,  $M_y$  can be obtained by the following equation.

$M_r = F_y Z + F_z Y$   
 $M_p = F_x (Z - Z_d) + F_z X$   
 $M_y = -F_x (Y - Y_d) + F_y X$

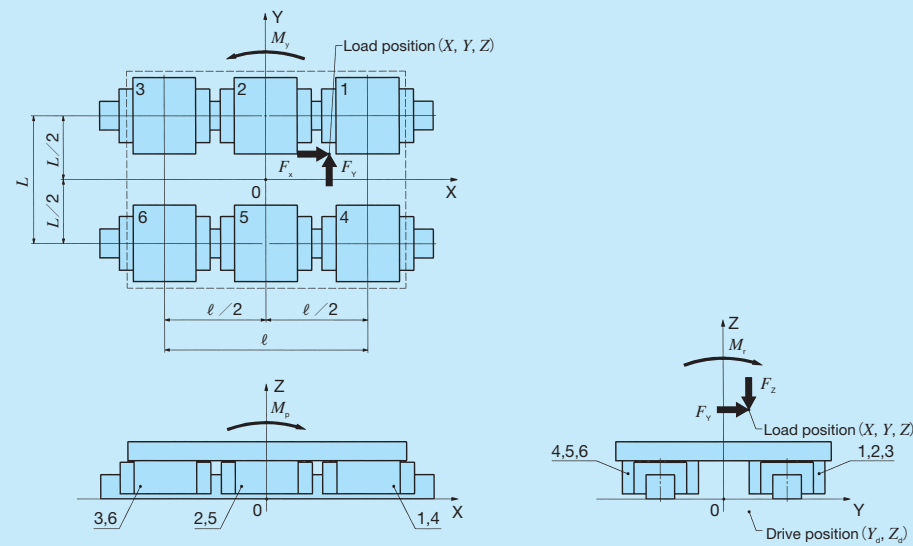Table 7.5 Two track rails and three slide units




| Slide unit No. | Load applied on the slide unit                    |                                  |
|----------------|---------------------------------------------------|----------------------------------|
|                | Downward load<br>$F_r$                            | Lateral load<br>$F_a$            |
| 1              | $\frac{F_z}{6} + \frac{M_r}{3L} + \frac{M_p}{2l}$ | $\frac{F_y}{6} + \frac{M_y}{2l}$ |
| 2              | $\frac{F_z}{6} + \frac{M_r}{3L}$                  | $\frac{F_y}{6}$                  |
| 3              | $\frac{F_z}{6} + \frac{M_r}{3L} - \frac{M_p}{2l}$ | $\frac{F_y}{6} - \frac{M_y}{2l}$ |
| 4              | $\frac{F_z}{6} - \frac{M_r}{3L} + \frac{M_p}{2l}$ | $\frac{F_y}{6} + \frac{M_y}{2l}$ |
| 5              | $\frac{F_z}{6} - \frac{M_r}{3L}$                  | $\frac{F_y}{6}$                  |
| 6              | $\frac{F_z}{6} - \frac{M_r}{3L} - \frac{M_p}{2l}$ | $\frac{F_y}{6} - \frac{M_y}{2l}$ |

Remark: The moment loads in each direction  $M_r$ ,  $M_p$ ,  $M_y$  can be obtained by the following equation.

$M_r = F_y Z + F_z Y$   
 $M_p = F_x (Z - Z_d) + F_z X$   
 $M_y = -F_x (Y - Y_d) + F_y X$

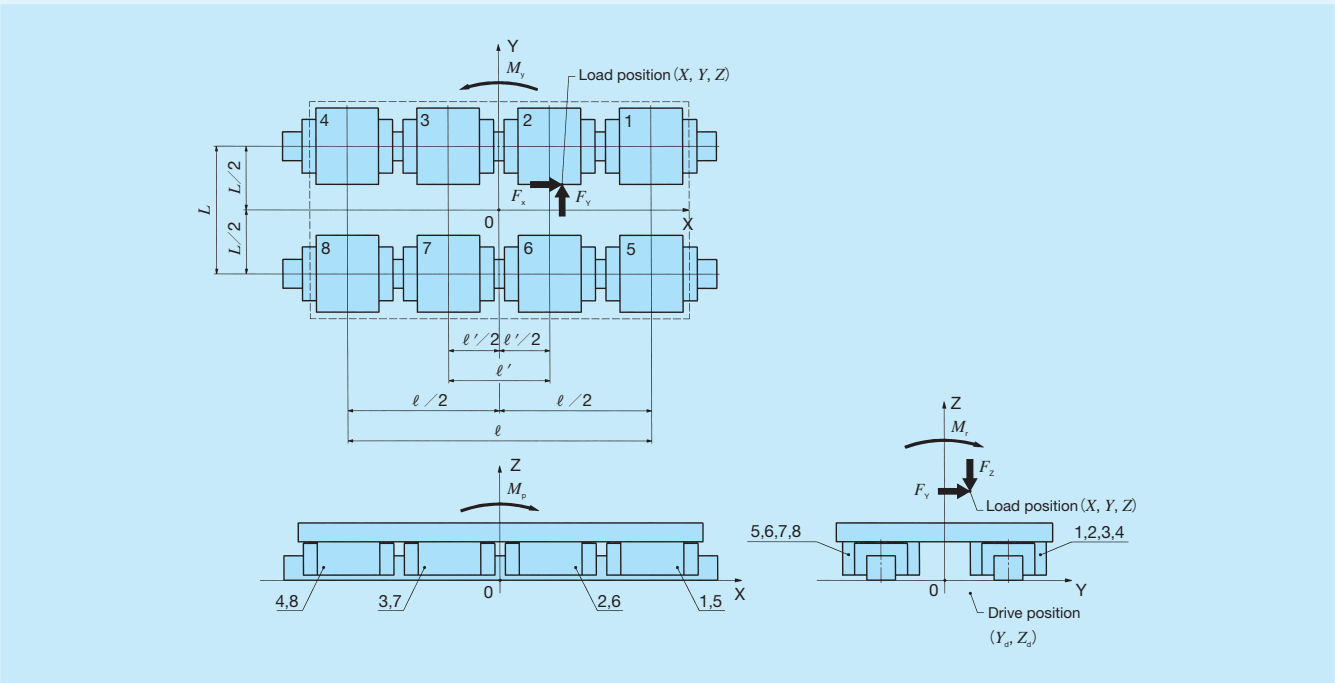Table 7.6 Two track rails and four slide units



| Slide unit No. | Load applied on the slide unit                                                  |                                                                |
|----------------|---------------------------------------------------------------------------------|----------------------------------------------------------------|
|                | Downward load<br>$F_z$                                                          | Lateral load<br>$F_y$                                          |
| 1              | $\frac{F_z}{8} + \frac{M_x}{4L} + \frac{M_y}{2} \frac{\ell}{\ell^2 + \ell'^2}$  | $\frac{F_y}{8} + \frac{M_x}{2} \frac{\ell}{\ell^2 + \ell'^2}$  |
| 2              | $\frac{F_z}{8} + \frac{M_x}{4L} + \frac{M_y}{2} \frac{\ell'}{\ell^2 + \ell'^2}$ | $\frac{F_y}{8} + \frac{M_x}{2} \frac{\ell'}{\ell^2 + \ell'^2}$ |
| 3              | $\frac{F_z}{8} + \frac{M_x}{4L} - \frac{M_y}{2} \frac{\ell'}{\ell^2 + \ell'^2}$ | $\frac{F_y}{8} - \frac{M_x}{2} \frac{\ell'}{\ell^2 + \ell'^2}$ |
| 4              | $\frac{F_z}{8} + \frac{M_x}{4L} - \frac{M_y}{2} \frac{\ell}{\ell^2 + \ell'^2}$  | $\frac{F_y}{8} - \frac{M_x}{2} \frac{\ell}{\ell^2 + \ell'^2}$  |
| 5              | $\frac{F_z}{8} - \frac{M_x}{4L} + \frac{M_y}{2} \frac{\ell}{\ell^2 + \ell'^2}$  | $\frac{F_y}{8} + \frac{M_x}{2} \frac{\ell}{\ell^2 + \ell'^2}$  |
| 6              | $\frac{F_z}{8} - \frac{M_x}{4L} + \frac{M_y}{2} \frac{\ell'}{\ell^2 + \ell'^2}$ | $\frac{F_y}{8} + \frac{M_x}{2} \frac{\ell'}{\ell^2 + \ell'^2}$ |
| 7              | $\frac{F_z}{8} - \frac{M_x}{4L} - \frac{M_y}{2} \frac{\ell'}{\ell^2 + \ell'^2}$ | $\frac{F_y}{8} - \frac{M_x}{2} \frac{\ell'}{\ell^2 + \ell'^2}$ |
| 8              | $\frac{F_z}{8} - \frac{M_x}{4L} - \frac{M_y}{2} \frac{\ell}{\ell^2 + \ell'^2}$  | $\frac{F_y}{8} - \frac{M_x}{2} \frac{\ell}{\ell^2 + \ell'^2}$  |

Remark: The moment loads in each direction  $M_x$ ,  $M_y$ ,  $M_z$  can be obtained by the following equation.

$M_x = F_y Z + F_z Y$   
 $M_y = F_x (Z - Z_d) + F_z X$   
 $M_z = -F_x (Y - Y_d) + F_y X$

# Mean Equivalent Load for Fluctuating Load

When the load on the Linear Way and Linear Roller Way varies, instead of dynamic equivalent load  $P$ , the mean equivalent load  $P_m$  is used for calculating formula of life. The mean equivalent load is a load converted to give life equal to that for fluctuating load. It is obtained by the following formula:

$$P_m = \sqrt[p]{\frac{1}{L} \int_0^L P_n^p dL} \dots \dots \dots (11)$$

- where,  $P_m$  : Mean equivalent load, N
- $L$  : Total traveling distance, m
- $P_n$  : Fluctuating load, N
- $p$  : Exponent (ball type: 3, roller type: 10/3)

Table. 8 gives calculation examples of the mean equivalent load for typical fluctuating loads.

Table 8 Mean equivalent load for fluctuating load

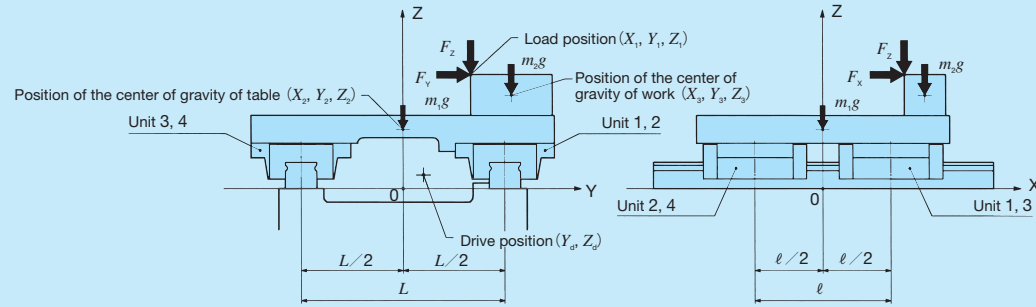
| Example                      |  | Mean equivalent load                                                                                                                                                                                                                                                                                                                                     |
|------------------------------|--|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ① Stepwise changing load     |  | $P_m = \sqrt[p]{\frac{1}{L} (P_1^p L_1 + P_2^p L_2 + \dots + P_n^p L_n)}$ <p>where, <math>L_1</math> : Total traveling distance receiving the load <math>P_1</math>, m<br/><math>L_2</math> : Total traveling distance receiving the load <math>P_2</math>, m<br/><math>L_n</math> : Total traveling distance receiving the load <math>P_n</math>, m</p> |
|                              |  |                                                                                                                                                                                                                                                                                                                                                          |
| ② Monotonously changing load |  | $P_m \doteq \frac{1}{3} (2P_{max} + P_{min})$ <p>where, <math>P_{max}</math> : Maximum value of fluctuating load, N<br/><math>P_{min}</math> : Minimum value of fluctuating load, N</p>                                                                                                                                                                  |
|                              |  |                                                                                                                                                                                                                                                                                                                                                          |

# Examples of Load and Life Calculation

## Example 1

Linear Way Model.....ME 25 C2 R640 H  
Basic dynamic load rating.....  $C = 18100 \text{ N}$   
Basic static load rating.....  $C_0 = 21100 \text{ N}$   
Applied load.....  $F_{x1} = 1000 \text{ N}$   
.....  $F_{y1} = 2000 \text{ N}$   
.....  $F_{z1} = 1000 \text{ N}$   
Load position.....  $X_1 = 60 \text{ mm}$   
.....  $Y_1 = 50 \text{ mm}$   
.....  $Z_1 = 83 \text{ mm}$   
Table mass.....  $m_1 = 10 \text{ kg}$   
Position of the center of gravity of table.....  $X_2 = 0 \text{ mm}$   
.....  $Y_2 = 0 \text{ mm}$   
.....  $Z_2 = 43 \text{ mm}$

Work mass.....  $m_2 = 10 \text{ kg}$   
Position of center of gravity of work.....  $X_3 = 75 \text{ mm}$   
.....  $Y_3 = 80 \text{ mm}$   
.....  $Z_3 = 68 \text{ mm}$   
Number of strokes per minute.....  $n_1 = 5 \text{ cpm}$   
Stroke length.....  $S = 100 \text{ mm}$   
Distance between slide units.....  $\ell = 100 \text{ mm}$   
Distance between the track rails.....  $L = 150 \text{ mm}$   
Drive position.....  $Y_d = 150 \text{ mm}$   
.....  $Z_d = 10 \text{ mm}$



The life and static safety factor in the case of Example 1 is calculated. Load factor  $f_w$  is assumed to be 1.5.

### ① Calculation of load on the slide unit

Due to the applied load and the table weight, moment load occurs around each coordinate axis of the Linear Way as shown below.

$$\begin{aligned} M_r &= \Sigma (F_z Z) + \Sigma (F_y Y) = F_{y1} Z_1 + F_{z1} Y_1 + m_1 g Y_2 + m_2 g Y_3 \\ &= 2000 \times 83 + 1000 \times 50 + 10 \times 9.8 \times 0 + 10 \times 9.8 \times 80 \\ &\approx 224000 \\ M_p &= \Sigma \{F_x (Z - Z_d)\} + \Sigma (F_z X) = F_{x1} (Z_1 - Z_d) + F_{z1} X_1 + m_1 g X_2 \\ &\quad + m_2 g X_3 \\ &= 1000 \times (83 - 10) + 1000 \times 60 + 10 \times 9.8 \times 0 + 10 \times 9.8 \\ &\quad \times 75 \approx 140000 \\ M_y &= -\Sigma \{F_x (Y - Y_d)\} + \Sigma (F_y X) = -F_{x1} (Y_1 - Y_d) + F_{y1} X_1 \\ &= -1000 \times (50 - 150) + 2000 \times 60 = 220000 \end{aligned}$$

where,  $M_r$ : Moment load in the rolling direction, N · mm  
 $M_p$ : Moment load in the pitching direction, N · mm  
 $M_y$ : Moment load in the yawing direction, N · mm

The loads applied on each slide unit are calculated according to Table 7.4 on page III-11.

$$\begin{aligned} F_{r1} &= \frac{\Sigma F_z}{4} + \frac{M_r}{2L} + \frac{M_p}{2\ell} = \frac{F_{z1} + m_1 g + m_2 g}{4} + \frac{M_r}{2L} + \frac{M_p}{2\ell} \\ &= \frac{1000 + 10 \times 9.8 + 10 \times 9.8}{4} + \frac{224000}{2 \times 150} + \frac{140000}{2 \times 100} \\ &\approx 1750 \\ F_{r2} &= \frac{\Sigma F_z}{4} + \frac{M_r}{2L} - \frac{M_p}{2\ell} = \frac{F_{z1} + m_1 g + m_2 g}{4} + \frac{M_r}{2L} - \frac{M_p}{2\ell} \approx 346 \\ F_{r3} &= \frac{\Sigma F_z}{4} - \frac{M_r}{2L} + \frac{M_p}{2\ell} = \frac{F_{z1} + m_1 g + m_2 g}{4} - \frac{M_r}{2L} + \frac{M_p}{2\ell} \approx 252 \\ F_{r4} &= \frac{\Sigma F_z}{4} - \frac{M_r}{2L} - \frac{M_p}{2\ell} = \frac{F_{z1} + m_1 g + m_2 g}{4} - \frac{M_r}{2L} - \frac{M_p}{2\ell} \\ &\approx -1150 \\ F_{a1} &= F_{a3} = \frac{\Sigma F_y}{4} + \frac{M_y}{2\ell} = \frac{F_{y1}}{4} + \frac{M_y}{2\ell} \\ &= \frac{2000}{4} + \frac{220000}{2 \times 100} = 1600 \\ F_{a2} &= F_{a4} = \frac{\Sigma F_y}{4} - \frac{M_y}{2\ell} = \frac{F_{y1}}{4} - \frac{M_y}{2\ell} = -600 \end{aligned}$$

### ② Calculating of rating life

The upward / downward load and lateral load are converted by formula (7) and (8) on page III-7.

$$\begin{aligned} F_{re1} &= k_r |F_{r1}| = 1 \times 1750 = 1750 \\ F_{re2} &= k_r |F_{r2}| = 1 \times 346 = 346 \\ F_{re3} &= k_r |F_{r3}| = 1 \times 252 = 252 \\ F_{re4} &= k_r |F_{r4}| = 1 \times 1150 = 1150 \\ F_{ae1} &= k_a |F_{a1}| = 1 \times 1600 = 1600 \\ F_{ae2} &= k_a |F_{a2}| = 1 \times 600 = 600 \\ F_{ae3} &= k_a |F_{a3}| = 1 \times 1600 = 1600 \\ F_{ae4} &= k_a |F_{a4}| = 1 \times 600 = 600 \end{aligned}$$

where,  $k_r, k_a$ : Conversion factors for load direction (See Table 4 on page III-7.)

The dynamic equivalent load is calculated by formula (9) on page III-7.

$$\begin{aligned} P_1 &= X |F_{re1}| + Y |F_{ae1}| = 1 \times 1750 + 0.6 \times 1600 = 2710 \\ P_2 &= X |F_{re2}| + Y |F_{ae2}| = 0.6 \times 346 + 1 \times 600 \approx 808 \\ P_3 &= X |F_{re3}| + Y |F_{ae3}| = 0.6 \times 252 + 1 \times 1600 \approx 1750 \\ P_4 &= X |F_{re4}| + Y |F_{ae4}| = 1 \times 1150 + 0.6 \times 600 = 1510 \end{aligned}$$

The basic rating life of slide unit 1 receiving the largest dynamic equivalent load is calculated. The basic rating life is obtained by the formula (1) given on the page III-6 considering the load factor  $f_w$  (see Table 2 on page III-6).

$$\begin{aligned} L_1 &= 50 \left( \frac{C}{f_w P_1} \right)^3 = 50 \times \left( \frac{18100}{1.5 \times 2710} \right)^3 \approx 4410 \\ L_{h1} &= \frac{10^6 L_1}{2 S n_1 \times 60} = \frac{10^6 \times 4410}{2 \times 100 \times 5 \times 60} \approx 73500 \end{aligned}$$

As the result of calculation above, the basic rating life is about 73,500 hours.

### ③ Calculating of static safety factor

The static equivalent load is calculated from the upward / downward load and lateral load by formula (10) on page III-8.

$$\begin{aligned} P_{01} &= k_{0r} |F_{r1}| + k_{0a} |F_{a1}| = 1 \times 1750 + 1 \times 1600 = 3350 \\ P_{02} &= k_{0r} |F_{r2}| + k_{0a} |F_{a2}| = 1 \times 346 + 1 \times 600 = 946 \\ P_{03} &= k_{0r} |F_{r3}| + k_{0a} |F_{a3}| = 1 \times 252 + 1 \times 1600 = 1852 \\ P_{04} &= k_{0r} |F_{r4}| + k_{0a} |F_{a4}| = 1 \times 1150 + 1 \times 600 = 1750 \end{aligned}$$

where,  $k_{0r}, k_{0a}$ : Conversion factors for load direction (See Table 6 on page III-8.)

The static safety factor of slide unit 1 receiving the largest static equivalent load is calculated. The static safety factor is calculated by formula (5) on page III-6.

$$f_{s1} = \frac{C_0}{P_{01}} = \frac{21100}{3350} \approx 6.3$$

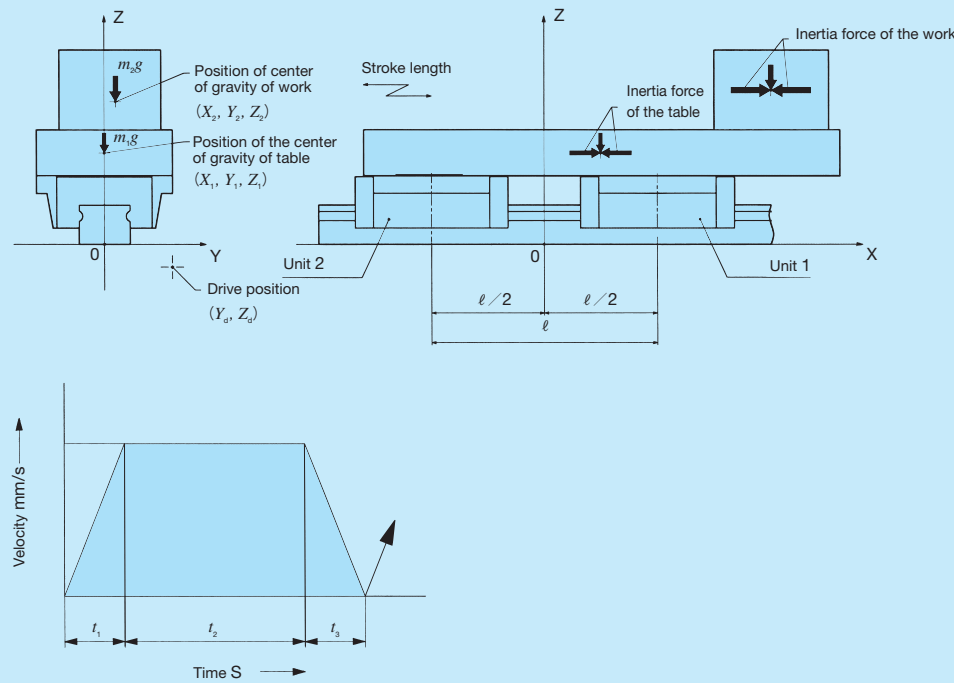
As the result of calculation above, the static safety factor is about 6.3.



### Example 2

|                                                  |                                       |
|--------------------------------------------------|---------------------------------------|
| Linear Way Model·····                            | MH 45 C2 R1050 H                      |
| Basic dynamic load rating·····                   | $C = 74600 \text{ N}$                 |
| Basic static load rating·····                    | $C_0 = 80200 \text{ N}$               |
| Static moment rating in the $T_0$ direction····· | $T_0 = 1610 \text{ N} \cdot \text{m}$ |
| Table mass·····                                  | $m_1 = 100 \text{ kg}$                |
| Position of the center of gravity of table·····  | $X_1 = 50 \text{ mm}$                 |
| ····· $Y_1 = 0 \text{ mm}$                       |                                       |
| ····· $Z_1 = 80 \text{ mm}$                      |                                       |
| Work mass·····                                   | $m_2 = 1000 \text{ kg}$               |
| Position of center of gravity of work·····       | $X_2 = 200 \text{ mm}$                |
| ····· $Y_2 = 10 \text{ mm}$                      |                                       |
| ····· $Z_2 = 130 \text{ mm}$                     |                                       |

|                                              |                         |
|----------------------------------------------|-------------------------|
| Distance between slide units·····            | $\ell = 200 \text{ mm}$ |
| Stroke length·····                           | $S = 500 \text{ mm}$    |
| Number of strokes per minute·····            | $n_1 = 6 \text{ cpm}$   |
| Maximum traveling velocity·····              | $V = 100 \text{ mm/s}$  |
| Time spent for acceleration·····             | $t_1 = 0.1 \text{ s}$   |
| Time spent during constant speed motion····· | $t_2 = 4.9 \text{ s}$   |
| Time spent for deceleration·····             | $t_3 = 0.1 \text{ s}$   |
| Drive position·····                          | $Y_d = 60 \text{ mm}$   |
| ····· $Z_d = -20 \text{ mm}$                 |                         |



The life and static safety factor in the case of Example 2 is calculated. Load factor  $f_w$  is assumed to be 1.5.

#### ① Calculation of load on the slide unit

Due to the applied load and the table mass and inertia force, moment load occurs around each coordinate axis of the Linear Way as shown below.

(During acceleration at the start of motion)

$$M_r = \sum (F_y Z) + \sum (F_z Y) = m_1 g Y_1 + m_2 g Y_2 = 100 \times 9.8 \times 0 + 1000 \times 9.8 \times 10 \div 98000$$

$$M_p = \sum \{F_x (Z - Z_d)\} + \sum (F_z X) \\ = m_1 \frac{V_{\max}}{1000 \times t_1} (Z_1 - Z_d) + m_2 \frac{V_{\max}}{1000 \times t_1} (Z_2 - Z_d) + m_1 g X_1 + m_2 g X_2 \\ = 100 \times \frac{100}{1000 \times 0.1} \times (80 + 20) + 1000 \times \frac{100}{1000 \times 0.1} \times (130 + 20) + 100 \times 9.8 \times 50 + 1000 \times 9.8 \times 200 \div 2169000$$

$$M_y = -\sum \{F_x (Y - Y_d)\} + \sum (F_y X) \\ = -m_1 \frac{V_{\max}}{1000 \times t_1} (Y_1 - Y_d) - m_2 \frac{V_{\max}}{1000 \times t_1} (Y_2 - Y_d) \\ = -100 \times \frac{100}{1000 \times 0.1} \times (0 - 60) - 1000 \times \frac{100}{1000 \times 0.1} \times (10 - 60) \div 56000$$

(During constant speed motion)

$$M_r = m_1 g Y_1 + m_2 g Y_2 \div 98000$$

$$M_p = m_1 g X_1 + m_2 g X_2 \div 2010000$$

$$M_y = 0$$

(During deceleration at the end of motion)

$$M_r = m_1 g Y_1 + m_2 g Y_2 \div 98000$$

$$M_p = -m_1 \frac{V_{\max}}{1000 \times t_3} (Z_1 - Z_d) - m_2 \frac{V_{\max}}{1000 \times t_3} (Z_2 - Z_d) + m_1 g X_1 + m_2 g X_2 \div 1850000$$

$$M_y = m_1 \frac{V_{\max}}{1000 \times t_3} (Y_1 - Y_d) + m_2 \frac{V_{\max}}{1000 \times t_3} (Y_2 - Y_d) \div -56000$$

where,  $M_r$ : Moment load in the rolling direction, N · mm  
 $M_p$ : Moment load in the pitching direction, N · mm  
 $M_y$ : Moment load in the yawing direction, N · mm

The loads applied on each slide unit are calculated according to Table 7.2 on page III-9.

(During acceleration at the start of motion)

$$F_{r1} = \frac{\sum F_z + \frac{M_p}{\ell}}{2} = \frac{m_1 g + m_2 g}{2} + \frac{M_p}{\ell} \\ = \frac{100 \times 9.8 + 1000 \times 9.8}{2} + \frac{2169000}{200} \div 16200$$

$$F_{r2} = \frac{\sum F_z + \frac{M_p}{\ell}}{2} = \frac{m_1 g + m_2 g}{2} - \frac{M_p}{\ell} \div -5460$$

$$F_{a1} = \frac{\sum F_y + \frac{M_y}{\ell}}{2} = 280$$

$$F_{a2} = \frac{\sum F_y + \frac{M_y}{\ell}}{2} = -280$$

$$M_{01} = M_{02} = \frac{M_r}{2} = 49000$$

(During constant speed motion)

$$F_{r1} = \frac{100 \times 9.8 + 1000 \times 9.8}{2} + \frac{2010000}{200} \div 15400$$

$$F_{r2} \div -4660$$

$$F_{a1} = F_{a2} = 0$$

$$M_{01} = M_{02} = 49000$$

(During deceleration at the end of motion)

$$F_{r1} = \frac{100 \times 9.8 + 1000 \times 9.8}{2} + \frac{1850000}{200} \div 14600$$

$$F_{r2} \div -3860$$

$$F_{a1} \div -280$$

$$F_{a2} \div 280$$

$$M_{01} = M_{02} = 49000$$

#### ② Calculating of rating life

The upward / downward load, lateral load and the moment load along  $T_0$  direction are calculated by the formula (7) and (8) on page III-7, and the dynamic equivalent load is calculated by formula (9).

(During acceleration at the start of motion)

$$F_{re1} = k_r |F_{r1}| + \frac{C_0}{T_0} |M_{01}| = 1 \times 16200 + \frac{80200}{1610} \times \frac{49000}{1000} \div 18600$$

$$F_{re2} = 1 \times 5460 + \frac{80200}{1610} \times \frac{49000}{1000} \div 7900$$

$$F_{ae1} = k_a |F_{a1}| = 1.28 \times 280 \div 358$$

$$F_{ae2} = 1.28 \times 280 \div 358$$

$$P_{1a} = X F_{re1} + Y F_{ae1} = 1 \times 18600 + 0.6 \times 358 \div 18800$$

$$P_{2a} = X F_{re2} + Y F_{ae2} = 1 \times 7900 + 0.6 \times 358 \div 8110$$

(During constant speed motion)

$$F_{re1} = 1 \times 15400 + \frac{80200}{1610} \times \frac{49000}{1000} \div 17800$$

$$F_{re2} = 1 \times 4660 + \frac{80200}{1610} \times \frac{49000}{1000} \div 7100$$

$$F_{ae1} = 0$$

$$F_{ae2} = 0$$

$$P_{1b} = 17800$$

$$P_{2b} = 7100$$

(During deceleration at the end of motion)

$$F_{re1} = 1 \times 14600 + \frac{80200}{1610} \times \frac{49000}{1000} \div 17000$$

$$F_{re2} = 1 \times 3860 + \frac{80200}{1610} \times \frac{49000}{1000} \div 6300$$

$$F_{ae1} = 1.28 \times 280 \div 358$$

$$F_{ae2} = 1.28 \times 280 \div 358$$

$$P_{1c} = 1 \times 17000 + 0.6 \times 358 \div 17200$$

$$P_{2c} = 1 \times 6300 + 0.6 \times 358 \div 6510$$

Because the dynamic equivalent load changes stepwise along the traveling distance, the mean equivalent load is calculated from ① in Table 8 on page III-14.

$$P_{m1} = \sqrt[3]{\frac{1}{S} \left( P_{1a}^3 \frac{V_{\max} t_1}{2} + P_{1b}^3 V_{\max} t_2 + P_{1c}^3 \frac{V_{\max} t_3}{2} \right)} \\ = \left\{ \frac{1}{500} \times \left( 18800^3 \times \frac{100 \times 0.1}{2} + 17800^3 \times 100 \times 4.9 \right. \right. \\ \left. \left. + 17200^3 \times \frac{100 \times 0.1}{2} \right) \right\}^{1/3} \div 17800$$

$$P_{m2} = \left\{ \frac{1}{500} \times \left( 8110^3 \times \frac{100 \times 0.1}{2} + 7100^3 \times 100 \times 4.9 \right. \right. \\ \left. \left. + 6510^3 \times \frac{100 \times 0.1}{2} \right) \right\}^{1/3} \div 7110$$

The basic rating life of slide unit 1 receiving the largest dynamic equivalent load is calculated. The basic rating life is obtained by the formula (1) given on the page III-6 considering the load factor  $f_w$  (see Table 2 on page III-6).

$$L_1 = 50 \left( \frac{C}{f_w P_{m1}} \right)^3 = 50 \left( \frac{74600}{1.5 \times 17800} \right)^3 \div 1090$$

$$L_{h1} = \frac{10^6 L_1}{2S n_1 \times 60} = \frac{10^6 \times 1090}{2 \times 500 \times 6 \times 60} \div 3030$$

As the result of calculation above, the basic rating life is about 3,030 hours.

#### ③ Calculating of static safety factor

The static equivalent load is calculated from the upward / downward load and lateral load by formula (10) on page III-8.

(During acceleration at the start of motion)

$$P_{01a} = k_{0r} |F_{r1}| + k_{0a} |F_{a1}| + \frac{C_0}{T_0} |M_{01}| = 1 \times 16200 + 1.28 \times 280 \\ + \frac{80200}{1610} \times \frac{49000}{1000} \div 19000$$

$$P_{02a} = k_{0r} |F_{r2}| + k_{0a} |F_{a2}| + \frac{C_0}{T_0} |M_{02}| = 1.19 \times 5460 + 1.28 \\ \times 280 + \frac{80200}{1610} \times \frac{49000}{1000} \div 9300$$

(During constant speed motion)

$$P_{01b} = 1 \times 15400 + 1.28 \times 0 + \frac{80200}{1610} \times \frac{49000}{1000} \div 19000$$

$$P_{02b} = 1.19 \times 4660 + 1.28 \times 0 + \frac{80200}{1610} \times \frac{49000}{1000} \div 7990$$

(During deceleration at the end of motion)

$$P_{01c} = 1 \times 14600 + 1.28 \times 280 + \frac{80200}{1610} \times \frac{49000}{1000} \div 17400$$

$$P_{02c} = 1.19 \times 3860 + 1.28 \times 280 + \frac{80200}{1610} \times \frac{49000}{1000} \div 7390$$

The static safety factor of slide unit 1 during acceleration at the start of motion receiving the largest static equivalent load is calculated. The static safety factor is calculated by formula (5) on page III-6.

$$f_s = \frac{C_0}{P_{01a}} = \frac{80200}{19000} \div 4.2$$

As the result of calculation above, the static safety factor is about 4.2.

Accuracy

Five classes of accuracy, ordinary, high, precision, super precision, and ultra precision are specified for Linear Way and Linear Roller Way. The outline of applicable accuracy classes is shown in Table 9. For details, see an explanation of each series.

Table 9 Accuracy classes and series

| Class (classification symbol)                                  | Ordinary    | High | Precision | Super precision | Ultra precision |
|----------------------------------------------------------------|-------------|------|-----------|-----------------|-----------------|
| Series name                                                    | (No symbol) | (H)  | (P)       | (SP)            | (UP)            |
| C-Lube Linear Way ML<br>Linear Way L                           | —           | ○    | ○         | —               | —               |
| C-Lube Linear Way ME<br>Linear Way E                           | ○           | ○    | ○         | ○               | —               |
| C-Lube Linear Way MH<br>Linear Way H                           | —           | ○    | ○         | ○               | —               |
| Linear Way F                                                   | —           | ○    | ○         | ○               | —               |
| C-Lube Linear Way MUL<br>Linear Way U                          | ○           | ○    | —         | —               | —               |
| C-Lube Linear Roller Way Super MX<br>Linear Roller Way Super X | —           | ○    | ○         | ○               | ○               |
| Linear Roller Way X                                            | —           | ○    | ○         | ○               | ○               |
| Linear Way Module                                              | —           | ○    | ○         | ○               | —               |

Preload

Objectives of preload

In some cases, the linear motion rolling guide is used with clearance given to the linear motion rolling guide when light motion with small load is required. However, for some applications, it may be used with play in the guiding mechanism removed or with preload to increase rigidity. Preload is applied to the contact parts of a raceway and rolling elements with internal stress generated in advance. When a external load is applied on the preloaded linear motion rolling guide, shock absorbing with this internal stress makes elastic deformation smaller, and its rigidity is increased. (See Fig. 3)

Preload setting

Preload amount is determined by considering the characteristics of the machines or equipments on which the linear motion rolling guide is mounted and the nature of load acting on the linear motion rolling guide. The standard amount of preload for linear motion rolling guides is, in general, approx. 1/3 of load when the rolling elements are balls (steel balls) and approx. 1/2 of load when they are rollers (cylindrical rollers). If the linear motion rolling guides are required to have very high rigidity to withstand vibration or fluctuating load, a larger preload may be applied. For applicable preload amount, see Table 10. For details, see an explanation of each series.

Precaution for preload selection

Even when high rigidity must be required, excessive preload should be avoided, because it will produce an excessive stress between rolling elements and raceways, and eventually result in short life of linear motion rolling guides. It is important to apply a proper amount of preload, considering the operational conditions. When using with a large preload, contact **IKO**.

Table 10 Series and preload amount

| Preload (preload symbol)                                       | Clearance | Clearance | Standard    | Light preload | Medium preload | Heavy preload |
|----------------------------------------------------------------|-----------|-----------|-------------|---------------|----------------|---------------|
| Series name                                                    | (Tc)      | (To)      | (No symbol) | (T1)          | (T2)           | (T3)          |
| C-Lube Linear Way ML<br>Linear Way L                           | —         | ○         | ○           | ○             | —              | —             |
| C-Lube Linear Way ME<br>Linear Way E                           | ○         | —         | ○           | ○             | ○              | —             |
| C-Lube Linear Way MH<br>Linear Way H                           | —         | ○         | ○           | ○             | ○              | ○             |
| Linear Way F                                                   | —         | —         | ○           | ○             | ○              | —             |
| C-Lube Linear Way MUL<br>Linear Way U                          | —         | —         | ○           | ○             | —              | —             |
| C-Lube Linear Roller Way Super MX<br>Linear Roller Way Super X | —         | —         | ○           | ○             | ○              | ○             |
| Linear Roller Way X                                            | —         | —         | ○           | ○             | ○              | ○             |

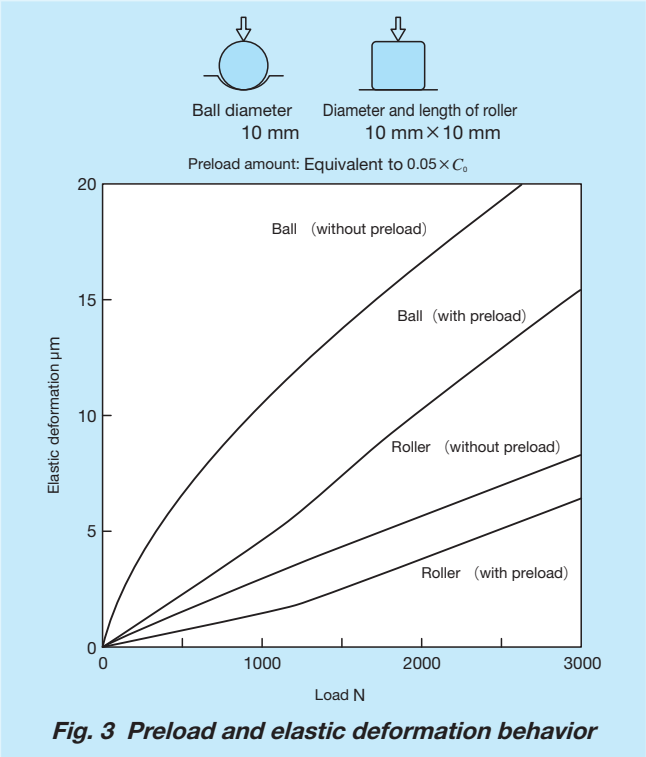


Fig. 3 Preload and elastic deformation behavior

Friction

Friction of linear motion rolling guide

The static friction (start-up friction) of linear motion rolling guides is much lower than that of conventional plain guides. Also, the difference between static friction and dynamic friction is small, and frictional resistance varies little when velocity changes. These are excellent features of linear motion rolling guides, and account for their ability to reduce power consumption, suppress operating temperature rise, and increase traveling speed. Since frictional resistance and variation are small, high-speed response characteristics to motion commands and high accuracy positioning can be achieved.

Friction coefficient

The frictional resistance of linear motion rolling guides varies with their model, applied load, velocity and characteristics of lubricant. Generally, lubricant or seals are major factors in determining the frictional resistance in light load or high-speed operation, while the amount of load is the major factor in heavy load or low speed operation. The frictional resistance of linear motion rolling guides depends on various factors, but generally the following formula is used.

F = μP .....(11)

where, F : Frictional resistance, N  
μ : Dynamic friction coefficient  
P : Applied load, N

For sealed guides, seal resistance is added to the above value, but this resistance varies greatly depending on the interference amount of seal lip and lubrication conditions. Where the lubrication and mounting condition are correct and the load is moderate, the friction coefficients of Linear Way and Linear Roller Way in operation are within the range shown in Table 11. Generally, friction coefficient is large under small load.

Table 11 Friction coefficient

| Series name       | Dynamic friction coefficient μ (1) |
|-------------------|------------------------------------|
| Linear Way        | 0.0040~0.0060                      |
| Linear Roller Way | 0.0020~0.0040                      |

Note (1) These friction coefficients do not include seal.

Lubrication

Objectives of lubrication

The objectives of applying lubricant for linear motion rolling guides is to keep raceways, rolling elements, etc. in a linear motion rolling guide from metal contact, and thereby reduce friction and wear preventing heat generation and seizure. When an adequate oil film is formed at the rolling contact area between the raceways and rolling elements, the contact stress due to load can be reduced. To manage the formation of adequate oil film is important for ensuring the reliability of linear motion rolling mechanism.

Selection of lubricant

To obtain the full performance of linear motion rolling guides, it is necessary to select an appropriate lubricant and lubrication method by considering the model, load and velocity of each linear motion rolling guide. However, as compared with plain guides, lubrication of linear motion rolling guides is much simpler. Only a small amount of lubrication oil is needed and replenishment interval is longer, so maintenance can be greatly reduced. Grease and oil are the two most commonly used lubricants for linear motion rolling guides.

Grease lubrication

For linear motion rolling guides, lithium-soap base grease (Consistency No.2 of JIS) is commonly used. For rolling guides operating under heavy load conditions, grease containing extreme pressure additives is recommended. In clean and high-vacuum environments, where low dust generating performance and low vaporization characteristics are required, greases containing a synthetic-base oil or a soap other than the lithium-soap base are used. For applications in these environments, due consideration is necessary to select a grease that is suitable for the operating conditions of linear motion rolling guide and achieves satisfactory lubrication performance at the same time.

Table 12 Pre-packed grease list

| Series name                                                    | Pre-packed grease                                 |
|----------------------------------------------------------------|---------------------------------------------------|
| C-Lube Linear Way ML<br>Linear Way L                           | MULTEMP PS No.2<br>[KYODO YUSHI CO., LTD.]        |
| C-Lube Linear Way ME<br>Linear Way E                           | Alvania EP Grease 2<br>[SHOWA SHELL SEKIYU K. K.] |
| C-Lube Linear Way MH (1)<br>Linear Way H (1)                   |                                                   |
| Linear Way F                                                   |                                                   |
| C-Lube Linear Way MUL<br>Linear Way U (2)                      | MULTEMP PS No.2<br>[KYODO YUSHI CO., LTD.]        |
| C-Lube Linear Roller Way Super MX<br>Linear Roller Way Super X | Alvania EP Grease 2<br>[SHOWA SHELL SEKIYU K. K.] |
| Linear Roller Way X                                            |                                                   |
| Linear Way Module                                              |                                                   |

Notes (1) MULTEMP PS No.2 is pre-packed in size 8 to 12 series.  
(2) Alvania EP Grease 2 is pre-packed in size 40 to 130 series.

Grease replenishment interval

The quality of any grease will gradually deteriorate as operating time passes. Therefore, periodic replenishment is necessary. Grease replenishment interval varies depending on the operating conditions. A six month interval is generally recommended, and if the machine operation consists of reciprocating motions with many cycles and long strokes, replenishment every three month is recommended. In addition, linear motion rolling guides in which the lubrication part "C-Lube" is built deliver long-term maintenance free performance. This eliminates the need for lubrication mechanism and workload which used to be necessary for linear motion rolling guides and significantly reduces maintenance cost.

## Grease replenishment method

New grease must be supplied through a grease feed device such as a grease nipple until old grease is discharged. After grease is replenished, running-in is performed and excess grease will be discharged to outside of the linear motion rolling guide. Discharged grease must then be removed before starting the operation.

The amount of grease required for standard replenishment is about 1/3 to 1/2 of the free space inside the linear motion rolling guide. When grease is supplied from a grease nipple for the first time, there will be grease lost in the replenishment path. The amount lost should be taken into consideration.

Generally, immediately after grease is replenished, frictional resistance tends to increase. If additional running-in is performed for 10 to 20 reciprocating cycles after excess grease is discharged, frictional resistance becomes small and stable.

For applications where low frictional resistance is required, the replenishment amount of grease may be reduced, but it must be kept to an appropriate level so as not to give a bad influence on the lubrication performance.

## Mixing of different type of grease

Mixing different types of grease may result in changing the properties of base oil, soap base, or additives used, and, in some cases, severely deteriorate the lubrication performance or cause trouble due to chemical changes of additives. Old grease should therefore be removed thoroughly before filling with new grease.

**Table 13 Grease brands used in linear motion rolling guide**

| Brand                                                           |                             | Base oil                   | Thickener               | Range of operating temperature <sup>(2)</sup><br>℃ | Usage                                              |
|-----------------------------------------------------------------|-----------------------------|----------------------------|-------------------------|----------------------------------------------------|----------------------------------------------------|
| Alvania EP Grease 2                                             | [SHOWA SHELL SEKIYU K. K.]  | Mineral oil                | Lithium                 | -20~110                                            | General application with extreme-pressure additive |
| Alvania Grease S2                                               | [SHOWA SHELL SEKIYU K. K.]  | Mineral oil                | Lithium                 | -25~120                                            | General application                                |
| MULTEMP PS No.2                                                 | [KYODO YUSHI CO., LTD.]     | Synthetic oil, Mineral oil | Lithium                 | -50~130                                            | General application                                |
| <b>IKO</b> Low Dust-Generation Grease for Clean Environment CG2 | [NIPPON THOMPSON CO., LTD.] | Synthetic oil              | Urea                    | -40~200                                            | For clean environment<br>Long life                 |
| <b>IKO</b> Low Dust-Generation Grease for Clean Environment CGL | [NIPPON THOMPSON CO., LTD.] | Synthetic oil, Mineral oil | Lithium / Calcium       | -30~120                                            | For clean environment<br>Low sliding               |
| DEMNUM™ Grease L-200 <sup>(1)</sup>                             | [DAIKIN INDUSTRIES, LTD.]   | Synthetic oil              | Ethylene tetra-fluoride | -60~300                                            | For clean environment                              |
| FOMBLIN® VAC3 <sup>(1)</sup>                                    | [SOLVAY SOLEXIS]            | Synthetic oil              | Ethylene tetra-fluoride | -20~250                                            | For vacuum                                         |
| <b>IKO</b> Anti-Fretting Corrosion Grease AF2                   | [NIPPON THOMPSON CO., LTD.] | Synthetic oil              | Urea                    | -50~170                                            | Fretting-proof                                     |
| 6459 Grease N                                                   | [SHOWA SHELL SEKIYU K. K.]  | Mineral oil                | Poly-urea               | —                                                  | Fretting-proof                                     |

Notes (1) Set replenishment intervals to short.

(2) The ranges of operating temperature are quoted from the grease manufacturer's cataloged values, but do not guarantee regular use under high temperature environment.

Remarks 1. FOMBLIN® is a registered trademark of SOLVAY SOLEXIS.

2. Check with the chosen grease manufacturer's catalog before use.

For grease for use other than listed, contact **IKO**.

## Oil lubrication

For oil lubrication, heavy load requires high oil viscosity and high velocity requires low oil viscosity. Generally, for linear motion rolling guides operating under heavy load, lubrication oil with a viscosity of about  $68 \text{ mm}^2/\text{s}$  is used. For linear motion rolling guides under light load at high-speed operation, lubrication oil with a viscosity of about  $13 \text{ mm}^2/\text{s}$  is used.

## Lubrication part "C-Lube"

C-Lube is a porous resin with molding formed fine resin powder. It is a lubrication part impregnated with a large amount of lubrication oil in its open pores by capillary inside. Lubrication oil is supplied directly to balls (steel balls) or rollers (cylindrical rollers), not to the track rail. When the balls or rollers have contact with C-Lube built in the slide unit, lubrication oil is supplied to the surface of the balls or rollers. As the balls or rollers circulate, the lubricant is distributed to the loading area along the track rail. This results in adequate lubrication oil being properly maintained in the loading area and lubrication performance will last for a long time.

The surface of C-Lube is always covered with the lubrication oil. Lubrication oil is continuously supplied to the surface of balls or rollers by surface tension in the contact of C-Lube surface and balls or rollers.

## Miniature greaser

The miniature greaser is specially prepared for grease replenishment for Linear Way and Linear Roller Way with an oil hole. Table 14 shows types of grease and specifications of miniature greasers.



**Table 14 Grease type and miniature greaser**

| Identification number | Grease name                                                     | Amount | Outer diameter of grease feed needle |
|-----------------------|-----------------------------------------------------------------|--------|--------------------------------------|
| MG10 / MT2            | MULTEMP PS No.2<br>[KYODO YUSHI CO., LTD.]                      | 10 ml  | ø 1 mm                               |
| MG10 / CG2            | <b>IKO</b> Low Dust-Generation Grease for Clean Environment CG2 |        |                                      |
| MG2.5 / EP2           | Alvania EP Grease 2<br>[SHOWA SHELL SEKIYU K. K.]               | 2.5 ml |                                      |
| MG2.5 / CG2           | <b>IKO</b> Low Dust-Generation Grease for Clean Environment CG2 |        |                                      |
| MG2.5 / CGL           | <b>IKO</b> Low Dust-Generation Grease for Clean Environment CGL |        |                                      |
| MG2.5 / AF2           | <b>IKO</b> Anti-Fretting Corrosion Grease AF2                   |        |                                      |

## Grease nipple and supply nozzle

Tables 15.1 and 15.2 show the specifications of grease nipples and applicable types of supply nozzles, and Table 16 shows the specifications of supply nozzles.

**Table 15.1 Grease nipple and applicable supply nozzle type**

| Grease nipple |                                                                                                                                                              | Applicable supply nozzle type            |                                                |
|---------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|------------------------------------------------|
| Type          | Dimensions and shape                                                                                                                                         | Type                                     | Shape                                          |
| A-M3          | <p>Width across flats 4</p> <p>M3×0.5</p> <p>4.5</p> <p>4.2</p>                                                                                              | A-5120V<br>A-5240V<br>B-5120V<br>B-5240V | <p>Straight type</p> <p>A-****V</p>            |
| A-M4          | <p>Width across flats 4.5</p> <p>M4×0.7</p> <p>6</p> <p>4</p>                                                                                                |                                          | <p>Straight type with angle</p> <p>B-****V</p> |
| B-M4          | <p>About 67.5°</p> <p>Width across flats 6</p> <p>M4×0.7</p> <p>6</p> <p>10</p> <p>2.1</p> <p>6</p> <p>5.1</p> <p>3.7</p> <p>φ5.1</p> <p>(Tapered screw)</p> | A-8120V<br>B-8120V                       |                                                |

**Table 15.2 Grease nipple and applicable supply nozzle type**

| Grease nipple |                                                                                                      | Applicable supply nozzle type    |               |
|---------------|------------------------------------------------------------------------------------------------------|----------------------------------|---------------|
| Type          | Dimensions and shape                                                                                 | Type                             | Shape         |
| B-M6          | <p>JIS type 1 equivalent</p> <p>Width across flats 8</p> <p>MT6×0.75</p>                             | Products available on the market |               |
| JIS type 1    | <p><math>\phi 6.6</math></p> <p><math>\phi 4.8</math></p> <p>Width across flats 7</p> <p>M6×0.75</p> |                                  | Straight type |
| JIS type 2    | <p><math>\phi 6.6</math></p> <p><math>\phi 4.8</math></p> <p>Width across flats 10</p> <p>PT1/8</p>  |                                  | Chuck type    |
| JIS type 4    | <p>JIS type 1 equivalent</p> <p>Width across flats 10</p> <p>PT1/8</p>                               |                                  | Hose type     |
| A-PT 1/4      | <p><math>\phi 6.6</math></p> <p><math>\phi 4.8</math></p> <p>Width across flats 14</p> <p>PT1/4</p>  |                                  |               |


Note (1) For straight type, chuck type and hose type supply nozzles available on the market, it is recommended to use one with an outer diameter  $D$  of 13 mm or less.



Table 16 Types and dimensions of supply nozzle

| Type    | Dimensions and shape |
|---------|----------------------|
| A-5120V |                      |
| A-5240V |                      |
| B-5120V |                      |
| B-5240V |                      |
| A-8120V |                      |
| B-8120V |                      |

Remark: The supply nozzles shown in the table can be mounted on the main body of a common grease gun available on the market shown below. If needed, specify the supply nozzle type and place an order to **IKO**.



Piping joint

When applying centralized grease or oil lubrication, detach the grease nipple or plug from the slide unit, and replace them with piping joints, which are prepared for various female threads for piping. Use them after confirming the dimensions of the piping joints and  $H_3$  dimensions in the dimensions table of each models, because the top face of some piping joints is at the same or higher level than the top face of slide unit. Fig. 4.1 and 4.2 and Tables 17.1, 17.2, 17.3, and 17.4 show identification number and dimensions of piping joints. Note that some of them are not applicable for the slide units of special specifications. Piping joints can be mounted on Linear Way and Linear Roller Way prior to delivery upon request. If needed, please contact **IKO**.

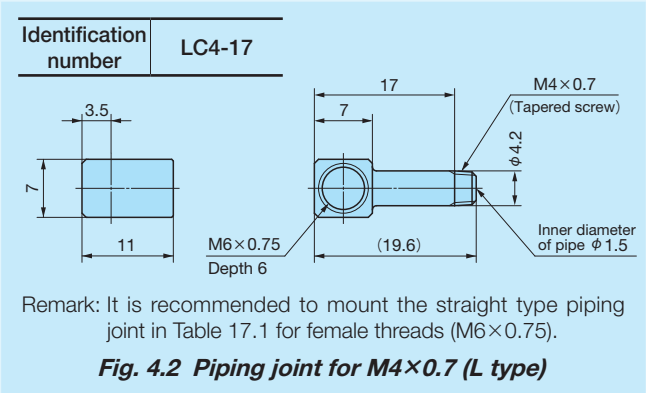
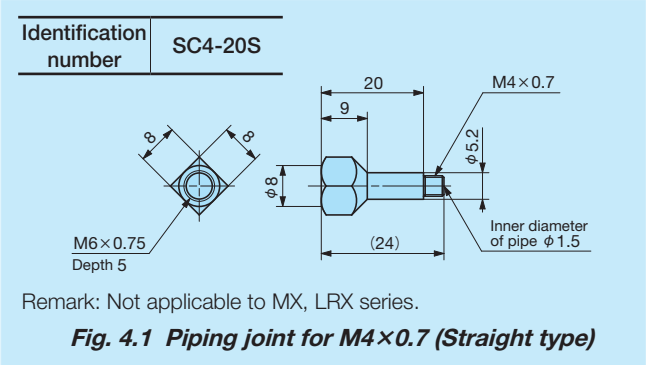


Table 17.1 Piping joint for M6×0.75 (Straight type)

| Identification number | $L_1$ | $L_2$ | $L_3$ | $L_4$ |
|-----------------------|-------|-------|-------|-------|
| SC6-16                | 22    | 12.4  | 16    | 9     |
| SC6-22S               | 28    | 12    | 22    | 6     |
| SC6-25S               | 31    | 12    | 25    | 6     |

Table 17.2 Piping joint for M6×0.75 (L type)

| Identification number | $L_1$ | $L_2$ | $D$ |
|-----------------------|-------|-------|-----|
| LC6-18                | 25    | 18    | 9   |
| LC6-22S               | 28    | —     | 6   |
| LC6-24                | 30.5  | 23.5  | 9   |
| LC6-25S               | 31    | —     | 6   |

Table 17.3 Piping joint for PT1/8 (Straight type)

| Identification number | $L_1$ |
|-----------------------|-------|
| SC1/8-19S             | 25    |
| SC1/8-34S             | 40    |

Table 17.4 Piping joint for PT1/8 (L type)

| Identification number | $L_1$ |
|-----------------------|-------|
| LC1/8-19S             | 25    |
| LC1/8-34S             | 40    |

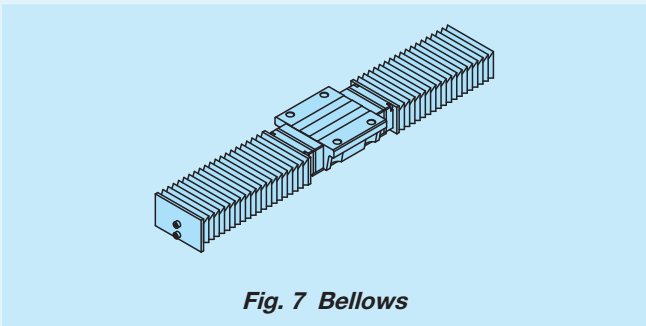
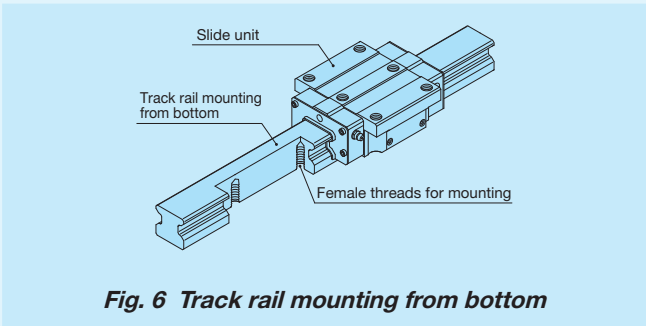
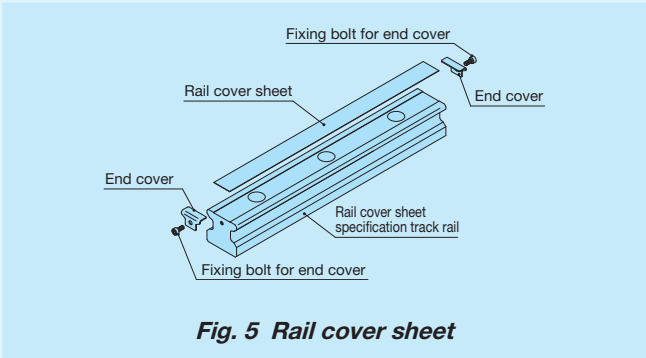
Dust Protection

Purpose of dust protection

To obtain the full performance of linear motion rolling guides, it is important to protect them from the intrusion of dust and other harmful foreign substances. Select an effective sealing or dust-protection device to withstand any operating conditions that might be imposed.

Method of dust protection

Linear Way and Linear Roller Way have end seals as a standard specification. In addition, double seals or scrapers are provided as special specifications for improvement in dust protection performance. Also caps and a rail cover sheet to cover the mounting hole of track rail (Fig. 5) and track rail mounting from bottom with no mounting hole on the upper surface (Fig. 6) will further increase the reliability of dust protection. However, if large amount of contaminant or dust are floating, or if large particles of foreign substances such as chips or sand may adhere to the raceway, complete dust protection becomes difficult. In this case, it is recommended to cover the whole unit with bellows (Fig. 7), telescope type shield, etc. When rail cover sheets or track rails mounting from bottom are needed, please contact **IKO**.






Specific bellows

The specific bellows are manufactured to match the dimensions of Linear Way and Linear Roller Way for easy mounting and excellent dust protection. If special bellows to be used in an upside-down position or those made of heat-resistant material are needed, please contact **IKO**.

Identification number of bellows

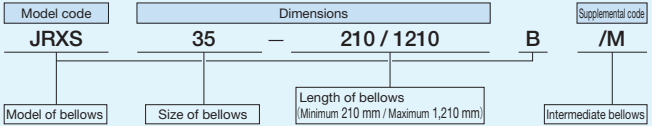The identification number of bellows consists of a model code, dimensions, and any supplemental codes. Its standard arrangement is shown below.



Calculation of minimum length of bellows

The minimum necessary length of specific bellows is determined, by first calculating the necessary number of accordion pleats as follows.

$$ns = \frac{S}{\ell_{s_{\max}} - \ell_{s_{\min}}}$$

where,  $ns$  : Number of pleats (Raise decimal fractions)  
 $S$  : Stroke length, mm  
 $\ell_{s_{\max}}$  : Maximum length of one pleat (See Tables 19.1 and 19.2)  
 $\ell_{s_{\min}}$  : Minimum length of one pleat (See Tables 19.1 and 19.2)

$$L_{\min} = ns \times \ell_{s_{\min}} + m \times 5 + 10$$
$$L_{\max} = S + L_{\min}$$

where,  $L_{\min}$  : Minimum length of bellows, mm  
 $L_{\max}$  : Maximum length of bellows, mm  
 $m$  : Number of internal guide plates (See Table 18)

Table 18 Number of internal guide plates for bellows

| Model                                 | <i>P</i> dimensions of specific bellows <sup>(1)</sup> mm |       | Number of internal guide plates <i>m</i>                |
|---------------------------------------|-----------------------------------------------------------|-------|---------------------------------------------------------|
|                                       | Above                                                     | Below |                                                         |
| JEF<br>JRES                           | —                                                         | 35    | $m = \frac{ns}{7} - 1$                                  |
| JES<br>JHS<br>JFS<br>JRXS···B<br>JFFS | —                                                         | 22    | $m = \frac{ns}{16}$<br>when $ns \leq 20$ , then $m = 0$ |
|                                       | 22                                                        | 25    | $m = \frac{ns}{12}$<br>when $ns \leq 18$ , then $m = 0$ |
|                                       | 25                                                        | 35    | $m = \frac{ns}{8}$                                      |

Note <sup>(1)</sup> For *P* dimensions, see Table 19.1 and Table 19.2.  
Remark: In calculating the number of internal guide plates *m*, raise the decimal fractions for JEF and JRES and omit the decimal fractions for others.

Intermediate bellows

Since different type of mounting plate is used for mounting bellows between slide units. add supplemental code "/M" onto the identification number when ordering. Reinforced bellows are also available, which are specially designed for use on long track rails or for lateral mounting. The width *A* of reinforced bellows is greater than that of standard type bellows. If needed, please contact **IKO**.

Table 19.1 Dimensions of bellows and applicable models

unit: mm

| Series name                                         | Size | Bellows model code | Type | <i>H</i>            | <i>A</i>          | <i>a</i> | <i>B</i> | <i>P</i> | $\ell_{s_{\min}}$ | $\ell_{s_{\max}}$ |
|-----------------------------------------------------|------|--------------------|------|---------------------|-------------------|----------|----------|----------|-------------------|-------------------|
| C-Lube Linear Way ME<br>Linear Way E                | 15   | JEF 15             | II   | 23.5                | 34                | 14       | 17       | 8        | 2                 | 9                 |
|                                                     | 20   | JEF 20             |      | 27.5                | 40                | 19       | 21       | 9        | 2                 | 10                |
|                                                     | 25   | JEF 25             |      | 32                  | 46                | 22       | 24       | 10       | 2                 | 11                |
|                                                     | 30   | JES 30             |      | 42                  | 70                | 27       | 35       | 15       | 2                 | 14                |
|                                                     | 35   | JES 35             |      | 48                  | 85                | 33       | 40       | 18       | 2                 | 18.5              |
|                                                     | 45   | JES 45             |      | 60                  | 105               | 44       | 50       | 22       | 2                 | 23.5              |
| C-Lube Linear Way MH<br>Linear Way H <sup>(1)</sup> | 15   | JHS 15             | I    | 31 <sup>(2)</sup>   | 55                | —        | 19.5     | 15       | 2                 | 14                |
|                                                     | 20   | JHS 20             |      | 35 <sup>(2)</sup>   | 60                | —        | 25       | 15       | 2                 | 14                |
|                                                     | 25   | JHS 25             |      | 39 <sup>(2)</sup>   | 64                | —        | 29.5     | 15       | 2                 | 14                |
|                                                     | 30   | JHS 30             |      | 42                  | 70                | —        | 35       | 15       | 2                 | 14                |
|                                                     | 35   | JHS 35             |      | 48                  | 85                | —        | 40       | 18       | 2                 | 18.5              |
|                                                     | 45   | JHS 45             |      | 60                  | 105               | —        | 50       | 22       | 2                 | 23.5              |
|                                                     | 55   | JHS 55             |      | 70                  | 120               | —        | 57       | 25       | 2                 | 28                |
|                                                     | 65   | JHS 65             |      | 90                  | 158               | —        | 76       | 35       | 2                 | 42                |
| Linear Way F                                        | 33   | JFFS 33            | II   | 26 <sup>(2)</sup>   | 66 <sup>(3)</sup> | —        | 23       | 15       | 2                 | 15                |
|                                                     | 37   | JFFS 37            | II   | 27.5 <sup>(2)</sup> | 70 <sup>(3)</sup> | —        | 24       | 15       | 2                 | 15                |
|                                                     | 40   | JFS 40             | I    | 32 <sup>(2)</sup>   | 80                | —        | 27       | 15       | 2                 | 14                |
|                                                     | 42   | JFFS 42            | II   | 30.5 <sup>(2)</sup> | 76 <sup>(3)</sup> | —        | 27.5     | 15       | 2                 | 15                |
|                                                     | 60   | JFS 60             | I    | 36 <sup>(2)</sup>   | 100               | —        | 30       | 15       | 2                 | 14                |
|                                                     | 69   | JFFS 69            | II   | 36 <sup>(2)</sup>   | 106               | —        | 31.5     | 15       | 2                 | 15                |
|                                                     | 90   | JFS 90             | I    | 50                  | 150               | —        | 43       | 22       | 2                 | 23.5              |

Notes <sup>(1)</sup> Not applicable to horizontal mounting type LWHY.  
<sup>(2)</sup> The height of bellows may become higher than the height *H* of dimensions of assembly of slide units. Check *H* dimensions of each series in dimension table.  
<sup>(3)</sup> The width of bellows may become lager than the *W<sub>2</sub>* dimensions of slide units. Check with *W<sub>2</sub>* dimensions of each series in dimension table.

Table 19.2 Dimensions of bellows and applicable models

unit: mm

| Series name                                                    | Size | Bellows model code | <i>H</i>          | <i>A</i>           | <i>a</i> | <i>B</i> | <i>P<sub>1</sub></i> | <i>P<sub>2</sub></i> | $\ell_{s_{\min}}$ | $\ell_{s_{\max}}$ |
|----------------------------------------------------------------|------|--------------------|-------------------|--------------------|----------|----------|----------------------|----------------------|-------------------|-------------------|
| C-Lube Linear Roller Way Super MX<br>Linear Roller Way Super X | 15   | JRES 15            | 34 <sup>(1)</sup> | 55 <sup>(2)</sup>  | 14       | 30       | 17.5                 | 15                   | 2                 | 15                |
|                                                                | 20   | JRES 20            | 39 <sup>(1)</sup> | 60 <sup>(2)</sup>  | 19       | 34       | 15                   | 15                   | 2                 | 15                |
|                                                                | 25   | JRES 25            | 42 <sup>(1)</sup> | 65 <sup>(2)</sup>  | 22       | 36       | 16.5                 | 15                   | 2                 | 15                |
|                                                                | 30   | JRES 30            | 46 <sup>(1)</sup> | 70 <sup>(2)</sup>  | 27       | 39.5     | 15                   | 15                   | 2                 | 15                |
|                                                                | 35   | JRES 35            | 48                | 88 <sup>(2)</sup>  | 33       | 41.5     | 24                   | 15                   | 2                 | 15                |
|                                                                | 45   | JRES 45            | 60                | 108 <sup>(2)</sup> | 44       | 52       | 29                   | 20                   | 2                 | 21                |
|                                                                | 55   | JRES 55            | 70                | 122 <sup>(2)</sup> | 52       | 61       | 31                   | 22                   | 2                 | 23.5              |
|                                                                | 65   | JRES 65            | 88                | 140 <sup>(2)</sup> | 61       | 76       | 25                   | 25                   | 2                 | 30                |
| Linear Roller Way X                                            | 85   | JRES 85            | 107               | 180                | 82       | 89       | 30                   | 30                   | 2                 | 36                |
|                                                                | 25   | JRXS 25···B        | 40                | 60                 | 22       | 34       | 15                   | 12                   | 2                 | 10                |
|                                                                | 35   | JRXS 35···B        | 48                | 88                 | 34       | 41.5     | 24                   | 15                   | 2                 | 14                |
|                                                                | 45   | JRXS 45···B        | 60                | 108                | 44       | 52       | 29                   | 20                   | 2                 | 21                |
|                                                                | 55   | JRXS 55···B        | 70                | 122                | 54       | 61       | 31                   | 22                   | 2                 | 23.5              |
|                                                                | 75   | JRXS 75···B        | 90                | 160                | 74       | 80       | 40                   | 30                   | 2                 | 36                |




Notes <sup>(1)</sup> The height of bellows may become higher than the height *H* of dimensions of assembly of slide units. Check *H* dimensions of each series in dimension table.  
<sup>(2)</sup> The width of bellows may become higher than the *W<sub>2</sub>* dimensions of slide units. Check *H* dimensions in dimension table.

1N=0.102kgf=0.2248lbs.  
1mm=0.03937inch


# Order Quantity

To order Linear Way and Linear Roller Way, please specify the number of sets based on the number of track rails. For slide units of the interchangeable specification or single track rails, please specify the number of units.



## Interchangeable specification

|                                                                                                                     |                                                                                                        |                                  |
|---------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|----------------------------------|
| Single slide unit<br><br>(2 units) | Example of identification number indication<br><b>LWESG 25 C1 SL T1 P S1 /U</b><br>Display is C1 only. | Order quantity<br><b>2 units</b> |
| Single track rail<br><br>(1 unit)  | Example of identification number indication<br><b>LWE 25 R640 SL P S1 /F</b>                           | Order quantity<br><b>1 unit</b>  |
| Assembled set<br><br>(1 set)       | Example of identification number indication<br><b>LWESG 25 C2 R640 SL T1 P S1 /FU</b>                  | Order quantity<br><b>1 set</b>   |

## Non-interchangeable specification

|                                                                                                                 |                                                                                    |                                |
|-----------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|--------------------------------|
| Assembled set<br><br>(1 set) | Example of identification number indication<br><b>LWESG 25 C2 R640 SL T1 P /FU</b> | Order quantity<br><b>1 set</b> |
|-----------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|--------------------------------|


## Specification with 1 multiple assembled sets as 1 assembled group (Special specification /W)

|                                                                                                                                                               |                                                                                 |                                 |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|---------------------------------|
| Linear Way and Linear Roller Way<br><br>(With 2 sets as 1 assembled group) | Example of identification number indication<br><b>LRX 45 C2 R1260 T3 SP /W2</b> | Order quantity<br><b>2 sets</b> |
| Linear Way Module<br><br>(With 2 sets as 1 assembled group)                | Example of identification number indication<br><b>LWM 2 M2 R480 P /W2</b>       | Order quantity<br><b>2 set</b>  |

# Special Specification


For Linear Way and Linear Roller Way, special specification described in pages Ⅲ-28 through Ⅲ-34 is available. There is limitation on applicable special specification. For details, see an explanation of each series.

## Butt-jointing track rails /A




When the track rail of non-interchangeable specification is longer than the maximum length, two or more track rails should be butted in a linear motion direction. For length and number of track rails to butt, contact **IKO**.

## Stainless steel end plate /BS

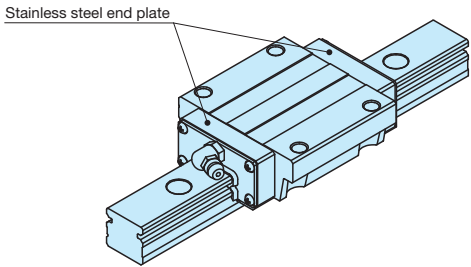

The standard synthetic resin end plates are replaced with stainless steel end plates. The total length of the slide unit remains unchanged. In addition, for improvement of heat resistance, it is recommended to use "No end seal (supplemental code /N)" together.


## Chamfered reference surface /C /CC



Add chamfer to the reference mounting surface of the slide unit and track rail.


- ① /C Add chamfer to the reference mounting surface of the track rail.
- ② /CC Add chamfer to the reference mounting surface of the slide unit and track rail.

## Opposite reference surfaces arrangement /D

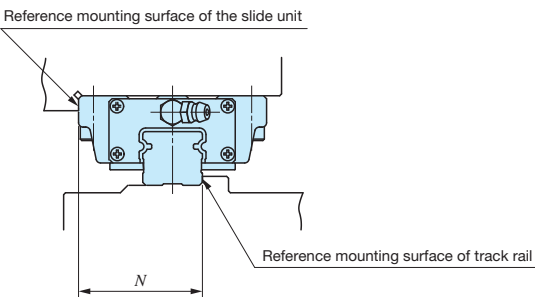


Reference mounting surface of the track rail should be the opposite of the standard position. Accuracy of *N* dimensions and parallelism during operation remain unchanged.

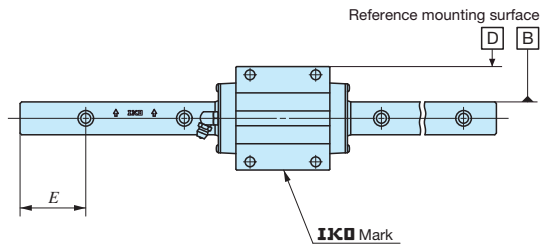Specified rail mounting hole positions /E




By specifying  $E$  dimensions from the mounting hole at the track rail left end to the left end surface when seen from **IKO** mark of the slide unit, specify the position of track rail mounting hole.  
Specify the dimensions (in mm) after "/E".  
In addition,  $E$  dimension range is limited. For details, please contact **IKO**.  
For Linear Way H horizontal mounting type and Linear Way Module series, see an explanation of each series.

Caps for rail mounting holes /F



Dedicated caps for rail mounting holes are included. They close track rail mounting holes to improve sealing property in a motion direction. Contact **IKO** for aluminum caps for rail mounting holes.

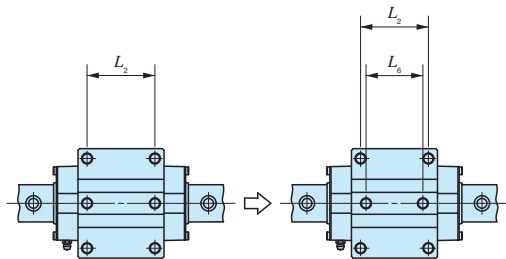Changed pitch of slide unit middle mounting holes /GE




Change the dimension between mounting holes at the slide unit center.

Hybrid C-Lube Linear Way /HB

Change the material of rolling elements built into the slide unit to silicon nitride ceramics.

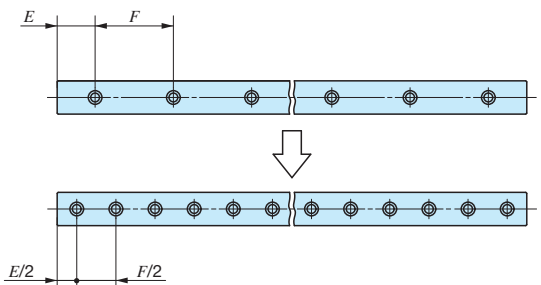Half pitch mounting holes for track rail /HP




Set the pitch of track rail mounting holes to a half of the standard  $F$  dimension. The specification with bolts for track rail mounting holes are supplied with the required number of bolts.

Inspection sheet /I

Inspection sheet of  $H$  dimension,  $N$  dimension and parallelism during slide unit operation are appended in each set.

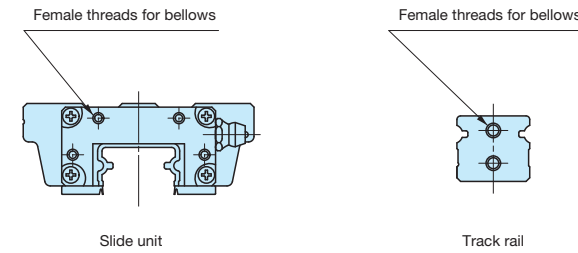
Female threads for bellows (Single unit) /J /JR /JL



For single slide unit or single track rail of the interchangeable specification, fit female threads for bellows.

- ① /J Fit female threads to both ends of the slide unit or track rail.
- ② /JR Fit female threads to a right end surface of the slide unit seen from **IKO** mark of the slide unit.
- ③ /JL Fit female threads to a left end surface of the slide unit seen from **IKO** mark of the slide unit.

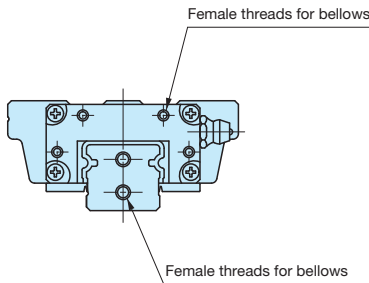Female threads for bellows (Assembled set) /J /JJ /JR /JS /JJS



For assembled set of the interchangeable specification or a non-interchangeable specification product, fit female threads for bellows to the slide unit and track rail.

- ① /J Fit female threads to both ends of the track rail and to slide unit end nearest to both ends of the track rail. (When only one slide unit is used, fit them to both ends of the track rail)
- ② /JJ When two or more slide units are used, fit female threads to both ends of the track rail and to both ends of each slide unit. (When only one slide unit is used, specify "/J")
- ③ /JR Fit female threads to both ends of the track rail.
- ④ /JS Fit female threads to slide unit end nearest to both ends of the track rail. (When only one slide unit is used, they are fitted to both ends of the track rail)
- ⑤ /JJS When two or more slide units are used, fit female threads to both ends of each slide unit. (When only one slide unit is used, specify "/JS")

Black chrome surface treatment /LC /LR /LCR

Acrylate resin coating is applied to improve the rust prevention property after black impregnated chrome surface treatment.

- ① /LC Perform casing treatment.
- ② /LR Perform track rail treatment.
- ③ /LCR Perform casing and track rail treatment.

Special Specification

Fluorine black chrome surface treatment /LFC /LFR /LFCR

Fluorinated resin coating is applied to improve the rust prevention property after black impregnated chrome surface treatment. In addition, this prevent foreign substances from sticking to the surface.

- ① /LFC Perform casing treatment.
- ② /LFR Perform track rail treatment.
- ③ /LFCR Perform casing and track rail treatment.

With track rail mounting bolt /MA

Recommended track rail mounting bolt is included. For bolt size, see the dimension table.

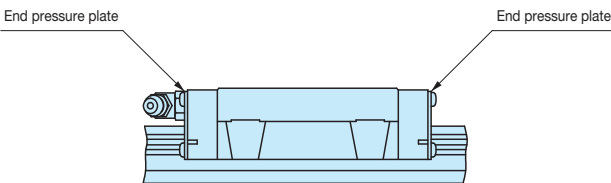
Without track rail mounting bolt /MN

Track rail mounting bolt is not included.

Changed size of mounting holes /M4


Set the M3 track rail mounting hole for ME15 to M4. For combination with track rail mounting bolt (supplemental code "/MA"), specify "/MA4".

No end seal /N




End seals at both ends of the slide unit can be replaced with end pressure plates, which do not come in contact with the track rail, to reduce frictional resistance. No under seal is attached.  
This specification is not effective for dust protection.

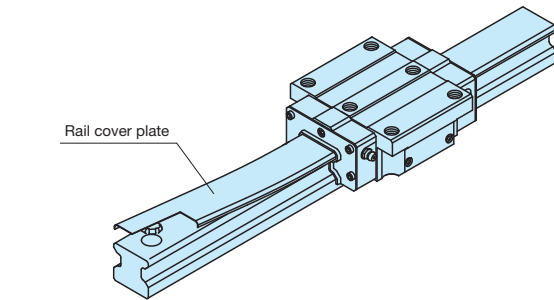Rail cover plate for track rail /PS




Deliver with the track rail cover plate mounted. Covering the upper surface with U-shape stainless steel thin plate after assembly of the track rail improves the sealing property further. Change the end seal to dedicated one.  
In addition, see the supplied rail cover plate instruction manual for mounting of rail cover plate.

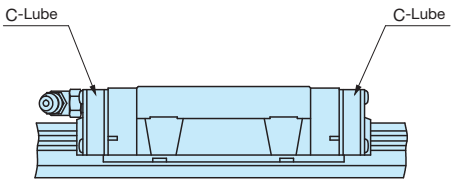With C-Lube plate /Q



The C-Lube impregnated with lubricant is attached inside the end seal of the slide unit, so that the interval for reapplying lubricant can be extended.

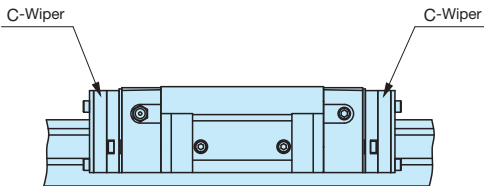C-Wiper /RC /RCC




C-Wiper is mounted on the slide unit end to improve dust protection property.  
In addition, the slide unit with C-Wiper is equipped with inner seal (/UR) and scraper (/Z) together.

- ① /RC Fit C-Wiper to slide unit end nearest to both ends of the track rail. When only one slide unit is used, fit them to both ends of the track rail.
- ② /RCC When two or more slide units are used, fit C-Wiper to both ends of each slide unit.

Special environment seal /RE

The standard end seal and under seal are replaced with seals for special environment that can be used at high temperatures.

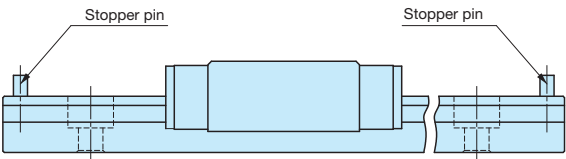Track rail with stopper pins /S




Mount stopper pins to both ends of the track rail as slide unit retainers.

Butt-jointing track rails (Interchangeable specification) /T

Finish the butted parts at both ends so as to set the interchangeable specification track rail in a linear motion direction.  
Butt the same interchangeable code for track rails. For non-interchangeable specification, specify butt-jointing track rails "/A".




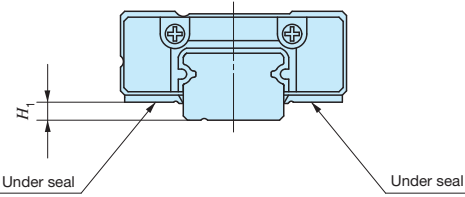Under seal <sup>(1)</sup> /U




The seal is attached to the bottom of the slide unit to prevent foreign substances from entering from underneath.

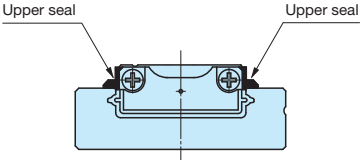Note <sup>(1)</sup> For C-Lube Linear Way UL and Linear Way U, attach "upper seal".  
The seal is attached to the upper end of the slide unit to prevent foreign substances from entering from above.



Inner seal /UR

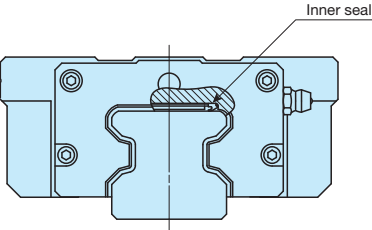


Attach the inner seal to the inside of the slide unit.  
Inner seal improves dust protection property of the cylindrical roller circulation part against foreign substances from the upper surface of the track rail.

Double seals (Single unit) /N /NR /NL

Double end seals are mounted to the interchangeable specification slide unit to improve the dust protection property.

- ① /N Apply double seals to both ends of the slide unit.
- ② /NR Apply double seals to a right end surface of the slide unit seen from the **IKO** mark of the slide unit.
- ③ /NL Apply double seals to a left end surface of the slide unit seen from the **IKO** mark of the slide unit.

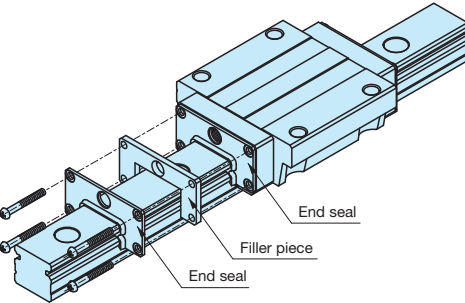
Double seals (Assembled set) /N /NV



Double end seals are mounted to the interchangeable specification assembled set or non-interchangeable specification product's slide unit to improve the dust protection property.

- ① /N Apply double seals to slide unit end nearest to both ends of the track rail. When only one slide unit is used, fit them to both ends of the track rail.
- ② /NV When two or more slide units are used, apply double seals to both ends of each slide unit.

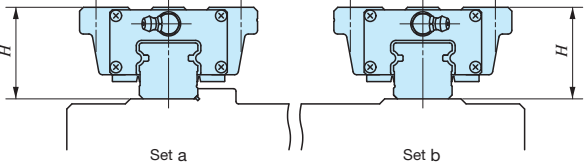A group of multiple assembled sets /W



Set the variation of  $H$  dimensions of the Linear Way and Linear Roller Way of multiple assembled sets on the same flat surface in the standard range.  
The variation of  $H$  dimensions of the multiple assembled sets is the same as the accuracy of one set.  
Indicate the number of sets after "/W" based on the number of units when specify.

Specified grease /YCG /YCL /YAF /YBR /YNG

The type of pre-packed grease can be changed by the supplemental code.

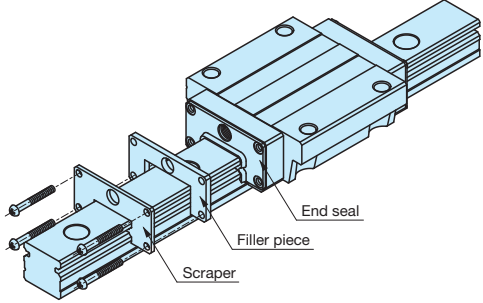
- ① /YCG Low Dust-Generation Grease for Clean Environment CG2 is pre-packed.
- ② /YCL Low Dust-Generation Grease for Clean Environment CGL is pre-packed.
- ③ /YAF Anti-Fretting Corrosion Grease AF2 is pre-packed.
- ④ /YBR MOLYCOTE BR2- Plus Grease [Dow Corning] is pre-packed.
- ⑤ /YNG No grease is pre-packed.

Scraper (Single unit) /Z /ZR /ZL

Mount a metal scraper to the interchangeable specification slide unit.  
The scraper is non-contact type and effectively eliminate large foreign substances adhering to the track rail.

- ① /Z Mount scrapers to both ends of the slide unit.
- ② /ZR Fit a scraper to a right end surface of the slide unit seen from **IKO** mark of the slide unit.
- ③ /ZL Fit a scraper to a left end surface of the slide unit seen from **IKO** mark of the slide unit.

Scraper (Assembled set) /Z /ZZ



Mount a metal scraper to the interchangeable specification assembled set or non-interchangeable specification product's slide unit.  
The scraper is non-contact type and effectively eliminate large foreign substances adhering to the track rail.

- ① /Z Fit a scraper to slide unit end nearest to both ends of the track rail. When only one slide unit is used, fit them to both ends of the track rail.
- ② /ZZ When two or more slide units are used, fit scrapers to both ends of each slide unit.

Precaution for Use

Precaution for Mounting

Operating temperature

The maximum operating temperature for linear motion rolling guide with integrated C-Lube is 80°C. The maximum operating temperature for linear motion rolling guide without integrated C-Lube is 120°C and temperature up to 100°C is allowed for continuous operation. When the temperature exceeds 100°C, contact **IKO**.  
When specifying special specification with C-Lube plate (supplemental code "/Q"), utilize it below 80°C.

Multiple slide units used in close proximity

When using multiple slide units in close proximity, greater load may be applied than the calculated value depending on the deviation of slide unit mounting accuracy for the machine or device. In such cases, allowance for greater applied load than the calculated value should be made.

Lateral or upside-down mounting

For lateral or upside-down mounting of the Linear Way E and Linear Way F, specify the special specification (supplemental code "/U") with under seal as necessary to prevent foreign substances from entering into the slide unit.

Operation velocity

Operation velocity limit value of the Linear Way and Linear Roller Way depends on operation conditions such as motion characteristics, applied load, lubrication status, mounting accuracy and environment temperature. Reference values based on actual performance and experienced values as a reference of maximum velocity under typical operating conditions are indicated in Table 20.

Table 20 Reference maximum velocity

| Size | Maximum velocity m/min |
|------|------------------------|
| 35   | 180                    |
| 45   | 120                    |
| 55   | 100                    |
| 65   | 75                     |

Cleaning and removing fat

Never clean up a linear motion rolling guide with integrated C-Lube with organic solvent or white kerosene with property of removing fat.

Lubrication oil supply point for oil lubrication

If the lubrication oil is supplied by a gravity drip system, enough lubrication oil may not be supplied to ways above the supply point, so lubrication path and supply point must be considered. For such applications, contact **IKO**.

When mounting multiple assembled sets at the same time

- Interchangeable specification products  
For interchangeable specification products, assemble a slide unit and a track rail with the same interchangeable code ("S1" or "S2").
- Non-interchangeable specification products  
Do not change the combination of delivered slide unit and track rail.
- Product including multiple assembled sets  
For special specification (supplemental code "/W") products with multiple assembled sets, the delivered combination is managed as a group for variation. So do not mix with different group for mounting.

Assembling of slide unit and track rail

When assembling the slide unit on the track rail, correctly fit the grooves of the slide unit and the track rail and move the slide unit softly in parallel direction. Rough handling may result in damaging of seals or dropping of steel balls and cylindrical roller.  
For product including a dummy rail as a standard accessory, operation of the slide unit to the track rail can be made easier by using the dummy rail.  
Though the dummy rail is included as an accessory of products indicated in Table 22.1 and Table 22.2, it is also available for other products. If these parts are necessary, please contact **IKO**.

Mounting accuracy


Deviation of accuracy of Linear Way and Linear Roller Way mounting surface or deviation of accuracy in mounting may generate large load over the calculated value. Note that such load could affect the life adversely. It enhances the reliability of Linear Way and Linear Roller Way to ensure high machining accuracy and assembly accuracy depending on operational conditions of the track rail and slide unit such as required motion accuracy and rigidity and to consider mounting structure that can maintain the accuracy and performance.  
Typical reference values for mounting parallelism between multiple assembled sets used are shown in Table 21.

Table 21 Parallelism between two mounting surfaces unit: μm

| Classification | Ordinary<br>(No symbol) | High<br>(H) | Precision<br>(P) | Super<br>precision<br>(SP) | Ultra<br>precision<br>(UP) |
|----------------|-------------------------|-------------|------------------|----------------------------|----------------------------|
| Parallelism    | 30                      |             | 20               | 10                         | 6                          |

Shoulder height and corner radius of the reference mounting surface

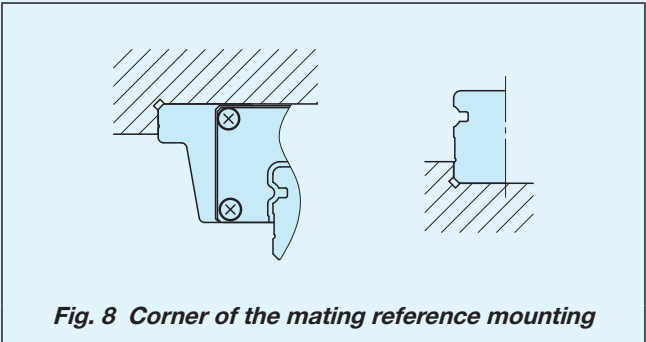For the shape of opposite corner of the reference surface, it is recommended to have relieved fillet as indicated in Fig. 8, but you may also use it with providing radius at the corner. For recommended values for the shoulder height and corner radius of the reference mounting surface, see an explanation of each series.




| Series name and size                                           |            | Interchangeable |                | Non-interchangeable specification |
|----------------------------------------------------------------|------------|-----------------|----------------|-----------------------------------|
|                                                                |            | Single unit     | Assembled set  | Assembled set                     |
| C-Lube Linear Way ML<br>Linear Way L                           |            | ○               | See Table 22.2 | See Table 22.2                    |
| C-Lube Linear Way ME<br>Linear Way E                           |            | ○               | —              | —                                 |
| C-Lube Linear Way MH<br>Linear Way H                           | 8~12       | ○               | ○              | ○                                 |
|                                                                | 15~65      | ○               | —              | —                                 |
|                                                                | Extra long | ○               | ○              | ○                                 |
|                                                                | 85         | —               | —              | —                                 |
| Linear Way F                                                   |            | ○               | —              | —                                 |
| C-Lube Linear Way MUL<br>Linear Way U                          | 25, 30     | —               | —              | ○                                 |
|                                                                | 40~130     | —               | —              | —                                 |
| C-Lube Linear Roller Way Super MX<br>Linear Roller Way Super X | 10~30      | ○               | ○              | ○                                 |
|                                                                | 35~65      | ○               | —              | —                                 |
|                                                                | Extra long | ○               | ○              | ○                                 |
|                                                                | 85, 100    | —               | —              | —                                 |
| Linear Roller Way X                                            |            | —               | —              | —                                 |

Table 22.2 Appended dummy rail model number for C-Lube Linear Way L and Linear Way L

| C-Lube Linear Way ML |           | Linear Way L  |              |
|----------------------|-----------|---------------|--------------|
| Standard type        | Wide type | Standard type | Wide type    |
| —                    | —         | LWL 2         | LWLF 4       |
| —                    | —         | LWLC 3        | LWLFC 6      |
| —                    | —         | LWL 3         | LWLF 6       |
| MLC 5                | MLFC 10   | LWLC 5···B    | LWLFC 10···B |
| ML 5                 | MLF 10    | LWL 5···B     | LWLF 10···B  |
| MLC 7                | MLFC 14   | LWLC 7···B    | LWLFC 14···B |
| ML 7                 | MLF 14    | LWL 7···B     | LWLF 14···B  |
| MLG 7                | MLFG 14   | LWLG 7···B    | LWLFG 14···B |
| MLC 9                | MLFC 18   | LWLC 9···B    | LWLFC 18···B |
| ML 9                 | MLF 18    | LWL 9···B     | LWLF 18···B  |
| MLG 9                | MLFG 18   | LWLG 9···B    | LWLFG 18···B |
| MLL 9                | —         | LWLG 12···B   | LWLFG 24···B |
| MLG 12               | MLFG 24   | LWLG 15···B   | LWLFG 30···B |
| MLL 12               | —         | LWLG 20···B   | LWLFG 42···B |
| MLG 15               | MLFG 30   | LWLG 25···B   | —            |
| MLL 15               | —         | —             | —            |
| MLG 20               | MLFG 42   | —             | —            |
| MLG 25               | —         | —             | —            |


Cleanup of mounting surface

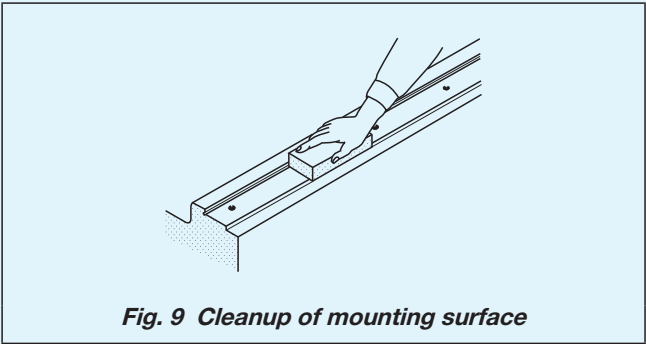Remove burrs and blemishes by using oil-stone, etc. and wipe off rust prevention oil and dust with clean cloth from mounting surface and reference mounting surface of the machine or device to which the Linear Way or Linear Roller Way are mounted.



Mounting of caps for rail mounting holes

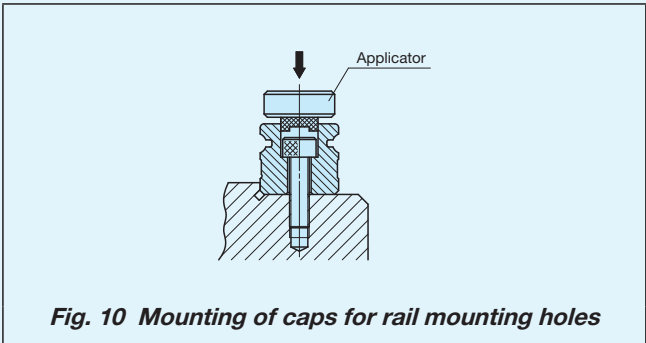When mounting the special specification caps for rail mounting holes (supplemental code "/F") on the track rail, use a flat applicator and stamp it by bits until it becomes plane with the track rail upper surface.



Tightening torque for mounting bolts

Typical fixing screw tightening torque to mount the Linear Way and Linear Roller Way is indicated in Table 23. When vibration and shock of the machine or device are large, fluctuating load is large, or moment load is applied, fix it by using the torque 1.2 to 1.5 times larger than the value indicated as necessary.

If the mating member material is cast iron or aluminum, reduce the tightening torque depending on the strength characteristic of the mating member material.

For details, see an explanation of each series.


Table 23 Tightening torque for fixing screw

| Bolt size  | Tightening torque N · m                                  |                                                           |                                                          |
|------------|----------------------------------------------------------|-----------------------------------------------------------|----------------------------------------------------------|
|            | High carbon steel-made screw<br>(Strength division: 8.8) | High carbon steel-made screw<br>(Strength division: 12.9) | Stainless steel-made screw<br>(Property division: A2-70) |
| M 1 ×0.25  | —                                                        | —                                                         | 0.04                                                     |
| M 1.4×0.3  | —                                                        | —                                                         | 0.10                                                     |
| M 1.6×0.35 | —                                                        | —                                                         | 0.15                                                     |
| M 2 ×0.4   | —                                                        | —                                                         | 0.31                                                     |
| M 2.3×0.4  | —                                                        | —                                                         | 0.48                                                     |
| M 2.5×0.45 | —                                                        | —                                                         | 0.62                                                     |
| M 2.6×0.45 | —                                                        | —                                                         | 0.70                                                     |
| M 3 ×0.5   | 1.2                                                      | 1.7                                                       | 1.1                                                      |
| M 4 ×0.7   | 2.8                                                      | 4.0                                                       | 2.5                                                      |
| M 5 ×0.8   | 5.6                                                      | 7.9                                                       | 5.0                                                      |
| M 6 ×1     | —                                                        | 13.3                                                      | 8.5                                                      |
| M 8 ×1.25  | —                                                        | 32.0                                                      | 20.4                                                     |
| M10 ×1.5   | —                                                        | 62.7                                                      | —                                                        |
| M12 ×1.75  | —                                                        | 108                                                       | —                                                        |
| M14 ×2     | —                                                        | 172                                                       | —                                                        |
| M16 ×2     | —                                                        | 263                                                       | —                                                        |
| M20 ×2.5   | —                                                        | 512                                                       | —                                                        |
| M24 ×3     | —                                                        | 882                                                       | —                                                        |
| M30 ×3.5   | —                                                        | 1 750                                                     | —                                                        |


Mounting surface, reference mounting surface and typical mounting structure

When mounting Linear Way and Linear Roller Way, properly align the reference mounting surface B and D of the track rail and slide unit with the reference mounting surface of the table and bed and fix them. (See Fig. 11)

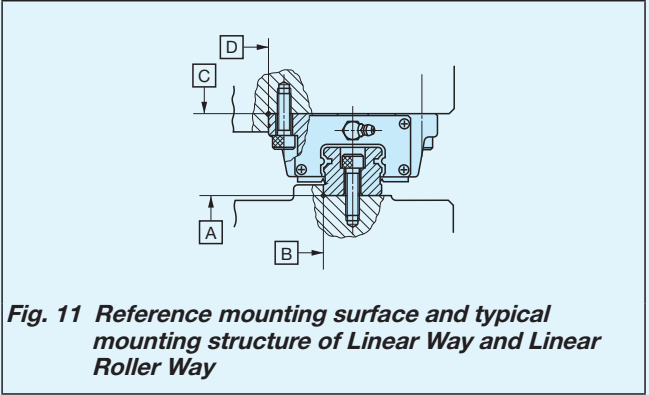The reference mounting surfaces B and D and mounting surfaces A and C are precisely ground. Machining the mounting surface of the table and bed, such as machine or device, to high accuracy and mounting them properly will ensure stable linear motion with high accuracy.






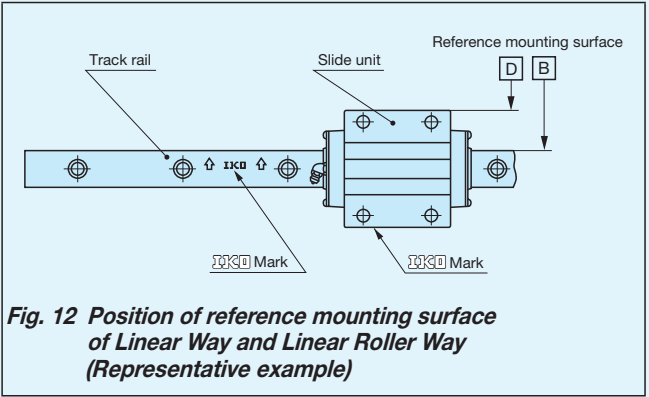
Reference mounting surface of the slide unit is the opposite side of the **IKO** mark. The track rail reference mounting surface is identified by locating the **IKO** mark on the top surface of the track rail. It is the side surface above the mark (in the direction of the arrow). (See Fig. 12.)



Load direction and mounting structure

When lateral load, alternate load, or fluctuating load is applied onto the Linear Way or Linear Roller Way, securely fix the ends of slide unit and track rail as indicated in the Fig. 13 and Fig. 14.

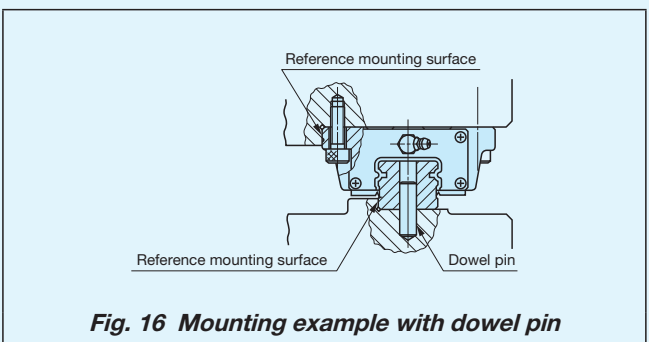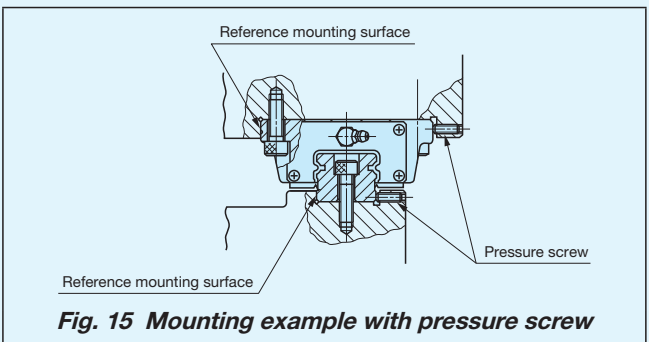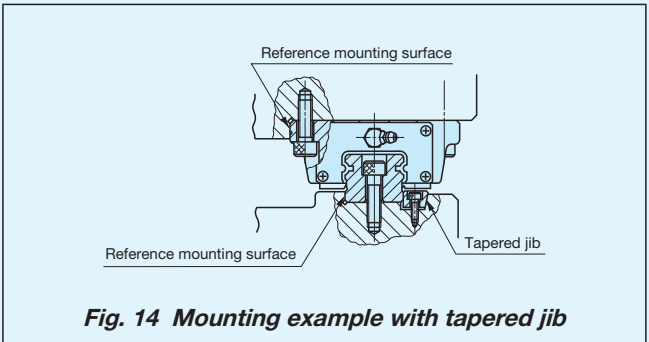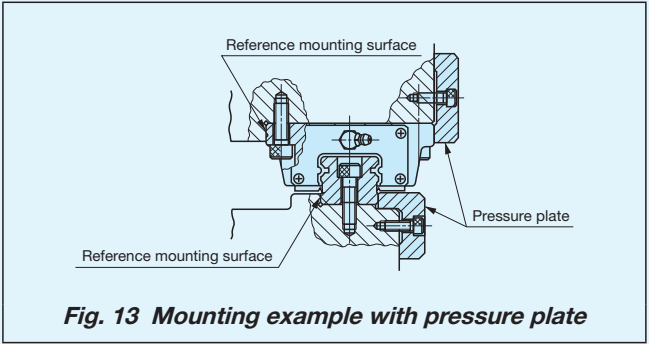When the load is small or operational conditions are not harsh, mounting methods indicated in Fig. 15 and Fig. 16 may be used.






# Mounting Examples

Typical procedures to mount Linear Way and Linear Roller Way are described in Examples 1 to 4 using a Linear Way as a representative case.

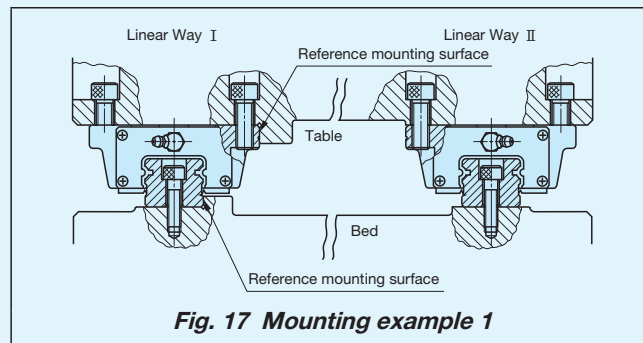
## Example 1. Typical operation



For typical application without shock, reference mounting surface is prepared on each bed and table on the reference side. The mounting procedures are as follows. (See Fig. 17)


### ① Cleanup of mounting surface and reference mounting surface

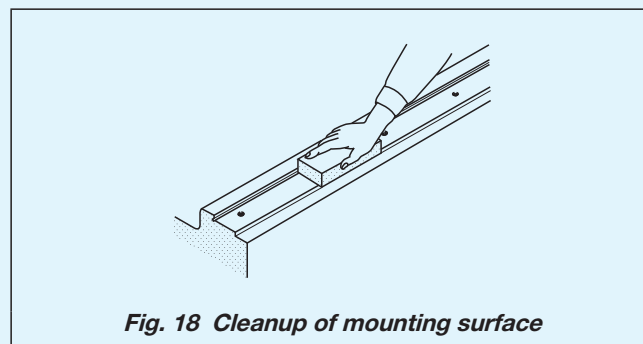- Remove burrs and blemishes by using oil-stone, etc. from reference mounting surface and mounting surface of the machine or the device to which Linear Way is mounted and wipe off with clean cloth. (see Fig. 18)
- Wipe off rust prevention oil and dust on the reference mounting surface and the mounting surface of the Linear Way with clean cloth.




### ② Temporary fixing of Linear Way I and II track rails

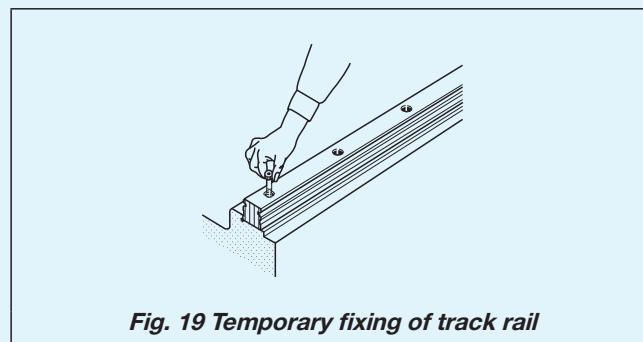- Align and temporarily fix them with reference mounting surface of each Linear Way track rail. (See Fig. 19)
- At this point, ensure that the fixing bolt does not interfere with the mounting hole.
- Fix the Linear Way II track rail to the bed.



### ③ Fixing of Linear Way I track rail

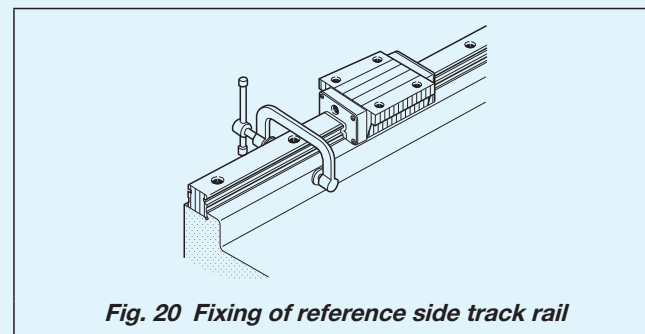- Use small type vise or the like to stick track rail reference mounting surface to the reference mounting surface of the bed and tighten the fixing bolt at the same position. Repeat this method from one end to fix the track rail in order. (See Fig. 20)
- Linear Way II track rail should be left temporarily fixed.



### ④ Temporary fixing of Linear Way I and II slide units

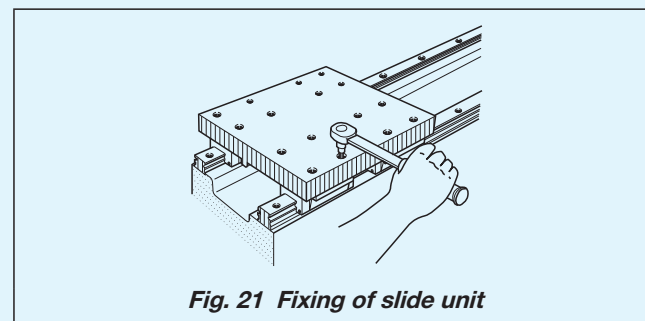
- Align the Linear Way with the mounting position of the table and load the table gently.
- Temporarily fix the Linear Way I and II slide units to the table.

### ⑤ Fixing of Linear Way I slide unit

- Align the reference mounting surface of the Linear Way I slide unit with the reference mounting surface of the table correctly and fix them.


### ⑥ Fixing of Linear Way II slide unit

- Fix one of the Linear Way II slide units in a motion direction correctly and leave the other slide units temporarily fixed. (See Fig. 21)



### ⑦ Fixing of Linear Way II track rail

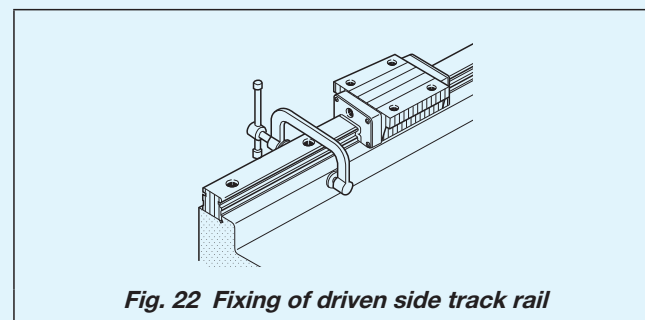
- Move the table and fix the Linear Way II track rail ensuring smooth motion status. At this point, tighten each fixing bolt immediately after the fixed slide unit of the Linear Way II passes on each of it. Repeat this method from one end to fix the track rail in order. (See Fig. 22)



### ⑧ Fixing of Linear Way II slide unit

- Fix the rest of the Linear Way II slide units.

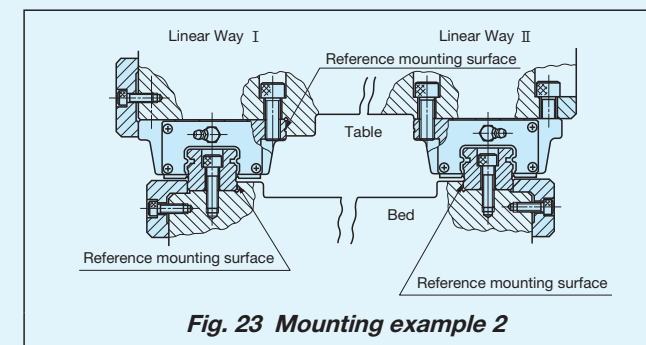
## Example 2. Operation for linear motion with accuracy and rigidity



If accuracy and rigidity of linear motion are required, prepare two reference mounting surfaces on the bed and one reference mounting surface on the table. The mounting procedures are as follows. (See Fig. 23)


### ① Cleanup of mounting surface and reference mounting surface

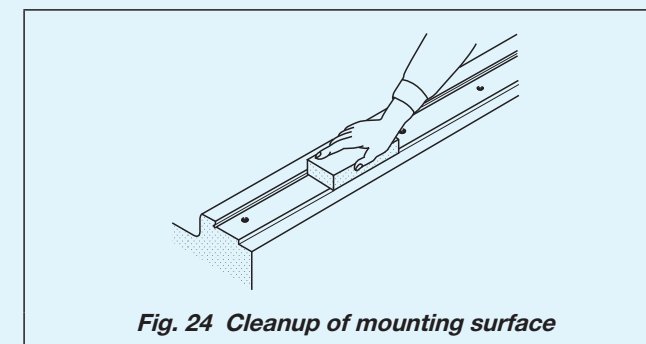- Remove burrs and blemishes by using oil-stone, etc. from reference mounting surface and mounting surface of the machine or the device to which Linear Way is mounted and wipe off with clean cloth. (see Fig. 24)
- Wipe off rust prevention oil and dust on the reference mounting surface and the mounting surface of the Linear Way with clean cloth.




### ② Temporary fixing of Linear Way I and II track rails

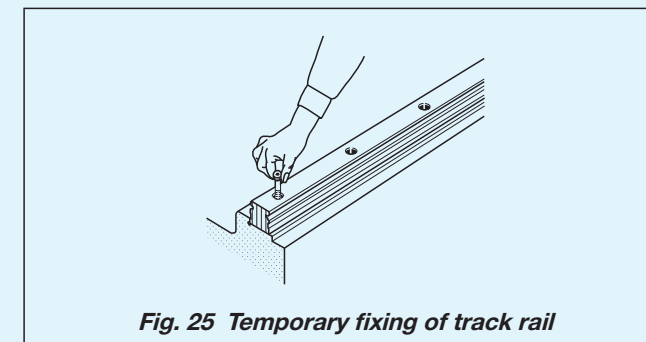- Align and temporarily fix them with reference mounting surface of each Linear Way track rail. (See Fig. 25)
- At this point, ensure that the fixing bolt does not interfere with the mounting hole.



### ③ Fixing of Linear Way I and II track rails

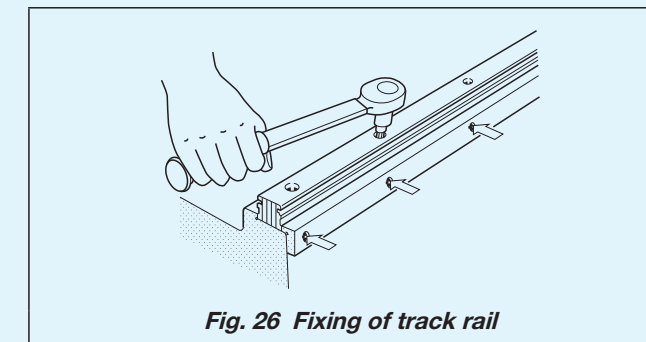- Stick the track rail reference mounting surface of the Linear Way I to the reference mounting surface of the bed with pressure plate or pressure screws and tighten the track rail fixing bolt at the same position. Repeat this method from one end to fix the track rail in order. (See Fig. 26)



### ④ Temporary fixing of Linear Way I and II slide units

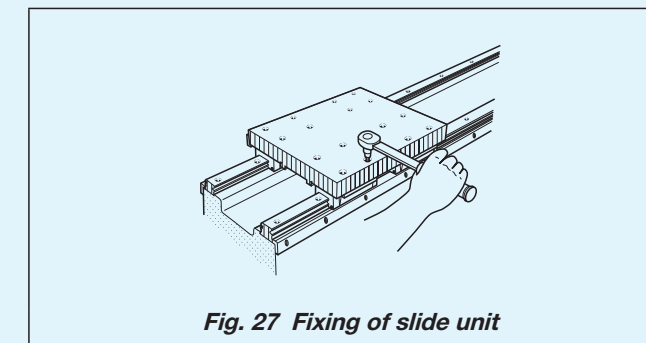
- Align the slide unit with the mounting position of the table and load the table gently. Temporarily fix the Linear Way I and II slide units to the table.

### ⑤ Fixing of Linear Way I slide unit

- Align the reference mounting surface of the Linear Way I slide unit with the reference mounting surface of the table correctly and fix them with pressure plate or pressure screws.


### ⑥ Fixing of Linear Way II slide unit

- Move the table ensuring smooth motion status, and fix the Linear Way II slide unit. (See Fig. 27)






## Example 3 Operation in case the slide unit is fixed separated from the track rail

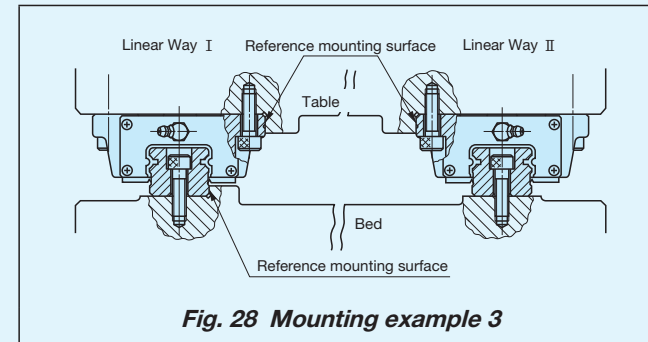

If it cannot be fixed securely with the table loaded, prepare one reference mounting surface on the bed and two reference mounting surfaces on the table. The mounting procedures are as follows. (See Fig. 28)


### ① Cleanup of mounting surface and reference mounting surface

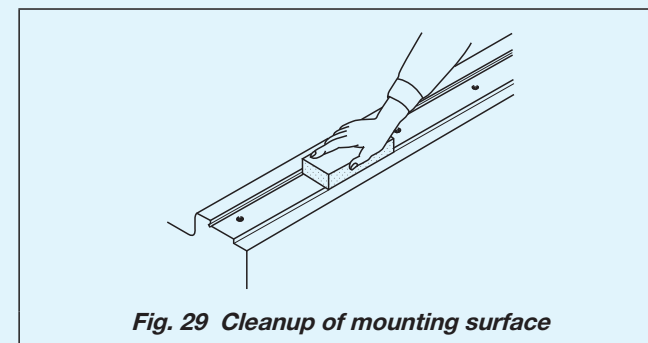- Remove burrs and blemishes by using oil-stone, etc. from reference mounting surface and mounting surface of the machine or the device to which Linear Way is mounted and wipe off with clean cloth. (see Fig. 29)
- Wipe off rust prevention oil and dust on the reference mounting surface and the mounting surface of the Linear Way with clean cloth.




### ② Temporary fixing of Linear Way I and II track rails

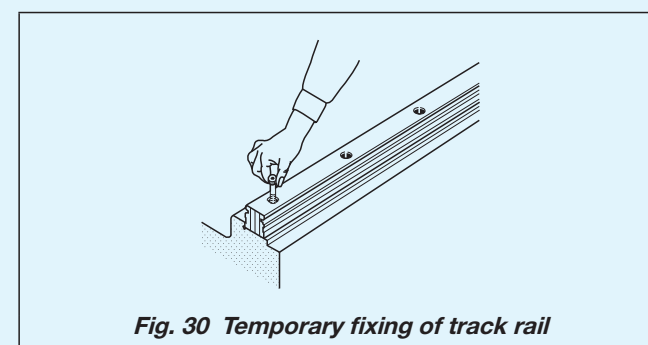- Align and temporarily fix them with reference mounting surface of each Linear Way track rail. (See Fig. 30)
- At this point, ensure that the fixing bolt does not interfere with the mounting hole.



### ③ Fixing of Linear Way I track rail

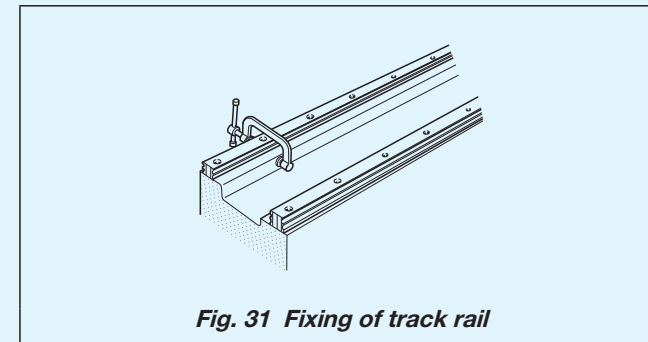- Use small type vise or the like to stick track rail reference mounting surface to the reference mounting surface of the bed and tighten the fixing bolt at the same position. Repeat this method from one end to fix the track rail in order. (See Fig. 31)
- Linear Way II track rail should be left temporarily fixed.




### ④ Separation of track rail and slide unit

- After checking the combination and positions of Linear Way I and II track rails and slide units, separate each slide unit from the track rail.

### ⑤ Fixing of Linear Way I and II slide units

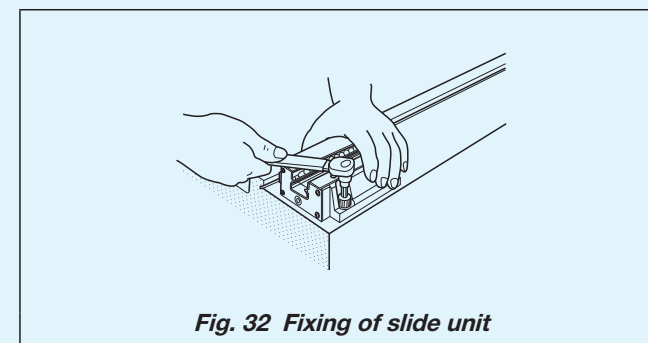- Align with the reference mounting surface of the Linear Way I and II slide units correctly, and fix them. (See Fig. 32)




### ⑥ Setting of track rail and slide unit

- Insert and assemble the slide unit fixed to the table slowly with care while aligning it with the track rail fixed and temporarily fixed to the bed to maintain parallelism.

### ⑦ Fixing of Linear Way II track rail

- Move the table and fix the Linear Way II track rail ensuring smooth motion status. At this point, tighten each fixing bolt immediately after the fixed slide unit of the Linear Way II passes on each of it. Repeat this method from one end to fix the track rail in order.

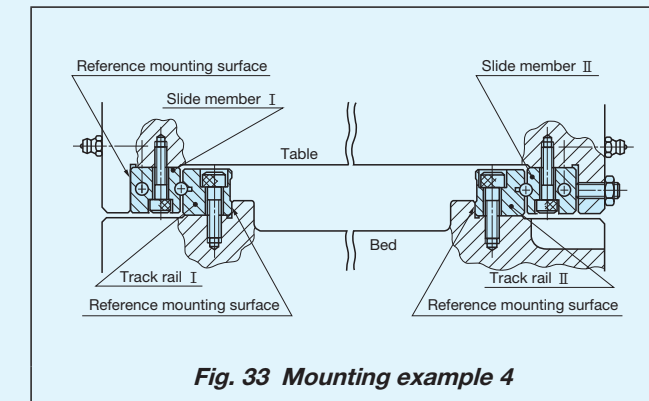
## Example 4. Operation of Linear Way Module



For the Linear Way Module, normally 2 sets are used in parallel as indicated in Fig. 33. For the mounting, typically follow the procedure below (see Fig. 33).


### ① Cleanup of mounting surface and reference mounting surface

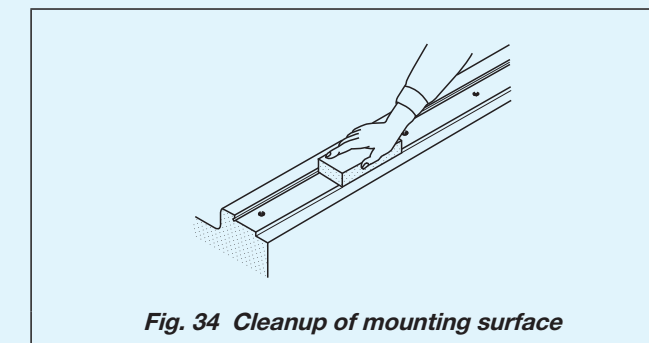- Remove burrs and blemishes by using oil-stone, etc. from reference mounting surface and mounting surface of the machine or the device to which Linear Way Module is mounted and wipe off with clean cloth (see Fig. 34).
- Wipe off rust prevention oil and dust on the reference mounting surface and the mounting surface of the Linear Way Module with clean cloth.




### ② Fixing of track rail

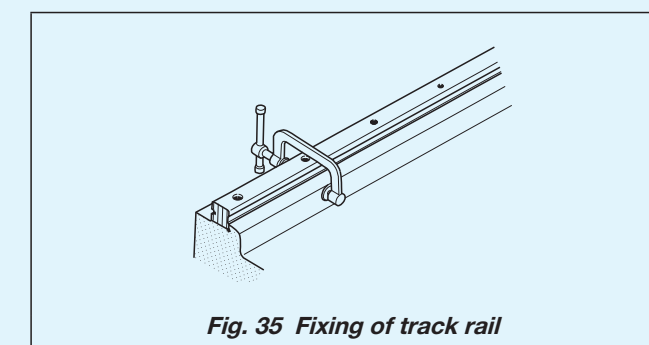- Align the reference mounting surfaces of track rails I and II with the reference mounting surfaces of the bed correctly, stick them by using small type vise, and tighten the fixing bolts at the same position (see Fig. 35).



### ③ Fixing the slide member

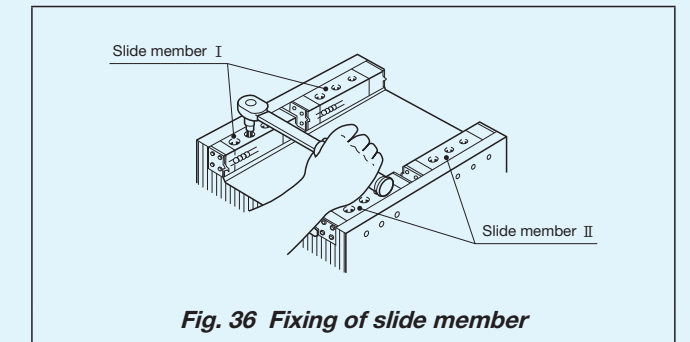- Align the reference mounting surface of the slide member I with the reference mounting surface of the table correctly, tighten the fixing bolt to fix them, and temporarily fix the slide member II (see Fig. 36).





### ④ Setting of table and bed

- Insert and assemble the slide member fixed to the table slowly with care while aligning it with the track rail fixed to the bed to maintain parallelism.

### ⑤ Fixing the slide member II

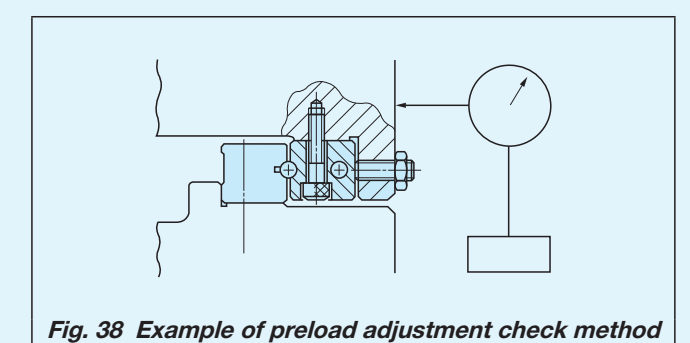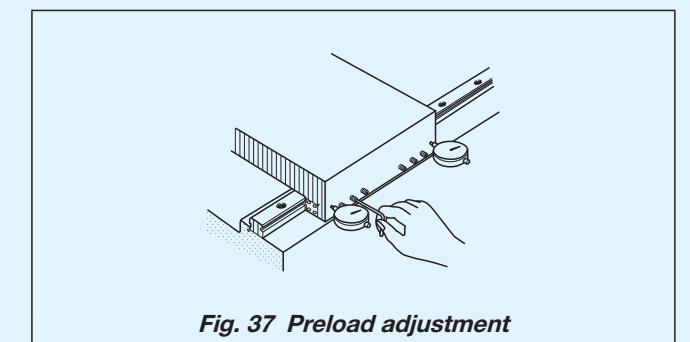- As indicated in Fig. 37, tighten the preload adjusting screw at the center first and then all the rest preload adjusting screws in order while measuring the clearance by using the dial gauge.
- The position where the dial gauge deflection stops after moving the table to right and left indicates zero preload or slight preload state.
- After preload adjustment, tighten the fixing bolt to fix them.



### Mounting of reference side track rail

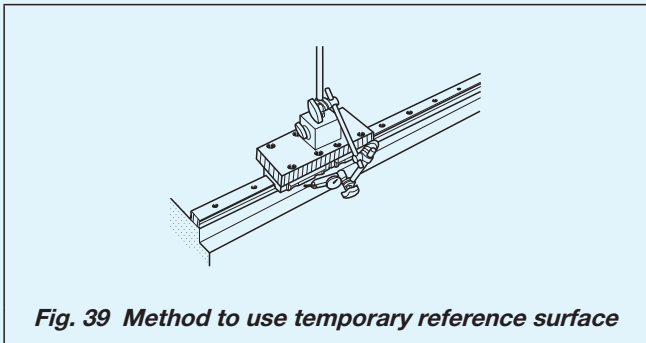
Mounting methods of reference side track rail are indicated below. Select a method suitable for the specifications of your machine or device.

① Method to use reference mounting surface

- Stick track rail reference mounting surface to the reference mounting surface of the bed by using a pressure plate or small type vise, and tighten the fixing bolt at the same position. Repeat this method from one end to fix the track rail in order.


② Method to use temporary reference surface

- Prepare temporary reference surface around the mounting surface of the bed, temporarily fix the track rail, fix the measurement stand on the upper surface of the slide unit as indicated in Fig. 39, place an indicator onto the temporary reference surface, and fix them from one end of the track rail in order while maintaining straightness.



③ Method with straight-edge

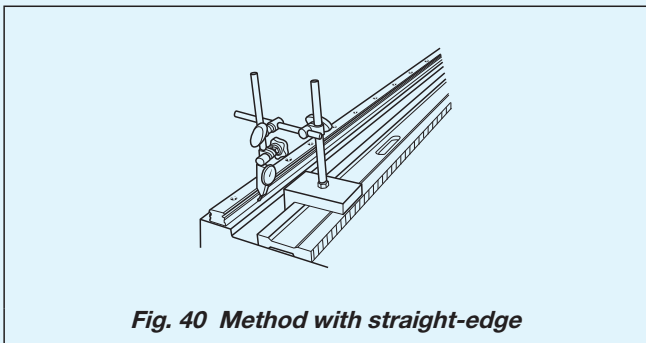- After temporary fixing of the track rail, apply an indicator to the reference mounting surface of the track rail as indicated in Fig. 40 and fix them from one end of the track rail in order referring to the straight-edge while maintaining straightness.



### Mounting of driven side track rail

Mounting methods of driven side track rail are indicated below. Select a method suitable for the specifications of your machine or device.

① Method to use reference mounting surface

- Stick track rail reference mounting surface to the reference mounting surface of the bed by using a pressure plate or small type vise, and tighten the fixing bolt at the same position. Repeat this method from one end to fix the track rail in order.

② Method to follow the reference side track rail

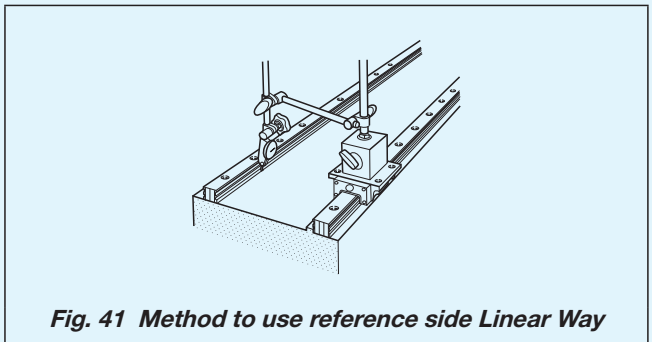
- Correctly mount the reference side track rail and one of the driven slide units in motion direction, temporarily fix the rest of slide units and track rails, and fix them from one end of the driven side track rail in order ensuring smooth motion status.

③ Method with straight-edge

- After temporary fixing of the track rail, apply an indicator to the reference mounting surface of the track rail as indicated in Fig. 40 and fix them from one end of the track rail in order referring to the straight-edge while maintaining straightness.

④ Method to use reference side Linear Way


- Fix a measurement stand onto the upper surface of the reference side slide unit as indicated in Fig. 41, place an indicator onto the reference mounting surface of the driven side track rail, and fix them from one end in order while maintaining parallelism.



### Mounting procedures when track rails are butt-jointed


When multiple track rails are butt-jointed, it is necessary to specify special specification butted track rails (non-interchangeable specification, supplemental code "/A") or butt-jointing track rails (interchangeable specification, supplemental code "/T").

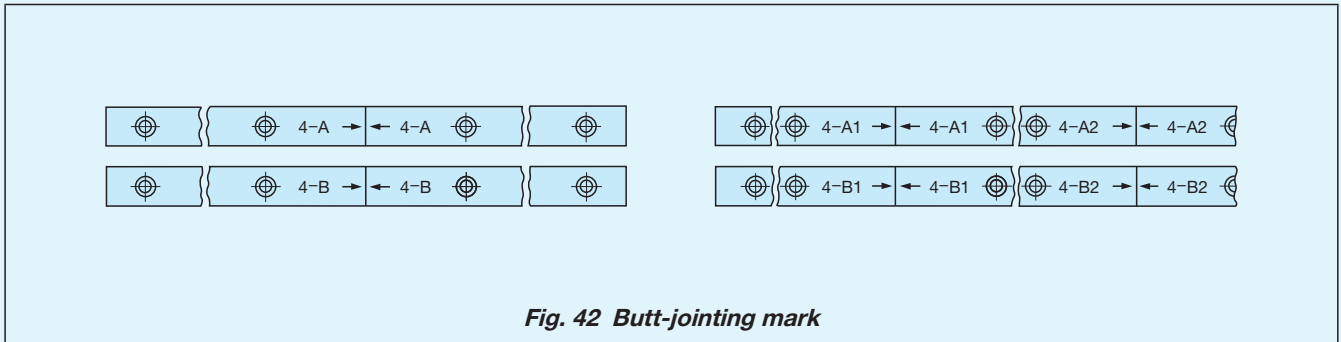Butt-jointing track rails have a butt-jointing mark on the track rail end surface as indicated in Fig. 42. Typical method to butt-joint the track rails is as follows.



- ① Align the butt-jointing mark on the track rail end surface and temporarily fix it. Since butt-jointing track rails are interchangeable, no butt-jointing position is specified.

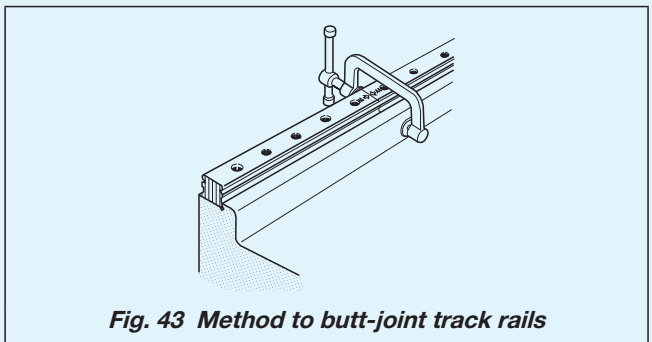- ② Correctly align the reference mounting surface of the track rail with that of the bed in order. At this point, use a small type vise or the like to stick the reference mounting surfaces of the bed and track rail together so as to eliminate any step at the joint part of the track rail. (See Fig. 43)



Model Code Index

| Model code | Series name                               | Catalog name | Page   | Model code   | Series name    | Catalog name | Page   |
|------------|-------------------------------------------|--------------|--------|--------------|----------------|--------------|--------|
| B          |                                           |              |        | LM…AJ        | Linear Bushing | RED          | II-167 |
|            |                                           |              |        | LM…F         | Linear Bushing | RED          | II-181 |
| BG         | Stroke Rotary Cage                        | RED          | II-212 | LM…F AJ      | Linear Bushing | RED          | II-181 |
| BK…A       | Miniature Stroke Rotary Bushing           | RED          | II-207 | LM…F OP      | Linear Bushing | RED          | II-181 |
| BSP…SL     | Precision Linear Slide Unit               | RED          | II- 89 | LM…F UU      | Linear Bushing | RED          | II-183 |
| BSPG…SL    | Precision Linear Slide Unit               | RED          | II- 91 | LM…F UU AJ   | Linear Bushing | RED          | II-183 |
| BSR…SL     | Precision Linear Slide Unit               | RED          | II- 93 | LM…F UU OP   | Linear Bushing | RED          | II-183 |
| BSU…A      | Linear Slide Unit                         | RED          | II- 99 | LM…N         | Linear Bushing | RED          | II-167 |
| BWU        | High Rigidity Precision Linear Slide Unit | RED          | II- 81 | LM…N AJ      | Linear Bushing | RED          | II-167 |
|            |                                           |              |        | LM…N F       | Linear Bushing | RED          | II-181 |
| C          |                                           |              |        | LM…N F AJ    | Linear Bushing | RED          | II-181 |
|            |                                           |              |        | LM…N F OP    | Linear Bushing | RED          | II-181 |
| CRW        | Crossed Roller Way                        | RED          | II- 33 | LM…N F UU    | Linear Bushing | RED          | II-183 |
| CRW…SL     | Crossed Roller Way                        | RED          | II- 33 | LM…N F UU AJ | Linear Bushing | RED          | II-183 |
| CRWG       | Anti-Creep Cage Crossed Roller Way        | RED          | II- 27 | LM…N F UU OP | Linear Bushing | RED          | II-183 |
| CRWG…H     | Anti-Creep Cage Crossed Roller Way H      | RED          | II- 31 | LM…N OP      | Linear Bushing | RED          | II-167 |
| CRWM       | Crossed Roller Way                        | RED          | II- 49 | LM…N UU      | Linear Bushing | RED          | II-171 |
| CRWM…A     | Crossed Roller Way                        | RED          | II- 53 | LM…N UU AJ   | Linear Bushing | RED          | II-171 |
| CRWU       | Crossed Roller Way Unit                   | RED          | II- 63 | LM…N UU OP   | Linear Bushing | RED          | II-171 |
| CRWU…R     | Crossed Roller Way Unit                   | RED          | II- 67 | LM…OP        | Linear Bushing | RED          | II-167 |
| CRWU…RS    | Crossed Roller Way Unit                   | RED          | II- 71 | LM…UU        | Linear Bushing | RED          | II-171 |
| CRWUG      | Anti-Creep Cage Crossed Roller Way Unit   | RED          | II- 61 | LM…UU AJ     | Linear Bushing | RED          | II-171 |
|            |                                           |              |        | LM…UU OP     | Linear Bushing | RED          | II-171 |
| F          |                                           |              |        | LMB          | Linear Bushing | RED          | II-179 |
|            |                                           |              |        | LMB…AJ       | Linear Bushing | RED          | II-179 |
| FT         | Flat Roller Cage                          | RED          | II-231 | LMB…N        | Linear Bushing | RED          | II-179 |
| FT…N       | Flat Roller Cage                          | RED          | II-231 | LMB…N AJ     | Linear Bushing | RED          | II-179 |
| FT…V       | Flat Roller Cage                          | RED          | II-231 | LMB…N OP     | Linear Bushing | RED          | II-179 |
| FTW…A      | Flat Roller Cage                          | RED          | II-232 | LMB…OP       | Linear Bushing | RED          | II-179 |
| FTW…VA     | Flat Roller Cage                          | RED          | II-232 | LME          | Linear Bushing | RED          | II-175 |
|            |                                           |              |        | LME…AJ       | Linear Bushing | RED          | II-175 |
| G          |                                           |              |        | LME…F        | Linear Bushing | RED          | II-185 |
|            |                                           |              |        | LME…F AJ     | Linear Bushing | RED          | II-185 |
| GSN        | Roller Way                                | RED          | II-223 | LME…F OP     | Linear Bushing | RED          | II-185 |
|            |                                           |              |        | LME…F UU     | Linear Bushing | RED          | II-187 |
| L          |                                           |              |        | LME…F UU AJ  | Linear Bushing | RED          | II-187 |
|            |                                           |              |        | LME…F UU OP  | Linear Bushing | RED          | II-187 |
| LM         | Linear Bushing                            | RED          | II-167 | LME…N        | Linear Bushing | RED          | II-175 |
|            |                                           |              |        | LME…N AJ     | Linear Bushing | RED          | II-175 |

Note: BLUE denotes CAT-1552④E, while RED denotes CAT-1555②E.

Model Code Index

| Model code    | Series name               | Catalog name | Page   | Model code | Series name                   | Catalog name | Page   |
|---------------|---------------------------|--------------|--------|------------|-------------------------------|--------------|--------|
| LME…N F       | Linear Bushing            | RED          | II-185 | LRXL       | Linear Roller Way Super X     | BLUE         | II-175 |
| LME…N F AJ    | Linear Bushing            | RED          | II-185 | LRXS       | Linear Roller Way Super X     | BLUE         | II-187 |
| LME…N F OP    | Linear Bushing            | RED          | II-185 | LRXSC      | Linear Roller Way Super X     | BLUE         | II-187 |
| LME…N F UU    | Linear Bushing            | RED          | II-187 | LRXSG      | Linear Roller Way Super X     | BLUE         | II-187 |
| LME…N F UU AJ | Linear Bushing            | RED          | II-187 | LS         | Stroke Ball Spline            | RED          | II-149 |
| LME…N F UU OP | Linear Bushing            | RED          | II-187 | LSAG       | Linear Ball Spline G          | RED          | II-123 |
| LME…N OP      | Linear Bushing            | RED          | II-175 | LSAGF      | Linear Ball Spline G          | RED          | II-127 |
| LME…N UU      | Linear Bushing            | RED          | II-177 | LSAGFL     | Linear Ball Spline G          | RED          | II-127 |
| LME…N UU AJ   | Linear Bushing            | RED          | II-177 | LSAGFLT    | Linear Ball Spline G          | RED          | II-127 |
| LME…N UU OP   | Linear Bushing            | RED          | II-177 | LSAGFT     | Linear Ball Spline G          | RED          | II-127 |
| LME…OP        | Linear Bushing            | RED          | II-175 | LSAGL      | Linear Ball Spline G          | RED          | II-123 |
| LME…UU        | Linear Bushing            | RED          | II-177 | LSAGLT     | Linear Ball Spline G          | RED          | II-123 |
| LME…UU AJ     | Linear Bushing            | RED          | II-177 | LSAGT      | Linear Ball Spline G          | RED          | II-123 |
| LME…UU OP     | Linear Bushing            | RED          | II-177 | LSB        | Block Type Linear Ball Spline | RED          | II-141 |
| LMG           | Linear Bushing G          | RED          | II-159 | LSB…SL     | Block Type Linear Ball Spline | RED          | II-141 |
| LMGT          | Linear Bushing G          | RED          | II-159 | LSBT       | Block Type Linear Ball Spline | RED          | II-141 |
| LMS           | Miniature Linear Bushing  | RED          | II-192 | LST        | Stroke Ball Spline            | RED          | II-149 |
| LMS…F         | Miniature Linear Bushing  | RED          | II-192 | LWE        | Linear Way E                  | BLUE         | II- 53 |
| LMS…F UU      | Miniature Linear Bushing  | RED          | II-192 | LWE…Q      | Low Decibel Linear Way E      | BLUE         | II- 53 |
| LMS…UU        | Miniature Linear Bushing  | RED          | II-192 | LWE…SL     | Linear Way E                  | BLUE         | II- 53 |
| LMSL          | Miniature Linear Bushing  | RED          | II-192 | LWEC       | Linear Way E                  | BLUE         | II- 53 |
| LMSL…F        | Miniature Linear Bushing  | RED          | II-192 | LWEC…SL    | Linear Way E                  | BLUE         | II- 53 |
| LMSL…F UU     | Miniature Linear Bushing  | RED          | II-192 | LWEG       | Linear Way E                  | BLUE         | II- 53 |
| LMSL…UU       | Miniature Linear Bushing  | RED          | II-192 | LWEG…SL    | Linear Way E                  | BLUE         | II- 53 |
| LRWM          | Linear Way Module         | BLUE         | II-223 | LWES       | Linear Way E                  | BLUE         | II- 61 |
| LRWX…B        | Linear Roller Way X       | BLUE         | II-205 | LWES…Q     | Low Decibel Linear Way E      | BLUE         | II- 61 |
| LRWXH         | Linear Roller Way X       | BLUE         | II-207 | LWES…SL    | Linear Way E                  | BLUE         | II- 61 |
| LRX           | Linear Roller Way Super X | BLUE         | II-169 | LWESC      | Linear Way E                  | BLUE         | II- 61 |
| LRXC          | Linear Roller Way Super X | BLUE         | II-169 | LWESC…SL   | Linear Way E                  | BLUE         | II- 61 |
| LRXD          | Linear Roller Way Super X | BLUE         | II-177 | LWESG      | Linear Way E                  | BLUE         | II- 61 |
| LRXD…SL       | Linear Roller Way Super X | BLUE         | II-177 | LWESG…SL   | Linear Way E                  | BLUE         | II- 61 |
| LRXDC         | Linear Roller Way Super X | BLUE         | II-177 | LWET       | Linear Way E                  | BLUE         | II- 57 |
| LRXDC…SL      | Linear Roller Way Super X | BLUE         | II-177 | LWET…Q     | Low Decibel Linear Way E      | BLUE         | II- 57 |
| LRXDG         | Linear Roller Way Super X | BLUE         | II-177 | LWET…SL    | Linear Way E                  | BLUE         | II- 57 |
| LRXDG…SL      | Linear Roller Way Super X | BLUE         | II-177 | LWETC      | Linear Way E                  | BLUE         | II- 57 |
| LRXG          | Linear Roller Way Super X | BLUE         | II-169 | LWETC…SL   | Linear Way E                  | BLUE         | II- 57 |
| LRXH          | Linear Roller Way Super X | BLUE         | II-169 | LWETG      | Linear Way E                  | BLUE         | II- 57 |
| LRXHC         | Linear Roller Way Super X | BLUE         | II-169 | LWETG…SL   | Linear Way E                  | BLUE         | II- 57 |
| LRXHG         | Linear Roller Way Super X | BLUE         | II-169 | LWFF       | Linear Way F                  | BLUE         | II-129 |

Note: BLUE denotes CAT-1552④E, while RED denotes CAT-1555②E.

Model Code Index

| Model code | Series name  | Catalog name | Page    | Model code | Series name                   | Catalog name | Page    |
|------------|--------------|--------------|---------|------------|-------------------------------|--------------|---------|
| L          |              |              |         | LWLF…B     | Linear Way L                  | BLUE         | II - 31 |
|            |              |              |         | LWLF…BCS   | Linear Way L                  | BLUE         | II - 35 |
| LWFH       | Linear Way F | BLUE         | II -127 | LWLF…N     | Linear Way L                  | BLUE         | II - 31 |
| LWFS       | Linear Way F | BLUE         | II -131 | LWLFC      | Linear Way L                  | BLUE         | II - 31 |
| LWFS…SL    | Linear Way F | BLUE         | II -131 | LWLFC…B    | Linear Way L                  | BLUE         | II - 31 |
| LWH…B      | Linear Way H | BLUE         | II - 85 | LWLFC…N    | Linear Way L                  | BLUE         | II - 31 |
| LWH…M      | Linear Way H | BLUE         | II - 85 | LWLFG…B    | Linear Way L                  | BLUE         | II - 33 |
| LWH…MU     | Linear Way H | BLUE         | II - 85 | LWLFG…N    | Linear Way L                  | BLUE         | II - 33 |
| LWH…SL     | Linear Way H | BLUE         | II - 85 | LWLG…B     | Linear Way L                  | BLUE         | II - 25 |
| LWHD       | Linear Way H | BLUE         | II - 99 | LWLG…N     | Linear Way L                  | BLUE         | II - 25 |
| LWHD…B     | Linear Way H | BLUE         | II -101 | LWLM       | Linear Way Module             | BLUE         | II -219 |
| LWHD…M     | Linear Way H | BLUE         | II -101 | LWM        | Linear Way Module             | BLUE         | II -221 |
| LWHD…MU    | Linear Way H | BLUE         | II -101 | LWU        | Linear Way U                  | BLUE         | II -145 |
| LWHD…SL    | Linear Way H | BLUE         | II - 99 | LWU…B      | Linear Way U                  | BLUE         | II -145 |
| LWHDC…SL   | Linear Way H | BLUE         | II - 99 | LWUL…B     | Linear Way U                  | BLUE         | II -145 |
| LWHDG      | Linear Way H | BLUE         | II -101 | M          |                               |              |         |
| LWHDG…SL   | Linear Way H | BLUE         | II - 99 | MAG        | C-Lube Linear Ball Spline MAG | RED          | II -123 |
| LWHG       | Linear Way H | BLUE         | II - 85 | MAGF       | C-Lube Linear Ball Spline MAG | RED          | II -127 |
| LWHS…B     | Linear Way H | BLUE         | II -105 | MAGFT      | C-Lube Linear Ball Spline MAG | RED          | II -127 |
| LWHS…M     | Linear Way H | BLUE         | II -105 | MAGL       | C-Lube Linear Ball Spline MAG | RED          | II -123 |
| LWHS…MU    | Linear Way H | BLUE         | II -105 | MAGLT      | C-Lube Linear Ball Spline MAG | RED          | II -123 |
| LWHS…SL    | Linear Way H | BLUE         | II -105 | MAGT       | C-Lube Linear Ball Spline MAG | RED          | II -123 |
| LWHSG      | Linear Way H | BLUE         | II -105 | ME         | C-Lube Linear Way ME          | BLUE         | II - 53 |
| LWHT       | Linear Way H | BLUE         | II - 91 | ME…SL      | C-Lube Linear Way ME          | BLUE         | II - 53 |
| LWHT…B     | Linear Way H | BLUE         | II - 91 | MEC        | C-Lube Linear Way ME          | BLUE         | II - 53 |
| LWHT…M     | Linear Way H | BLUE         | II - 91 | MEC…SL     | C-Lube Linear Way ME          | BLUE         | II - 53 |
| LWHT…MU    | Linear Way H | BLUE         | II - 91 | MEG        | C-Lube Linear Way ME          | BLUE         | II - 53 |
| LWHT…SL    | Linear Way H | BLUE         | II - 91 | MEG…SL     | C-Lube Linear Way ME          | BLUE         | II - 53 |
| LWHTG      | Linear Way H | BLUE         | II - 93 | MES        | C-Lube Linear Way ME          | BLUE         | II - 61 |
| LWHY       | Linear Way H | BLUE         | II -109 | MES…SL     | C-Lube Linear Way ME          | BLUE         | II - 61 |
| LWL        | Linear Way L | BLUE         | II - 23 | MESC       | C-Lube Linear Way ME          | BLUE         | II - 61 |
| LWL…B      | Linear Way L | BLUE         | II - 25 | MESC…SL    | C-Lube Linear Way ME          | BLUE         | II - 61 |
| LWL…B CS   | Linear Way L | BLUE         | II - 27 | MESG       | C-Lube Linear Way ME          | BLUE         | II - 61 |
| LWL…N      | Linear Way L | BLUE         | II - 25 | MESG…SL    | C-Lube Linear Way ME          | BLUE         | II - 61 |
| LWL…Y      | Linear Way L | BLUE         | II - 23 | MET        | C-Lube Linear Way ME          | BLUE         | II - 57 |
| LWLC       | Linear Way L | BLUE         | II - 23 | MET…SL     | C-Lube Linear Way ME          | BLUE         | II - 57 |
| LWLC…B     | Linear Way L | BLUE         | II - 25 | METC       | C-Lube Linear Way ME          | BLUE         | II - 57 |
| LWLC…N     | Linear Way L | BLUE         | II - 25 |            |                               |              |         |
| LWLF       | Linear Way L | BLUE         | II - 31 |            |                               |              |         |

Note: BLUE denotes CAT-1552④E, while RED denotes CAT-1555②E.

Model Code Index

| Model code | Series name                       | Catalog name | Page    | Model code | Series name                       | Catalog name | Page    |
|------------|-----------------------------------|--------------|---------|------------|-----------------------------------|--------------|---------|
| METC…SL    | C-Lube Linear Way ME              | BLUE         | II - 57 | MXDG       | C-Lube Linear Roller Way Super MX | BLUE         | II -177 |
| METG       | C-Lube Linear Way ME              | BLUE         | II - 57 | MXDL       | C-Lube Linear Roller Way Super MX | BLUE         | II -179 |
| METG…SL    | C-Lube Linear Way ME              | BLUE         | II - 57 | MXG        | C-Lube Linear Roller Way Super MX | BLUE         | II -169 |
| MH         | C-Lube Linear Way H               | BLUE         | II - 85 | MXH        | C-Lube Linear Roller Way Super MX | BLUE         | II -169 |
| MH…M       | C-Lube Linear Way H               | BLUE         | II - 85 | MXHC       | C-Lube Linear Roller Way Super MX | BLUE         | II -169 |
| MH…MU      | C-Lube Linear Way H               | BLUE         | II - 85 | MXHG       | C-Lube Linear Roller Way Super MX | BLUE         | II -169 |
| MHD        | C-Lube Linear Way H               | BLUE         | II - 99 | MXHL       | C-Lube Linear Roller Way Super MX | BLUE         | II -169 |
| MHD…M      | C-Lube Linear Way H               | BLUE         | II -101 | MXL        | C-Lube Linear Roller Way Super MX | BLUE         | II -169 |
| MHD…MU     | C-Lube Linear Way H               | BLUE         | II -101 | MXN        | C-Lube Linear Roller Way Super MX | BLUE         | II -191 |
| MHD…SL     | C-Lube Linear Way H               | BLUE         | II - 99 | MXNG       | C-Lube Linear Roller Way Super MX | BLUE         | II -191 |
| MHDC…SL    | C-Lube Linear Way H               | BLUE         | II - 99 | MXNL       | C-Lube Linear Roller Way Super MX | BLUE         | II -191 |
| MHDG       | C-Lube Linear Way H               | BLUE         | II -101 | MXNS       | C-Lube Linear Roller Way Super MX | BLUE         | II -193 |
| MHDG…SL    | C-Lube Linear Way H               | BLUE         | II - 99 | MXNSG      | C-Lube Linear Roller Way Super MX | BLUE         | II -193 |
| MHDL       | C-Lube Linear Way H               | BLUE         | II -101 | MXNSL      | C-Lube Linear Roller Way Super MX | BLUE         | II -193 |
| MHG        | C-Lube Linear Way H               | BLUE         | II - 85 | MXS        | C-Lube Linear Roller Way Super MX | BLUE         | II -187 |
| MHS        | C-Lube Linear Way H               | BLUE         | II -105 | MXSC       | C-Lube Linear Roller Way Super MX | BLUE         | II -187 |
| MHS…M      | C-Lube Linear Way H               | BLUE         | II -107 | MXSG       | C-Lube Linear Roller Way Super MX | BLUE         | II -187 |
| MHS…MU     | C-Lube Linear Way H               | BLUE         | II -107 | MXSL       | C-Lube Linear Roller Way Super MX | BLUE         | II -187 |
| MHS…SL     | C-Lube Linear Way H               | BLUE         | II -105 | O          |                                   |              |         |
| MHSG       | C-Lube Linear Way H               | BLUE         | II -105 | OR…A       | Miniature Stroke Rotary Bushing   | RED          | II -207 |
| MHT        | C-Lube Linear Way H               | BLUE         | II - 91 | R          |                                   |              |         |
| MHT…M      | C-Lube Linear Way H               | BLUE         | II - 93 | RW         | Roller Way                        | RED          | II -221 |
| MHT…MU     | C-Lube Linear Way H               | BLUE         | II - 93 | RWB        | Roller Way                        | RED          | II -222 |
| MHT…SL     | C-Lube Linear Way H               | BLUE         | II - 91 | S          |                                   |              |         |
| MHTG       | C-Lube Linear Way H               | BLUE         | II - 91 | SF…A       | Miniature Stroke Rotary Bushing   | RED          | II -207 |
| MHTL       | C-Lube Linear Way H               | BLUE         | II - 95 | SR         | Roller Way                        | RED          | II -223 |
| ML         | C-Lube Linear Way ML              | BLUE         | II - 25 | ST         | Stroke Rotary Bushing             | RED          | II -199 |
| MLC        | C-Lube Linear Way ML              | BLUE         | II - 25 | ST…B       | Stroke Rotary Bushing             | RED          | II -199 |
| MLF        | C-Lube Linear Way ML              | BLUE         | II - 31 | ST…UU      | Stroke Rotary Bushing             | RED          | II -201 |
| MLFC       | C-Lube Linear Way ML              | BLUE         | II - 31 | ST…UU B    | Stroke Rotary Bushing             | RED          | II -201 |
| MLFG       | C-Lube Linear Way ML              | BLUE         | II - 33 | STS        | Miniature Stroke Rotary Bushing   | RED          | II -207 |
| MLG        | C-Lube Linear Way ML              | BLUE         | II - 25 | STSI       | Miniature Stroke Rotary Bushing   | RED          | II -207 |
| MLL        | C-Lube Linear Way ML              | BLUE         | II - 27 |            |                                   |              |         |
| MUL        | C-Lube Linear Way MUL             | BLUE         | II -145 |            |                                   |              |         |
| MX         | C-Lube Linear Roller Way Super MX | BLUE         | II -169 |            |                                   |              |         |
| MXC        | C-Lube Linear Roller Way Super MX | BLUE         | II -169 |            |                                   |              |         |
| MXD        | C-Lube Linear Roller Way Super MX | BLUE         | II -177 |            |                                   |              |         |
| MXD…SL     | C-Lube Linear Roller Way Super MX | BLUE         | II -177 |            |                                   |              |         |
| MXDC       | C-Lube Linear Roller Way Super MX | BLUE         | II -177 |            |                                   |              |         |


Note: BLUE denotes CAT-1552④E, while RED denotes CAT-1555②E.



# IKO Linear Motion Rolling Guide Series,
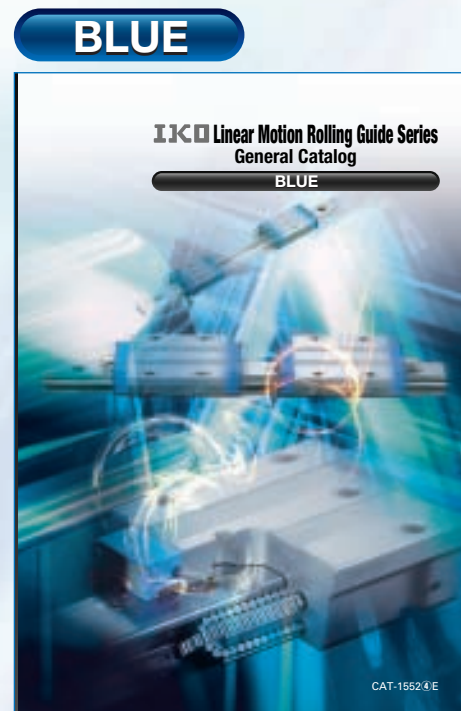
# Configuration of General Catalog

IKO Linear Motion Rolling Guide Series General Catalog Consists of **BLUE** and **RED**, the two volumes.  
(CAT-1552④E) (CAT-1555②E)



CAT-1552④E

## 【Models】

- Rail Guide Type  
Endless Linear Motion Type

C-Lube Linear Way ML  
Linear Way L



C-Lube Linear Way ME  
Linear Way E



C-Lube Linear Way MH  
Linear Way H



Linear Way F



C-Lube Linear Way MUL  
Linear Way U



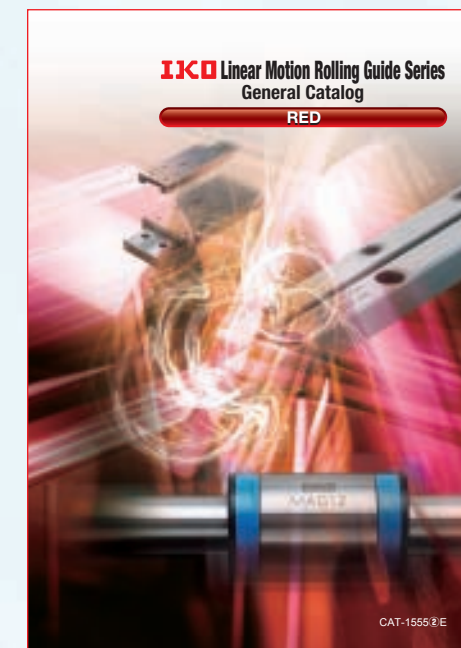
C-Lube Linear Roller Way Super MX  
Linear Roller Way Super X Linear Roller Way X



Linear Way Module



## RED



CAT-1555②E

## 【Models】

- Rail Guide Type  
Limited Linear Motion Type
- Shaft Guide Type  
Endless Linear Motion Type  
Limited Linear Motion Type  
Limited Linear Motion Type + Rolling Motion Type
- Flat Guide Type  
Endless Linear Motion Type  
Limited Linear Motion Type

Rail Guide Type  
Crossed Roller Way



Rail Guide Type  
Linear Slide Unit



Shaft Guide Type  
Linear Ball Spline



Shaft Guide Type  
Linear Bushing



Shaft Guide Type  
Stroke Rotary Bushing



Flat Guide Type  
Roller Way & Flat Roller Cage



Cam follower  
Roller follower





# IKO Introduction of Technical Service Site

"IKO Technical Service Site" can be accessed from our home page [www.iko.co.jp](http://www.iko.co.jp). The site also distributes various tools, etc., to select linear ways/linear roller ways, and please utilize the site for the assistance to select products. Additionally the site also provides CAD data and product catalog of needle series, linear motion rolling guide series and mechatronics series for you to download. Please consider to use for enhancing your design efficiency.

<http://www.ikont.co.jp/eg/>



## 1. Technical calculations

In the section of linear way/linear roller way load and life calculation, you can have the calculated load and the rating life by entering the use conditions.

Also you can derive the motor torque required for operation and the effective propulsion force during operation in the sections of motor torque calculation and calculation of effective propulsion force of linear motor tables respectively, and output the calculation results in PDF format, as well as save the histories.

## 2. Selection of Identification Number

By selecting such specification as model code, dimensions, part code, material code, preload symbol, classification symbol, interchangeable code and supplemental code of linear ways/linear roller ways, you can easily specify the identification number used for ordering.

Also you can browse the CAD data of the selected products, calculate the load, and output the selection results in PDF format, as well as save the histories.



## 3. Downloading CAD data

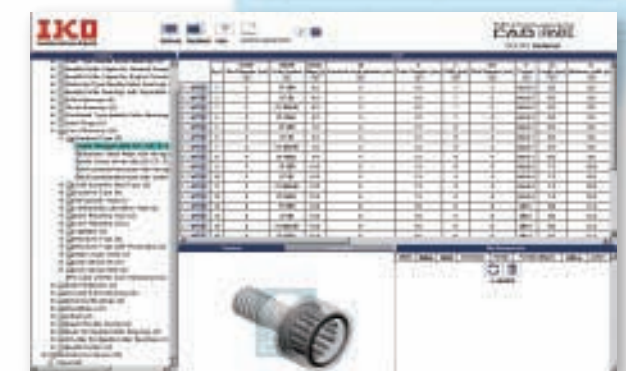
### 2-dimensional CAD data (DXF file)

There are two types of figures, brief figure and detailed figure. The brief figure shows only the external view lines, and the detailed figure shows the detailed lines. The drawing consists of three drawings: front view, side view and plain view. The scale shows only the original size (1:1), and it does not show dimension lines.



### 3-dimensional CAD data

It is linked to the mechanical parts CAD library "PART community". Entering the rail dimension and option contents to the detail, you can view the 2D/3D CAD data suitable for the specification for free of charge.



## 4. Downloading Catalog and Operation Manual

You can download product catalogs of needle series, linear motion rolling guide series and mechatronics series, operation manuals of precision positioning tables and various electrical components in PDF format, as well as support software for precision positioning tables.

For a brochure version of the catalogs, please ask from [www.iko.co.jp](http://www.iko.co.jp) home page, or contact the nearest branch or sales office.





# IKO Gentle to The Earth

Nippon Thompson Co., Ltd. is working to develop global environment-friendly products.

It is committed to developing products that make its customers' machinery and equipment more reliable, thereby contributing to preserving the global environment.

This development stance manifests well in the keyword "Oil Minimum."

Our pursuit of Oil Minimum has led to the creation of  
**IKO's** proprietary family of lubricating parts as "C-Lube."

- **IKO** Linear Motion Rolling Guides are manufactured through a control system that alleviates their impact on the global environment to meet the quality requirements of ISO 14001 and ISO 9001.
- The standard products listed in this catalog comply with the specifications of the six hazardous materials mentioned cited in the European RoHS Directive. For information on all other products, please check with **IKO**.

## IKO Products Underpin Sustain Technology Leaps

Nippon Thompson Co., Ltd. was the first Japanese manufacturer to develop needle bearings on its own and has since expanded into the arena of linear motion rolling guides (Linear Motion Series and Mechatro Series) on the support of its advanced expertise. The company now offers a vast assortment of ingenious products, including the world's first C-Lube maintenance-free series, to address increasingly diversified customer needs and thus sustain technology leaps.

## C-Lube Maintenance-Free Series Products Evolving from the "Oil Minimum" Concept

We have developed lubricating parts impregnated with a large amount of lubricant as C-Lube Series to save the customer's oiling management workload and built them into bearings and linear motion rolling guides.

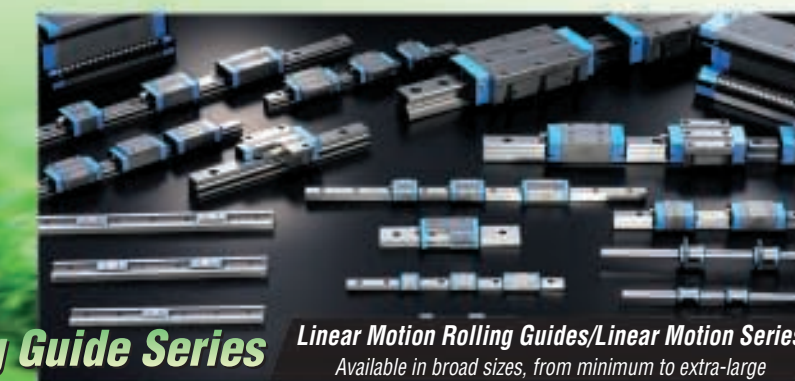
The C-Lube Series not only keeps products maintenance-free for long by giving them an optimal and minimal amount of a lubricant for an extended period of time but also contributes greatly to preserving the global environment.



**Needle Roller Bearings**

**Needle Bearings**


Machine elements essential to any industry



**Linear Motion Rolling Guide Series**

**Linear Motion Rolling Guides/Linear Motion Series**

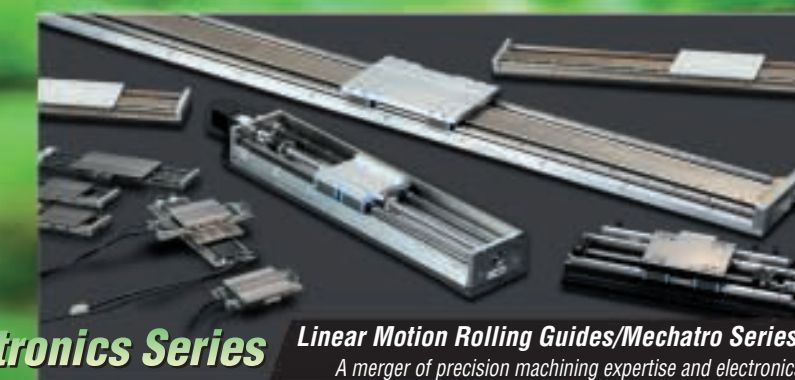Available in broad sizes, from minimum to extra-large



**Mechatronics Series**

**Linear Motion Rolling Guides/Mechatronics Series**

A merger of precision machining expertise and electronics